10-3510-208-34P

TM 10-3510-208-34P

TECHNICAL MANUAL

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS

(INCLUDING DEPOT MAINTENANCE REPAIR PARTS)

LAUNDRY UNIT, SINGLE TRAILER MOUNTED, W/ CANVAS COVER;

ARMY TYPE M532 (EIDAL MODL ELT9T)
NSN3510-00-782-5294
AND
(EDRO MODEL EP120-LTU)
NSN 3510-00-169-4735

This copy is a reprint which includes current pages from Changes 1 through 5.

HEADQUARTERS, DEPARTMENT OF THE ARMY
MAY 1978

D101.11:

READEX FICHE best copy available

CHANGE
NO. 5

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 17 March 1989

Direct Support and General Support Maintenance Repair Parts and Special Tools List (INcluding Depot Maintenance Repair Parts)

LAUNDRY UNIT, SINGLE TRAILER MOUNTED, W/CANVAS COVER; ARMY TYPE M532 (EIDAL MODL ELT9T)
NSN 3510-00-782-5294
(EDRO MODEL EP120-LTU)
NSN 3510-00-169-4735

TM 10-3510-208-34P, 1 May 1978, is changed as follows:

1. Remove and insert pages as indicated below. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove pages	Insert pages
2-7 and 2-8	2-7 and 2-8
2-29 and 2-30	2-29 and 2-30
2-93 and 2-94	2-93 and 2-94
4-1 and 4-2	4-1 and 4-2
4-7 through 4-10	4-7 through 4-10

2. Retain this sheet in front of manual for reference purposes.

By Order of the Secretary of the Army:

CARL E. VUONO
General, United States Army
Chief of Staff

Official:

WILLIAM J. MEEHAN, II
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:
To be distributed in accordance with DA Form 12-25A, Direct Support and General Support Maintenance requirements for Laundry Unit, Single Trailer Mounted, With Canvas Cover, Type M532.

CHANGE }
No. 3 }

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 1 June 1987

Direct Support and General Support Maintenance Repair Parts and Special Tools Lists (Including Depot Maintenance Repair Parts)

LAUNDRY UNIT, SINGLE TRAILER MOUNTED, W/CANVAS COVER;

ARMY TYPE M532 (EIDAL MODL ELT9T)
NSN 3510-00-782-5294
(EDRO MODEL EP120-LTU)
NSN 3510-00-169-4735

TM 10-3510-208-34P, 1 May 1978, is changed as follows:

1. Remove and insert pages as indicated below. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove pages	Insert pages
i and ii	i and ii
2-81 and 2-82	2-81 and 2-82
2-97 and 2-98	2-97 and 2-98
2-109 and 2-110	2-109 and 2-110
4-7 and 4-8	4-7 and 4-8
4-11 through 4-18	4-11 through 4-18

2. Retain this sheet in front of manual for reference purposes.

By Order of the Secretary of the Army:

JOHN A. WICKHAM, JR.
General, United States Army
Chief of Staff

Official:

R. L. DILWORTH
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:
To be distributed in accordance with DA Form 12-25A, Direct Support and General Support Maintenance requirements for Laundry Unit, Single Trailer Mounted, With Canvas Cover, Type M532.

CHANGE
NO. 2

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 5 November 1986

Direct Support and General Support Maintenance Repair Parts and Special Tools Lists

(Including Depot Maintenance Repair Parts)

LAUNDRY UNIT, SINGLE TRAILER MOUNTED, W/CANVAS COVER; ARMY TYPE M532 (EIDAL MODL ELT9T) NSN 3510-00-782-5294 and (EDRO MODEL EP120-LTU) NSN 3510-00-169-4735

TM 10-3510-208-34P, 1, May 1978, is changed as follows:

1. Remove and insert pages as indicated below. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicated by a miniature pointing hand.

Remove pages	Insert pages
2-7 through 2-10	2-7 through 2-10
2-41 and 2-42	2-41 and 2-42
2-67 and 2-68	2-67 and 2-68
2-91 through 2-94	2-91 through 2-94
2-109 and 2-110	2-109 and 2-110

2. Retain this sheet in front of manual for reference purposes.

By Order of the Secretary of the Army:

JOHN A. WICKHAM, JR.
General, United States Army
Chief of Staff

Official:

R. L. DILWORTH
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:
To be distributed in accordance with DA FOrm 12-25A, Direct Support and General Support Maintenance requirements for Laundry Unit, Single Trailer Mounted, with Canvas Cover, Type M532

TM 10-3510-208-34P
C 1

CHANGE
No. 1

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 21 July 1986

Direct Support and General Support Maintenance Repair Parts And Special Tools Lists

(Including Depot Maintenance
Repair Parts)

LAUNDRY UNIT, SINGLE TRAILER MOUNTED,
W/CANVAS COVER;
ARMY TYPE M532 (EIDAL MODL ELT9T)
NSN 3510-00-782-5294
And
(EDRO MODEL EP120-LTU)
NSN 3510-00-169-4735

TM 10-3510-208-34P, 1, May 1978, is changed as follows:

1. Remove and insert pages as indicated below. New or changed text material is indicated by a vertical bar in the margin. An illustration change is indicted by a miniature pointing hand.

Remove pages	Insert pages
2-29 and 2-30	2-29 and 2-30
2-79 and 2-80	2-79 and 2-80
2-93 and 2-94	2-93 and 2-94

2. Retain this sheet in front of manual for reference purposes.

By Order of the Secretary of the Army:

JOHN A. WICKHAM, JR.
General, United States Army
Chief of Staff

Official:

R. L. DILWORTH
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:
To be distributed in accordance with DA Form 12-25A, Direct Support and General Support Maintenance requirements for Laundry Unit, Single Trailer Mounted, with Canvas Cover, Type M532 (TM 10-3510-208 Series)

TECHNICAL MANUAL
NO. 10-3510-208-34P

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, D.C., 1 May 1978

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LISTS

(INCLUDING DEPOT MAINTENANCE REPAIR PARTS)

FOR

LAUNDRY UNIT, SINGLE TRAILER MOUNTED, W/CANVAS COVER; ARMY TYPE M532 (EIDAL MODEL ELT9T)

NSN 3510-00-782-5294

AND

(EDRO MODEL EP120-LTU)

NSN 3510-00-169-4735

Current as of 24 February 1978

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistake or if you know of a way to improve the procedures, please let us know. Mail your letter, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in the back of this manual direct to: Commander, U.S. Army Troop Support Command, ATTN: AMSTR-MCTS, 4300 Goodfellow Boulevard, St. Louis, MO 63120-1798. A reply will be furnished directly to you.

			Listing Page	Illus Figure
SECTION	I.	INTRODUCTION	1-1	
	II.	REPAIR PARTS LIST	2-1	
Group	01.	Hose Guard, Drain Bin and Storage Cylinder Box Drain Bin, Storage Cylinder Box and Hose Guard	2-1	1
	02.	Toolbox, Main Guard and Jackshaft Guard Toolbox, Main Drive Guard and Jackshaft Guard, EIDAL Model ELT9T	2-3	2
		Toolbox, Main Drive Guard, Main Drive Assembly Guard and Jackshaft Guards, EDRO Model EP120-LTU	2-5	3

---

*This manual supersedes TM 10-3510-208-35P, 16 September 1970, including all changes.

		Listing Page	Illus Figure
Group 03.	Hoses and Cable		
	Strainer, Suction Hose, Drain Hose and Cable	2-7	4
04.	Generator Mounting Frame, Exhaust Duct and Ground Rod		
	Generator Mounting Frame, Exhaust Duct and Ground Rod	2-9	5
05.	Washer-Extractor Tiedown Bar and Supports		
	Washer-Extractor Tiedown Bars and Supports EIDAL Model ELT9T	2-11	6
	Washer-Extractor Tiedown Bars and Supports EDRO Model EP120-LTU	2-13	7
06.	Fuel Filter, Tumbler Burner		
	Fuel Filter, Tumbler Burner	2-15	8
07.	Tumbler Burner Fuel Pump and Blower Assembly		
	Tumbler Burner Fuel Pump and Filter Fittings	2-16	9
	Fuel Pump, Exploded View	2-18	10
	Blower, Tumbler Burner	2-20	11
	Tumbler Blower Motor	2-22	12
08.	Water Pump, Frame, and Switchbox		
	Water Pump Switchbox	2-23	13
	Water Pump	2-25	14
	Water Pump Frame	2-27	15
09.	Transformer, Handy Box and Solenoid		
	Transformer, Handy Box and Solenoid	2-28	16
10.	Tumbler Burner		
	Tumbler Burner	2-30	17
11.	Tumbler Exhaust Motor and Related Parts.		
	Exhaust Motor Mounting Bracket and Belt Guard	2-32	18
	Tumbler Drive Motor	2-34	19
12.	Tumbler Drive Motor Conduit Box		
	Tumbler Drive Motor Conduit Box and Related Parts	2-35	20
13.	Tumbler Drive Motor and Related Parts		
	Tumbler Drive Motor and Mounting Bracket	2-37	21
	Tumbler Drive Motor	2-39	22
14.	Speed Reducer		
	Speed Reducer	2-41	23
15.	Exhaust Duct and Adapter		
	Exhaust Duct and Adapter	2-43	24
	Tumbler Heater Exhaust Duct and Retainer	2-45	25
16.	Exhaust Fan, Bracket and Jackshaft		
	Exhaust Fan, Bracket and Jackshaft	2-47	26
17.	Switchbox, Generator to Water Pump		
	Switchbox, Generator to Water Pump	2-49	27
18.	Outlet Duplex Box		
	Outlet Duplex Box	2-51	28
19.	Air Compressor and Mounting Bracket		
	Air Compressor and Mounting Bracket	2-53	29
	Air Compressor	2-54	30

Listing Page | Illus Figure

Group 20. Air Compressor Starter Switch

Air Compressor Starter Switch 2-56 31

21. Air Cylinder and Related Parts

Air Cylinder and Related Parts 2-58 32

22. Heat Exchanger Hood

Heat Exchanger Hood 2-60 33

23. Tumbler Air Heater

Tumbler Air Heater 2-62 34

24. Air Heater Mounting Plate and Fuel Line Support

Air Heater Mounting Plate and Fuel Line Support 2-64 35

25. Tumbler Cylinder, Base, Control Panel, and Related Parts

Trunnion 2-65 36
Tumbler Cylinder, Tumbler Barrel, Door Assembly and Related Parts 2-67 37
Tumbler Base, Control Panel and Related Parts 2-69 38
Tumbler Control Panel 2-72 39

26. Water Heater Panel Board

Water Heater Panel Board 2-74 40

27. Water Heater Burner and Related Parts

Water Heater Burner 2-76 41
Water Heater Fuel Lines and Pressure Gage 2-78 42
Water Heater Valves, Lines and Fittings 2-80 43

28. Water Heater Fuel Pump, Filter and Related Parts

Water Heater Fuel Filter and Related Parts 2-83 44
Fuel Filter, Water Heater 2-85 45

29. Water Heater Transformer

Water Heater Transformer 2-86 46

30. Fuel Pump, Water Heater Burner

Fuel Pump, Water Heater Burner 2-88 47

31. Water Heater Blower and Motor

Water Heater Blower and Motor 2-90 48

32. Water Heater Burner Blower Motor

Water Heater Burner Blower Motor 2-92 49

33. Water Heater Tank and Related Parts

Water Heater Tank and Related Parts 2-93 50

34. Water Level Plates and Tubes

Water Level Plates and Tubes 2-95 51

35. Water Level Control

Water Level Control 2-97 52

36. Control Box Assembly

Control Box Cover (Front View) 2-99 53
Main Control Box Timer, Alarm Bell and Light 2-101 54
Control Panel Junction Box 2-103 55
Control Panel Junction Connections 2-104 56

37. Formula Control Finger Box, Control Drum and Motor and Related Parts

Formula Control Finger Box and Related Parts 2-105 57
Formula Control Drum, Motor and Related Parts 2-107 58

			Listing Page	Illus Figure
Group	38.	Panel, Main Control Box and Air Manifold Assembly		
		Main Control Box	2-109	59
		Air Manifold Assembly	2-112	60
	39.	Air Lines		
		Air Lines	2-113	61
	40.	Main Drive Brake Assembly, Brake Air Cylinder, and Main Bearing Assembly		
		Air Brake Cylinder, Hub, Sheave and Related Parts	2-114	62
		Brake Air Cylinder	2-116	63
		Washer Cylinder Lockplate	2-117	64
		Main Bearing	2-118	65
	41.	Front Head Sheet Assembly and Washer Cylinder		
		Washer Door	2-120	66
		Cylinder, Washer	2-122	67
	42.	Valve, Drain Assembly		
		Drain Valve Controls	2-123	68
		Drain Valve Air Cylinder	2-125	69
		Drain Valve Body and Lever Guide	2-126	70
	43.	Washer Extractor Frame and Related Parts		
		Washer Extractor Frame and Related Parts	2-128	71
		Washer Base	2-131	72
	44.	Washer Motors, Extractor Motors, Washer Drive and Related Parts		
		Washer Motor	2-132	73
		EIDAL Extractor Motor and Motor Mountings	2-134	74
		EDRO Extractor Motor and Motor Mountings	2-136	75
		Hydro-Sheave Drive (EDRO Model EP120-LTU)	2-138	76
		Jackshaft, Washer Drive (EIDAL Model ELT9T)	2-139	77
		Jackshaft #2, Washer Drive (EDRO Model TP120-LTU)	2-141	78
		Jackshaft #1, Extractor Motor (EDRO Model EP120-LTU)	2-143	79
		Sensitive Switch	2-145	80
		Washer and Extractor Motors Base (EIDAL Model ELT9T)	2-146	81
		Air Cylinder, Washer Motor	2-148	82
		Washer and Extractor Motors Base (EDRO Model EP120-LTU)	2-150	83
	45.	Idler Pulley		
		Idler Pulley, Belt	2-152	84
	46.	Electrical Conduit		
		Electrical Conduit	2-153	85
	47.	Drain Pan Assembly		
		Drain Pan	2-155	86
	48.	Heat Exchanger Exhaust Duct and Retainer		
		Heat Exchanger Exhaust Duct and Retainer	2-156	87
	49.	Generator Switchbox and Outlet Box	2-158	88
		Generator Switchbox and Outlet Box	2-158	88
	50.	Fire Extinguisher, Step Assembly and Canvas Items		
		Fire Extinguisher, Step Assembly and Canvas Items	2-160	89
	51.	Bulk Material	2-161	

			Listing Page	Illus Figure
SECTION	III.	SPECIAL TOOLS LIST (Not Applicable)	3-1	
	IV.	NATIONAL STOCK NUMBER, REFERENCE NUMBER AND ALPHABETICAL INDEX	4-1	

SECTION I

INTRODUCTION

1. Scope.

This manual lists repair parts, special tools, test, measurement, and diagnostic equipment (TMDE), and other support equipment required for operation and performance of direct support, general support and depot maintenance of the Laundry Unit.

2. General.

a. Section II - Repair Parts List. A list of repair parts authorized for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of assembly groups in ascending numerical sequence, with the parts in each group listed in figure and item number sequence. Bulk materials are listed in NSN sequence, as the last group in Section II.

b. Section III - Special Tools List. (Not Applicable.)

c. Section IV - National Stock Number and Part Number Index. A list, in ascending numerical sequence, of all National Stock Numbers appearing in the listings, followed by a list, in alphanumeric sequence, of all part numbers appearing in the listings. National Stock Number and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns.

The following provides an explanation of columns found in the tabular listings:

a. Illustration. This column is divided as follows:

(1) Figure Number. Indicates the figure number of the illustration in which the item is shown.

(2) Item Number. The number used to identify each item called out in the illustration.

b. Source, Maintenance, and Recoverability Codes (SMR).

(1) Source Code. Source codes are assigned to support items to indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

Code	Definition
PA	Item procured and stocked for anticipated or known usage.
PB	Item procured and stocked for insurance purposes because essentiality dictates that a minimum quantity be available in the supply systems.
PC	Item procured and stocked and which otherwise would be coded PA except that it is deteriorative in nature.
PD	Support item, excluding support equipment, procured for initial issue or outfitting and stocked only for subsequent or additional initial issues or outfittings. Not subject to automatic replenishment.
PE	Support equipment procured and stocked for initial issue or outfitting to specified maintenance repair activities.
PF	Support equipment which will not be stocked but which will be centrally procured on demand.

Code	Definition
PG	Item procured and stocked to provide for sustained support for the life of the equipment. It is applied to an item peculiar to the equipment which, because of probable discontinuance or shutdown of production facilities, would prove uneconomical to reproduce at a later time.
KD	An item of a depot overhaul/repair kit and not purchased separately. Depot kit defined as a kit that provides items required at the time of overhaul or repair.
KF	An item of a maintenance kit and not purchased separately. Maintenance kit defined as a kit that provides an item that can be replaced at organizational or intermediate levels of maintenance.
KB	Item included in both a depot overhaul/repair kit and a maintenance kit.
MO	Item to be manufactured or fabricated at organizational level.
MF	Item to be manufactured or fabricated at the direct support maintenance level.
MH	Item to be manufactured or fabricated at the general support maintenance level.
MD	Item to be manufactured or fabricated at the depot maintenance level.
AO	Item to be assembled at organizational level.
AF	Item to be assembled at direct support maintenance level.
AH	Item to be assembled at general support maintenance level.
AD	Item to be assembled at depot maintenance level.
XA	Item is not procured or stocked because the requirements for the item will result in the replacement of the next higher assembly.
XB	Item is not procured or stocked. If not available through salvage, requisition.
XD	A support item that is not stocked. When required, item will be procured through normal supply channels.

NOTE

Cannibalization or salvage may be used as a source of supply for any items source coded above except those coded XA or XD.

(2) Maintenance Code. Maintenance codes are assigned to indicate the levels of maintenance authorized to use and repair support items. The maintenance codes are entered in the third and fourth positions of the Uniform SMR Code format as follows:

(a) The maintenance code entered in the third position will indicate the lowest maintenance level authorized to remove, replace, and use the support item. The maintenance code entered in the third position will indicate one of the following levels of maintenance.

Code	Application/Explanation
C	Crew or operator maintenance performed within organizational maintenance.
O	Support item is removed, replaced, used at the organizational level.
Z	Support item is removed, replaced, used by the direct support element of integrated direct support maintenance.
F	Support item is removed, replaced, used at the direct support level.

Code	Application/Explanation
H	Support item is removed, replaced, used at the general support level.
D	Support items that are removed, replaced used at depot, mobile depot, specialized repair activity only.

NOTE

Codes "Z" and "F" will be considered the same by direct support units.

(b) The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions). This position will contain one of the following maintenance codes:

Code	Application/Explanation
O	The lowest maintenance level capable of complete repair of the support item is the organizational level.
F	The lowest maintenance level capable of complete repair of the support item is the direct support level.
H	The lowest maintenance level capable of complete repair of the support item is the general support level.
D	The lowest maintenance level capable of complete repair of the support item is the depot level.
L	Repair restricted to designated specialized repair activity.
Z	Nonreparable. No repair is authorized.
B	No repair is authorized. The item may be reconditioned by adjusting, lubricating, etc., at the user level. No parts or special tools are procured for the maintenance of this item.

(3) Recoverability Code. Recoverability codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the Uniform SMR Code format as follows:

Recoverability Codes	Definition
Z	Nonreparable item. When unserviceable, condemn and dispose at the level indicated in Position 3.
O	Reparable item. When uneconomically reparable, condemn and dispose at organizational level.
F	Reparable item. When uneconomically reparable, condemn and dispose at the direct support level.
H	Reparable item. When uneconomically reparable, condemn and dispose at the general support level.
D	Reparable item. When beyond lower level repair capability, return to depot. Condemnation and disposal not authorized below depot level.
L	Reparable item. Repair, condemnation, and disposal not authorized below depot/specialized repair activity level.
A	Item requires special handling or condemnation procedures because of specific reasons (i.e., precious metal content, high dollar value, critical material or hazardous material). Refer to appropriate manuals/directives for specific instructions.

c. National Stock Number. Indicates the National Stock Number assigned to the item and will be used for requisitioning purposes.

d. Part Number. Indicates the primary number used by the manufacturer which controls the design and characteristics of the item by means of its engineering drawings, specifications standards, and inspection requirements to identify an item or range of items.

NOTE

> When a stock numbered item is requisitioned, the repair part received may have a different part number than the part being replaced.

e. Federal Supply Code for Manufacturer (FSCM). The FSCM is a 5-digit numeric code listed in SB 708-42 which is used to identify the manufacturer, distributor, or Government agency, etc.

f. Description. Indicates the Federal item name and, if required, a minimum description to identify the item. Items that are included in kits and sets are listed below the name of the kit or set with the quantity of each item in the kit or set indicated in the quantity incorporated in unit column. When the part to be used differs between serial numbers of the same model, the effective serial numbers are shown as the last line of the description. In the Special Tools List, the initial basis of issue (BOI) appears as the last line in the entry for each special tool, TMDE, and support equipment. When density of equipments supported exceeds density spread indicated in the basis of issue, the total authorization is increased accordingly.

g. Unit of Measure (U/M). Indicates the standard of the basic quantity of the listed items as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc.). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

h. Quantity Incorporated in Unit. Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly. A "V" appearing in this column in lieu of a quantity indicates that no specific quantity is applicable, (e.g., shims, spacers, etc,).

4. Special Information.

Code	Model
A	EIDAL Model ELT9T
B	EDRO Model EP120-LTU

a. Repair parts kits and gasket sets appear as the last entries in the repair parts listing for the figure in which its parts are listed as repair parts or are listed at the end of the repair parts listing for the last figure containing parts of the kit.

b. The following publications pertain to the Laundry Unit and its components.

TM 10-3510-208-12	Operational & Organizational Maintenance Manual.
TM 10-3510-208-20P	Organizational Maintenance Repair Parts and Special Tools List.
TM 10-3510-208-34	DS and GS Maintenance Manual.

5. How to Locate Repair Parts.

a. When National Stock Number or Part Number is Unknown:

(1) First. Using the table of contents, determine the assembly group within which the repair part belongs. This is necessary since illustrations are prepared for assembly groups, and listings are divided into the same groups.

(2) Second. Find the illustration covering the assembly group to which the repair part belongs.

(3) Third. Identify the repair part on the illustration and note the illustration figure and item number of the repair part.

(4) Fourth. Using the Repair Parts Listings, find the figure and item number noted on the illustration.

b. When National Stock Number or Part Number is Known.

(1) First. Using the Index of National Stock Numbers and Part Numbers, find the

pertinent National Stock Number or part number. This index is in ascending NSN sequence followed by a list of part numbers in ascending alphanumeric sequence, cross-referenced to the illustration figure number and item number.

(2) Second. After finding the figure and item number, locate the figure and item number in the repair parts list.

SECTION II

REPAIR PARTS LIST

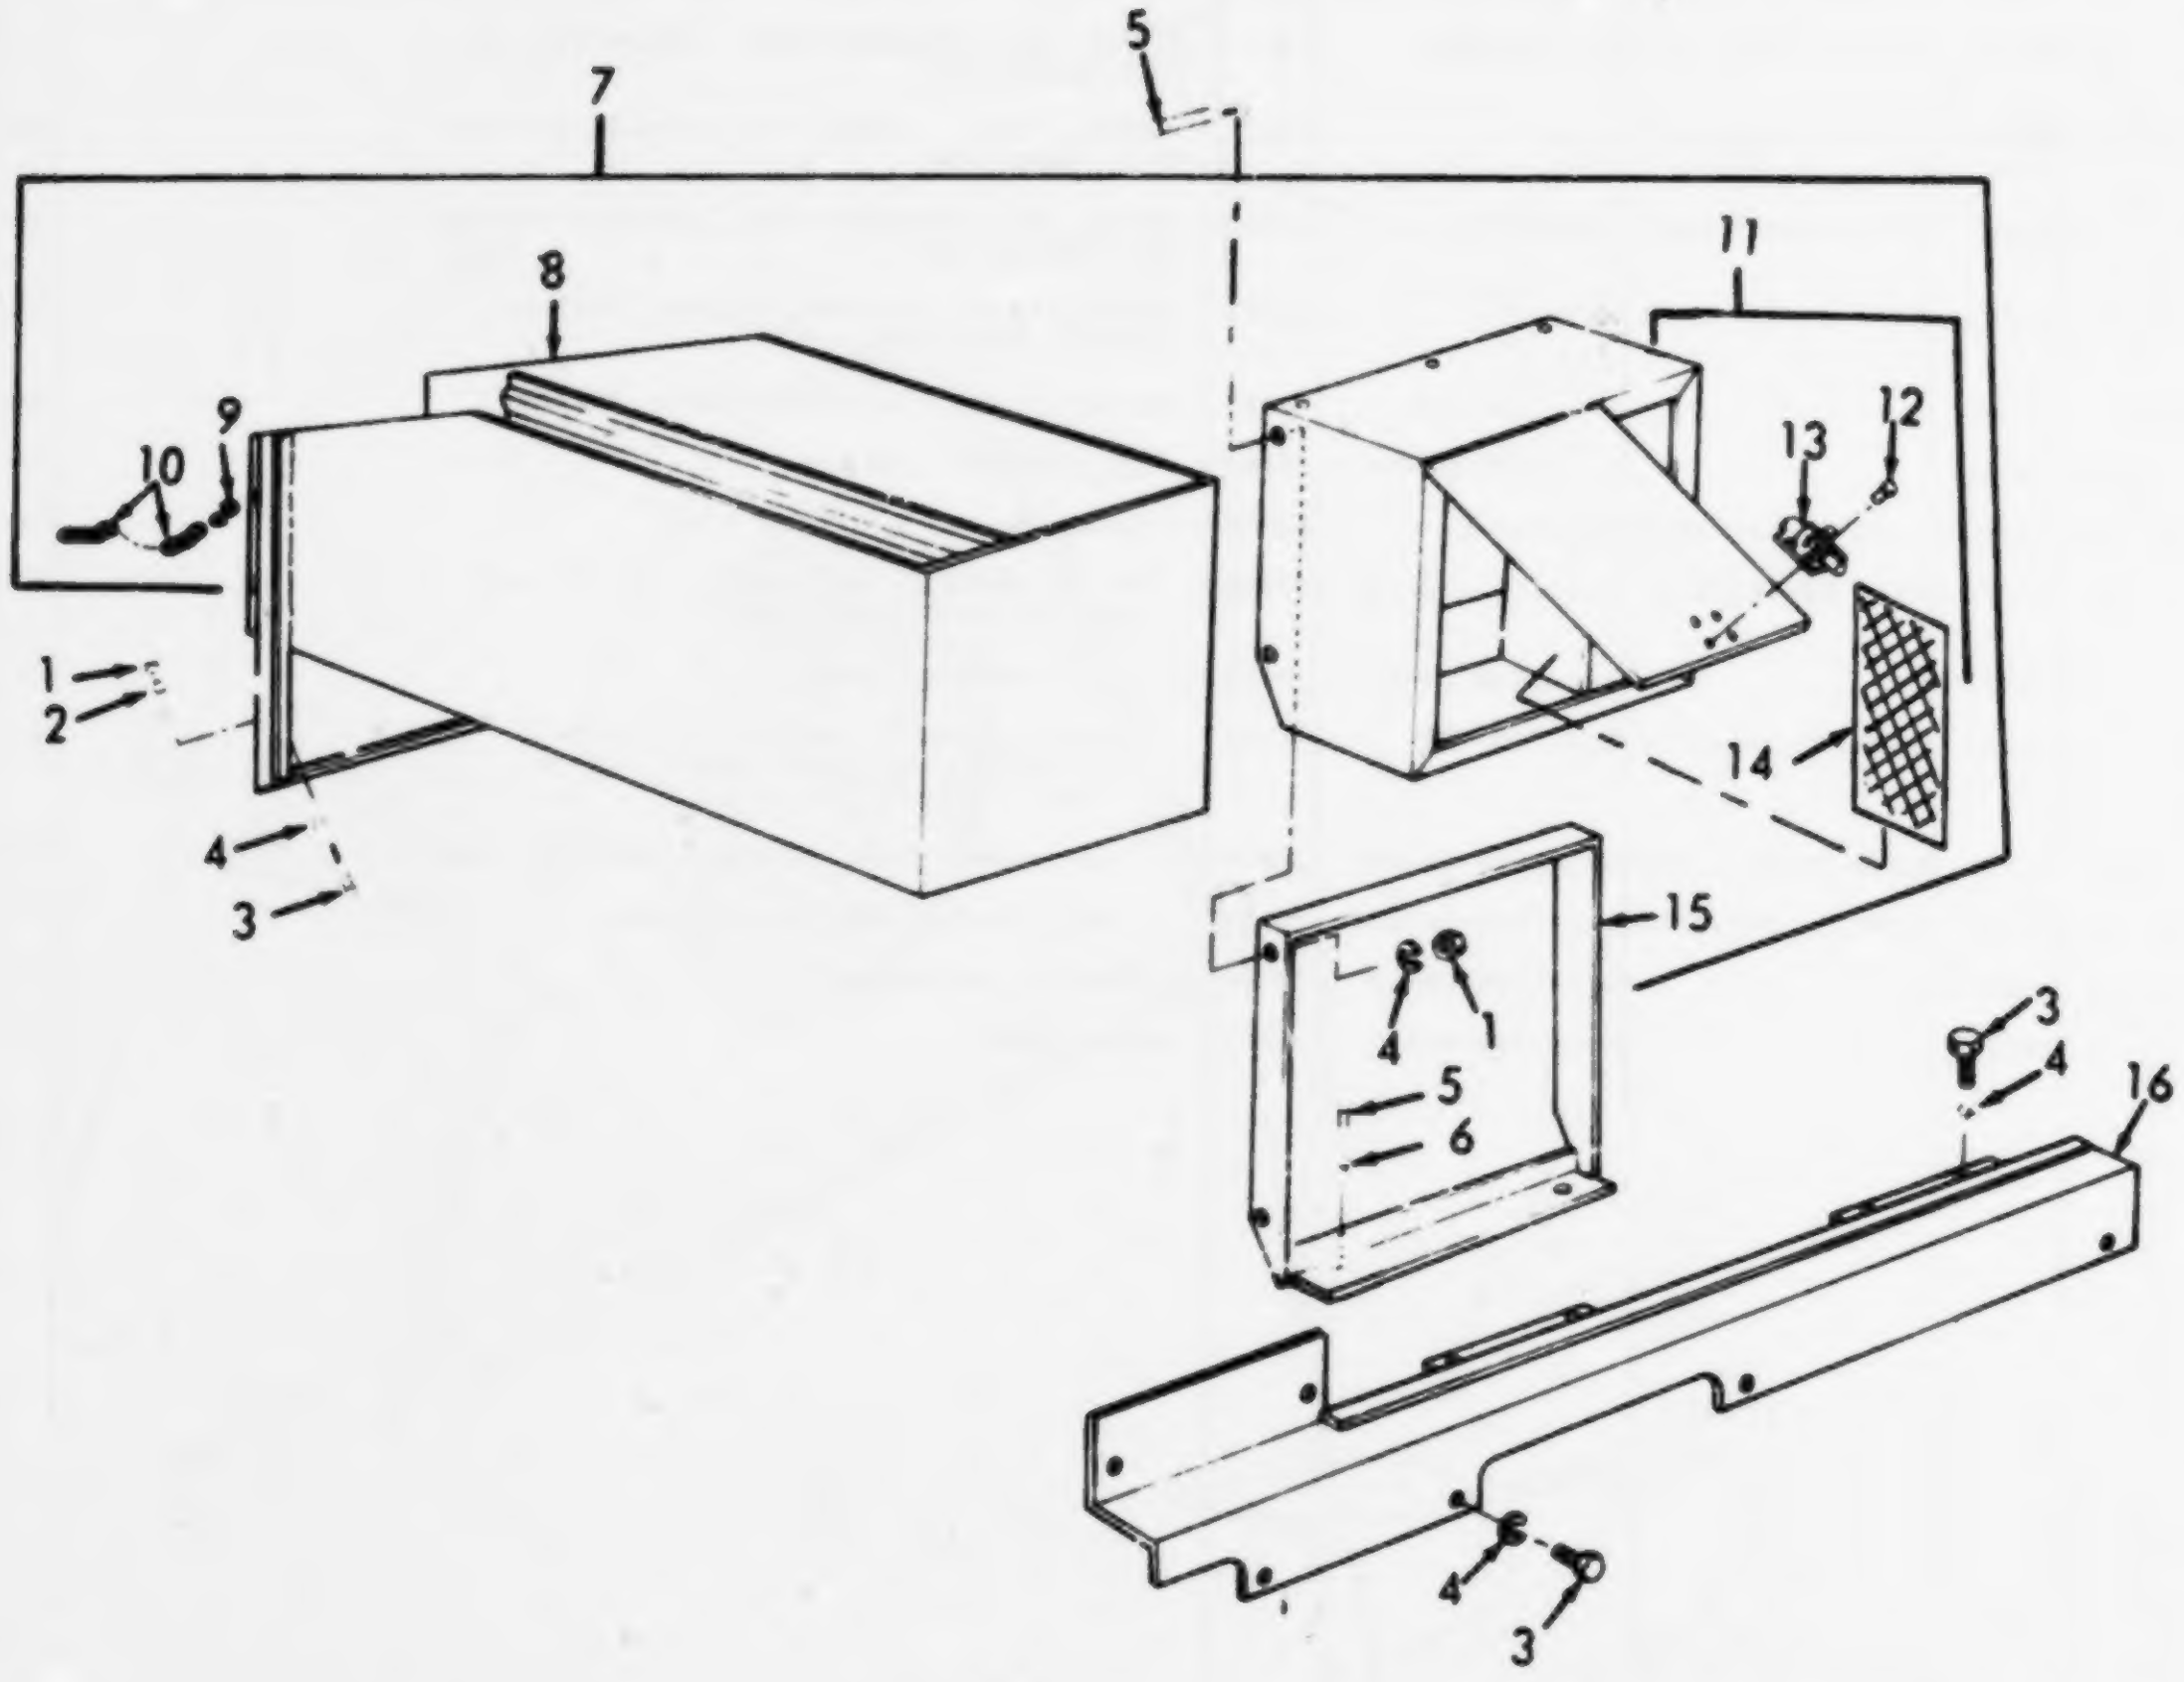
5
7
8
9
10
11
12
13
1
2
14
4
3
15
4
1
5
6
3
4
16
4
3

TS 3510-208-34P/1

Figure 1. Drain Bin, Storage Cylinder Box and Hose Guard.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 01 - HOSE GUARD, DRAIN BIN AND STORAGE CYLINDER BOX		
1	1	PAOZZ	5310-00-297-3251	MS55310-9	08288	NUT, PLAIN, HEXAGON: DRAIN BIN SUPPORT AND STORAGE ASSEMBLY MTG	EA	18
1	2	PAOZZ	5310-00-579-3454	MS55310-31	08288	WASHER, FLAT: DRAIN BIN AND HOSE GUARD MTG	EA	6
1	3	PAOZZ	5305-00-562-6572	571740-4H16	73030	SCREW, CAP, HEXAGON HEAD: DRAIN BIN AND HOSE GUARD MTG	EA	15
1	4	PAOZZ	5310-00-010-3319	X201	25051	WASHER, LOCK: DRAIN BIN, STORAGE BIN AND HOSE GUARD MTG	EA	20
1	5	PAOZZ	5305-00-068-0500	MS90725-3	96906	SCREW, CAP, HEXAGON HEAD: SUPPORT ASSEMBLY AND STORAGE BIN	EA	3
1	6	PAOZZ	5310-00-209-0786	MS35335-33	96906	WASHER, LOCK, EXTERNAL TOOTH: SUPPORT ASSEMBLY MTG SCREW	EA	3
1	7	XBOOO		6-1-1900-26A	72869	DRAIN BIN AND CYLINDER STORAGE ASSEMBLY	EA	1
1	8	XAOZZ		6-1-1916-26-4A	72869	BIN ASSEMBLY, DRAIN	EA	1
1	9	PAOZZ	4030-00-281-1683	MS54030-6	08288	HOOK, CHAIN, S: DRAIN BIN	EA	4
1	10	PAOZZ	4010-00-221-0738	6-1-1916-26-26A	72869	CHAIN, WELDED: DRAIN BIN, 14-1/2 IN. REQUIRED FOR EACH CHAIN	FT	V
1	11	XBOZZ		6-1-1916-26-9A	72869	BOX, STORAGE CYLINDER	EA	1
1	12	PAOZZ	5320-00-061-8213	MS20613-4P3	96906	RIVET, SOLID: LATCH MTG, STORAGE CYLINDER, UNIVERSAL HEAD, 1/8 IN. DIA X 3/16 IN. LG, STEEL	EA	4
1	13	PAOZZ	5340-00-664-1364	6-1-1918-26-16A	72869	LATCH AND BOLT: STORAGE ASSEMBLY DOOR	EA	1
1	14	PAOZZ	5330-00-933-7246	6-1-1918-26-27A	72869	FELT, SHEET, 36 IN. REQUIRED	FT	V
1	15	XBOZZ		6-1-1916-26-1A	72869	SUPPORT, DRAIN BIN	EA	1
1	16	XBOZZ		6-1-1900-81A	72869	GUARD, HOSE	EA	1

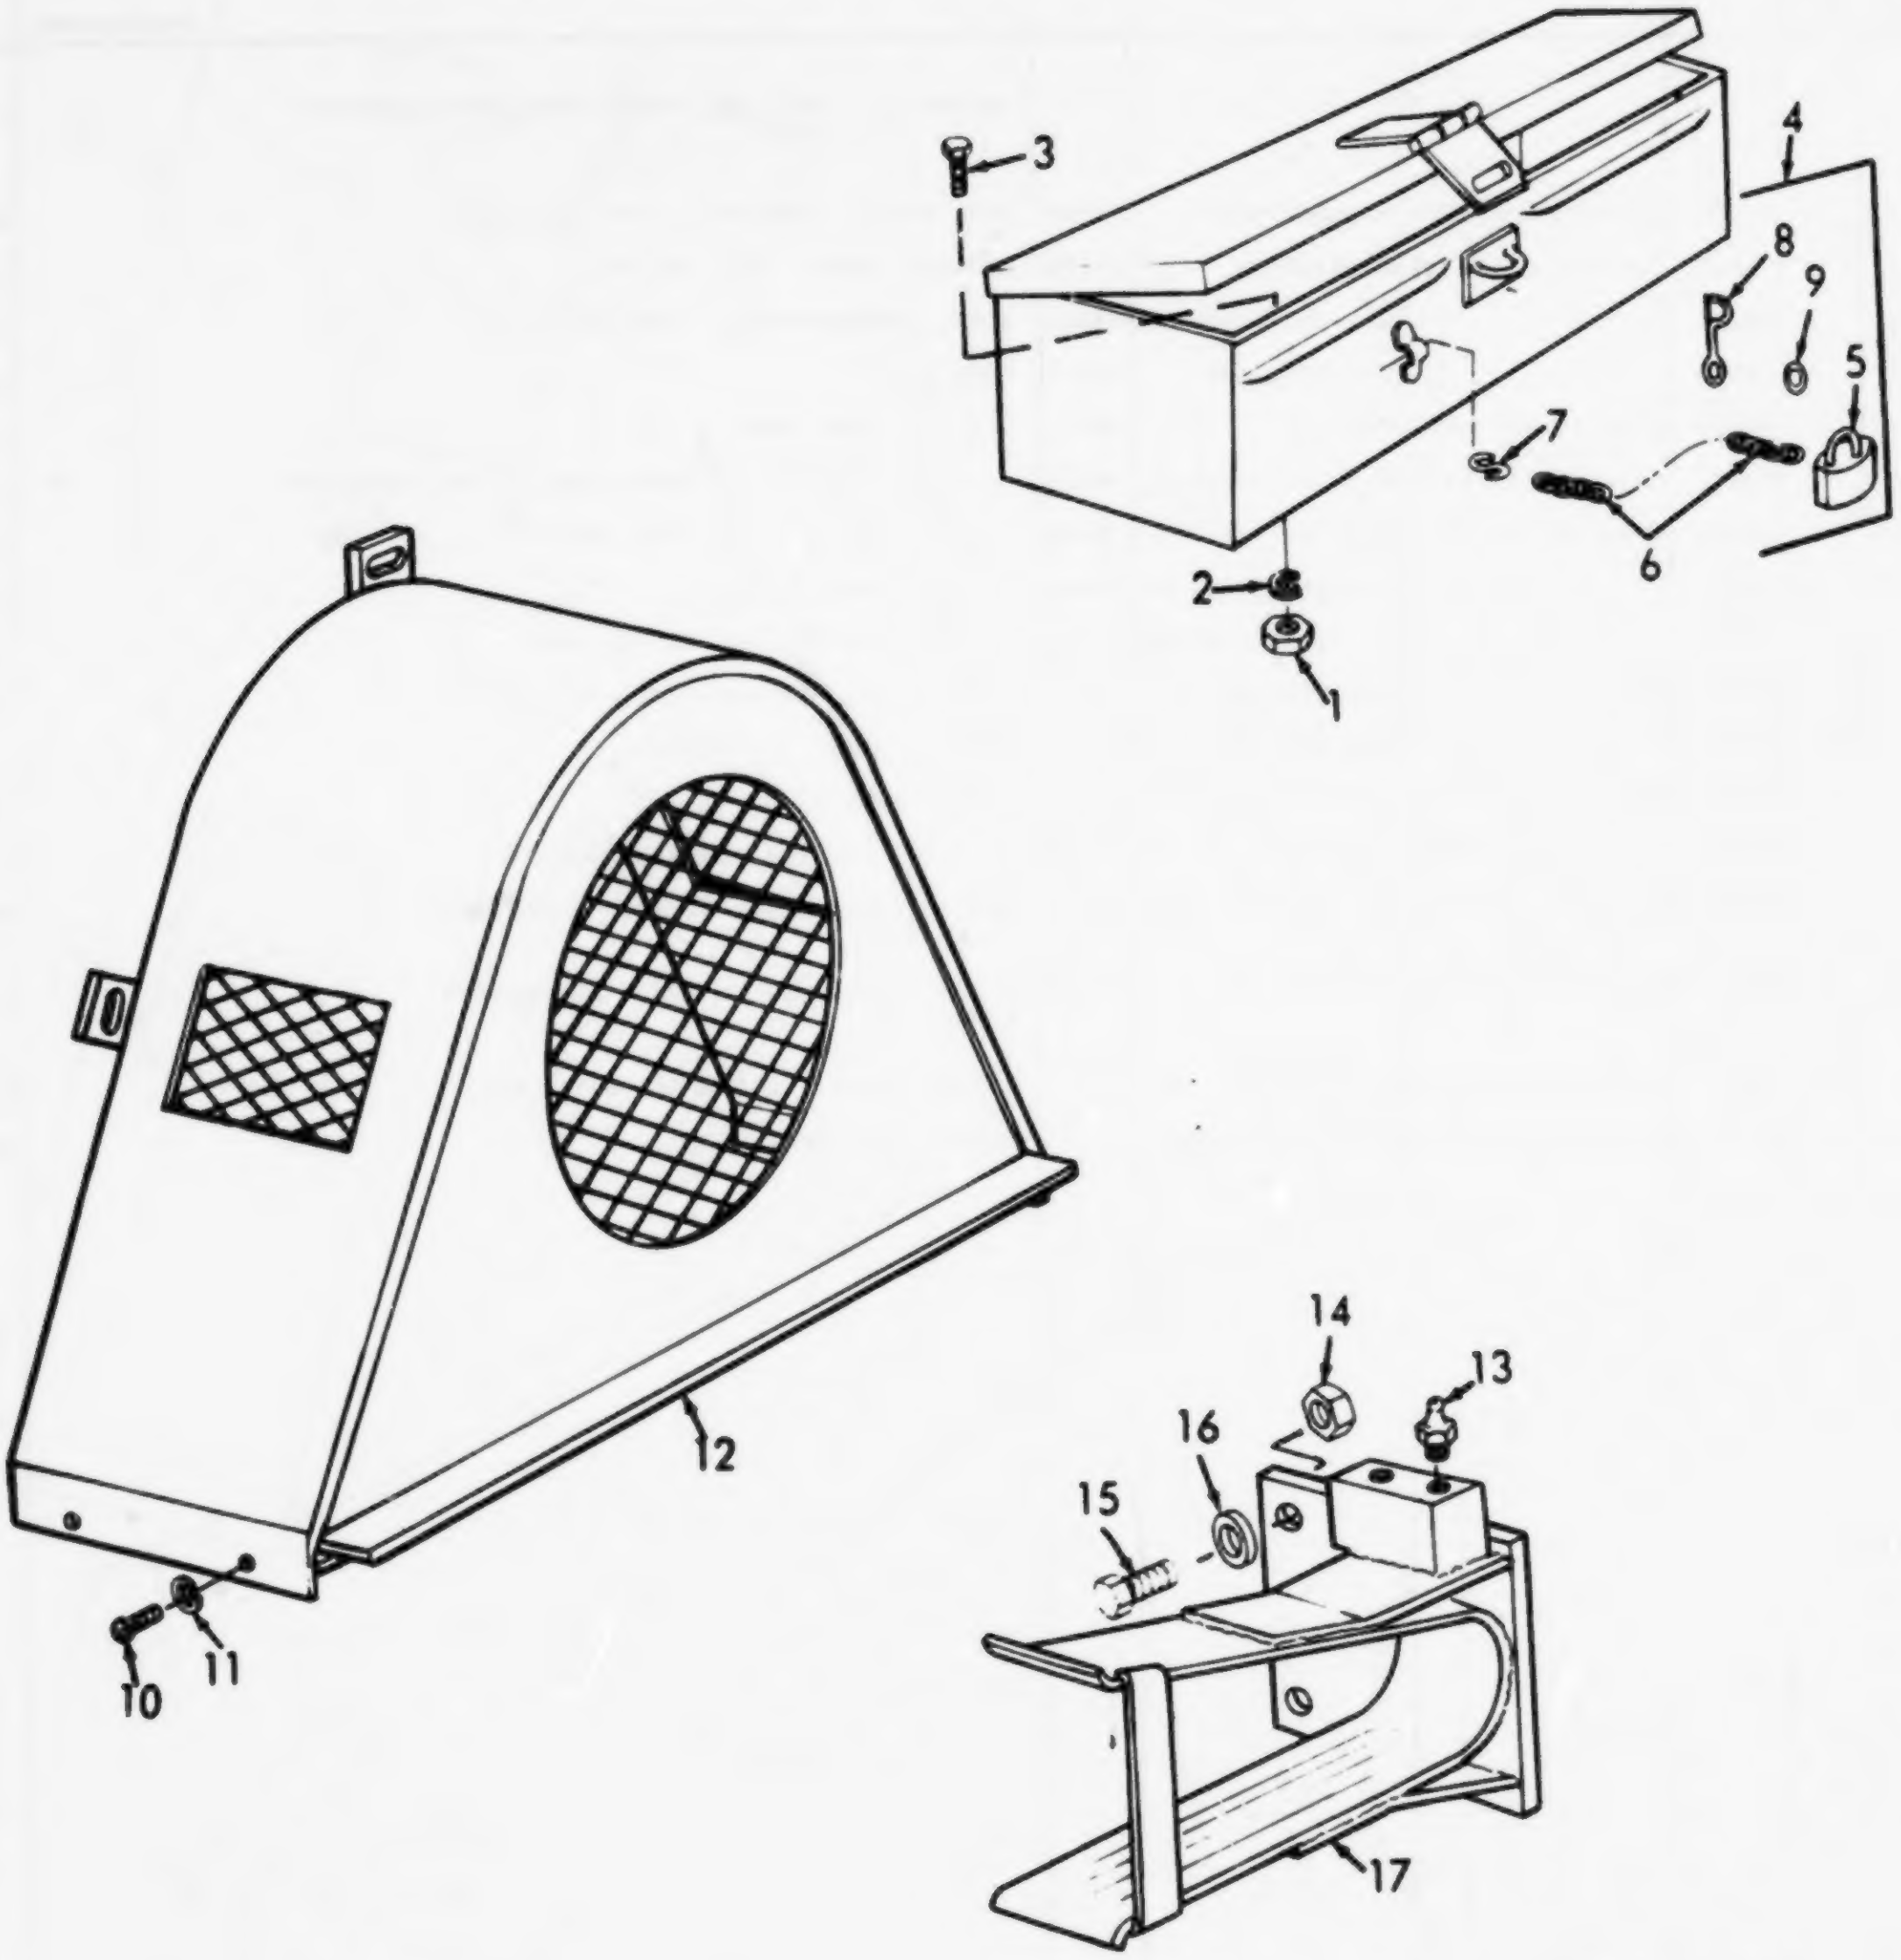
3
4
8
9
5
7
6
2
1
12
10
11
14
13
16
15
17

TS 3510-208-34P/2

Figure 2. Tool Box, Main Drive Guard and Jackshaft Guard, EIDAL Model ELT9T.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 02 - TOOL BOX, MAIN GUARD AND JACKSHAFT GUARD		
2	1	PAOZZ	5310-00-655-9335	MS35690-606	96906	NUT, PLAIN, HEXAGON: TOOL BOX MTG	EA	4
2	2	PAOZZ	5310-00-012-0382	MS55310-61	08288	WASHER, LOCK: TOOL BOX MTG	EA	4
2	3	XBOZZ		6-1-2518-148-10A	72869	BOLT, HEXAGON HEAD: TOOL BOX MTG	EA	4
2	4	XBOOO		6-1-1900-19A	72869	TOOL BOX	EA	1
2	5	PAOZZ	5340-00-582-2741	EPA	38797	LOCK: TOOL BOX, 1-3/4 IN.	EA	1
2	6	PAOZZ	4010-00-221-0738	6-1-1916-26-26A	72869	CHAIN, WELDED, TWISTED LINK, 20 IN. REQUIRED	FT	V
2	7	PAOZZ	4030-00-281-1683	6-1-1916-26-28A	72869	HOOK, CHAIN: TOOL BOX CHAIN	EA	1
2	8	XBOZZ		6-1-2518-148-16A	72869	HOOK, SNAP SWIVEL	EA	1
2	9	XBOZZ		6-1-2518-148-14A	72869	RING, 3/4 IN. ID, NO. 10 WIRE	EA	1
2	10	PAOZZ	5305-00-042-3437	6-1-1929-88A	72869	SCREW, CAP, HEXAGON HEAD: GUARD MTG	EA	4
2	11	XBOZZ		6-1-1929-89A	72869	WASHER, LOCK: GUARD MTG	EA	4
2	12	PBOZZ	3510-00-460-6072	6-1-1974-50A	72869	GUARD, MAIN DRIVE BELT	EA	1
2	13	PAOZZ	4730-00-172-0049	1650	70270	FITTING, LUBRICATION: JACKSHAFT	EA	2
2	14	PAOZZ	5310-00-050-3389	6-1-2981-33-100A	72869	NUT, SELF-LOCKING, HEXAGON: JACKSHAFT GUARD MTG	EA	2
2	15	PAOZZ	5305-00-716-8182	MS35292-114	96906	SCREW, CAP, HEXAGON HEAD: JACKSHAFT GUARD MTG	EA	2
2	16	PAOZZ	5310-00-595-6521	6-1-2981-33-104A		WASHER, FLAT: JACKSHAFT GUARD MTG	EA	4
2	17	PBOZZ	3510-00-133-5531	6-1-1936-33-30A		GUARD, JACKSHAFT	EA	1

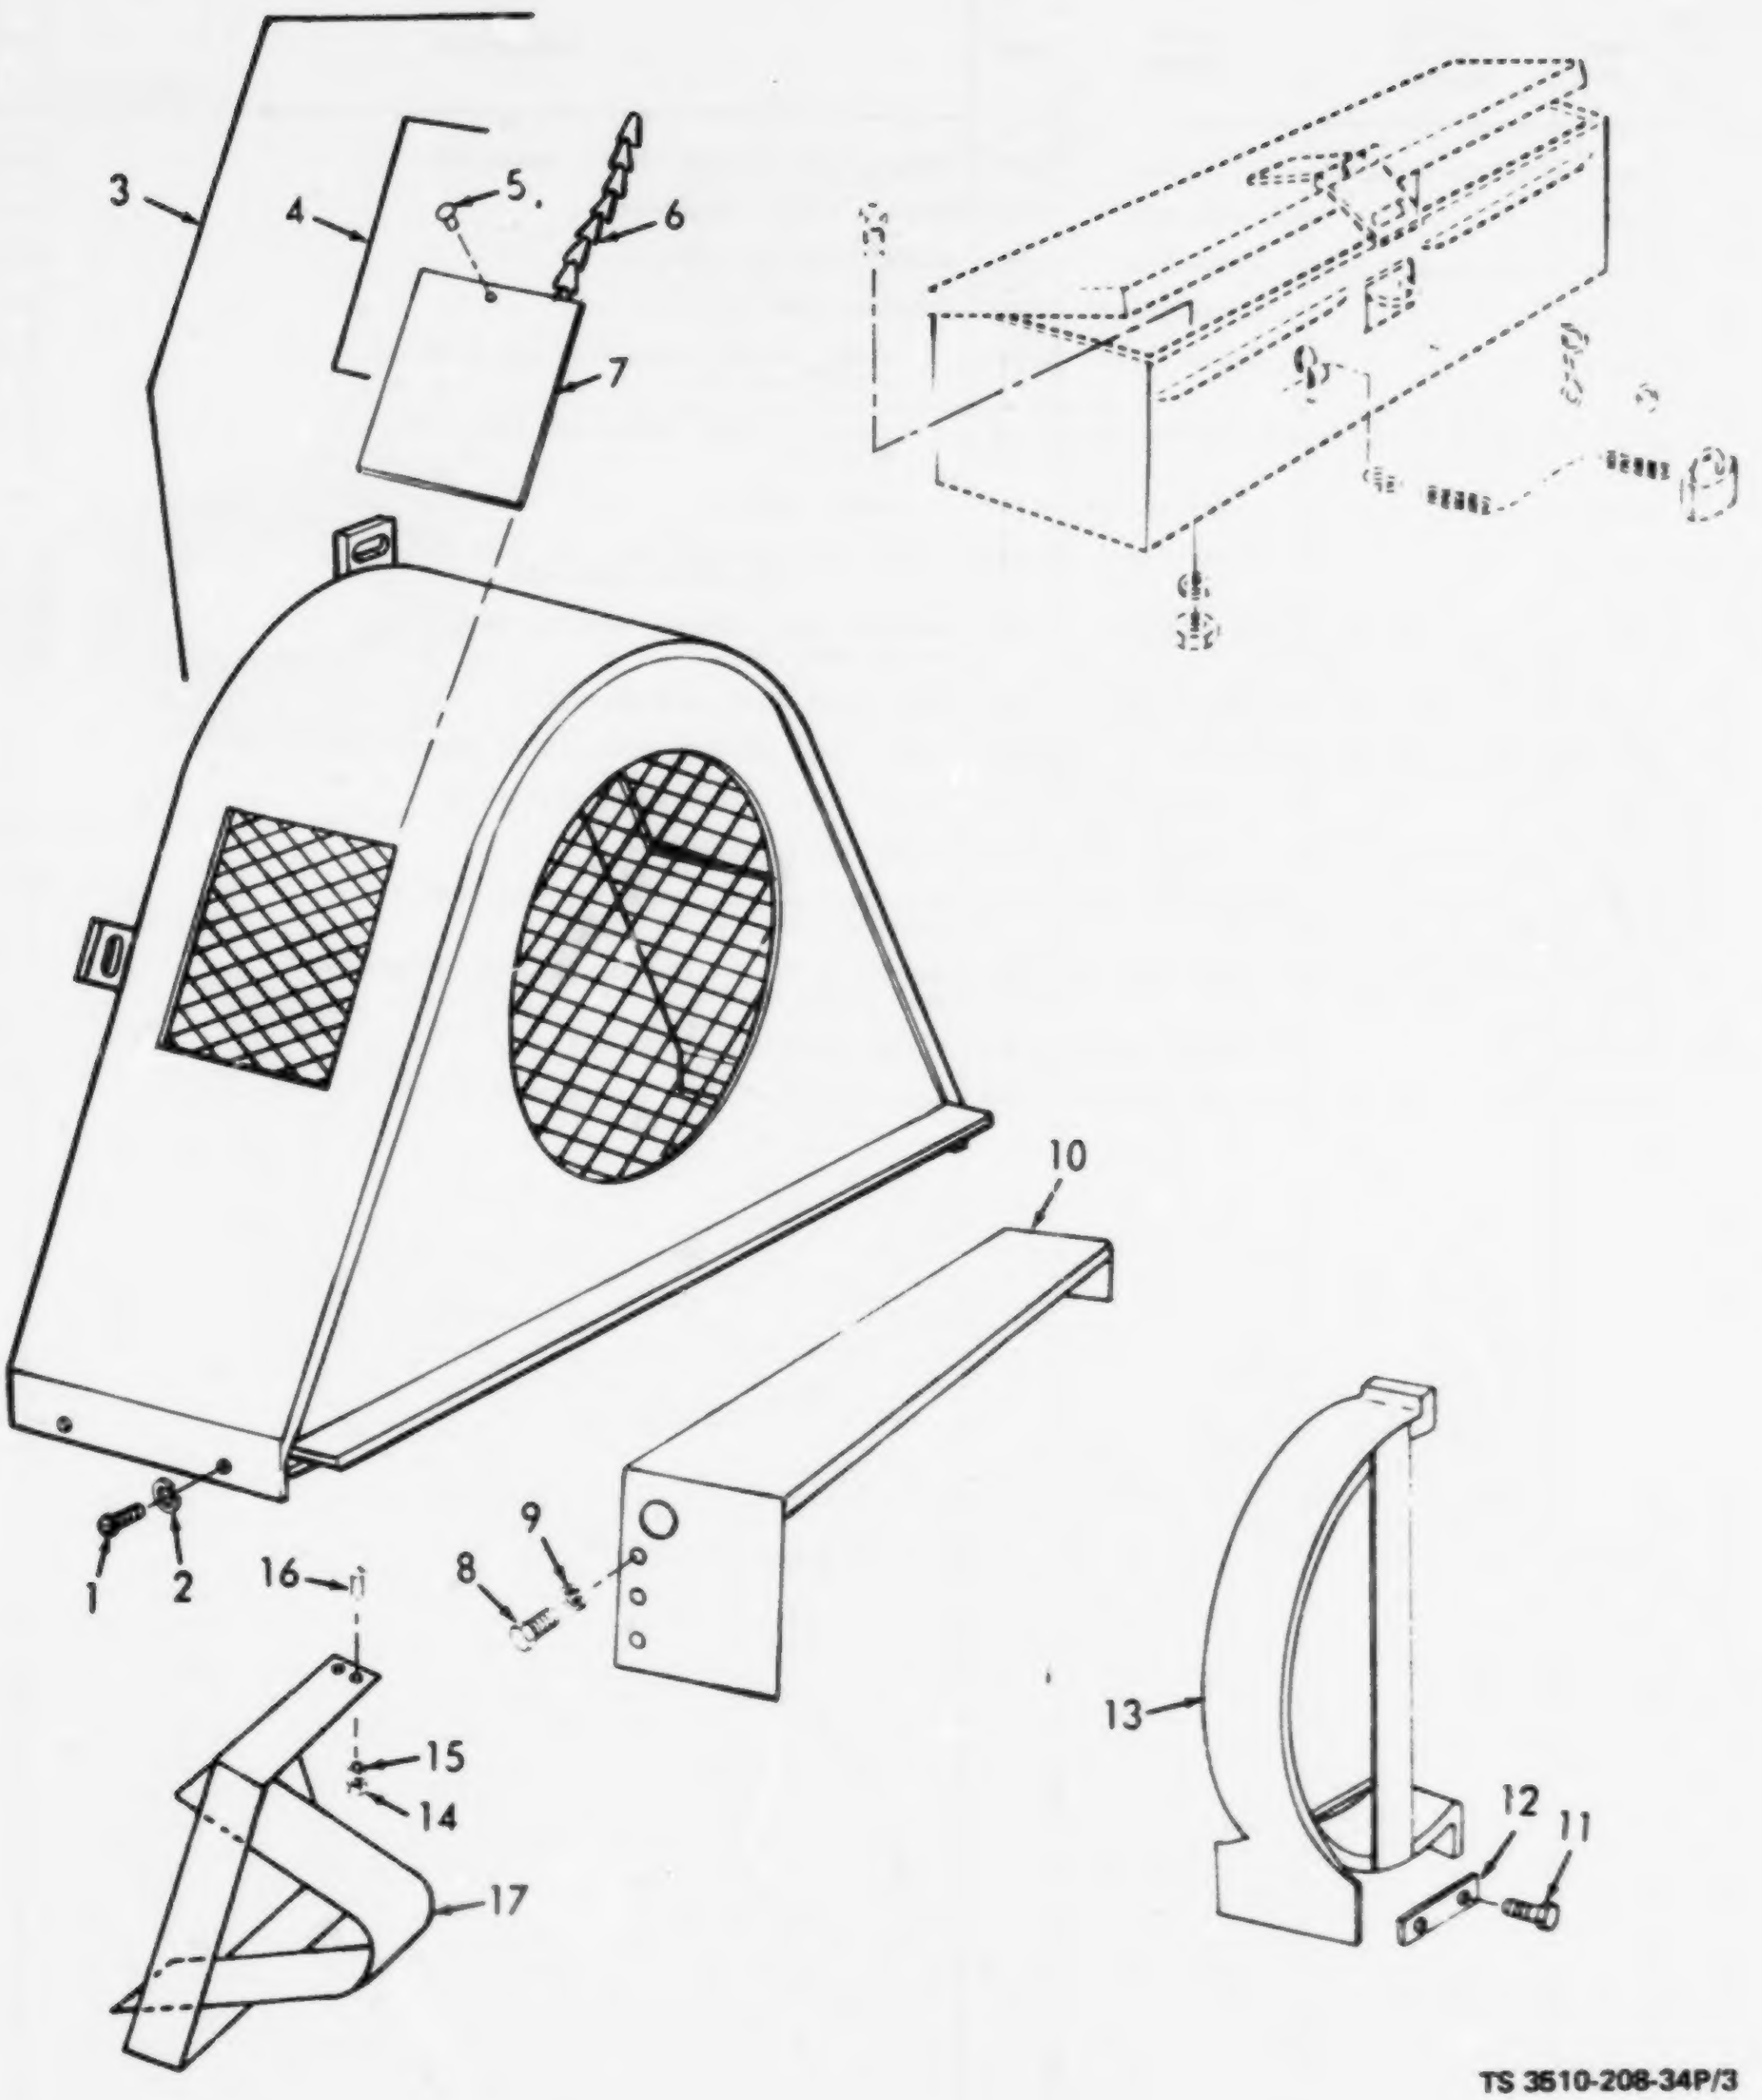
3
4
5.
6
7
10
9
8
1
2
16
15
14
17
13
12
11

TS 3510-208-34P/3

Figure 3. Tool Box, Main Drive Guard, Main Drive AssemblyGuard and Jackshaft Guards, EDRO Model EP120-LTU.

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
3	1	PAOZZ	5305-00-042-3437	6-1-1929-88A	72869	SCREW, CAP, HEXAGON HEAD: GUARD MTG	EA	7
3	2	XBOZZ		6-1-1929-89A	72869	WASHER, LOCK: GUARD MTG	EA	7
3	3	PBOOO	3510-00-460-6072	6-1-1974-50A	72869	GUARD, MAIN DRIVE BELT	EA	1
3	4	XBOZZ		6-1-1974-50-17A	72869	ACCESS DOOR ASSEMBLY	EA	1
3	5	XBOZZ		6-1-1974-50-22A	72869	RIVET, ROUND HEAD, 3/32 DIA 5/16 LG: SASH CHAIN MTG	EA	1
3	6	PAOZZ	4010-00-221-0738	6-1-1916-26-26A	72869	CHAIN, WELDED, TWIST AND LINK, 10 IN. REQUIRED	FT	V
3	7	XBOZZ		6-1-1974-50-18A	72869	DOOR, ACCESS	EA	1
3	8	XBOZZ		6-1-1929-95A	72869	SCREW, CAP, HEXAGON HD., 1/4 X 20 UNC-2A X 3/4 LG. MAIN DRIVE GUARD MTG	EA	6
3	9	XBOZZ		6-1-1929-96A	72869	WASHER, LOCK, MEDIUM, 1/4 IN. MAIN DRIVE GUARD MTG	EA	6
3	10	PBOZZ		6-1-1929-94A	72869	MAIN DRIVE GUARD ASSEMBLY	EA	1
3	11	PAOZZ	5305-00-269-3211	MS90725-60	96906	SCREW, CAP, HEXAGON HEAD: BELT GUARD PLATE	EA	2
3	12	XBOZZ		6-1-2988-33-56A	01551	PLATE, LOCK: BELT GUARD, EXTRACTOR	EA	1
3	13	PBOZZ	3510-00-460-6071	6-1-2988-33-37A	01551	GUARD, BELT, EXTRACTOR	EA	1
3	14	XBOZZ		6-1-2981-33-133A	72869	NUT, HEXAGON, NO. 10-24 UNC-2B: NO. 2 JACKSHAFT BELT GUARD AY MTG	EA	4
3	15	XBOZZ		6-1-2981-33-134A	72869	WASHER, LOCK, SPLIT, NO. 10: NO. 2 JACKSHAFT BELT GUARD AY MTG	EA	4
3	16	XBOZZ		6-1-2981-33-89A	72869	SCREW, MACHINE: GUARD MTG	EA	4
3	17	XBOZZ		6-1-2981-33-37A	72869	GUARD ASSEMBLY, NO. 2 JACKSHAFT BELTS	EA	1

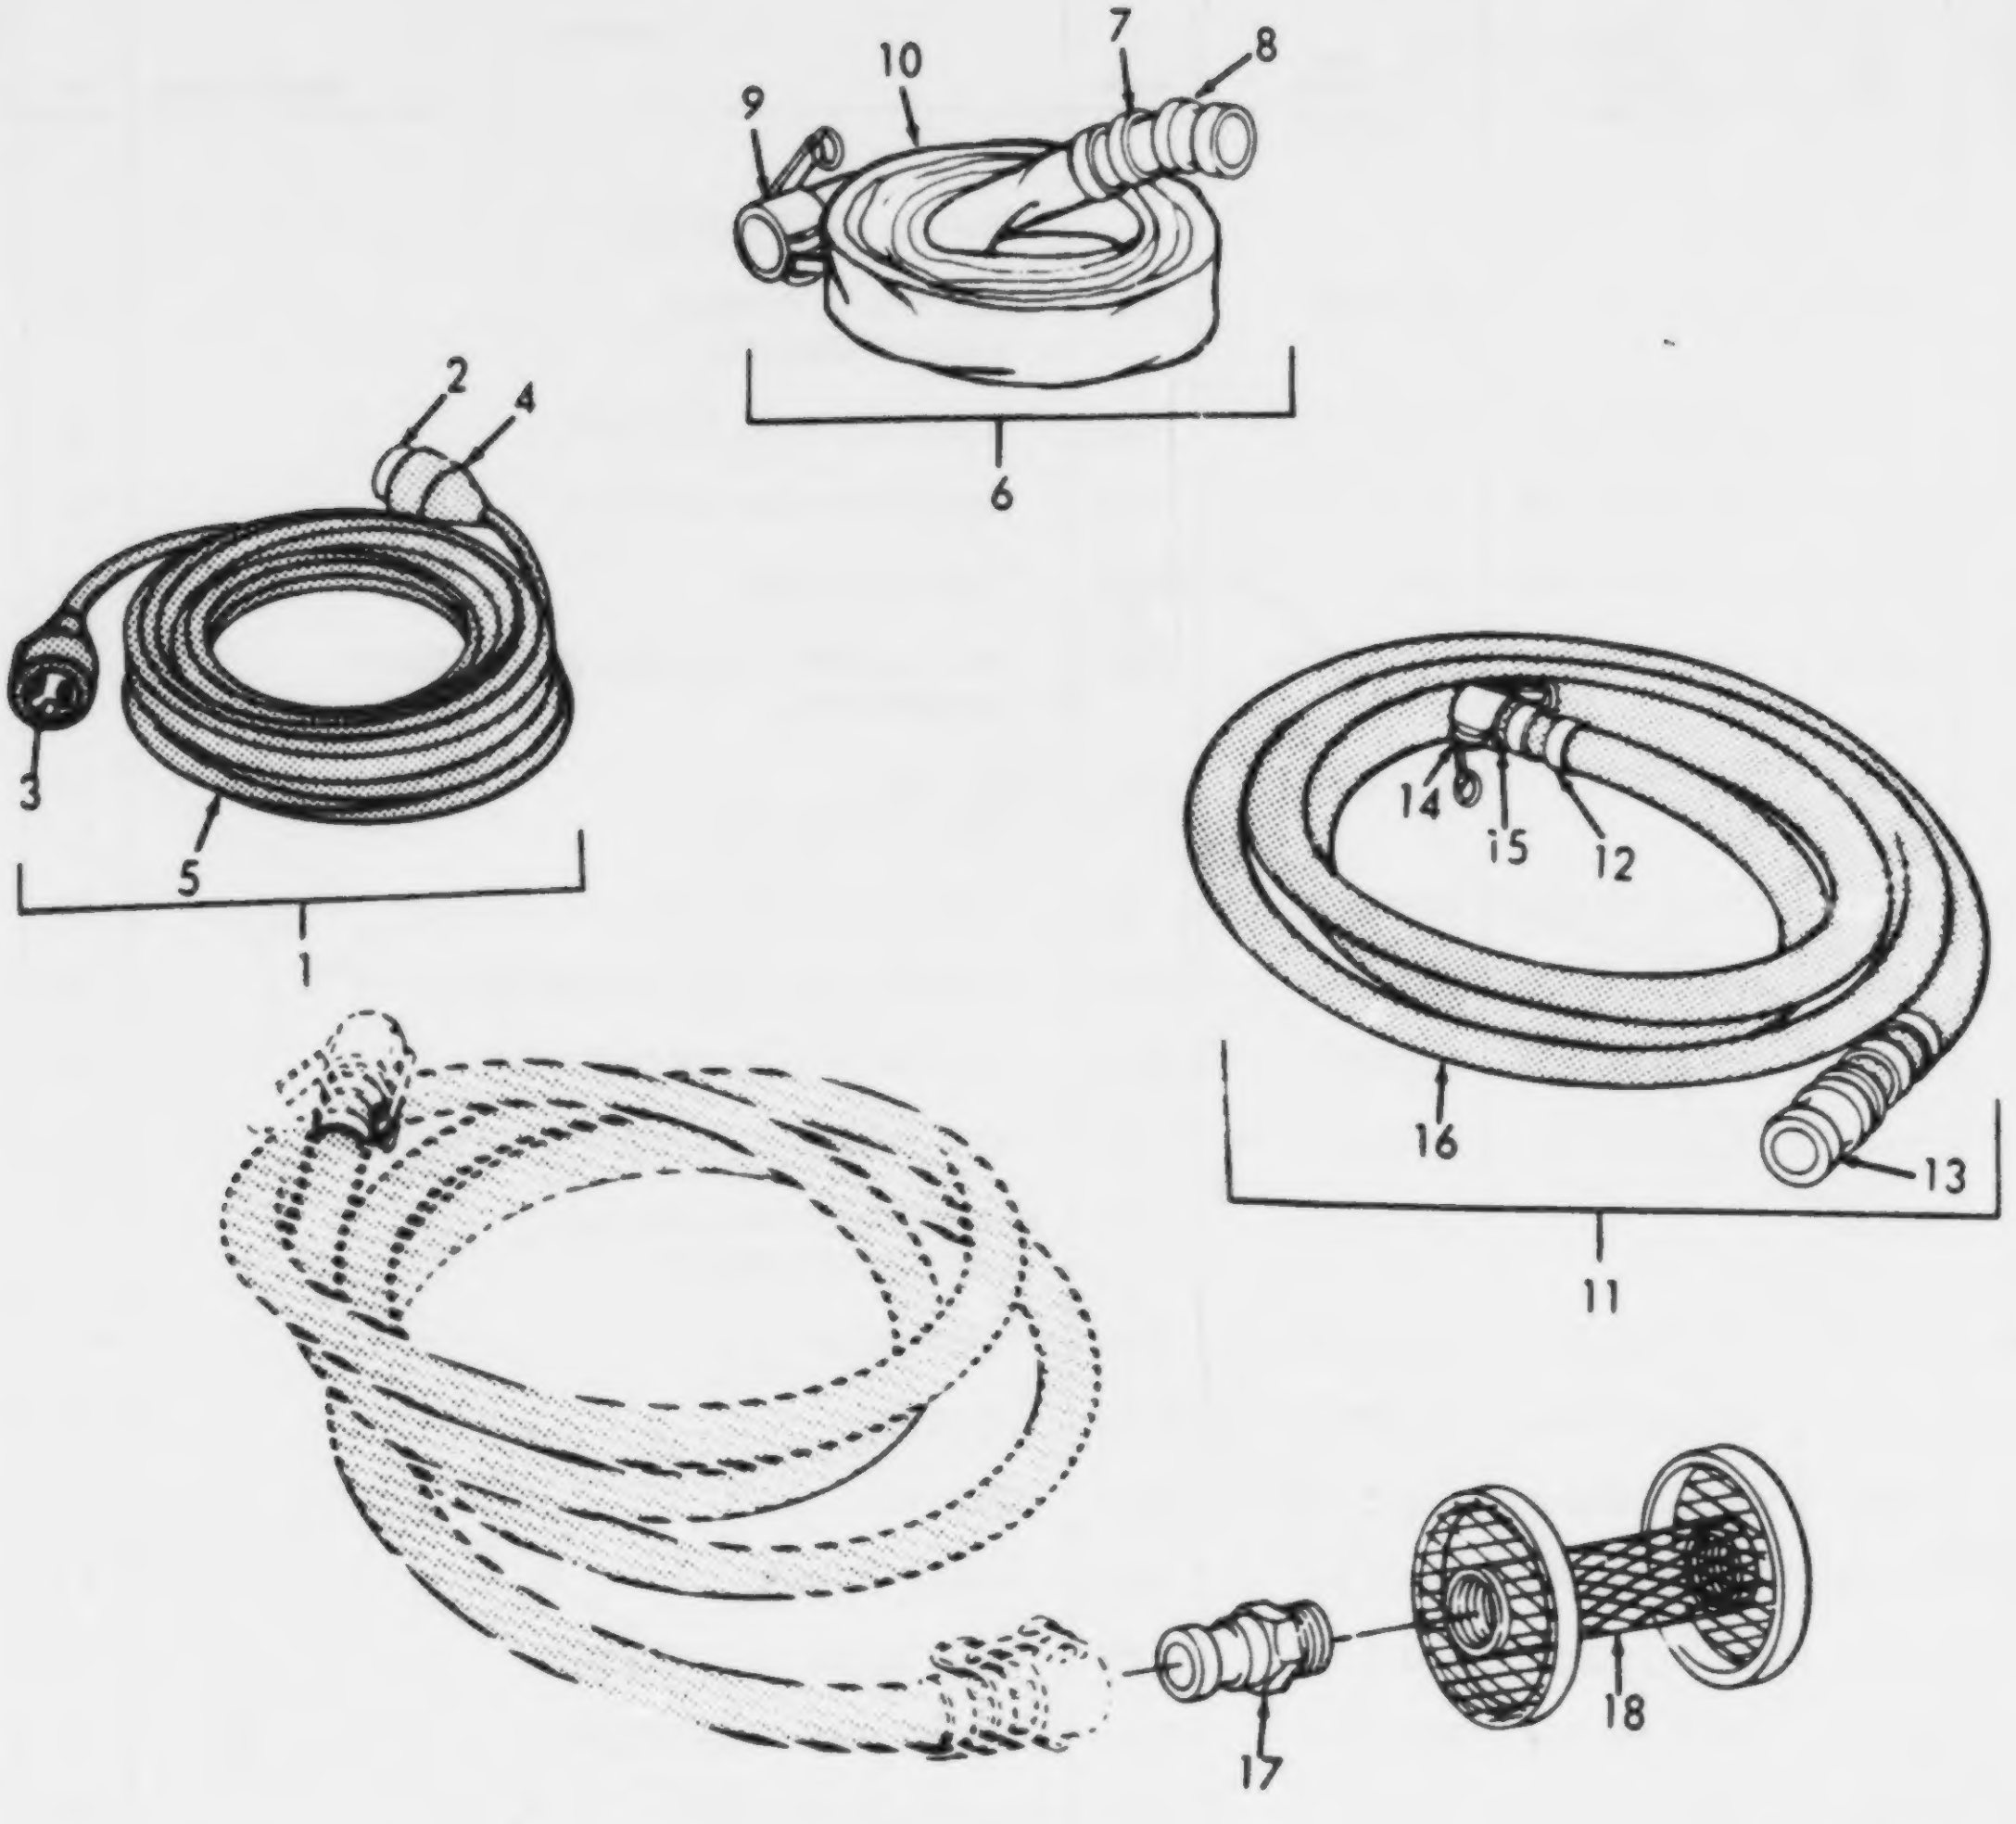
9
10
7
8
6
2
4
3
5
1
14
15
12
16
13
11
17
18

TS 3510-208-34P/4

Figure 4. Strainer, Suction, Hose, Drain Hose and Cable.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	FEDERAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION USABLE ON CODE	U/M	QTY INC IN UNIT
						GROUP 03—HOSES AND CABLE		
4	1	M0000		6-1-746-9A	81337	CABLE, SPECIAL PURPOSE MANUFACTURE FROM:	EA	2
4	2	PAOZZ	5935-00-176-3015	7413G	74545	CONNECTOR, PLUG, ELECTRICAL	EA	2
4	3	PAOZZ	5935-00-581-4099	7411G	74545	CONNECTOR, PLUG, ELECTRICAL	EA	2
4	4	PAOZZ	5935-00-284-3366	7541	74545	COVER, ELECTRICAL	EA	4
4	5	PAOZZ	6145-00-519-2821	6-1-746-9-11A	81337	CABLE, POWER, ELECTRICAL, 25 FT. REQUIRED FOR EACH CABLE	FT	V
4	6	M0000		6-1-746-8-A	81337	HOSE, FIRE MANUFACTURE FROM:	EA	2
4	7	PAOZZ	4730-00-055-8704	QS100M28S	08484	CLAMP, HOSE: FIRE HOSE	EA	8
4	8	PAOZZ	4730-00-948-1722	MS27025-9	96906	COUPLING, HALF, QUICK DISCONNECT	EA	2
4	9	PAOZZ	4730-00-360-0592	MS27021-9	96906	COUPLING, HALF, QUICK DISCONNECT	EA	2
4	10	PAOZZ	4720-00-229-0661	6-1-746-8-1A	81337	HOSE, RUBBER, 25 FT. REQUIRED FOR EACH HOSE	FT	V
4	11	M0000		6-1-746-7A	81337	HOSE ASSEMBLY, DRAIN AND SUCTION MANUFACTURE FROM:	EA	2
4	12	PAOZZ	4730-00-055-8704	QS100M28S	08484	CLAMP, HOSE	EA	8
4	13	PAOZZ	4730-00-950-9646	MS20725-10	96906	COUPLING	EA	2
4	14	PAOZZ	4730-00-949-8291	MS27021-10	96906	COUPLING	EA	2
4	15	PAOZZ	4730-00-360-0595	MS27030-5	96906	GASKET: COUPLING	EA	4
4	16	PAOZZ	4720-00-229-0661	6-1-746-7-1A	81337	HOSE, RUBBER, 25 FT. REQUIRED	FT	V
4	17	PAOZZ	4730-00-360-0589	MS27022-9	96906	COUPLING, HALF, QUICK DISCONNECT	EA	2
4	18	PAOZZ	4730-00-707-6626	47416	79466	STRAINER: SECTION HOSE	EA	1

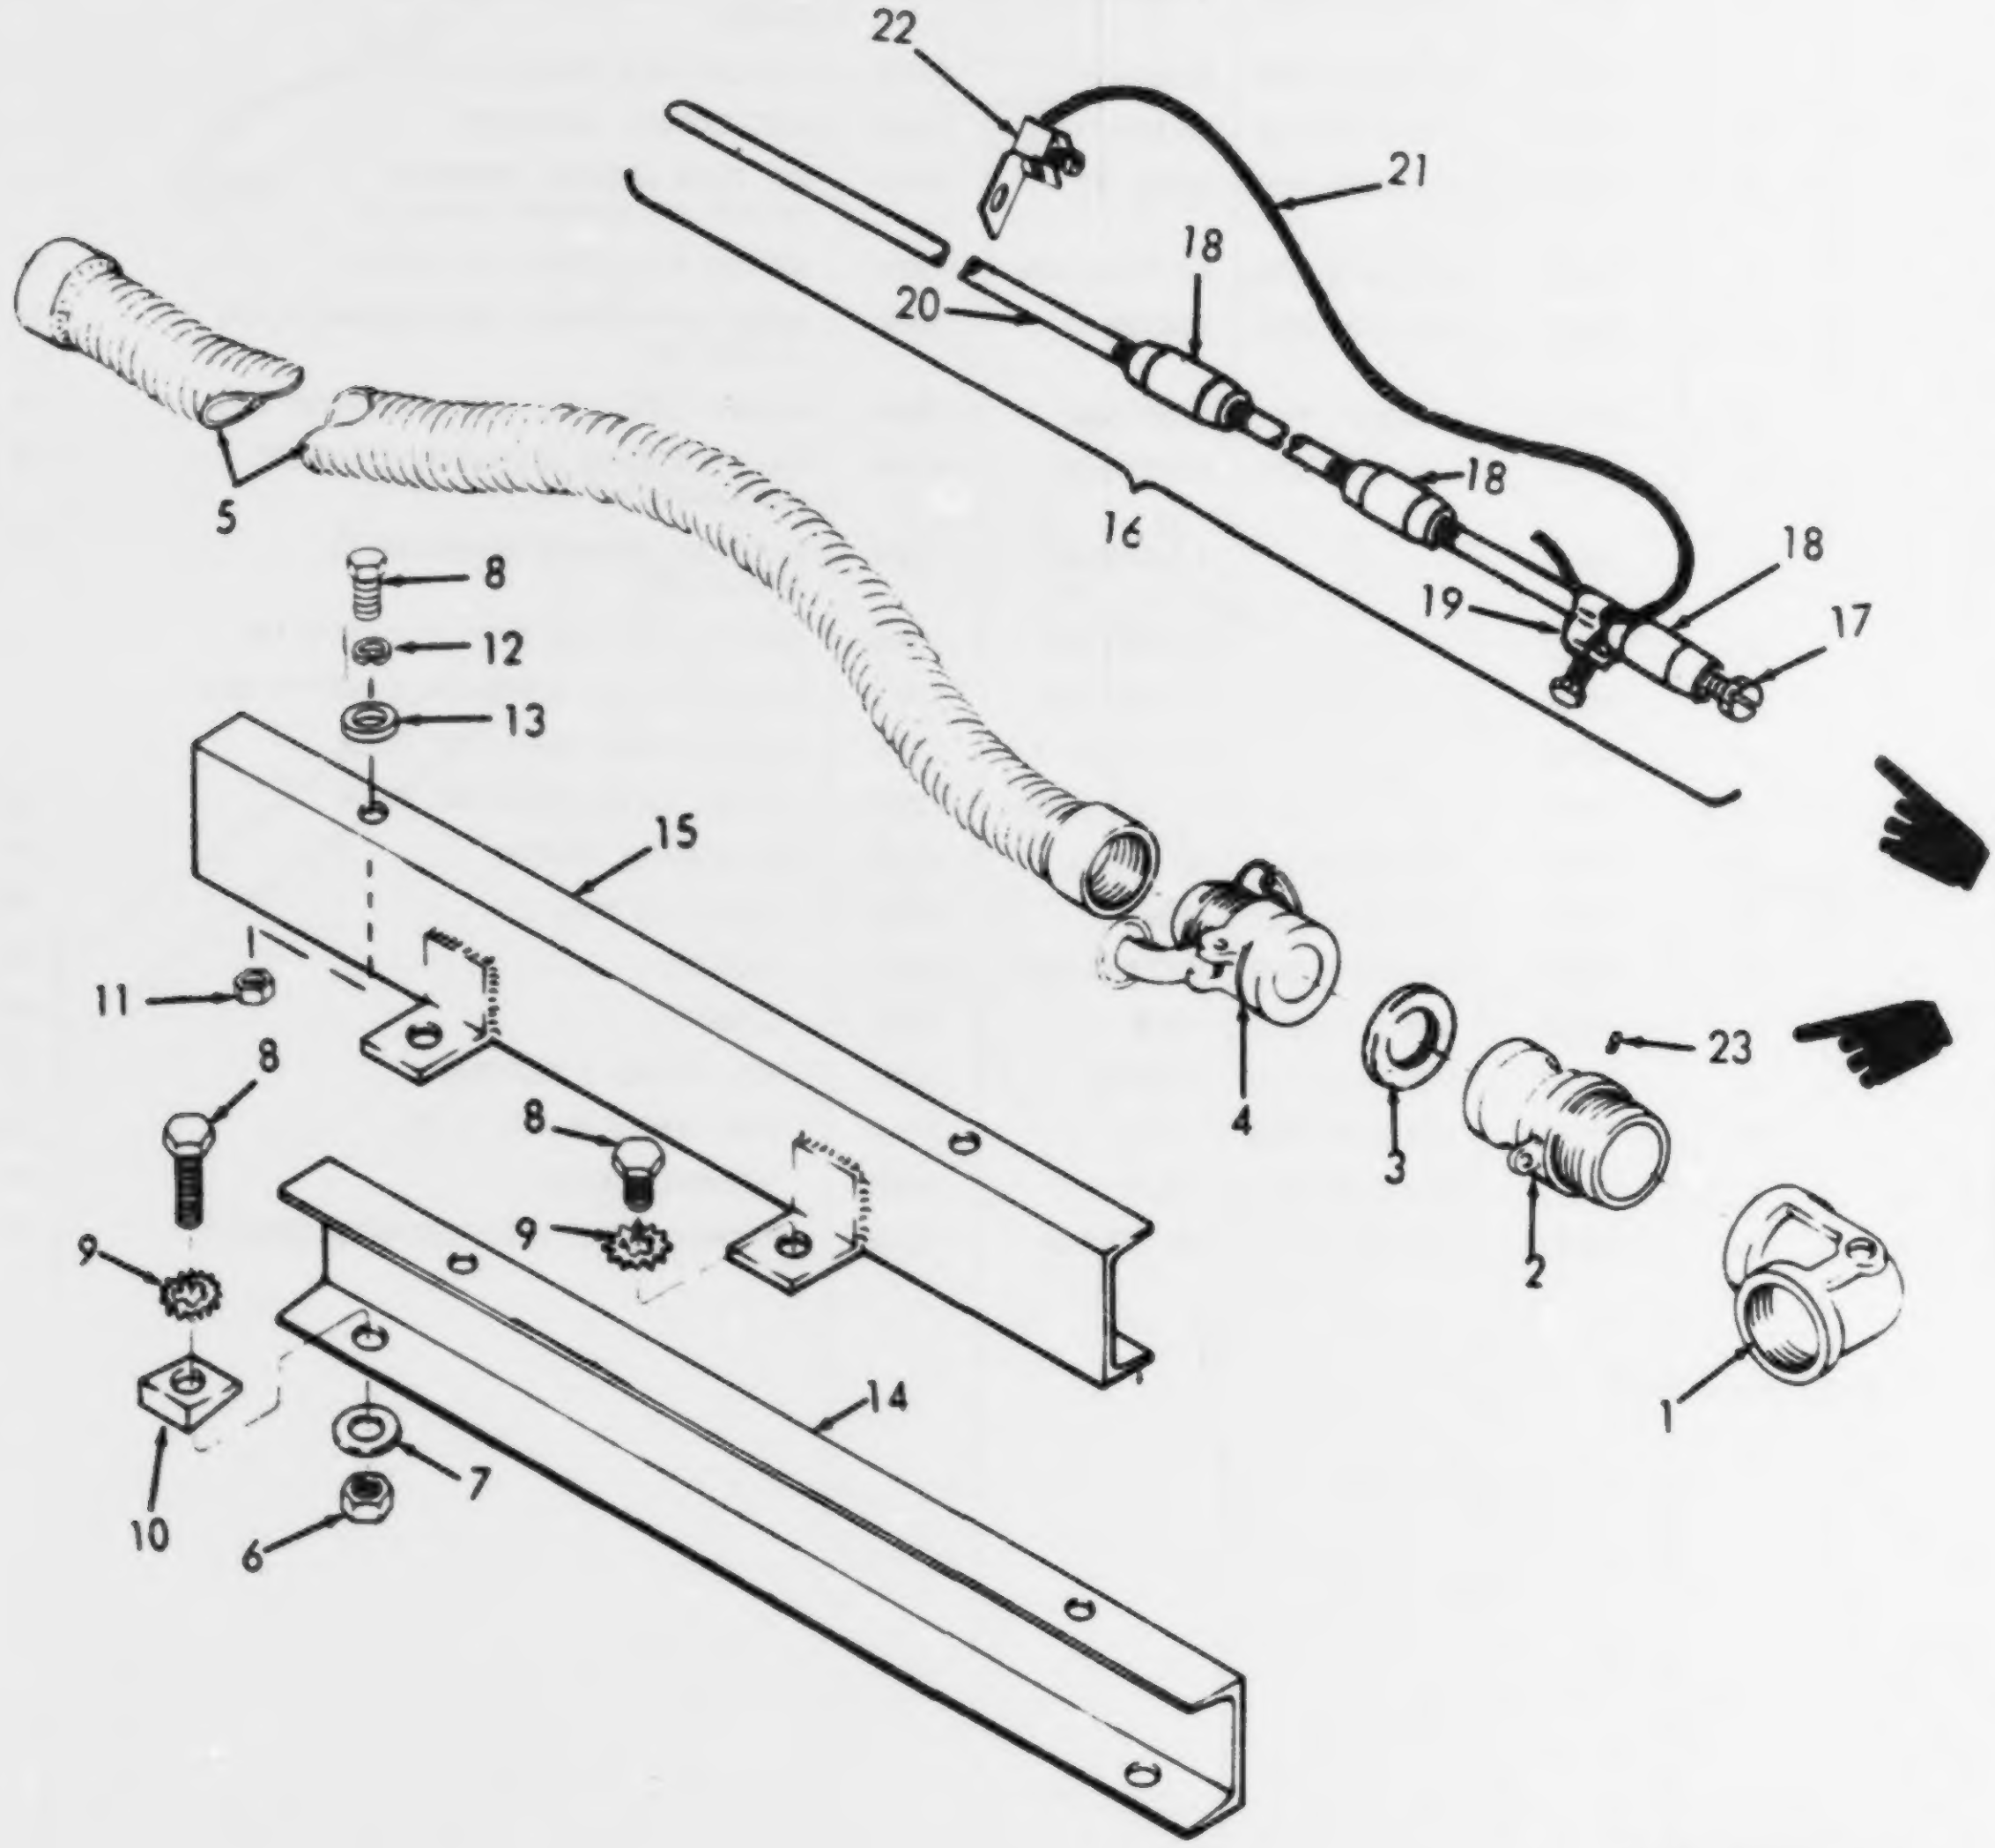
22
21
18
20
18
5
16
18
8
19
17
12
13
15
11
4
23
3
8
2
8
9
9
1
14
10
7
6

TS 3510-208-34P/5

Figure 5. Generator Mounting Frame, Exhaust Duct and Ground Rod.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	QTY INC IN UNIT
						GROUP 04 — GENERATOR MOUNTING FRAME, EXHAUST DUCT AND GROUND ROD		
5	1	PAOZZ	4730-00-933-7925	6-1-1900-139A	72869	ELBOW, PIPE: GENERATOR EXHAUST DUCT, 90 DEG, 150 LB, 1-1/4 NPT, FEMALE MODIFIED, CRES.	EA	1
5	2	PAOZZ	4730-00-491-0031	MS27022-8	96906	COUPLING HALF, BRONZE: 1-1/4 IN.	EA	1
5	3	PAOZZ	5330-00-776-7568	6-1-1900-145A	72869	GASKET, GENERATOR EXHAUST DUCT: ASBESTOS COPPER	EA	1
5	4	PAOZZ	4730-00-491-0030	MS27026-8	96906	COUPLING HALF, BRONZE: 1-1/4 IN.	EA	1
5	5	PBOZZ	4720-00-903-4148	6-1-1900-113A	72869	DUCT, EXHAUST, GENERATOR	EA	1
5	6	PAFZZ	5310-00-763-8920	MS5167-20	96906	NUT, PLAIN, HEXAGON: GENERATOR TO SUPPORT AND SUPPORT TO TRAILER	EA	8
5	7	PAFZZ	5310-00-739-2994	6-1-1912-21-84A	72869	WASHER, FLAT: SUPPORT TO TRAILER	EA	4
5	8	PAFZZ	5305-00-297-0664	MSS5305-43	08288	SCREW, CAP, HEXAGON, HEAD: GENERATOR AND SUPPORT MTG	EA	10
5	9	PAFZZ	5310-00-017-8627	MSS5310-62	08288	WASHER, LOCK: GENERATOR AND SUPPORT MTG	EA	13
5	10	PAFZZ	5310-00-776-0284	MSS5310-68	08288	WASHER, BEVELED: GENERATOR TO SUPPORT AND SUPPORT TO TRAILER	EA	8
5	11	XBFZZ		6-1-1900-108A	72869	NUT, PLAIN, HEXAGON: GENERATOR TO SUPPORT MTG	EA	4
5	12	XBFZZ		6-1-1900-109A	72869	WASHER, LOCK: GENERATOR TO SUPPORT MTG	EA	4
5	13	XBFZZ		6-1-1900-141A	72869	WASHER BEVELED: GENERATOR TO SUPPORT MTG	EA	4
5	14	XBFZZ		6-1-1912-21-73A	72869	SUPPORT, ENGINE GENERATOR: OUTER	EA	1
5	15	XBFZZ		6-1-1912-21-95A	72869	SUPPORT, ENGINE GENERATOR: INNER	EA	1
5	16	PBOZZ	5975-00-878-3791	MIL-R-11461	81349	ROD ASSEMBLY, GROUND	EA	1
5	17	PBOZZ	5975-00-924-9927	GRB58	73616	STUD, DRIVE HEAD	EA	1
5	18	PBOZZ	5975-00-794-2523	GRC58KNURLED	73616	COUPLING	EA	3
5	19	PBOZZ	5999-00-186-3912	HDC58	61882	CLAMP	EA	1
5	20	PAOZZ	5975-01-143-7340	HLP1053A	56681	ROD, GROUND (3 SECTIONS)	EA	1
5	21	PBOZZ	6145-00-189-6695	J-C-30	81348	WIRE, COPPER #6 AWG, 24 FT	FT	24
5	22	PAOZZ	5940-00-271-9504	CBA-70	01667	TERMINAL, GROUND	EA	1
5	23	PAOZZ	5305-00-249-0511	6-1-1900-142A	72869	SETSCREW, SOCKET HEAD: GENERATOR EXHAUST DUCT	EA	2

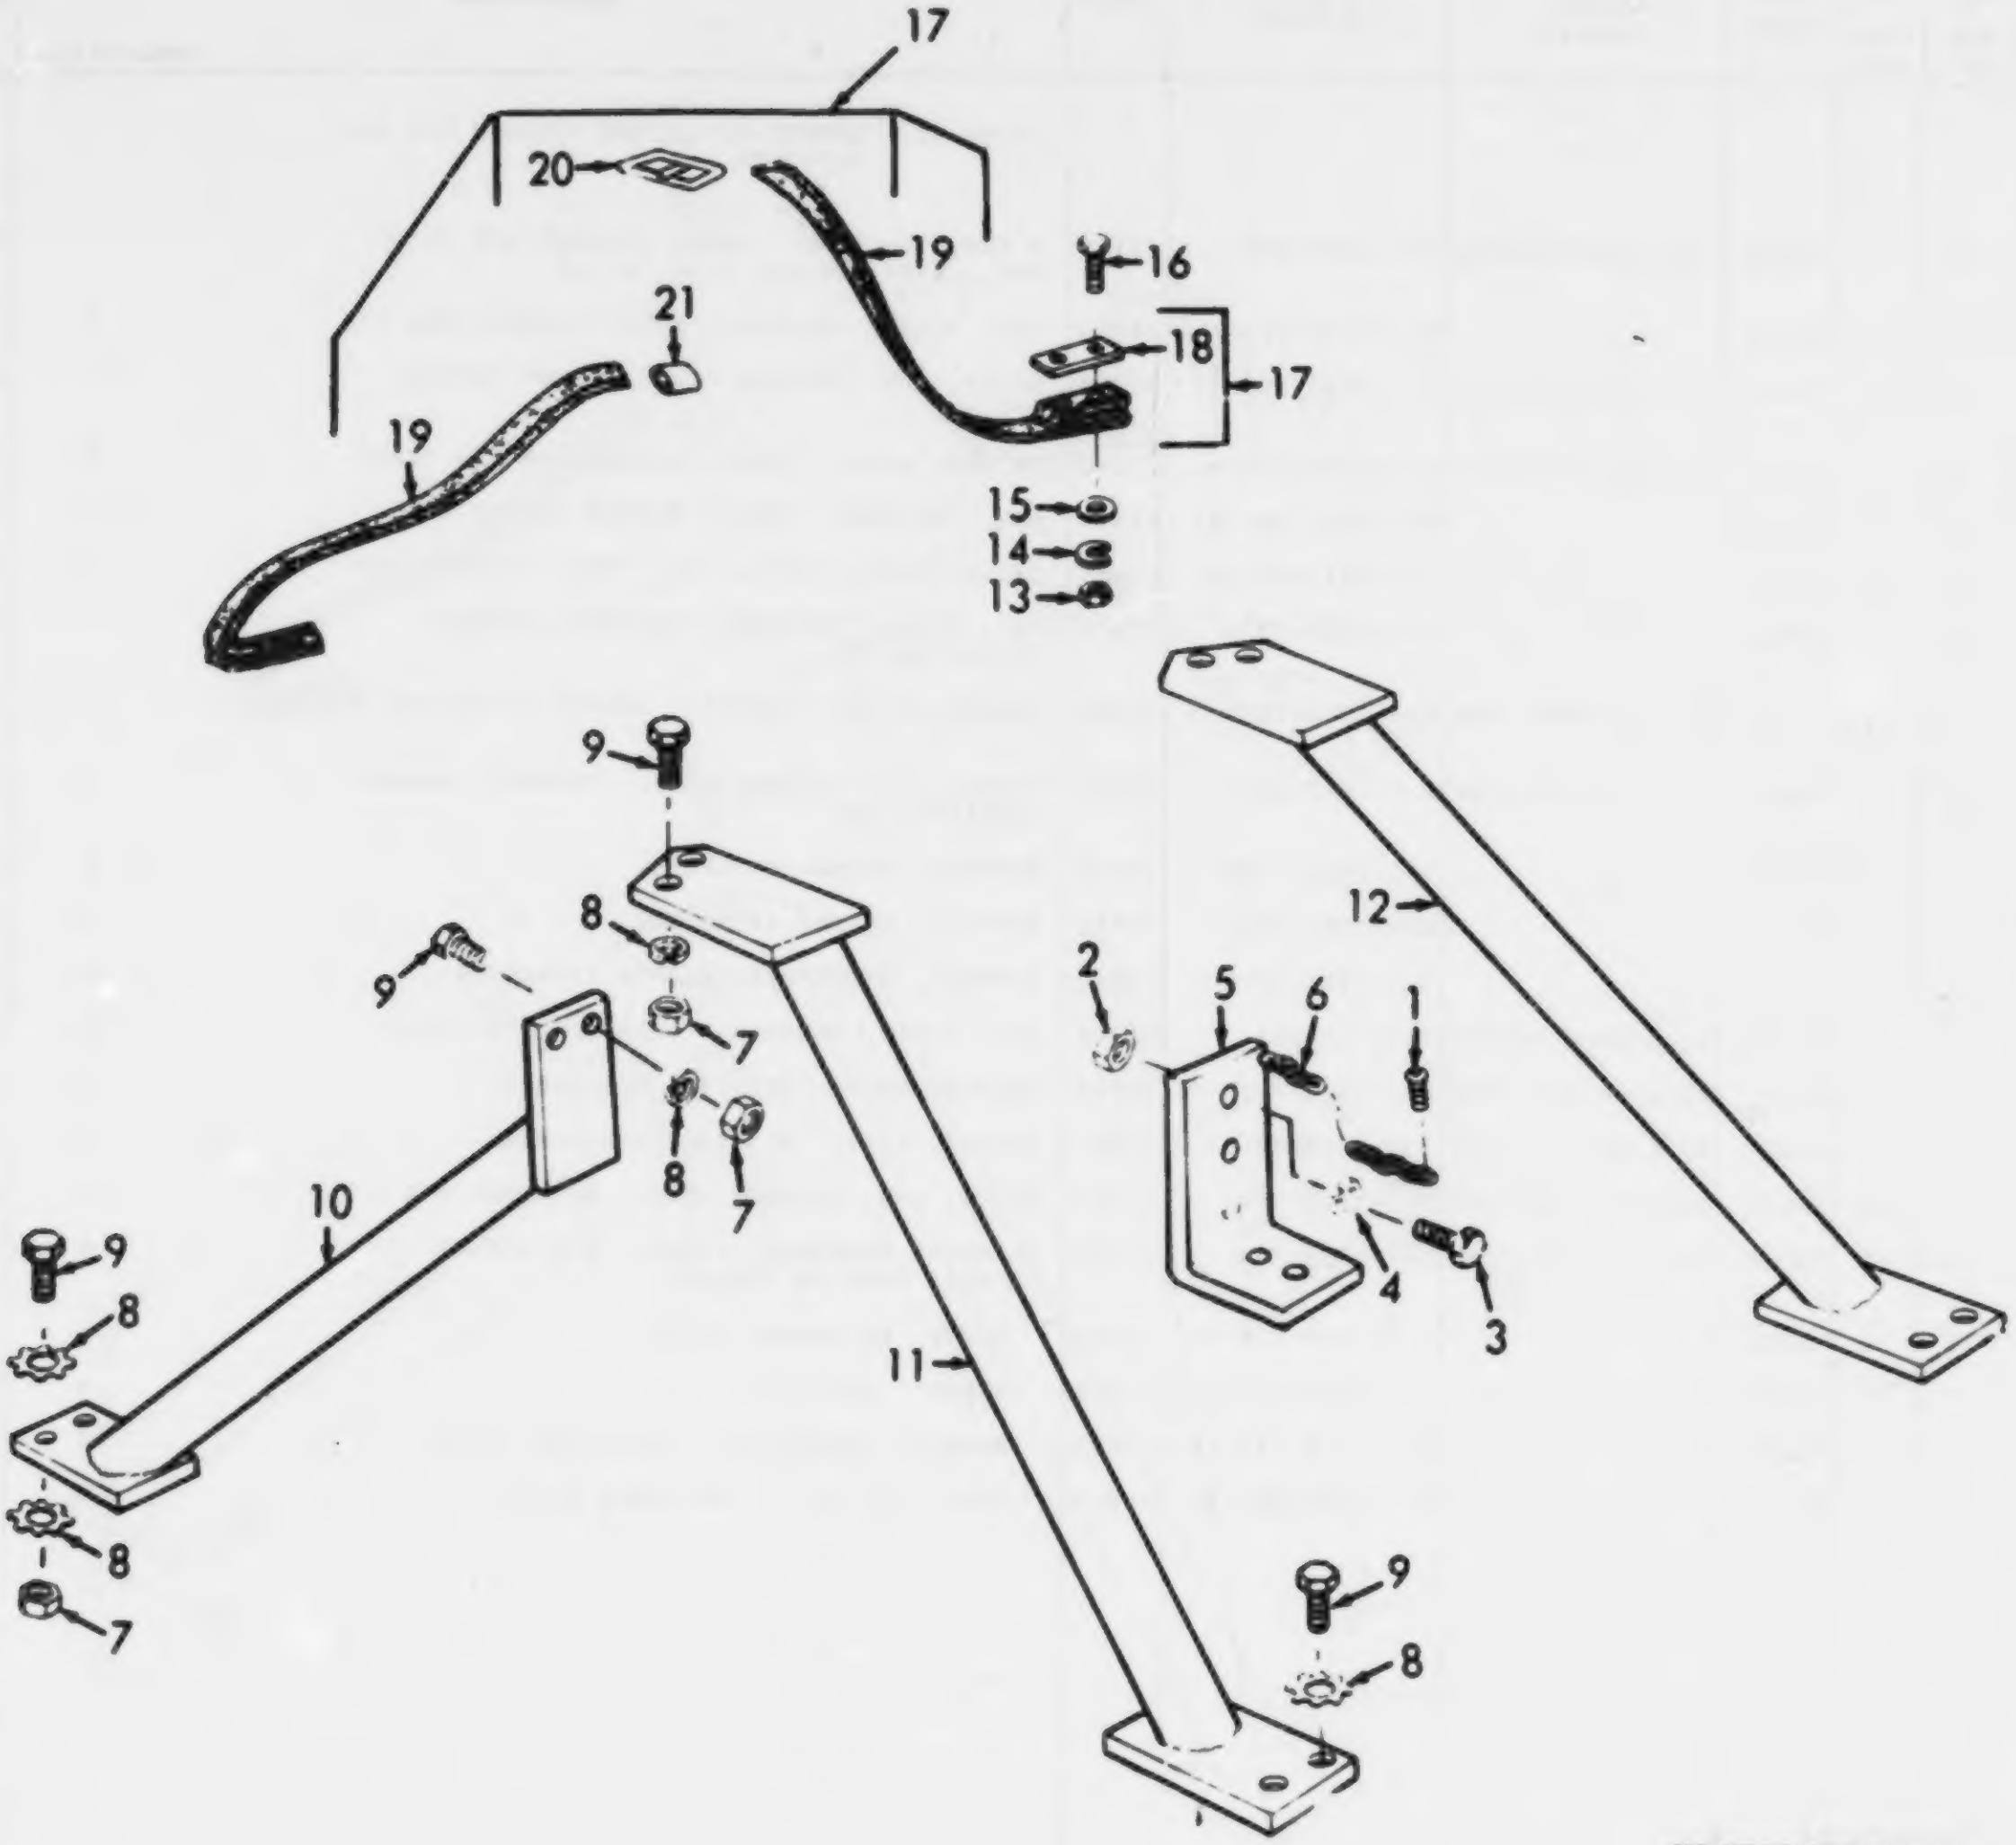
17
20
19
16
21
18
17
19
15
14
13
9
8
12
9
7
2
5
6
1
10
8
7
8
4
9
3
8
11
8
7
9
8

TS 3510-208-34P/6

Figure 6. Washer-Extractor Tiedown Bars and Supports ,EIDAL Model ELT9T.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION	Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 05 - WASHER-EXTRACTOR TIEDOWN BAR AND SUPPORTS			
6	1	PAOZZ	5305-00-016-9740	6-1-1929-61A	72869	SCREW, PAN HEAD: FRONT TIEDOWN BAR CHAIN MTG, 10-24 UNC-2A, 5/16 IN. LG	A	EA	1
6	2	XBOZZ		6-1-1929-87A	72869	NUT, PLAIN, HEXAGON: FRONT TIEDOWN BAR MTG	A	EA	2
6	3	PAOZZ	5305-00-051-0827	6-1-1929-86A	72869	SCREW, CAP, HEXAGON HEAD: FRONT TIEDOWN BAR MTG	A	EA	4
6	4	PAOZZ	5310-00-820-6653	6-1-1929-67A	72869	WASHER, LOCK: FRONT TIEDOWN BAR MTG SCREW	A	EA	4
6	5	XBOZZ		6-1-1971-48-1A	72869	BAR, TIEDOWN: FRONT, WASHER EXTRACTOR	A	EA	1
6	6	PAOZZ		6-1-1971-48-2A	72869	CHAIN, SASH, 10 IN. LG: FRONT TIEDOWN BAR	A	EA	1
6	7	XBOZZ		6-1-1900-157A	72869	NUT, PLAIN, HEXAGON: SUPPORT, WASHER EXTRACTOR MTG	A	EA	8
6	8	PAOZZ	5310-00-584-7888	6-1-1900-123A	72869	WASHER, STAR: SUPPORT, WASHER EXTRACTOR MTG	A	EA	18
6	9	PAOZZ	5305-00-281-1694	6-1-1900-122A	72869	SCREW, CAP, HEXAGON HEAD: SUPPORT, WASHER EXTRACTOR MTG	A	EA	2
6	10	XBOZZ		6-1-1981-119A	72869	SUPPORT, WASHER EXTRACTOR	A	EA	1
6	11	XBOZZ		6-1-1981-120A	72869	SUPPORT, WASHER EXTRACTOR	A	EA	1
6	12	XBOZZ		6-1-1981-121A	72869	SUPPORT, TRANSPORT, WASHER EXTRACTOR	A	EA	1
6	13	PAOZZ	5310-00-934-9758	MS35649-202	96906	NUT, PLAIN, HEXAGON: RETAINER MTG SCREW	A	EA	8
6	14	PAOZZ	5310-00-834-7606	6-1-1978-124-7A	72869	WASHER, LOCK: RETAINER MTG SCREW	A	EA	8
6	15	PAOZZ	5310-00-350-4989	6-1-1978-28-3A	72869	WASHER, FLAT: RETAINER MTG SCREW	A	EA	8
6	16	PAOZZ	5305-00-018-6742	6-1-1978-124A	72869	SCREW, CAP, HEXAGON HEAD: RETAINER MTG	A	EA	8
6	17	PBOOO	3510-00-411-2658	6-1-1978-28A	72869	RETAINER ASSEMBLY, STRAP: AIR HEATER EXHAUST DUCT IN TRANSIT	A	EA	2
6	18	XBOZZ		6-1-1978-124-1A	72869	PLATE, RETAINER, STRAP	A	EA	4
6	19	XBOZZ		6-1-1978-124-4A	72869	STRAP: RETAINER	A	EA	4
6	20	XBOZZ		6-1-1978-124-5A	72869	BUCKLE, TONGUELESS: RETAINER STRAP	A	EA	2
6	21	XBOZZ		6-1-1978-124-2A	72869	CLIP, END BALL: RETAINER STRAP	A	EA	2

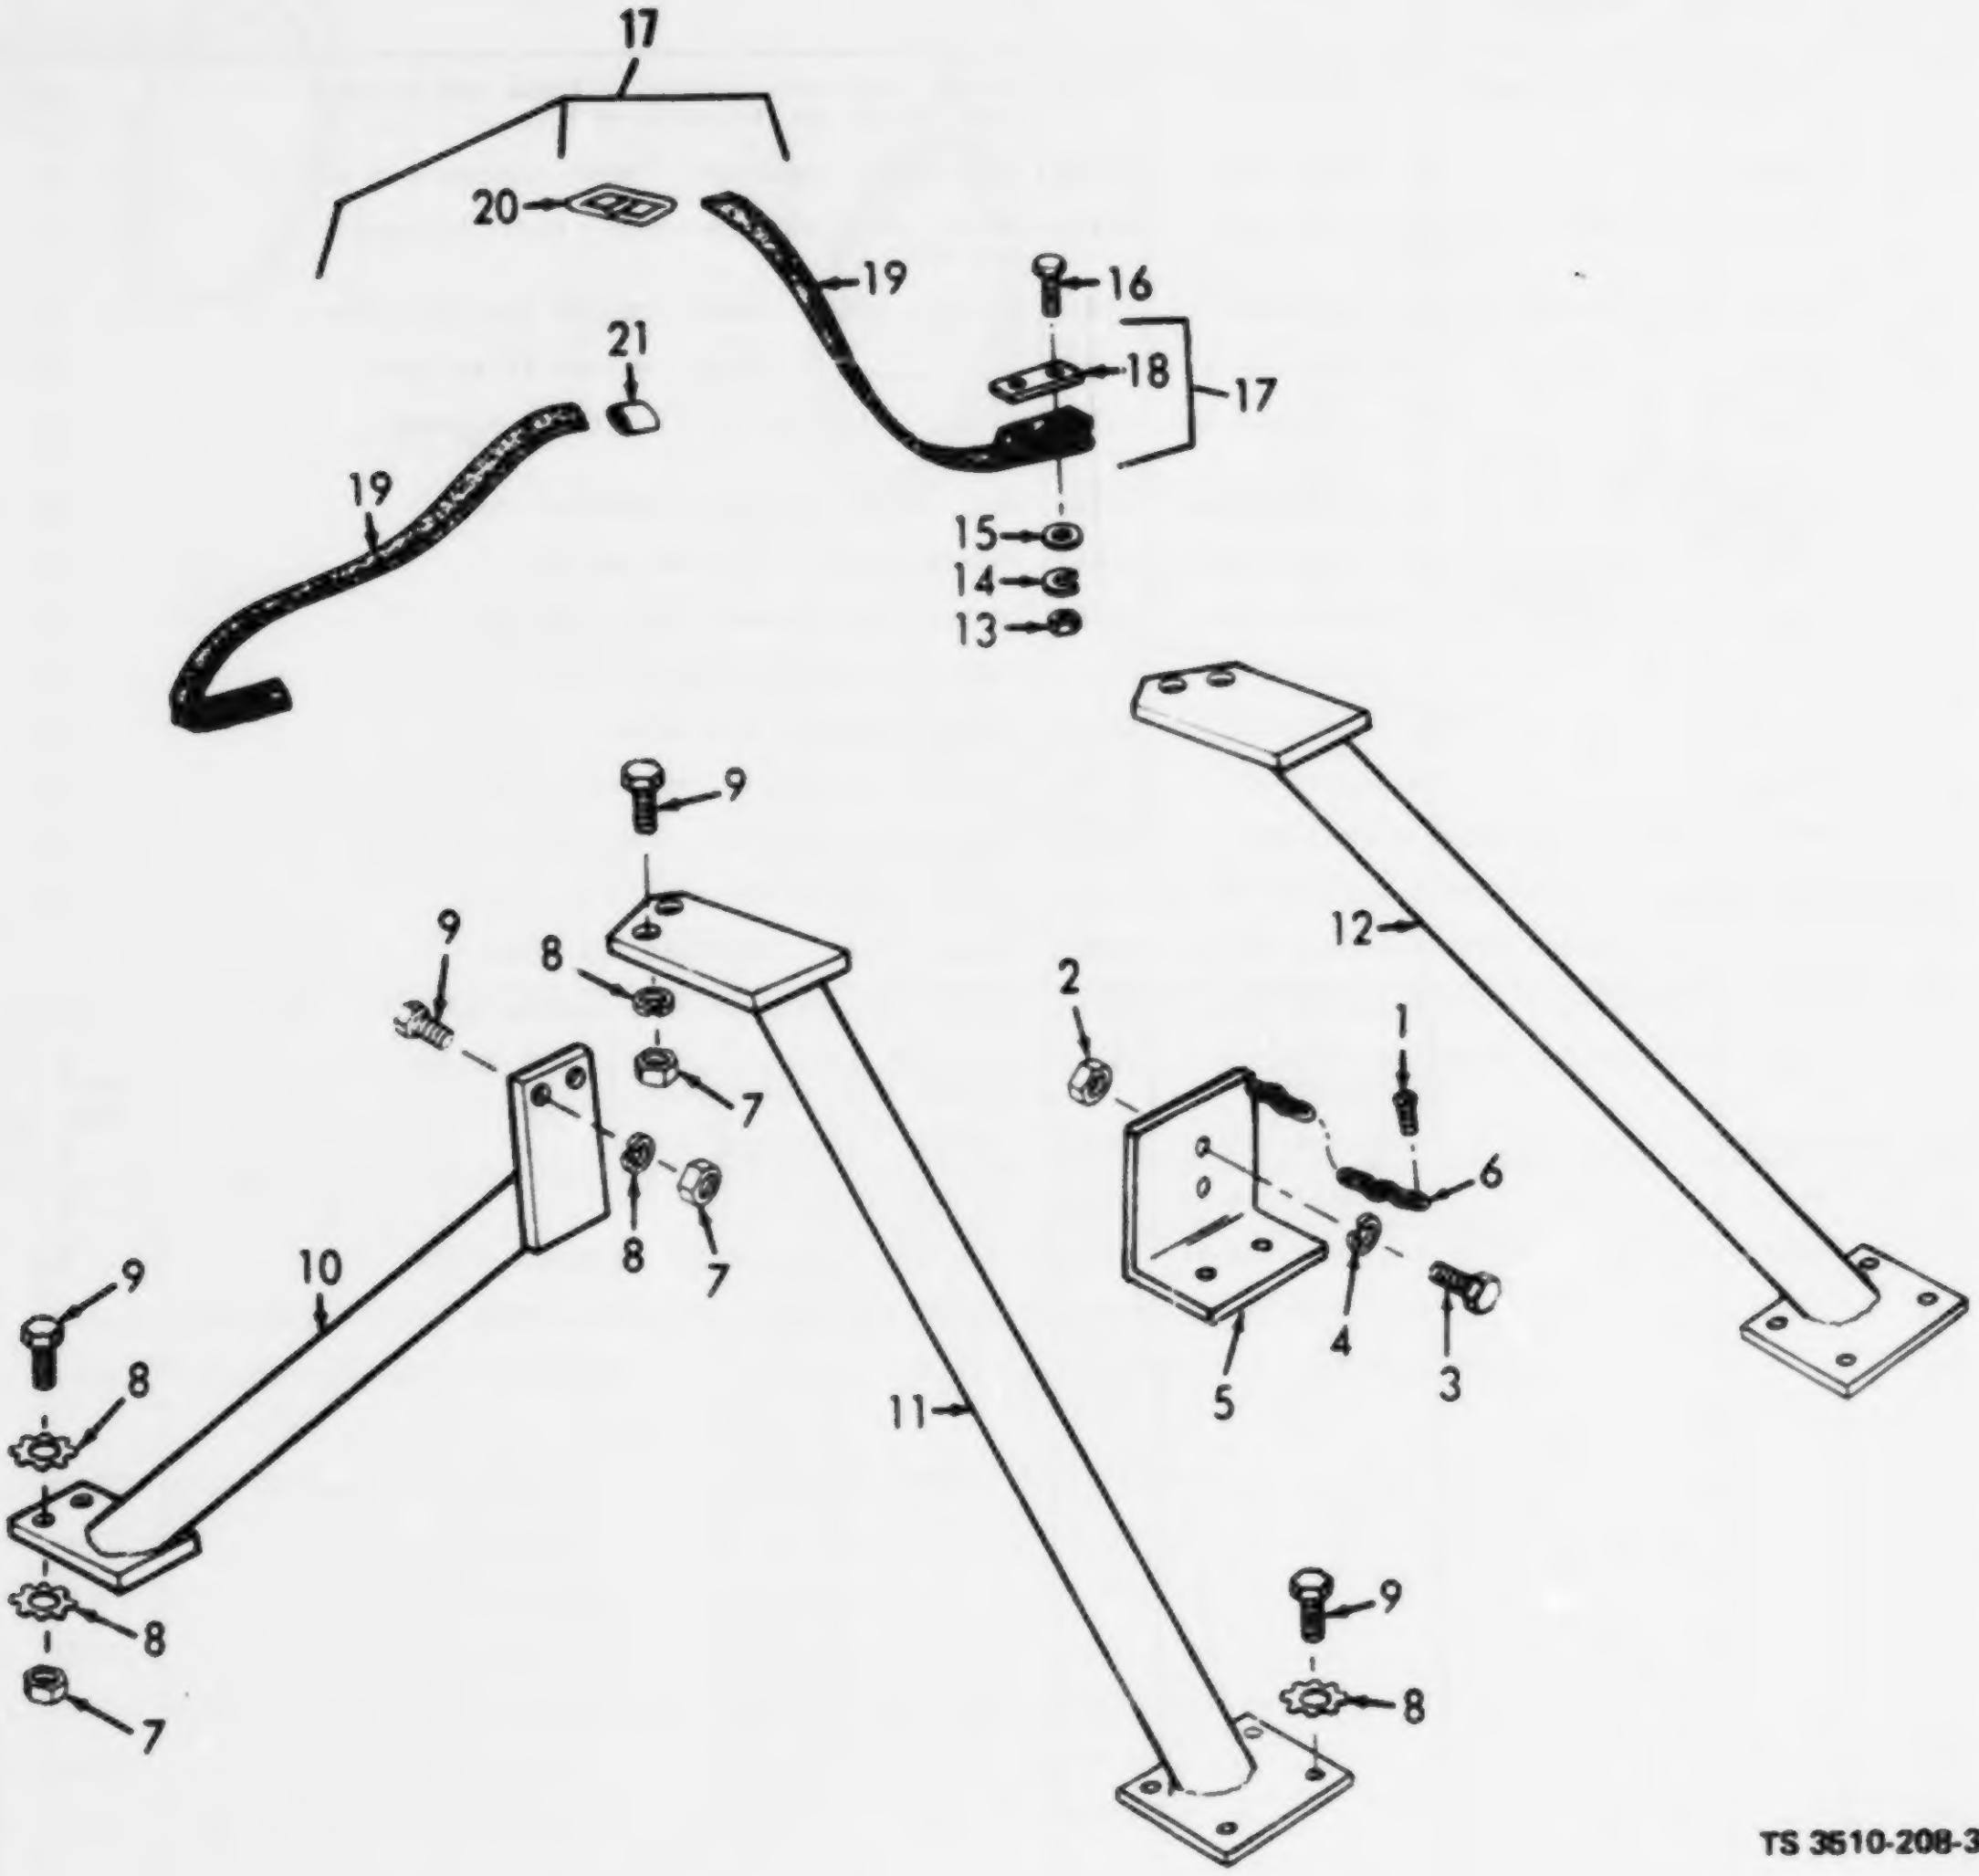

17
20
19
16
18
17
21
19
15
14
13
9
12
9
8
2
1
7
6
10
9
8
8
7
7
4
3
5
11
9
8
8
9
7

TS 3510-208-34P/7

Figure 7. Washer-Extractor Tiedown Bars and Supports EDRO Model EP120-LTU.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION	Usable On Code	(7) U/M	(8) QTY INC IN UNIT
7	1	PAOZZ	5305-00-016-9740	6-1-1929-61A	72869	SCREW, PAN HEAD: FRONT TIEDOWN BAR CHAIN MTG. 10-24 UNC-2A, 5/16 IN. LG	B	EA	1
7	2	XBOZZ		6-1-1929-87A	72869	NUT, PLAIN, HEXAGON: FRONT TIEDOWN BAR MTG	B	EA	2
7	3	PAOZZ	5305-00-051-0827	6-1-1929-86A	72869	SCREW, CAP, HEXAGON HEAD: FRONT TIEDOWN BAR MTG	B	EA	4
7	4	PAOZZ	5310-00-820-6653	6-1-1929-67A	72869	WASHER, LOCK: FRONT TIEDOWN BAR MTG SCREW	B	EA	4
7	5	XBOZZ		6-1-1971-48-11	01551	BAR, TIEDOWN: FRONT, WASHER EXTRACTOR	B	EA	1
7	6	PAOZZ		6-1-1971-48-2A	72509	CHAIN, SASH, 10 IN. LG: FRONT TIEDOWN BAR	B	EA	1
7	7	XBOZZ		6-1-1900-157A	72869	NUT, PLAIN, HEXAGON: SUPPORT MTG	B	EA	8
7	8	PAOZZ	5310-00-584-7888	6-1-1900-123A	72869	WASHER, LOCK: TIEDOWN BAR MTG	B	EA	18
7	9	PAOZZ	5305-00-281-1694	6-1-1900-122A	72869	SCREW, CAP, HEXAGON HEAD: SUPPORT	B	EA	16
7	10	XBOZZ		6-1-1981-119	01551	SUPPORT, WASHER EXTRACTOR	B	EA	1
7	11	XBOZZ		6-1-1981-120	01551	SUPPORT, WASHER EXTRACTOR	B	EA	1
7	12	XBOZZ		6-1-1981-121	01551	SUPPORT, TRANSPORT, WASHER EXTRACTOR	B	EA	1
7	13	PAOZZ	5310-00-934-9758	MS35649-202	96906	NUT, PLAIN, HEXAGON: RETAINER MTG SCREW	B	EA	8
7	14	PAOZZ	5310-00-834-7606	6-1-1978-1124-7A	72869	WASHER, LOCK: RETAINER MTG SCREW	B	EA	8
7	15	PAOZZ	5310-00-350-4989	6-1-1978-28-3A	72869	WASHER, FLAT: RETAINER MTG SCREW	B	EA	8
7	16	PAOZZ	5305-00-018-6742	6-1-1978-124A	72869	SCREW, CAP, HEXAGON HEAD: RETAINER MTG	B	EA	2
7	17	PBOOO	3510-00-411-2658	6-1-1978-28A	72869	RETAINER ASSEMBLY, STRAP: AIR HEATER EXHAUST DUCT IN TRANSIT	B	EA	2
7	18	XBOZZ		6-1-1978-124-1A	72869	PLATE: RETAINER, STRAP	B	EA	4
7	19	XBOZZ		6-1-1978-124-4A	72869	STRAP, RETAINER	B	EA	4
7	20	XBOZZ		6-1-1978-124-5A	72869	BUCKLE, TONGUELESS: RETAINER STRAP	B	EA	2
7	21	XBOZZ		6-1-1978-124-2A	72869	CLIP, END BALL: RETAINER STRAP	B	EA	2

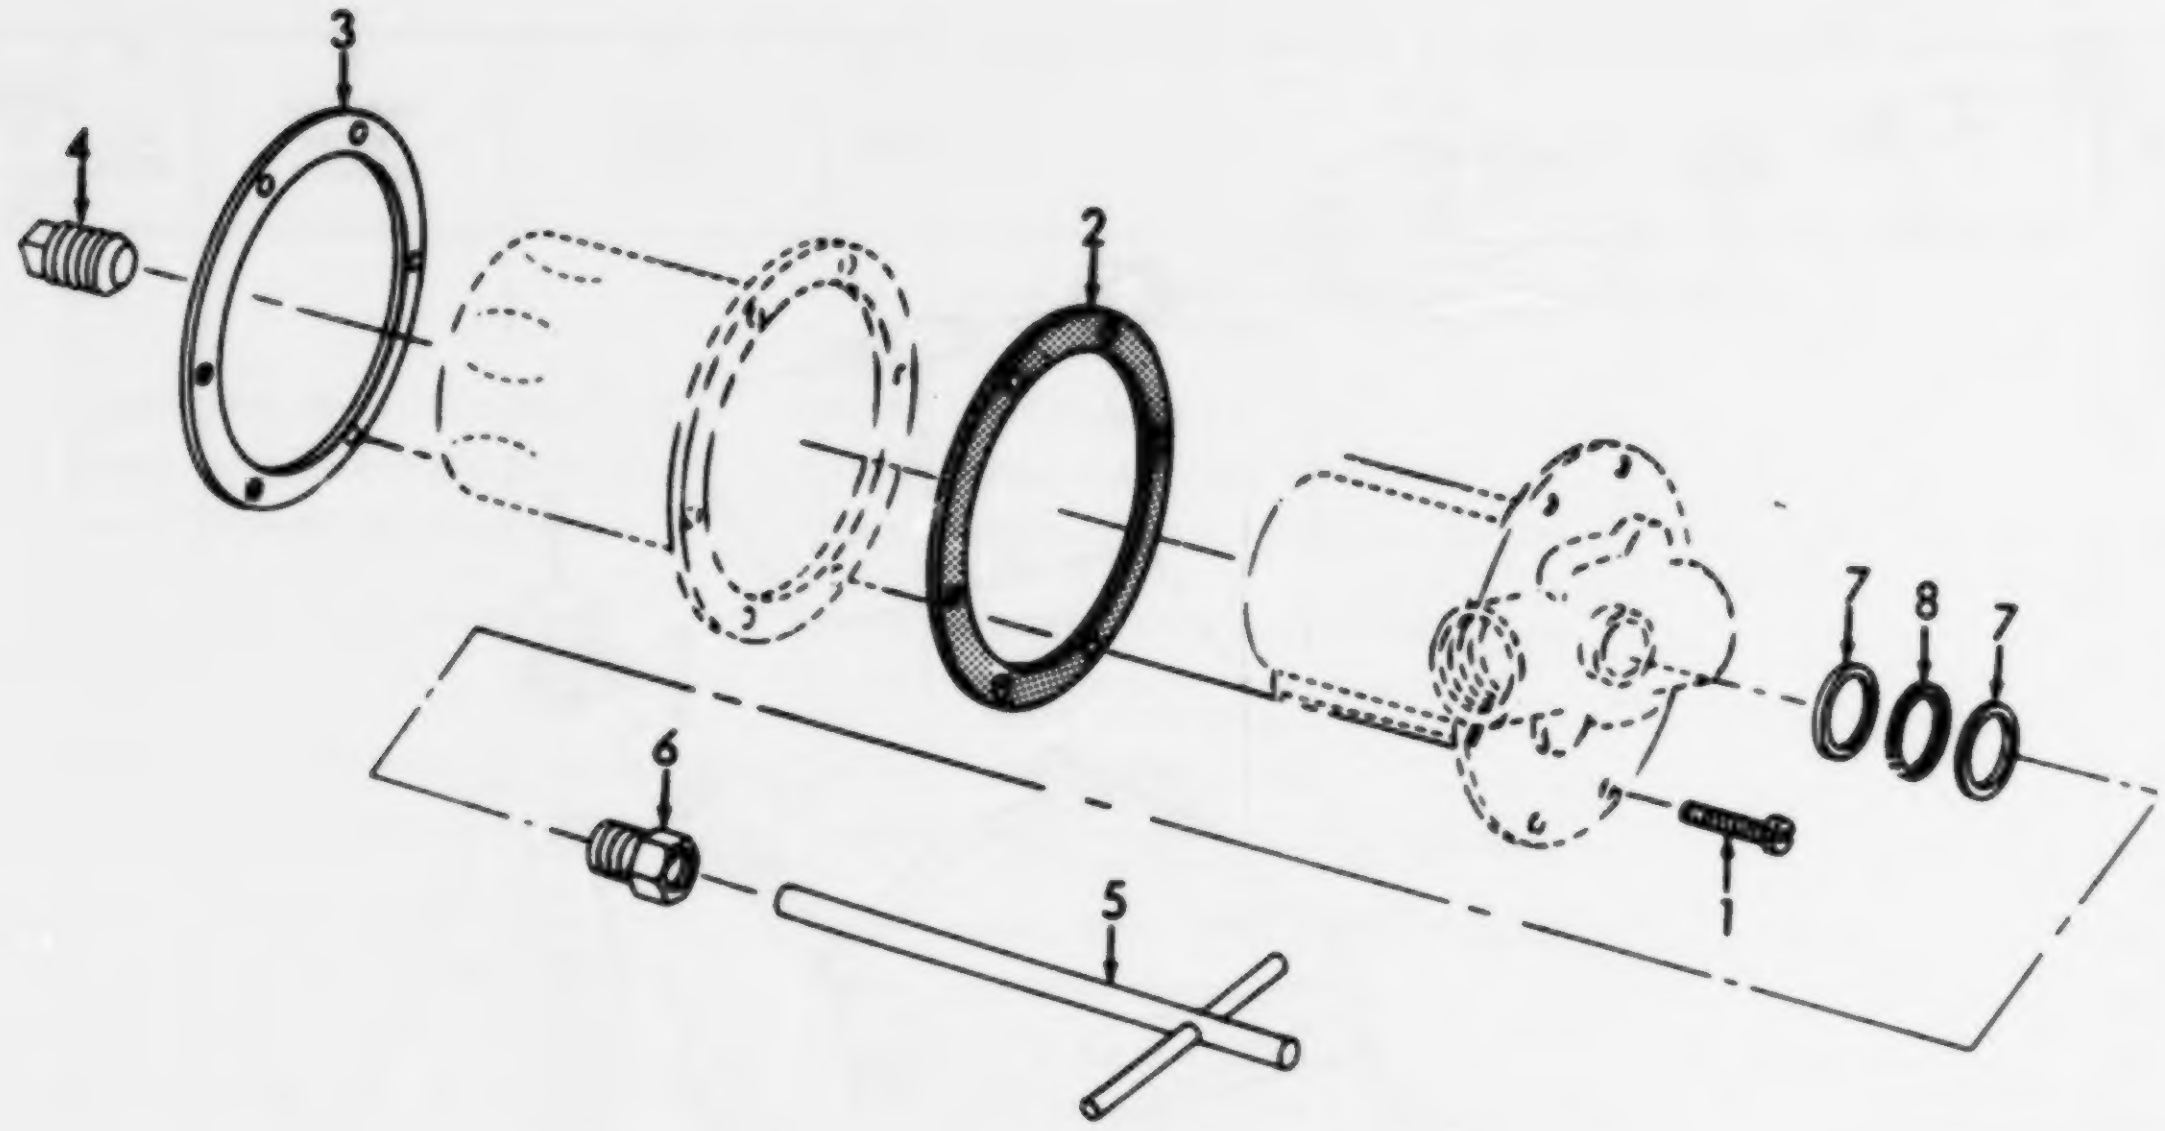

TS 3510-208-34P/8

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 06 - FUEL FILTER, TUMBLER BURNER		
8		PAOZZ	4330-00-640-5820	DS12706-2	15472	FILTER, FUEL: TUMBLER	EA	1
8	1	PAOZZ	5305-00-016-9525	MBOES169525	96906	SCREW, SELF-TAPPING: FILTER HEAD MTG, 12-24 THD SIZE, 5/8 IN. LG	EA	6
8	2	PAOZZ	5330-00-360-5303	32849-31	15472	GASKET, HEAD, FILTER	EA	1
8	3	XBOZZ		28329-00	15472	RING, FILTER HEAD	EA	1
8	4	XBOZZ		23370-31	15472	PLUG, DRAIN, FILTER	EA	1
8	5	XBOZZ		31582-32	15472	HANDLE, FILTER	EA	1
8	6	PAOZZ	4730-00-293-7971	32158-31	15472	BUSHING, MACHINE THREAD	EA	1
8	7	XBOZZ		32059-31	15472	WASHER, RECESSED	EA	2
8	8	PAOZZ	5330-00-351-6427	32058-31	15472	PACKING, PREFORMED	EA	1

Figure 8. Fuel Filter, Tumbler Burner.

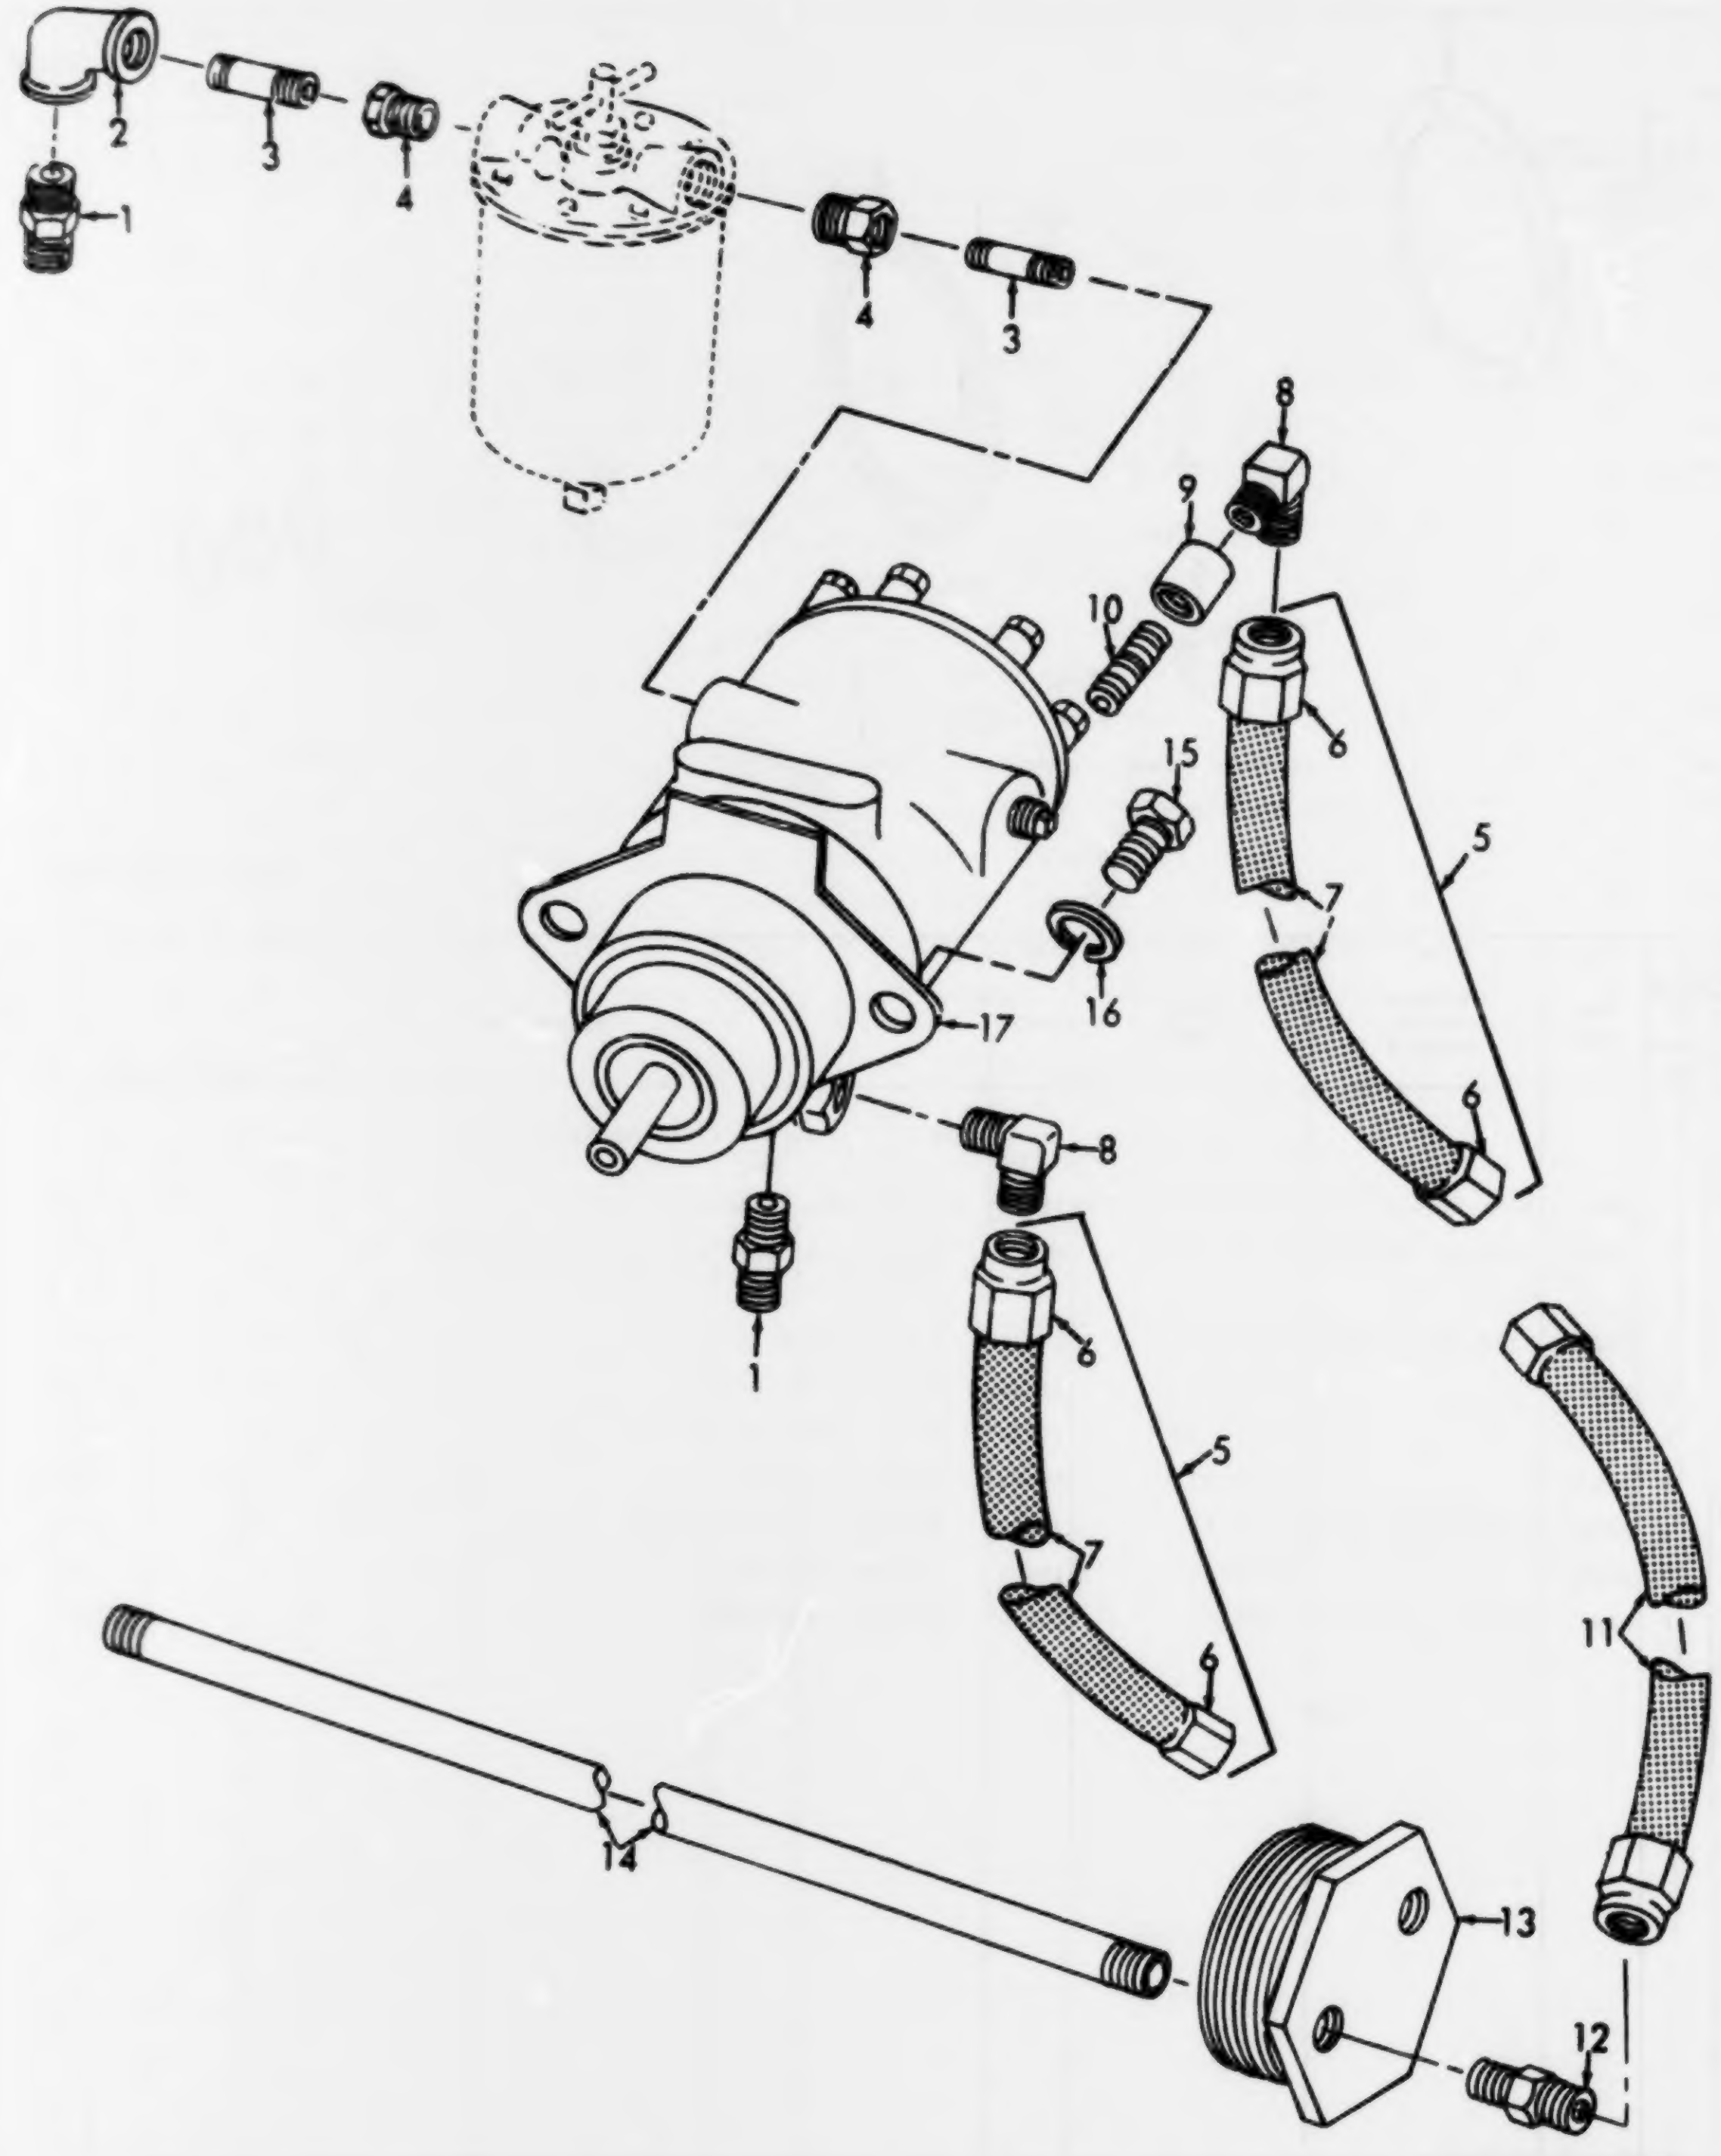
1
2
3
4
4
3
8
9
10
15
6
5
7
16
17
6
8
1
6
5
7
6
11
14
13
12

TS 3510-208-34P/9

Figure 9. Tumbler Burner Fuel Pump and Filter Fittings.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 07 - TUMBLER BURNER FUEL PUMP AND BLOWER ASSEMBLY		
9	1	PAOZZ	4730-00-391-3771	48X4A	79470	ADAPTER, MALE	EA	2
9	2	PAOZZ	4730-00-277-5542	WWP460CLA	81348	ELBOW, PIPE: 1/4 IN.	EA	2
9	3	PAOZZ	4730-00-196-1972	3328X4	79470	NIPPLE: FILTER LINES, 1/4 IN. IPS X 2 IN. LG	EA	2
9	4	PAOZZ	4730-00-011-9928	11928	00000	REDUCER: 1/4 IN. TO 3/8 IN.	EA	2
9	5	MOOOO		6-1-2302-25A	72869	HOSE ASSEMBLY: FUEL LINES MANUFACTURE FROM:	EA	2
9	6	PAOZZ	4730-00-533-4840	6-1-2302-25-2A	72869	FITTING, END, HOSE	EA	4
9	7	PAOZZ	4720-00-540-2465	H134	04255	HOSE, RUBBER: 13 IN. REQUIRED FOR EACH HOSE	FT	V
9	8	PAOZZ	4730-00-231-5632	MS39162-3	96906	ELBOW, MALE: FUEL LINES ATTACHING	EA	2
9	9	PAOZZ	4730-00-142-2165	144157STD	00000	COUPLING, PIPE: 1/8 IN.	EA	1
9	10	PAOZZ	4730-00-753-7464	6-1-2302-25-4A	72869	NIPPLE: 1/8 IN. X 1 IN.	EA	1
9	11	PAOZZ	4720-00-708-8047	47888	79466	HOSE ASSEMBLY: FUEL FEED AND RETURN	EA	2
9	12	PAOZZ	4730-00-142-2177	6-1-2302-25-1A	72869	ADAPTER, STRAIGHT, PIPE TO TUBE, MALE: HOSE TO PLUG	EA	2
9	13	PAOZZ	4530-00-359-9569	67243	79466	PLUG, BARREL	EA	1
9	14	PAOZZ	4710-00-359-9570	MS54710-1	08288	PIPE: FUEL	EA	1
9	15	PAOZZ	5305-00-269-3211	MS90725-60	96906	SCREW, CAP, HEXAGON HEAD: PUMP MTG	EA	2
9	16	PAOZZ	5310-00-637-9541	MS35338-46	96906	WASHER, LOCK: PUMP MTG	EA	2
9	17	PAOFF	4530-00-707-4851	J38A178P	58417	PUMP, ROTARY, POWER, DIESEL: TUMBLER	EA	1

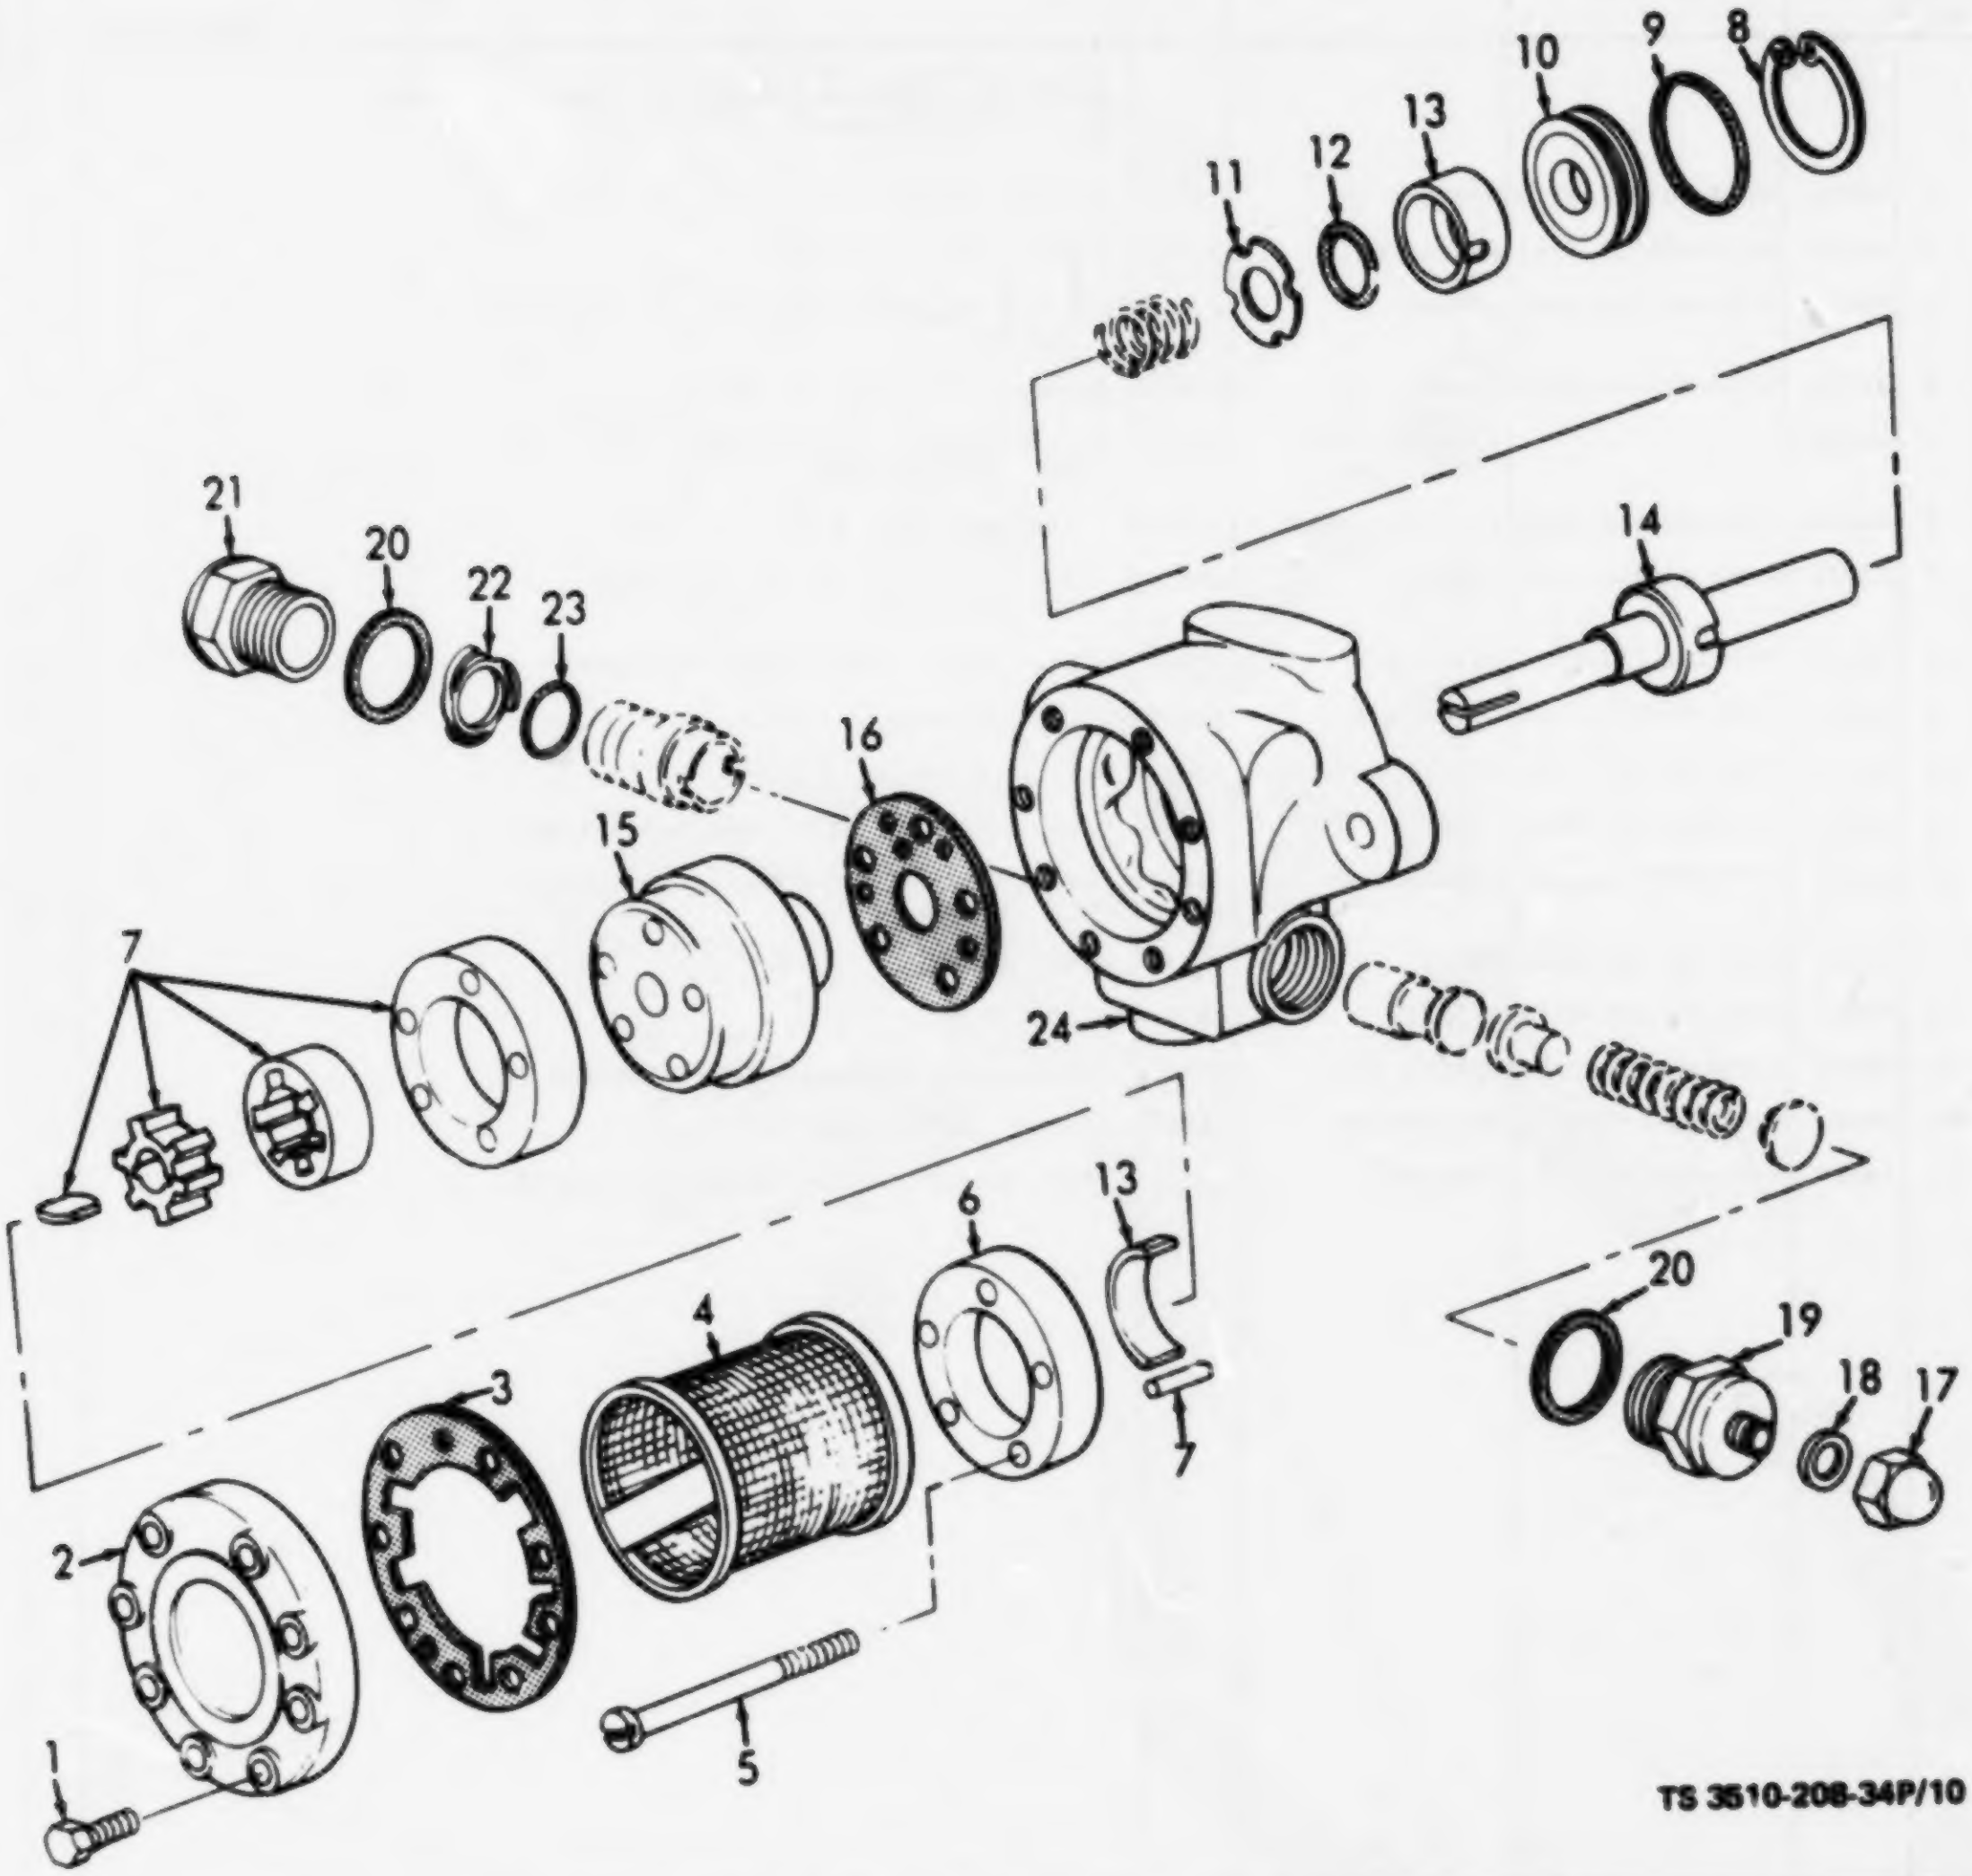

TS 3510-208-34P/10

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
10	1	PAFZZ	5305-00-716-8186	MS35298-110	96906	SCREW, CAP, HEXAGON HEAD: FRONT COVER MTG	EA	8
10	2	XAFZZ		112077	58417	COVER, FRONT	EA	1
10	3	KBFZZ		110441	58417	GASKET (SEE KIT, P/N 990636 (58417))	EA	1
10	4	KBFZZ		12132	58417	STRAINER (SEE KIT, P/N 990636 (58417))	EA	1
10	5	PAFZZ	5305-00-011-5298	105021	58417	SCREW, MACHINE: GEAR PLATE MTG	EA	5
10	6	KBFZZ		124027	58417	PLATE (SEE KIT, P/N 990636 (58417))	EA	1

Figure 10. Fuel Pump, Exploded View.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
10	7	KBFZZ		104671	58417	GEAR SET (SEE KIT, P/N 990636 (58417))	EA	1
10	8	XBFZZ		51017	58417	RING, SNAP, RETAINING	EA	1
10	9	KBFZZ		123652	58417	PACKING, PREFORMED (SEE KIT, P/N 990636 (58417))	EA	1
10	10	KBFZZ		129772	58417	SEAL (SEE KIT, P/N 990636 (58417))	EA	1
10	11	KBFZZ		129782	58417	WASHER, BACK-UP (SEE KIT, P/N 990636 (58417))	EA	1
10	12	KBFZZ		123632	58417	PACKING (SEE KIT, P/N 990636 (58417))	EA	1
10	13	KBFZZ		129792	58417	SEAL (SEE KIT, P/N 990636 (58417))	EA	1
10	14	XAFZZ		117667	58417	SHAFT ASSEMBLY	EA	1
10	15	KBFZZ		117531	58417	HOUSING (SEE KIT, P/N 990636 (58417))	EA	1
10	16	KBFZZ		113331	58417	GASKET, HOUSING (SEE KIT, P/N 990636 (58417))	EA	1
10	17	KBFZZ		100241	58417	NUT, PLAIN, CAP (SEE KIT, P/N 990636 (58417))	EA	1
10	18	PAFZZ	2910-00-472-6189	100371	58417	GASKET: END CAP NUT	EA	1
10	19	PAFZZ	5305-00-472-6234	103379	58417	SCREW	EA	1
10	20	KBFZZ		100901	58417	WASHER, NONMETALLIC (SEE KIT, P/N 990636 (58417))	EA	2
10	21	XBFZZ		114227	58417	PLUG, END	EA	1
10	22	PAFZZ	4520-00-976-2253	121732	58417	SPRING, SLEEVE, RETAINING	EA	1
10	23	KBFZZ		28778	58417	PACKING, PREFORMED (SEE KIT, P/N 990636 (58417))	EA	1
10	24	XAFZZ		119984	58417	BODY, FUEL PUMP	EA	1
10		PAFZZ	4530-00-707-4855	990636	58417	REPAIR KIT, FUEL PUMP: TUMBLER AIR HEATER BURNER	EA	1
10	3					1 EA, GASKET 110441 (58417)		
10	4					1 EA, STRAINER 121232 (58417)		
10	6					1 EA, PLATE 124027 (58417)		
10	7					1 EA, GEAR SET 104671 (58417)		
10	9					1 EA, PACKING, PREFORMED 123652 (58417)		
10	10					1 EA, SEAL 129772 (58417)		
10	11					1 EA, WASHER, BACK-UP 129782 (58417)		
10	12					1 EA, PACKING 123632 (58417)		
10	13					1 EA, SEAL 129792 (58417)		
10	15					1 EA, HOUSING 117531 (58417)		
10	16					1 EA, GASKET, HOUSING 113331 (58417)		
10	17					1 EA, NUT, PLAIN, CAP 100241 (58417)		
10	20					2 EA, WASHER, NONMETALLIC 1100901 (58417)		
10	23					1 EA, PACKING, PREFORMED 28778 (58417)		

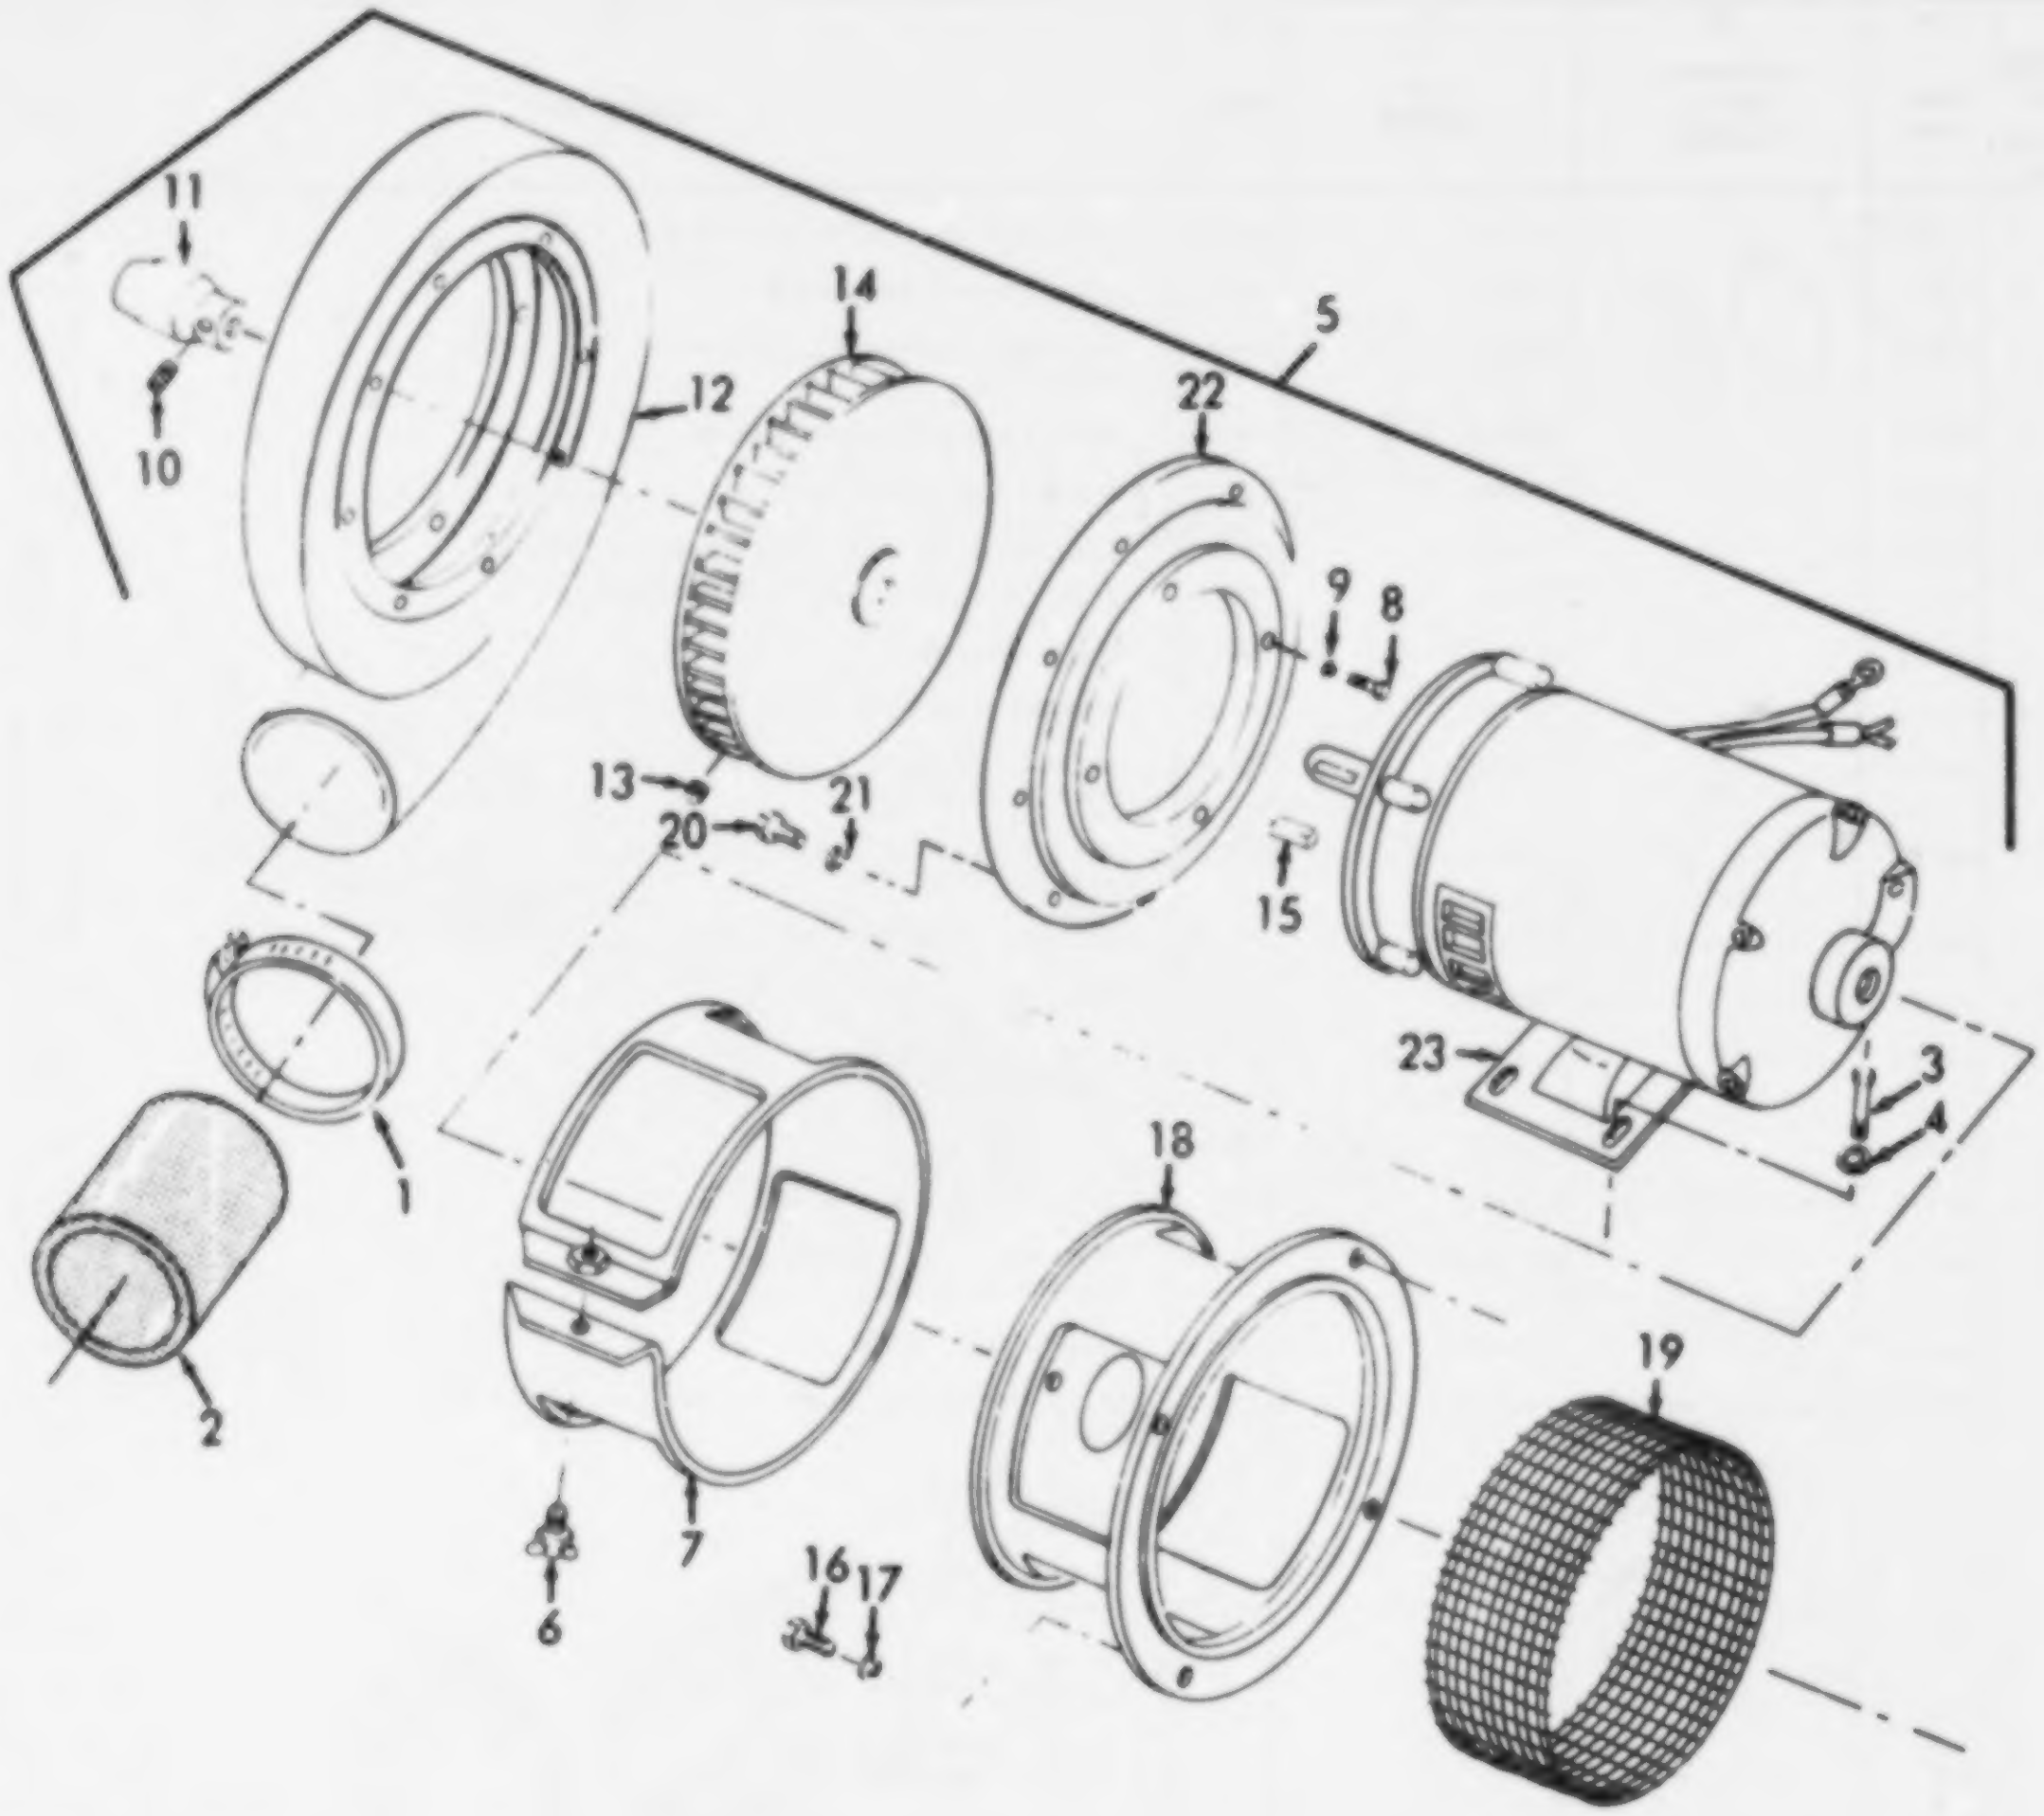
11
10
12
14
5
22
9
8
13
21
20
15
23
3
4
1
2
18
19
7
6
16
17

TS 3510-208-34P/11

Figure 11. Blower, Tumbler Burner.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO	(b) ITEM NO	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
11	1	PAOZZ	4530-00-359-9487	QS200M72S	08484	CLAMP, HOSE: BLOWER TO BURNER HOSE MTG	EA	2
11	2	PAOZZ	4520-00-359-9598	2387040260-81-2	45035	HOSE, 3-3/4 IN. REQUIRED	FT	V
11	3	PAOZZ	5305-00-269-3213	MS90725-62	96906	SCREW, CAP, HEXAGON HEAD: TUMBLER BLOWER MOTOR MTG	EA	4
11	4	PAOZZ	5310-00-637-9541	MS35338-46	96906	WASHER, LOCK: TUMBLER BLOWER MOTOR MTG	EA	4
11	5	PBOFF	3510-00-253-0588	AL129REVA	45035	BLOWER ASSEMBLY: TUMBLER	EA	1
11	6	PAOZZ	5305-00-078-7039	6-1-2371-20-425A	72869	THUMBSCREW: AIR SHUTTER MTG	EA	1
11	7	PAOZZ	4520-00-359-9592	1621-36-1	60883	SHUTTER ASSEMBLY: AIR INTAKE	EA	1
11	8	PAFZZ	5305-00-068-0502	6-1-2371-20-446A	72869	SCREW, CAP, HEXAGON HEAD: HOUSING TO MTG PLATE	EA	8
11	9	PAFZZ	5310-00-042-6758	6-1-2371-20-449A	72869	WASHER, LOCK: HOUSING TO MTG PLATE	EA	8
11	10	PAOZZ	5305-00-723-9388	6-1-2371-20-442A	72869	SETSCREW: COUPLING TO FUEL PUMP SHAFT	EA	1
11	11	PAOZZ	4920-00-629-4894	J1211-5-23	76005	COUPLING, SHAFT, FLEXIBLE: FUEL PUMP TO MOTOR	EA	1
11	12	XAOZZ		6-1-2511-20-430A	72869	HOUSING: BLOWER ASSEMBLY	EA	1
11	13	PAFZZ	5305-00-058-0783	6-1-2371-20-443A	72869	SETSCREW: IMPELLER TO SHAFT LOCKING	EA	2
11	14	PAFZZ	4520-00-359-9612	6-1-2371-20-434A	72869	IMPELLER, BLOWER	EA	1
11	15	PAFZZ	5315-00-057-6608	6-1-2371-20-441A	72869	KEY: IMPELLER TO SHAFT MTG	EA	1
11	16	PAOZZ	5306-00-225-8494	6-1-2371-20-445A	72869	SCREW, CAP, HEXAGON HEAD: INTAKE HOUSING MTG	EA	1
11	17	PAOZZ	5310-00-407-9566	6-1-2371-20-448A	72869	WASHER LOCK: INTAKE HOUSING MTG	EA	4
11	18	XAOZZ		6-1-2371-20-429A	72869	HOUSING, AIR INTAKE	EA	1
11	19	PAOZZ	4520-00-359-9590	6-1-2371-20-427A	72869	SCREEN: AIR FILTER	EA	1
11	20	PAFZZ	5305-00-269-3211	MS90725-60	96906	SCREW, CAP, HEXAGON HEAD: PLATE TO MOTOR MTG	EA	4
11	21	PAFZZ	5310-00-637-9541	MS35338-46	96906	WASHER, LOCK: PLATE TO MOTOR MTG	EA	4
11	22	XBFZZ		6-1-2371-20-428A	72869	FLANGE	EA	1
11	23	PAOFF	6105-00-930-9426	6-1-2337-20-482A	81337	MOTOR, BLOWER: TUMBLER BURNER	EA	1

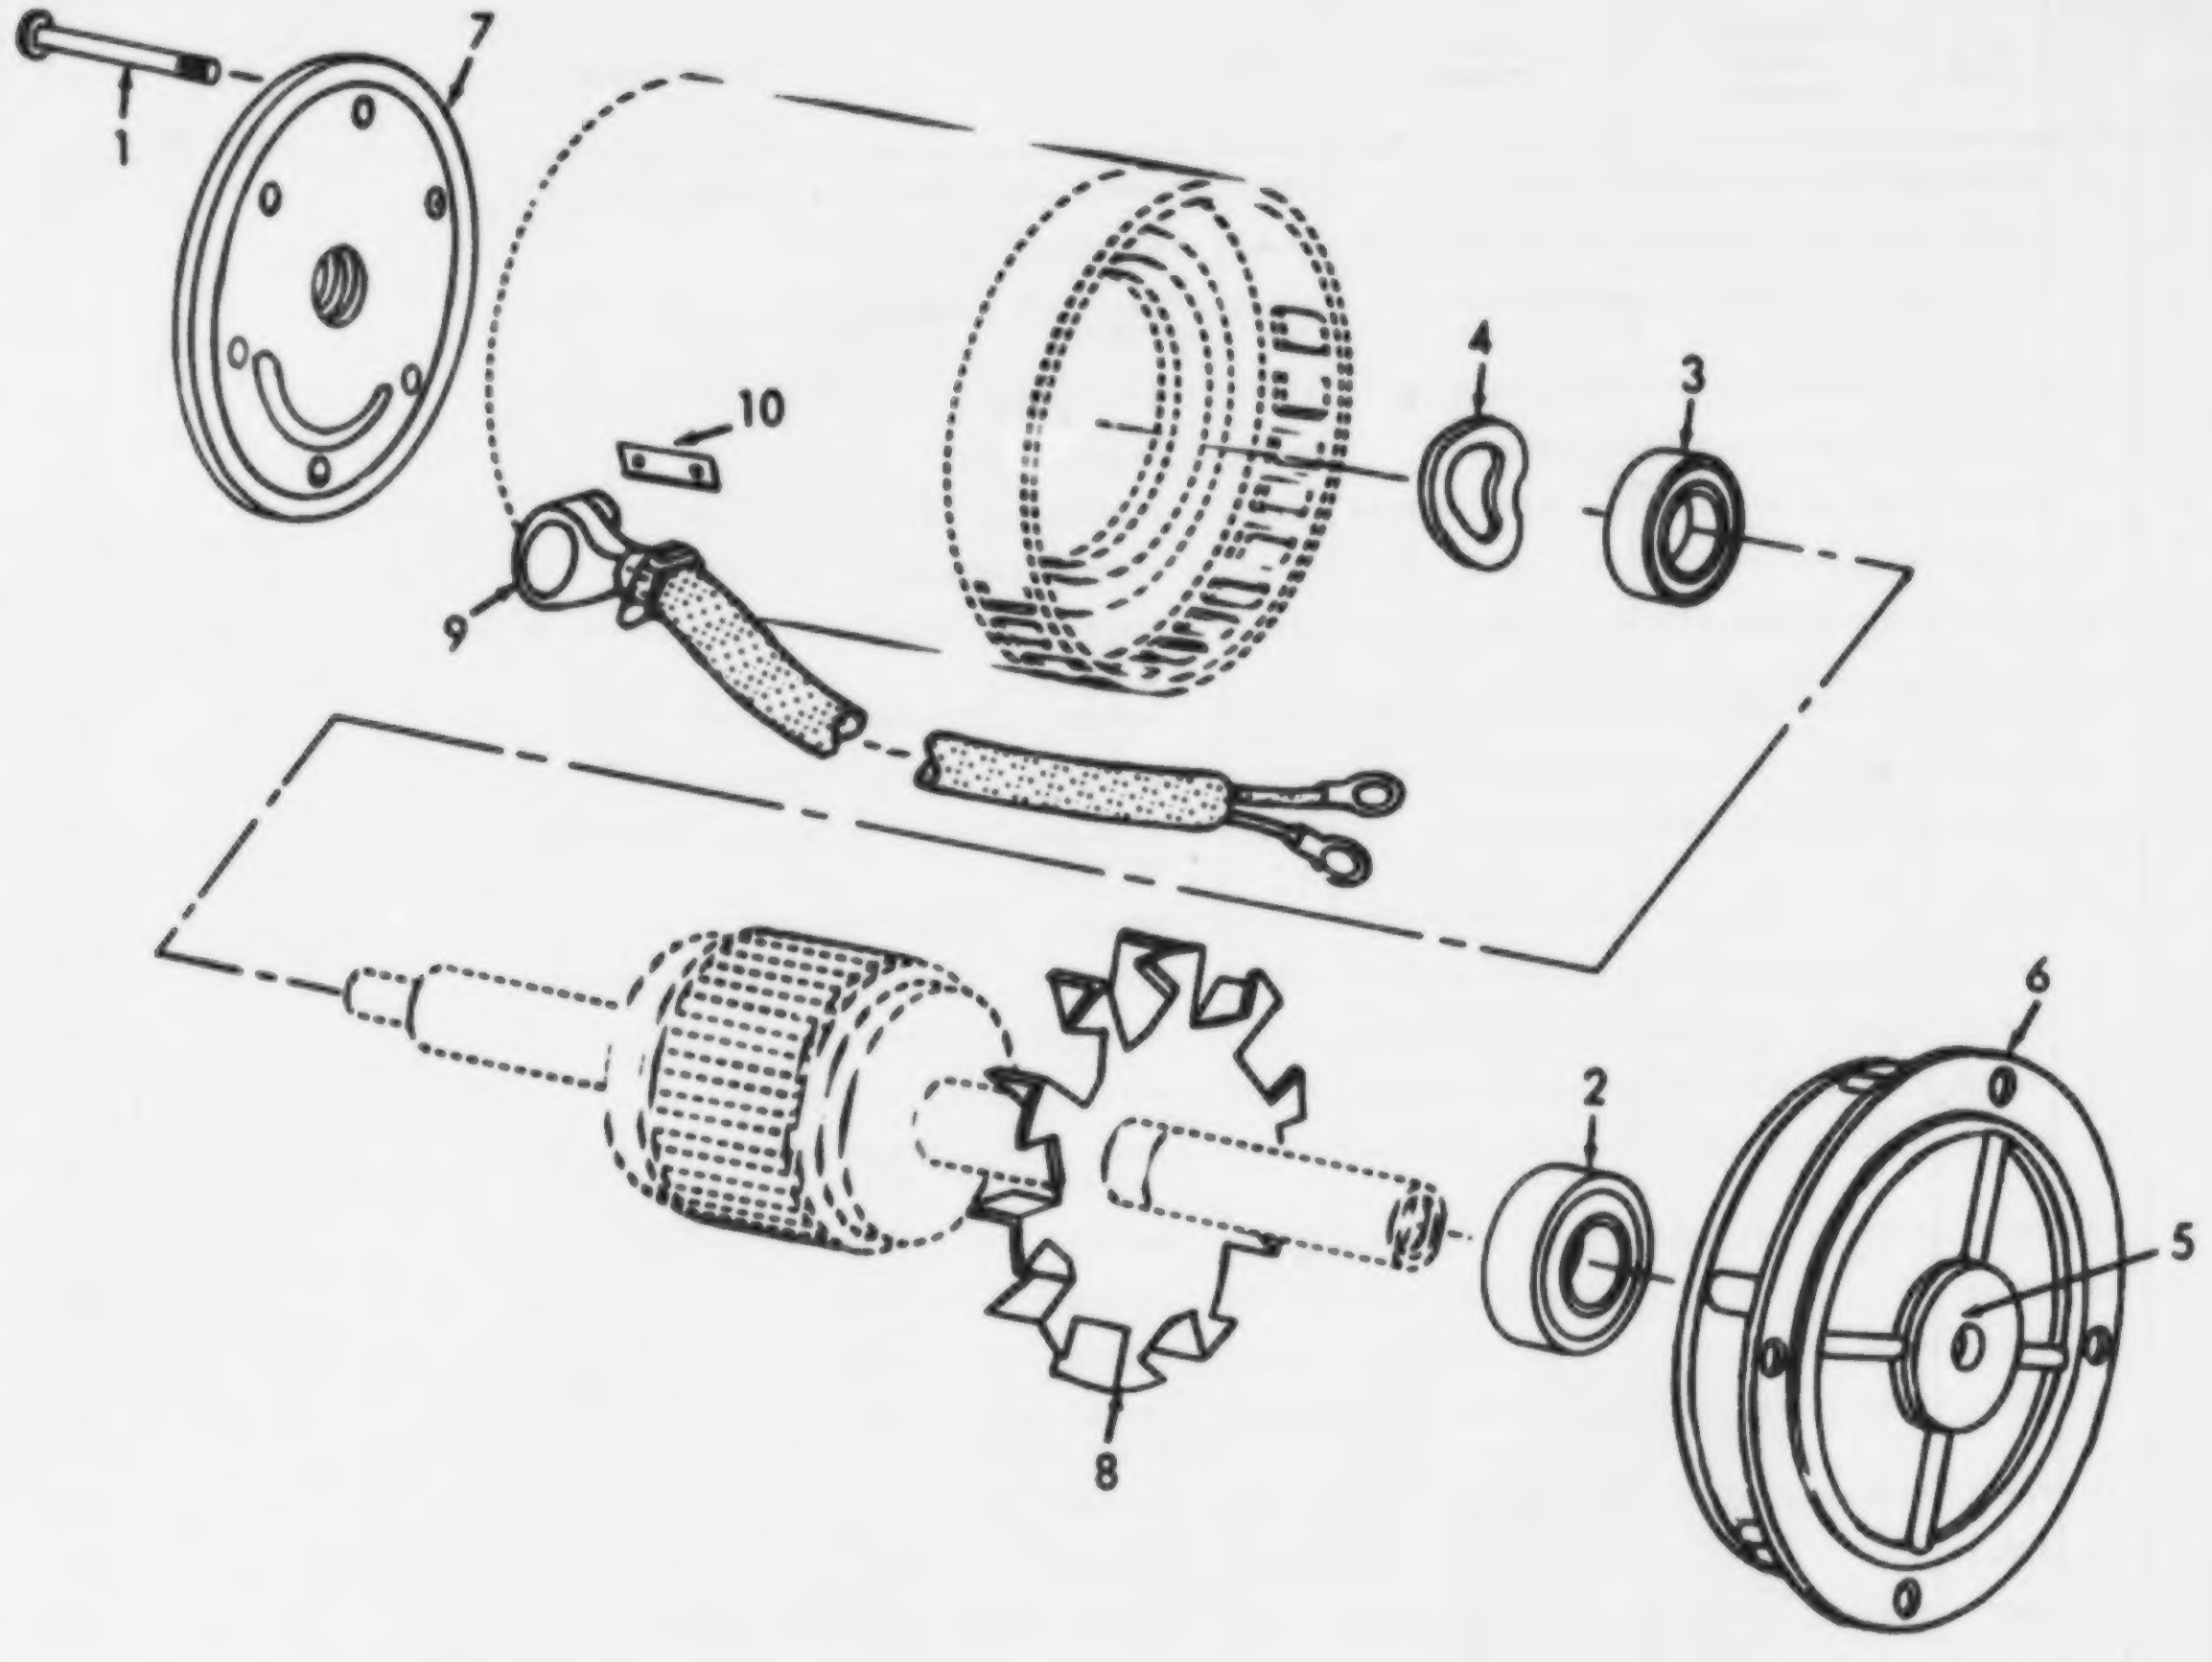

TS 3510-208-34P/12

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code .	U/M	QTY INC IN UNIT
12	1	XBFZZ		30127304	11349	BOLT, THRU: END BRACKET MTG, TUMBLER BLOWER MOTOR, 3/16-32 THD SIZE, 6-7/8 IN. LG	EA	4
12	2	PAFZZ	3110-00-555-5216	202KD	21335	BEARING, FRONT: TUMBLER BLOWER MOTOR	EA	1
12	3	PAFZZ	3110-00-913-6527	9802-16-7748624	21335	BEARING, REAR: TUMBLER BURNER BLOWER MOTOR	EA	1
12	4	PAFZZ	5310-00-930-2297	A76613-1	76117	SPRING, LOADING: TUMBLER BURNER BLOWER MOTOR	EA	1
12	5	XAFZZ		E55057-1	76117	CAP, DUST: BLOWER MOTOR	EA	2
12	6	XAFZZ		A56915AC	76117	END BRACKET: BLOWER MOTOR	EA	1
12	7	XAFZZ		E56456BC	76117	END BRACKET: BLOWER MOTOR	EA	1
12	8	XAFZZ		E70014EC	76117	FAN: BLOWER 'MOTOR	EA	1
12	9	XAFZZ		E12517-1	76117	PLUG: TUMBLER BURNER BLOWER MOTOR	EA	2
12	10	XAFZZ		E56837-1	76117	BOARD, TERMINAL: TUMBLER BURNER BLOWER MOTOR	EA	1

Figure 12. Tumbler Blower Motor.

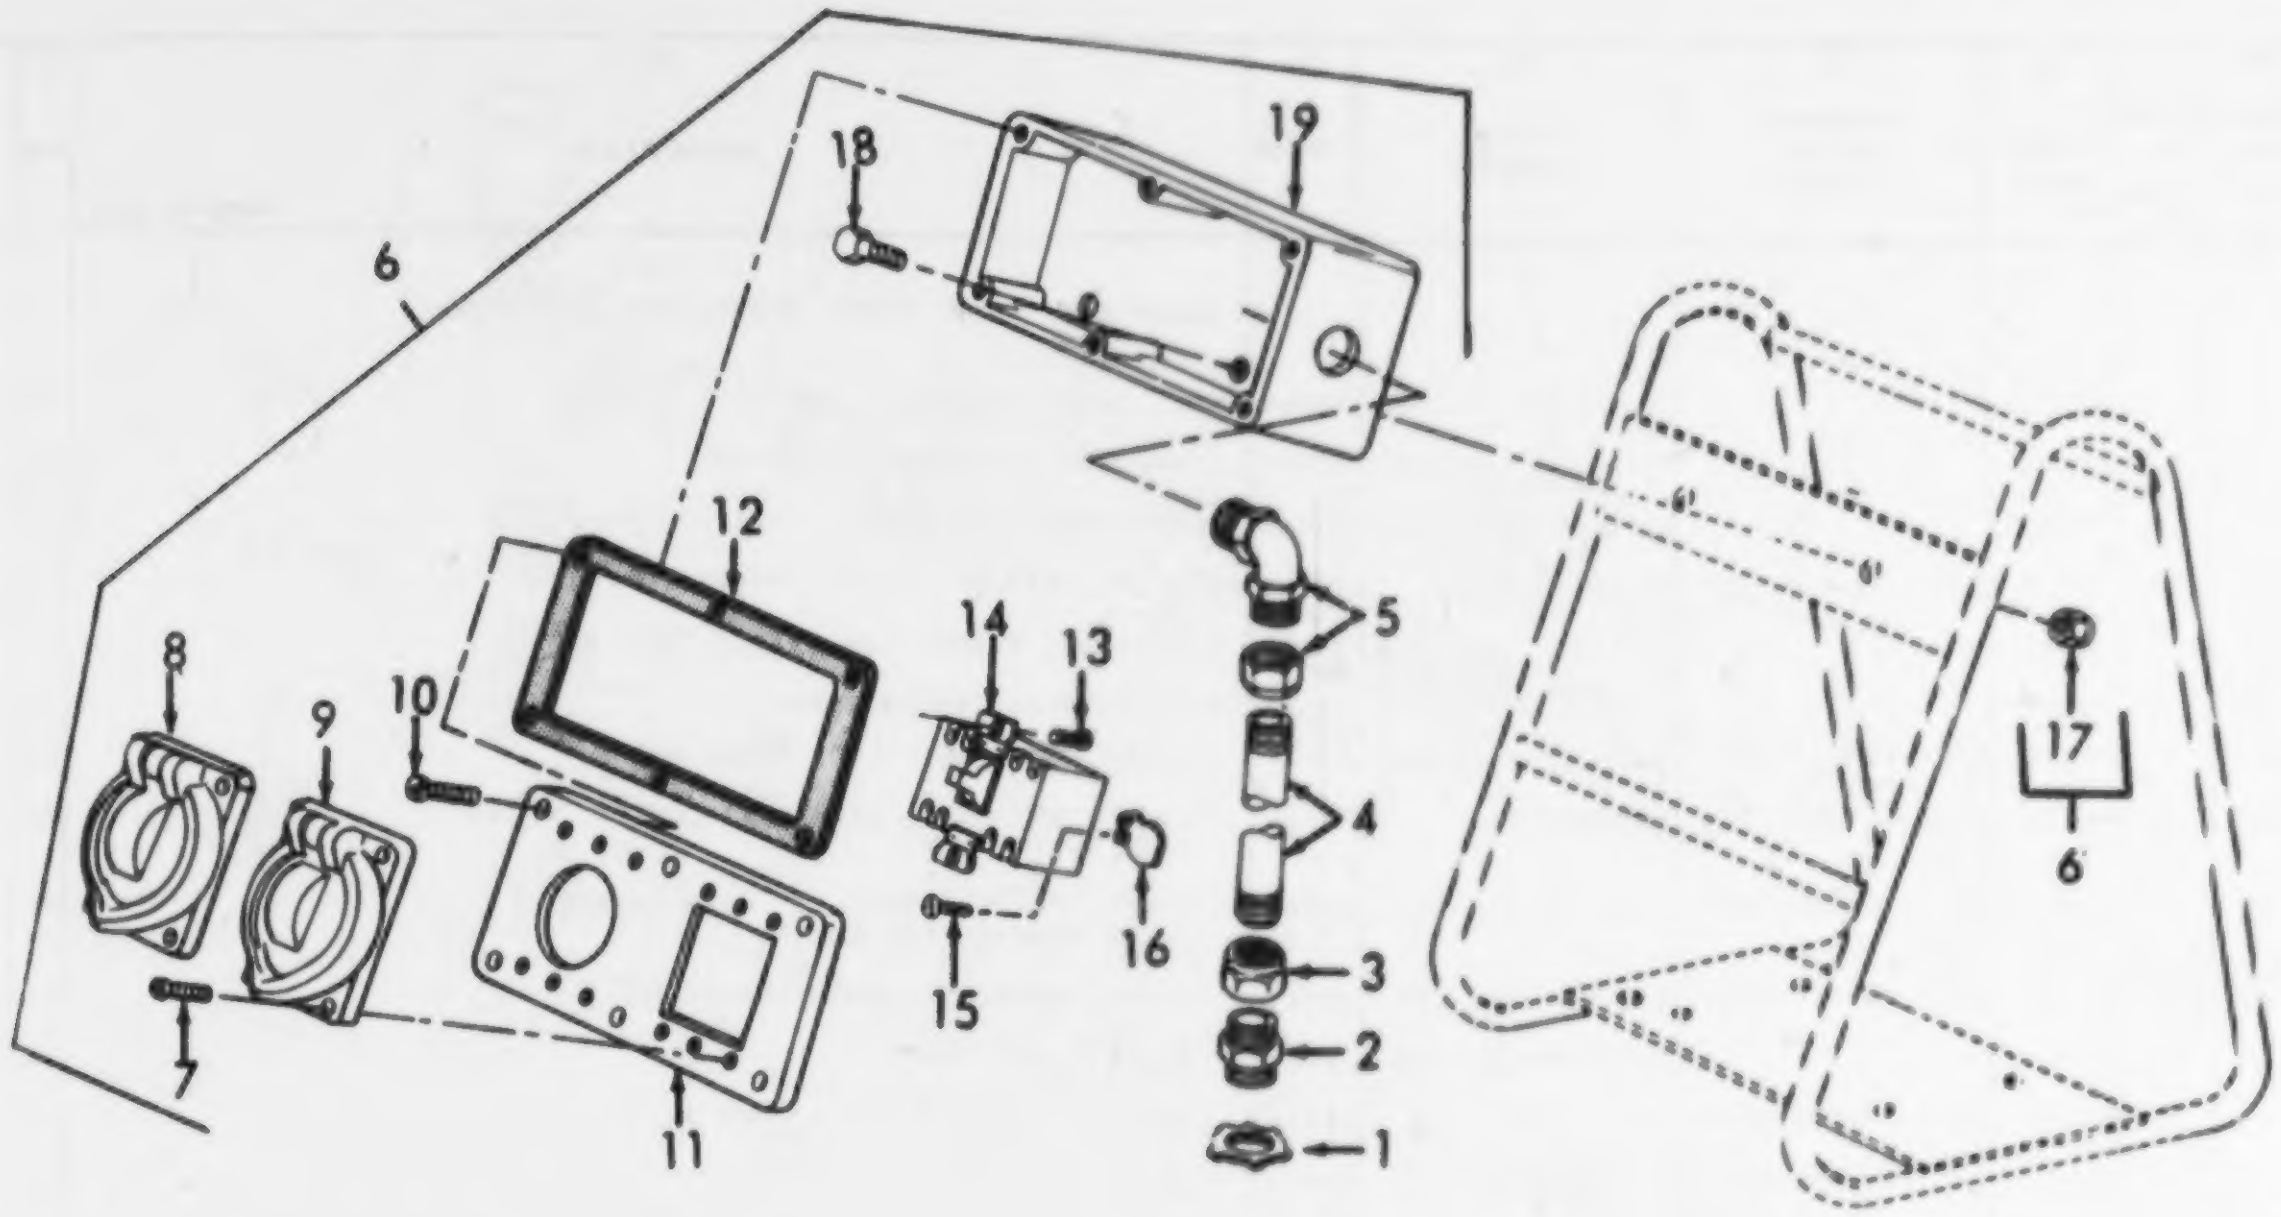
1
2
3
4
5
6
6
7
8
9
10
11
12
13
14
15
16
17
18
19

TS 3510-208-34P/13

Figure 13. Water Pump Switch Box.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 08 - WATER PUMP, FRAME, AND SWITCH BOX		
13	1	XBOZZ		6-1-1934-32-56A	72869	NUT, LOCK: CONDUIT, 1/2 IN.	EA	2
13	2	XBOZZ		6-1-2337-20-466A	72869	CONNECTOR, STRAIGHT: 1/2 IN.	EA	1
13	3	XBOZZ		6-1-1934-32-36A	72869	CONNECTOR, RAIN TIGHT: 1/2 IN.	EA	2
13	4	PAOZZ	5975-00-178-1216	6-1-743-2-10A	72869	CONDUIT, RIGID: 12 IN. REQUIRED	FT	V
13	5	XBOZZ		67223	79466	CONNECTOR, ELBOW: 90 DEGREE, 1/2 IN.	EA	1
13	6	XB000		47352	79466	BOX, SWITCH: WATER PUMP	EA	1
13	7	PAOZZ	5305-00-813-1904	6-1-744-2-9-11A	72869	SCREW, MACHINE: LIFT COVER MTG	EA	8
13	8	PAOZZ	5935-00-962-2510	MS55935-01	08288	CONNECTOR, MALE, WITH LIFT COVER: WATER PUMP SWITCH BOX	EA	1
13	9	PAOZZ	5975-00-840-5844	6-1-744-2-9-2A	72869	COVER, CONDUIT OUTLET: WITH GASKET, WATER PUMP SWITCH BOX	EA	1
13	10	PAOZZ	5305-00-151-3051	6-1-744-2-9-12A	72869	SCREW, MACHINE: FRONT COVER MTG	EA	6
13	11	XBOZZ		6-1-1909-21-99A	72869	COVER, BOX, FRONT	EA	1
13	12	PAOZZ	5330-00-703-1402	399031076	45034	GASKET, COVER: WATER PUMP SWITCH BOX	EA	1
13	13	PAOZZ	5305-00-543-4925	MS35265-66	96906	SCREW, MACHINE: SWITCH MTG	EA	2
13	14	PAOZZ	5925-00-300-4448	LL032U	04009	SWITCH, LOAD LIMIT: WATER PUMP	EA	1
13	15	XBOZZ		6-1-744-2-9-10A	72869	SCREW: THERMAL RELEASE HEATER	EA	2
13	16	PAOZZ	5950-00-674-5783	42118	04009	HEATER, THERMAL RELEASE: WATER PUMP SWITCH BOX	EA	2
13	17	PAOZZ	5310-00-826-8965	MS55310-6	08288	NUT, SELF-LOCKING, HEXAGON: BOX MTG, WATER PUMP SWITCH	EA	2
13	18	PAOZZ	5305-00-068-0502	MS90725-6	96906	SCREW, CAP, HEXAGON HEAD: BOX MTG, WATER PUMP SWITCH	EA	2
13	19	XBOZZ		6-1-1909-21-56A	72869	BOX ASSEMBLY, CONDUIT: WATER PUMP	EA	1

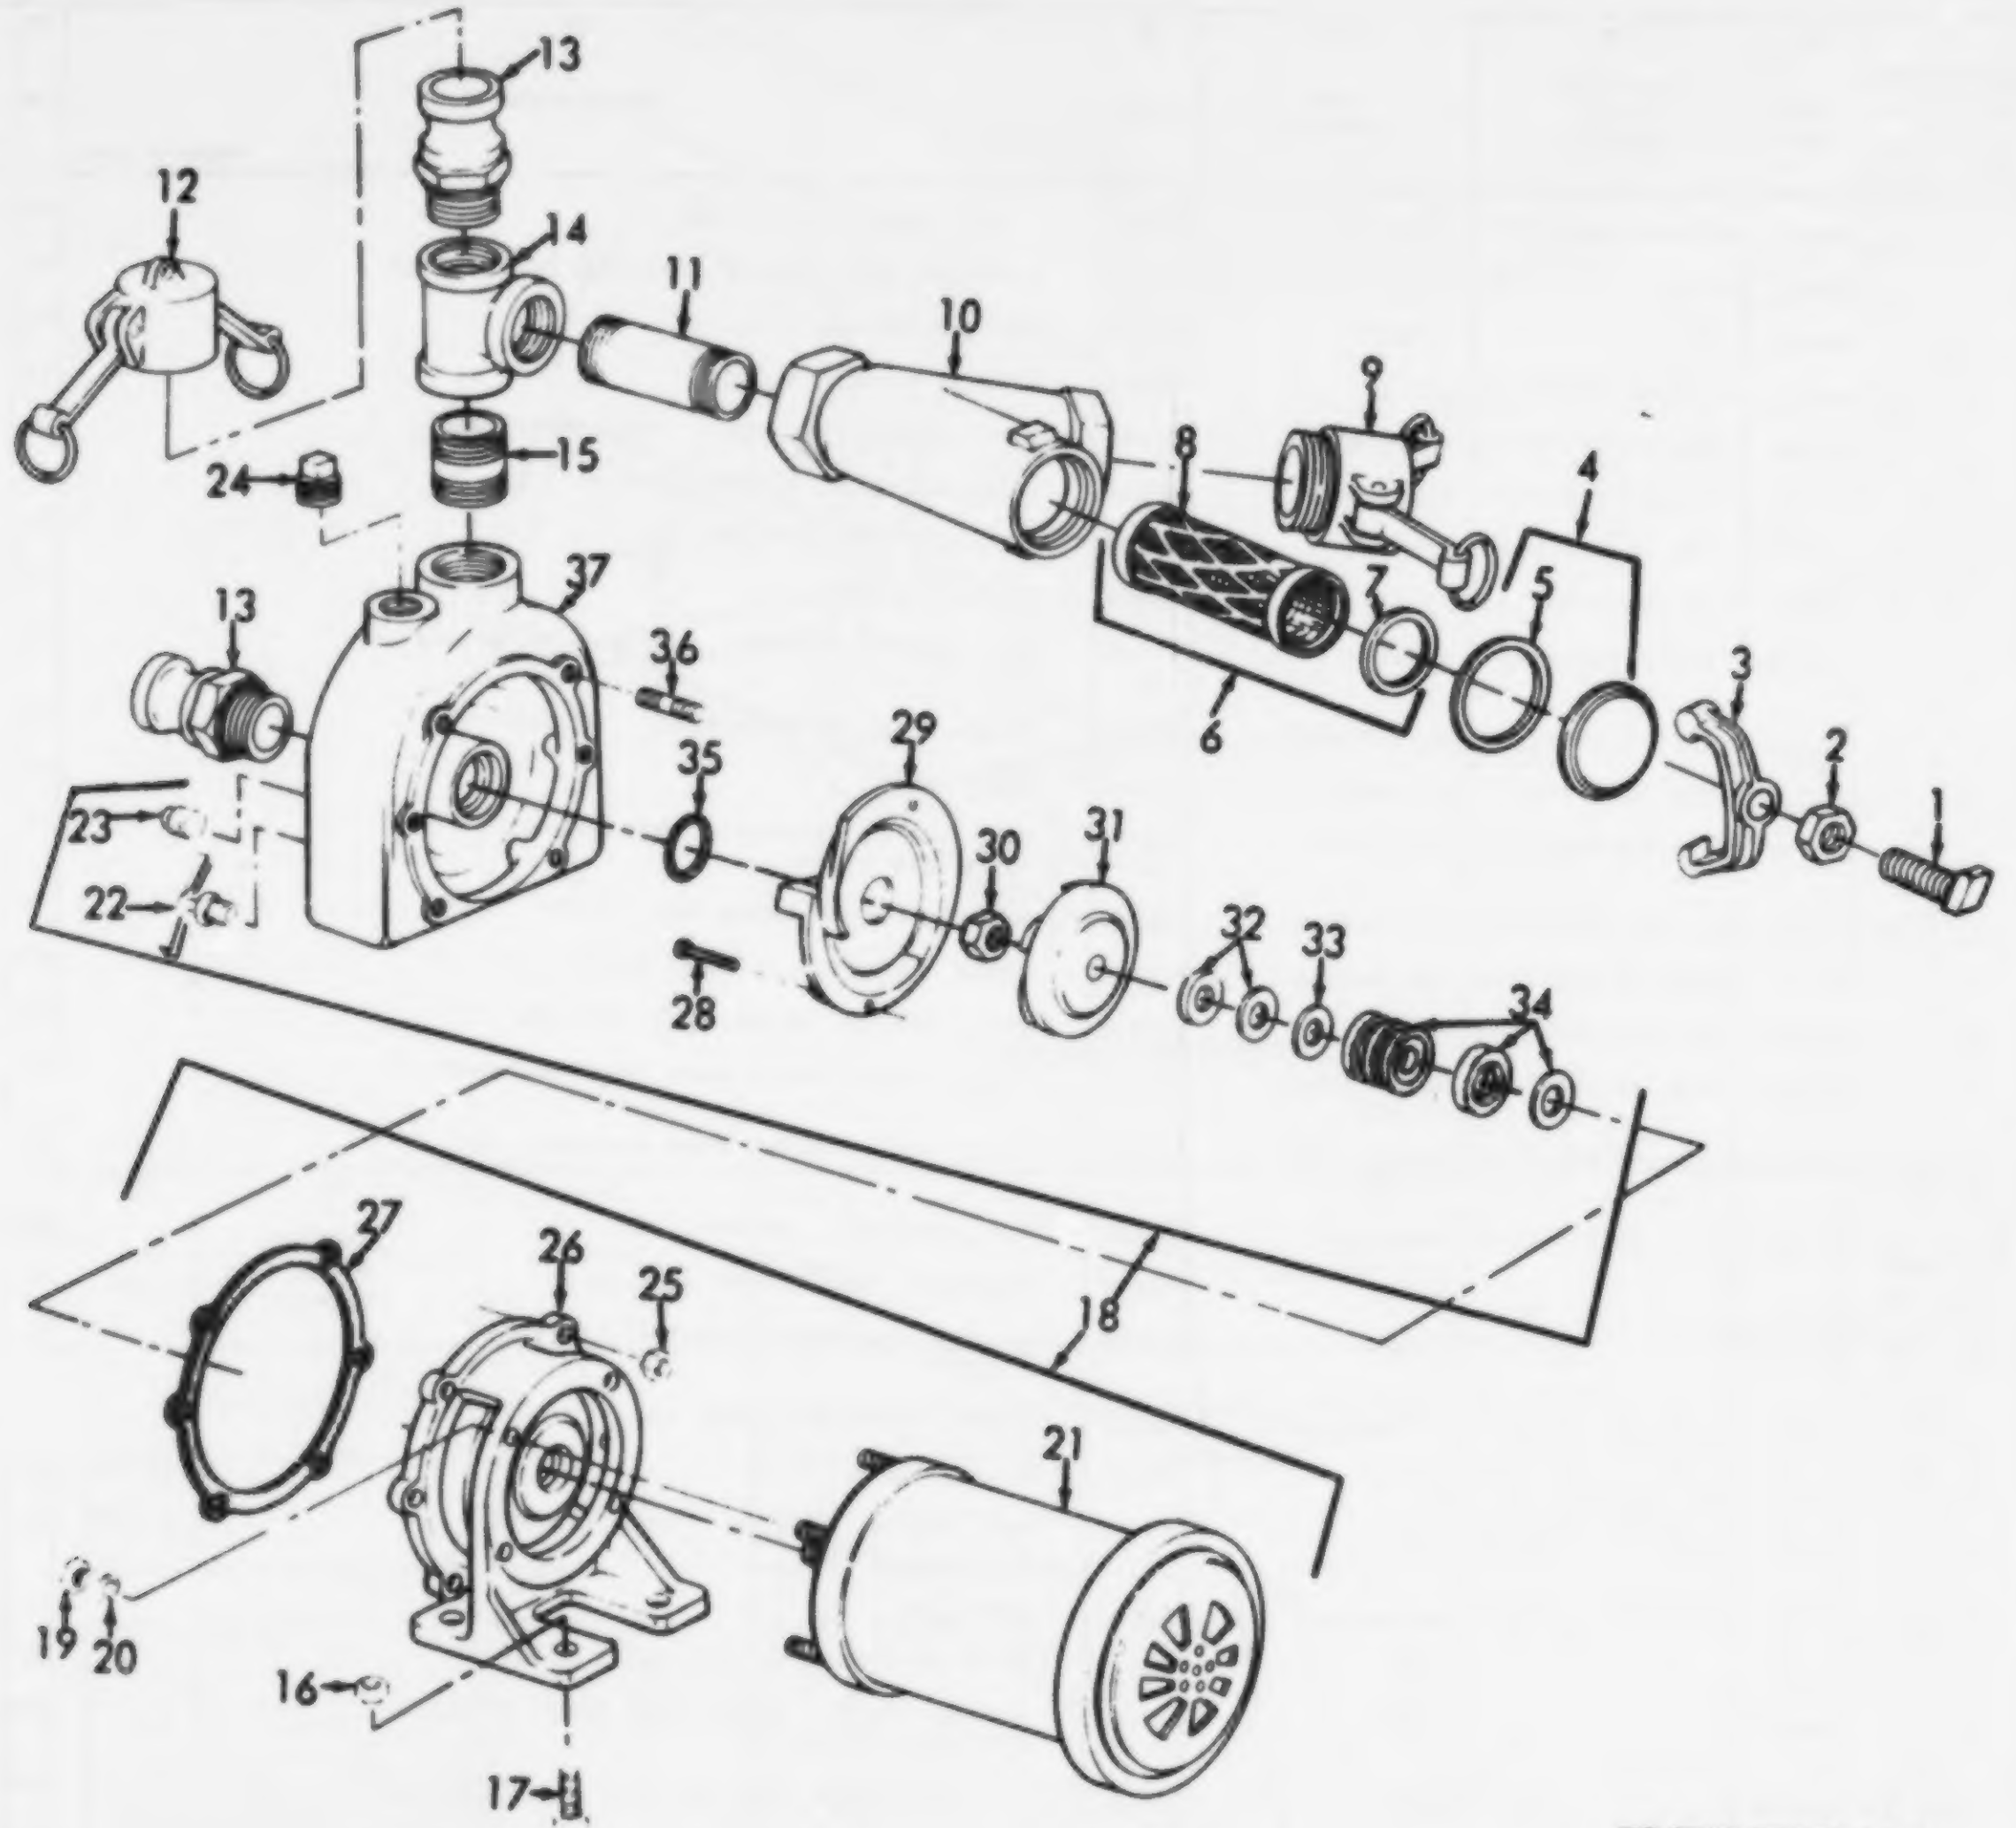
13
12
14
11
10
9
8
4
15
24
37
13
36
7
5
3
6
29
35
2
31
30
1
23
22
32
33
28
34
27
26
25
18
21
19
20
16
17

TS 3510-208-34P/14

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
14		PAOOO	4510-00-707-5969	47895	79466	PUMP ASSEMBLY, WATER	EA	1
14	1	PAOZZ	5306-00-010-9221	MS35354-127	96906	BOLT, SQUARE HEAD: STRAINER CAP MTG, 1/2-13 X 2 IN. LG	EA	1
14	2	PAOZZ	5310-00-834-8734	MS55310-10	08288	NUT, PLAIN, HEXAGON: STRAINER CAP MTG, 1/2-13	EA	1
14	3	XBOZZ		M337M1	79466	CLAMP, STRAINER CAP	EA	1
14	4	XBOZZ		M173A	79466	CAP, STRAINER	EA	1
14	5	PAOZZ	5330-00-704-0307	M440M	81718	GASKET, STRAINER CAP	EA	1
14	6	PAOZZ	4730-00-707-6621	67354	79466	STRAINER, SEDIMENT	EA	1
14	7	PAOZZ	5330-00-704-0307	M769M	79466	GASKET: STRAINER ELEMENT	EA	2

Figure 14. Water Pump.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
14	8	PAOZZ	4730-00-707-6622	198MA14	79466	GAGE AND SCREEN ELEMENT	EA	1
14	9	PAOZZ	4730-00-203-1010	6-1-743-2-7	81337	COUPLING HALF, QUICK DISCONNECT: SUCTION	EA	1
14	10	XBOZZ		C172A	79466	BODY, STRAINER	EA	1
14	11	PAOZZ	4730-00-359-5635	67218	79466	NIPPLE, PIPE: SUCTION	EA	1
14	12	PAOZZ	5340-00-823-5317	MS27028-9	96906	CAP, PROTECTIVE, DUST: DISCHARGE END	EA	1
14	13	PAOZZ	4730-00-360-0589	MS27022-9	96906	COUPLING HALF, QUICK DISCHARGE	EA	2
14	14	PAOZZ	4730-00-359-5656	A24PT	12793	TEE, COUPLING TO PUMP	EA	1
14	15	PAOZZ	4730-00-359-5631	67222	79466	NIPPLE, CLOSE	EA	1
14	16	PAOZZ	5310-00-050-6652	MS51922-17	96906	NUT, PLAIN, HEXAGON: WATER PUMP BRACKET MTG	EA	4
14	17	PAOZZ	5305-00-269-3213	MS90725-62	96906	SCREW, CAP, HEXAGON HEAD: BRACKET MTG	EA	4
14	18	PAOZF	4510-00-707-5971	811-2EE3-4	25567	PUMP, WATER	EA	1
14	19	PAOZZ	5310-00-050-6652	MS51922-17	96906	NUT, PLAIN, HEXAGON: WATER PUMP MOTOR MTG STUDS	EA	4
14	20	PAOZZ	5310-00-261-7340	MS35338-46	96906	WASHER, LOCK: MOTOR MTG STUDS	EA	4
14	21	PAOZF	6105-00-961-1632	5K43GG3266	03510	MOTOR, ELECTRIC: WATER PUMP	EA	1
14	22	PAOZZ	4820-00-276-9041	270	79470	COCK, DRAIN: WATER PUMP HOUSING	EA	1
14	23	PAOZZ	4730-00-289-5176	WWP471TYPE2 STYLEC	81349	PLUG, PIPE: WATER PUMP HOUSING, BACK	EA	1
14	24	PAOZZ	4730-00-826-6512	WWP471TYPE2 STYLEC	81349	PLUG, PIPE: WATER PUMP HOUSING, TOP	EA	1
14	25	PAOZZ	5310-00-297-2540	MS55310-7	08288	NUT, HEXAGON: BRACKET MTG	EA	4
14	26	XBOZZ		6103D	25567	BRACKET: WATER PUMP MTG	EA	1
14	27	KBOZZ		6103GA	25567	GASKET: HOUSING (PART OF KIT 10913 (25567))	EA	1
14	28	PAOZZ	5305-00-984-6214	MS35206-267	96906	SCREW, MACHINE: VANE MTG	EA	2
14	29	PAOZZ	4510-00-707-5975	7724	25567	PLATE, VANE	EA	
14	30	PAOZZ	5310-00-208-8426	B659	64104	NUT, PLAIN, HEXAGON: IMPELLER MTG, 7/16-20, BRONZE	EA	
14	31	PAOZZ	4510-00-707-5974	6479A	25567	IMPELLER	EA	
14	32	KBOZZ		5889	25567	SHIM SET (PART OF KIT 10913 (25567))	EA	
14	33	KBOZZ		6087	25567	WASHER, FLAT: WATER PUMP SHAFT (PART OF KIT 10913 (25567))	EA	
14	34	KBOZZ		5765	25567	SEAL ASSEMBLY (PART OF KIT 10913 (25567))	EA	1
14	35	KBOZZ		5300	25567	PACKING, PREFORMED (PART OF KIT 10913 (25567))	EA	1
14	36	PAOZZ	5307-00-467-5474	1539	10941	STUD, PLAIN: WATER PUMP HOUSING AND MOTOR MTG	EA	10
14	37	PAOZZ	4510-00-707-5973	6477	25567	HOUSING, WATER PUMP	EA	1
14		PAOZZ	4510-00-707-5972	10913	25567	REPAIR KIT, WATER PUMP	EA	1
14	27					1 EA, GASKET, HOUSING 6103GA (25567)		
14	32					1 EA, SHIM SET 5889 (25567)		
14	33					1 EA, WASHER, FLAT 6087 (25567)		
14	34					1 EA, SEAL ASSEMBLY 5765 (25567)		
14	35					1 EA, PACKING, PREFORMED 5300 (25567)		

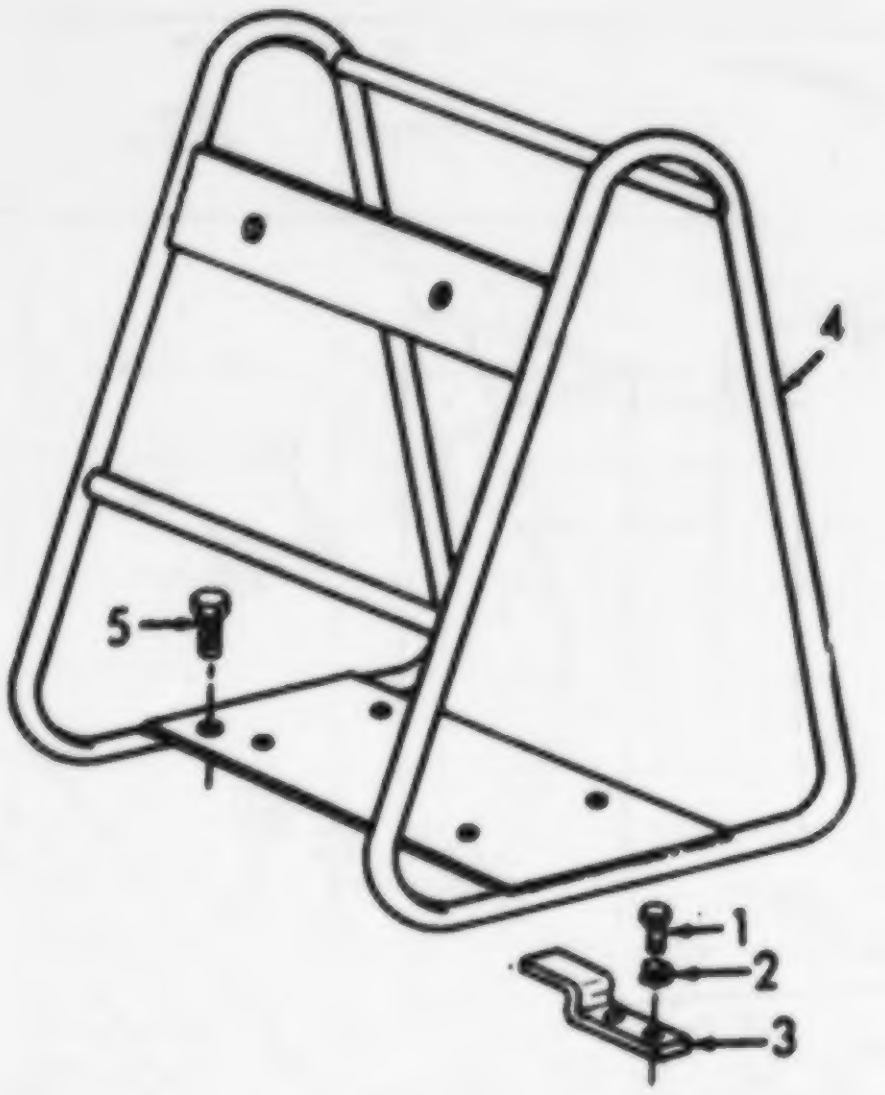

TS 3510-208-34P/15

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
15	1	PAOZZ	5305-00-068-0500	MS90725-3	96906	SCREW, CAP, HEXAGON HEAD: RETAINER MTG	EA	4
15	2	PAOZZ	5310-00-082-0650	MS45904-70	96906	WASHER, LOCK: RETAINER MTG	EA	4
15	3	XBOZZ		6-1-1900-82A	72869	RETAINER, PUMP	EA	[illegible]
15	4	PAOZZ	4510-00-707-5970	47484	79466	FRAME ASSEMBLY	EA	1
15	5	PAOZZ	5306-00-655-6170	MS35307-38	96906	SCREW, CAP, HEXAGON HEAD: FRAME MTG, 5/16-18 UNC-2A, 1-1/2 IN. LG	EA	1

Figure 15. Water Pump Frame.

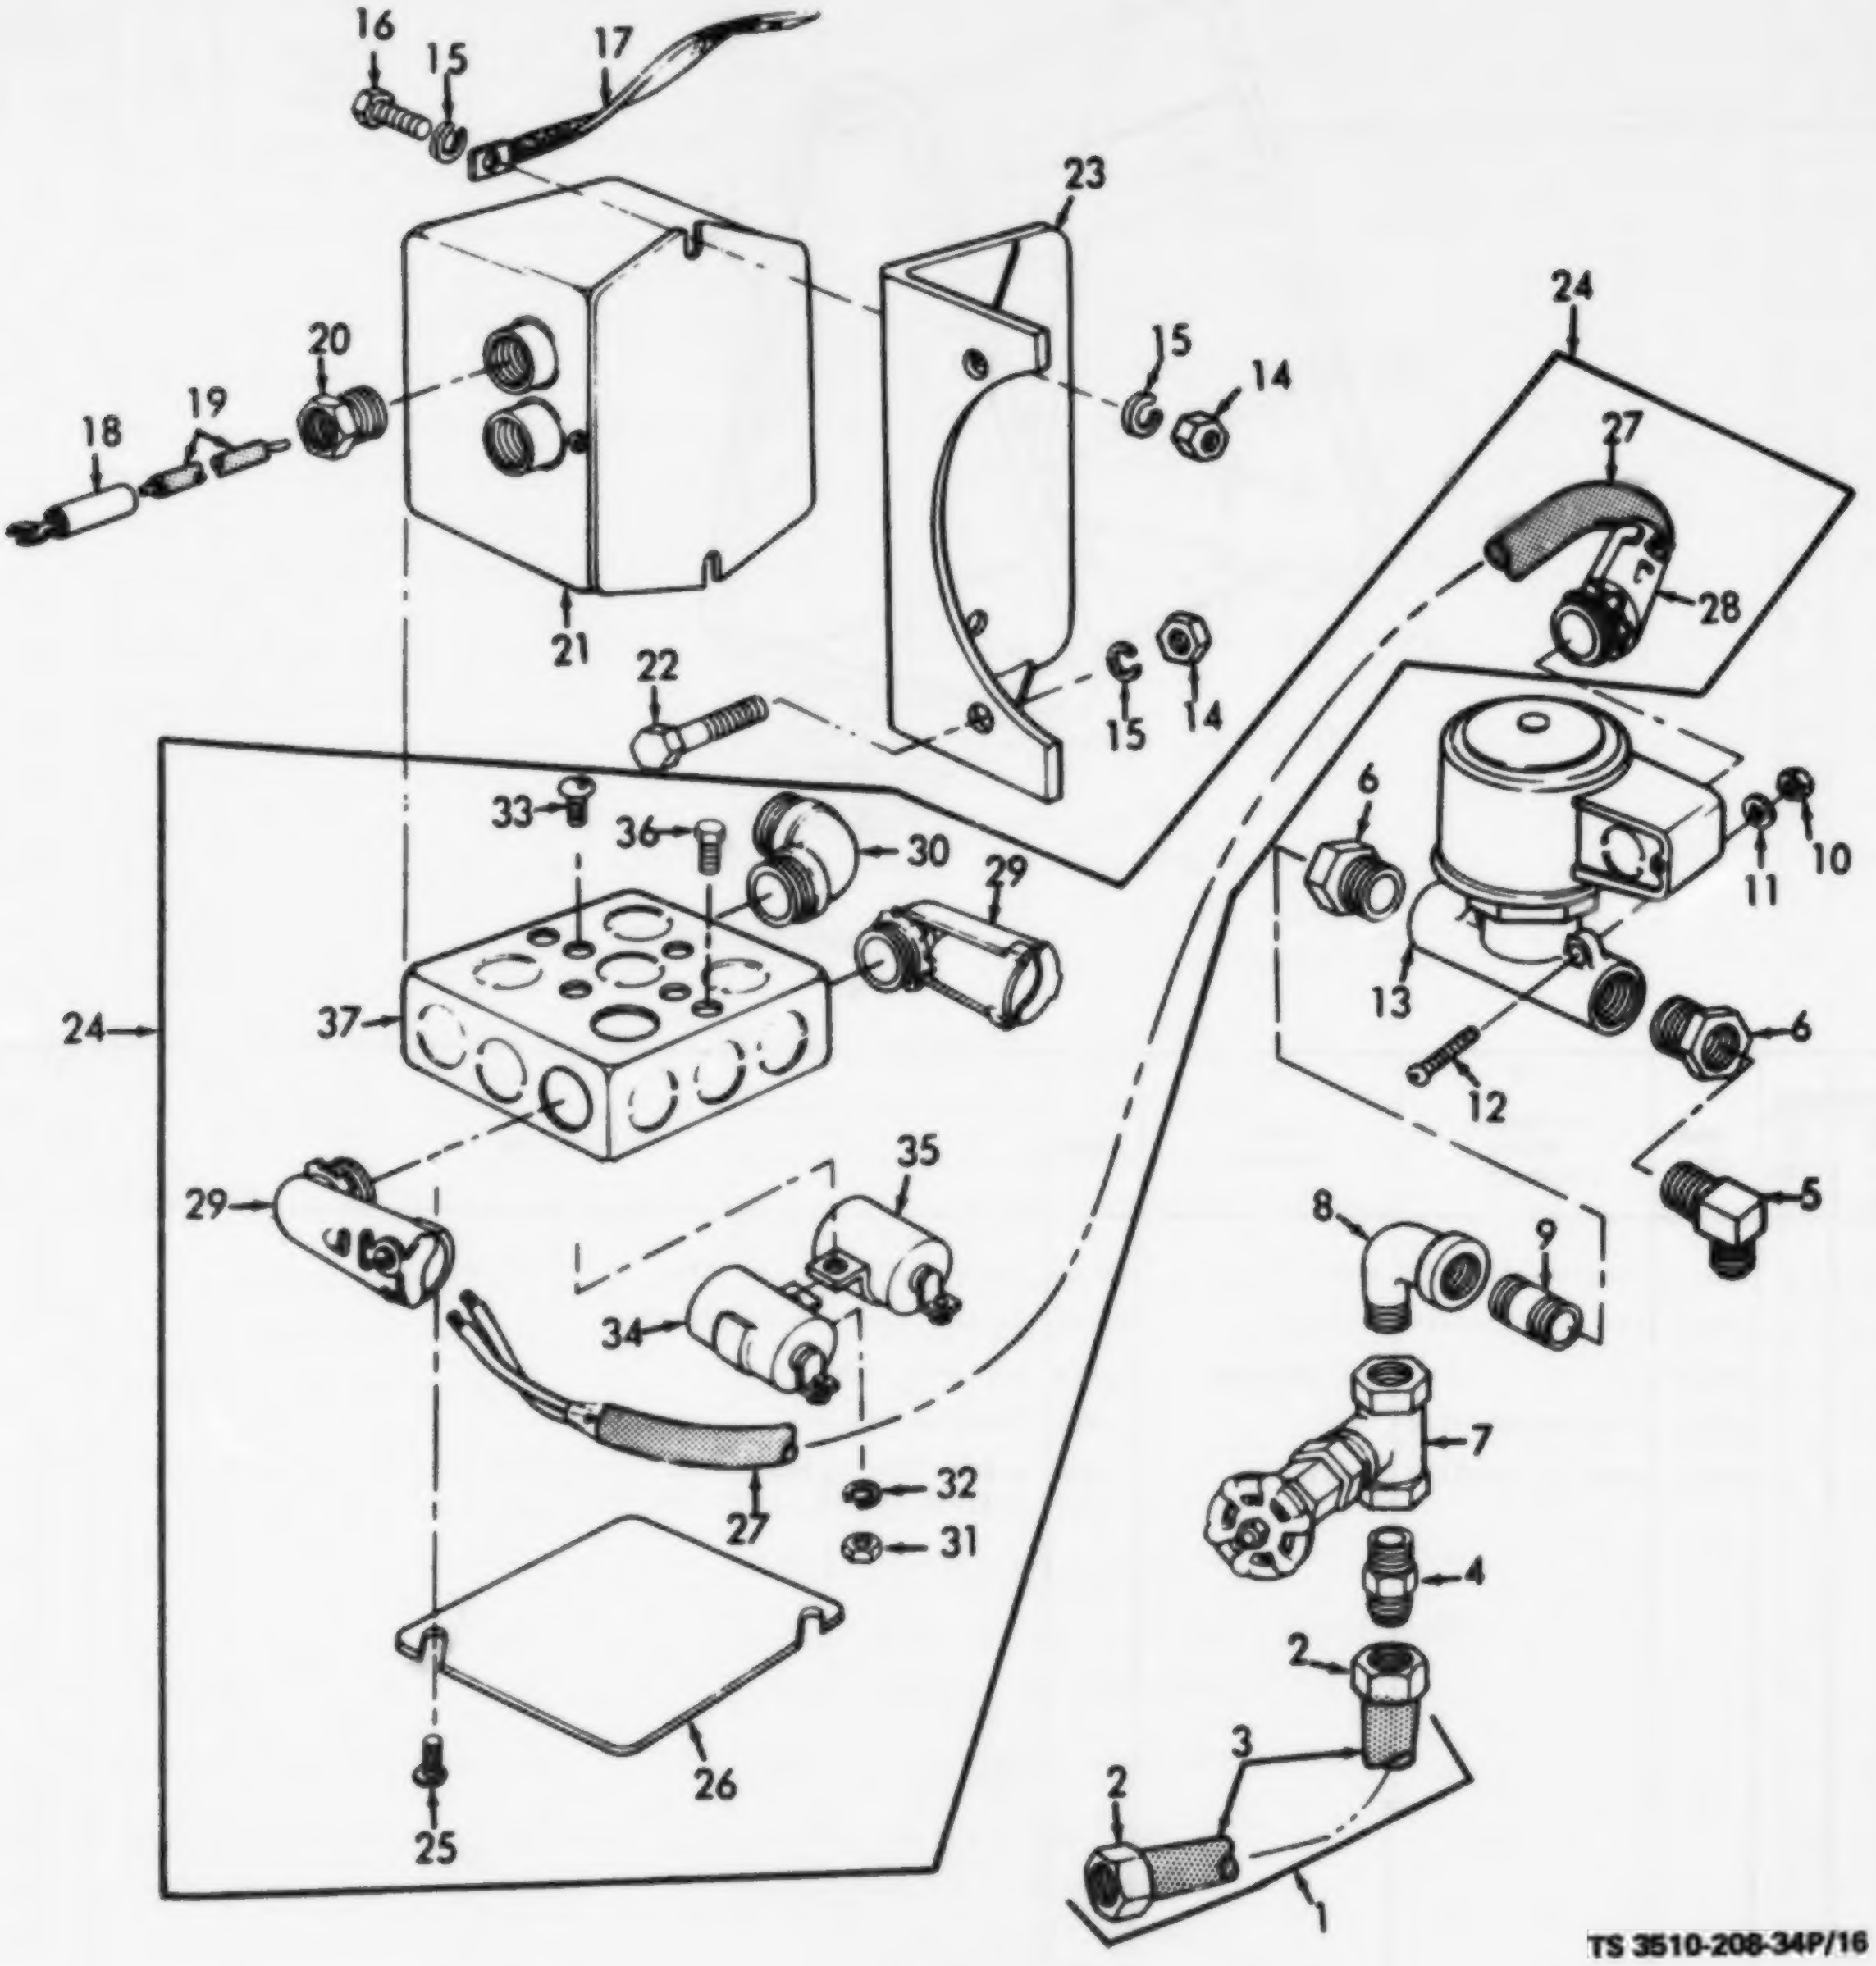
16
15
17
23
20
19
18
21
15
14
24
27
28
22
15
14
33
36
30
29
6
10
11
13
24
37
6
12
5
29
35
8
9
34
7
32
27
31
4
2
3
2
26
25
1
TS 3510-208-34P/16

Figure 16. Transformer, Handy Box and Solenoid.

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 09 - TRANSFORMER, HANDY BOX AND SOLENOID		
16	1	MOOOO		6-1-2302-25A	72869	HOSE: GLOBE VALVE MANUFACTURE FROM:	EA	1
16	2	PAOZZ	4730-00-533-4840	6-1-2302-25-2A	72869	FITTING, HOSE	EA	2
16	3	PAOZZ	4720-00-540-2465	H134	04255	HOSE, RUBBER, 13 IN. REQUIRED	FT	V
16	4	PAOZZ	4730-00-391-3771	MILF15049	81349	CONNECTOR, MALE: VALVE TO HOSE, 1/4 TUBE TO 1/4 NPT	EA	1
16	5	PAOZZ	4730-00-254-6225	MILF15049	81349	ELBOW, PIPE TO TUBE: SOLENOID VALVE, 1/4 TUBE TO 1/4 PIPE	EA	1
16	6	PAOZZ	4730-00-202-6491	WWP471	81348	BUSHING: SOLENOID VALVE TO GLOBE VALVE	EA	
16	7	PAOZZ	4820-00-200-0664	881-4	14959	VALVE, GLOBE: SOLENOID VALVE	EA	
16	8	PAOZZ	4730-00-277-5553	MS51952-2	96906	ELBOW, PIPE, STREET: GLOBE VALVE	EA	1
16	9	PAOZZ	4730-00-222-1837	WWN351	81348	NIPPLE: ELBOW TO BUSHING, SOLENOID, 1/4 NPT x 7/8 IN. LG	EA	1
16	10	PAOZZ	5310-00-934-9758	MS35649-202	96906	NUT, PLAIN, HEXAGON: SOLENOID MTG	EA	2
16	11	PAOZZ	5310-00-576-5752	MS35333-39	96906	WASHER, LOCK: SOLENOID MTG	EA	2
16	12	PAOZZ	5305-00-933-9884	6-1-2363-30-404A	72869	SCREW, MACHINE: SOLENOID VALVE MTG, 10-24 THD SIZE, 1-1/2 IN. LG	EA	2
16	13	PAOZZ	4810-00-930-2357	6-1-2363-20-395A	72869	VALVE, SOLENOID	EA	1
16	14	PAOZZ	5310-00-176-8141	6-1-2363-20-415A	72869	NUT, PLAIN, HEXAGON: TRANSFORMER AND BRACKET MTG	EA	4
16	15	PAOZZ	5310-00-901-0279	MS45904-74	96906	WASHER, LOCK: TRANSFORMER AND BRACKET MTG	EA	5
16	16	PAOZZ	5306-00-325-8497	6-1-2363-20-409A	72869	BOLT, MACHINE: TRANSFORMER MTG	EA	2
16	17	PAOZZ	4530-00-359-9481	6-1-2363-20-390A	72869	STRAP, BONDING: TRANSFORMER	EA	1
16	18	PAOZZ	5905-00-359-5372	159502001	45035	RESISTOR, FIXED: IGNITION CABLE	EA	2
16	19	PAOZZ	4530-00-359-9482	410101003	45035	CABLE, IGNITION: TRANSFORMER	EA	2
16	20	XBOZZ		6-1-2363-30-418A	60883	NIPPLE, CHASE: HANDY BOX, 1/2 IN.	EA	2
16	21	PAOZZ	5950-00-627-6753	638-253-296	75138	TRANSFORMER, POWER	EA	1
16	22	PAOZZ	5306-00-582-6207	6-1-2363-20-404A	72863	BOLT, MACHINE: SOLENOID BRACKET MTG	EA	2
16	23	XBOZZ		6-1-2363-20-379A	72869	BRACKET, TRANSFORMER	EA	1
16	24	XBOZZ		72-171-1-12	78229	BOX, HANDY	EA	1
16	25	PAOZZ	5305-00-614-0245	MS35265-64	96906	SCREW, MACHINE: HANDY BOX COVER MTG	EA	2
16	26	PAOZZ	5975-00-280-7445	72C1	78229	COVER, JUNCTION BOX	EA	1
16	27	XBOZZ		6-1-2337-20-462A	72869	CABLE, POWER, ELECTRICAL: HANDY BOX TO SOLENOID	EA	1
16	28	PAOZZ	5975-00-681-0531	265V	59730	ENTRANCE ELBOW, ELECTRICAL: SOLENOID POWER CABLE	EA	1
16	29	PAOZZ	5975-00-899-8948	321	59730	BOX CONNECTOR, ELECTRICAL: 90 DEGREE, HANDY BOX WIRE	EA	2
16	30	PAOZZ	5975-00-244-7807	4230	56730	BOX CONNECTOR ELBOW, ELECTRICAL	EA	2
16	31	PAOZZ	5310-00-761-6882	MS51967-2	96906	NUT, PLAIN, HEXAGON: RESISTOR MTG	EA	1
16	32	PAOZZ	5310-00-209-0786	MS35335-33	96906	WASHER, LOCK: RESISTOR MTG	EA	1
16	33	PAOZZ	5305-00-716-8192	MS90726-107	96906	SCREW, CAP, FILLISTER HEAD: RESISTOR MTG	EA	1
16	34	PAOZZ	5910-00-882-0556	CA485	14655	CONDENSER	EA	1
16	35	PAOZZ	5910-00-504-7418	CA482	81381	CAPACITOR, FIXED	EA	1
16	36	PAOZZ	5305-00-068-050	MS90725-6	96906	SCREW, CAP, HEXAGON HEAD	EA	2
16	37	PAOZZ	5975-00-899-794	321	59730	CONNECTOR BOX, ELECTRICAL	EA	1

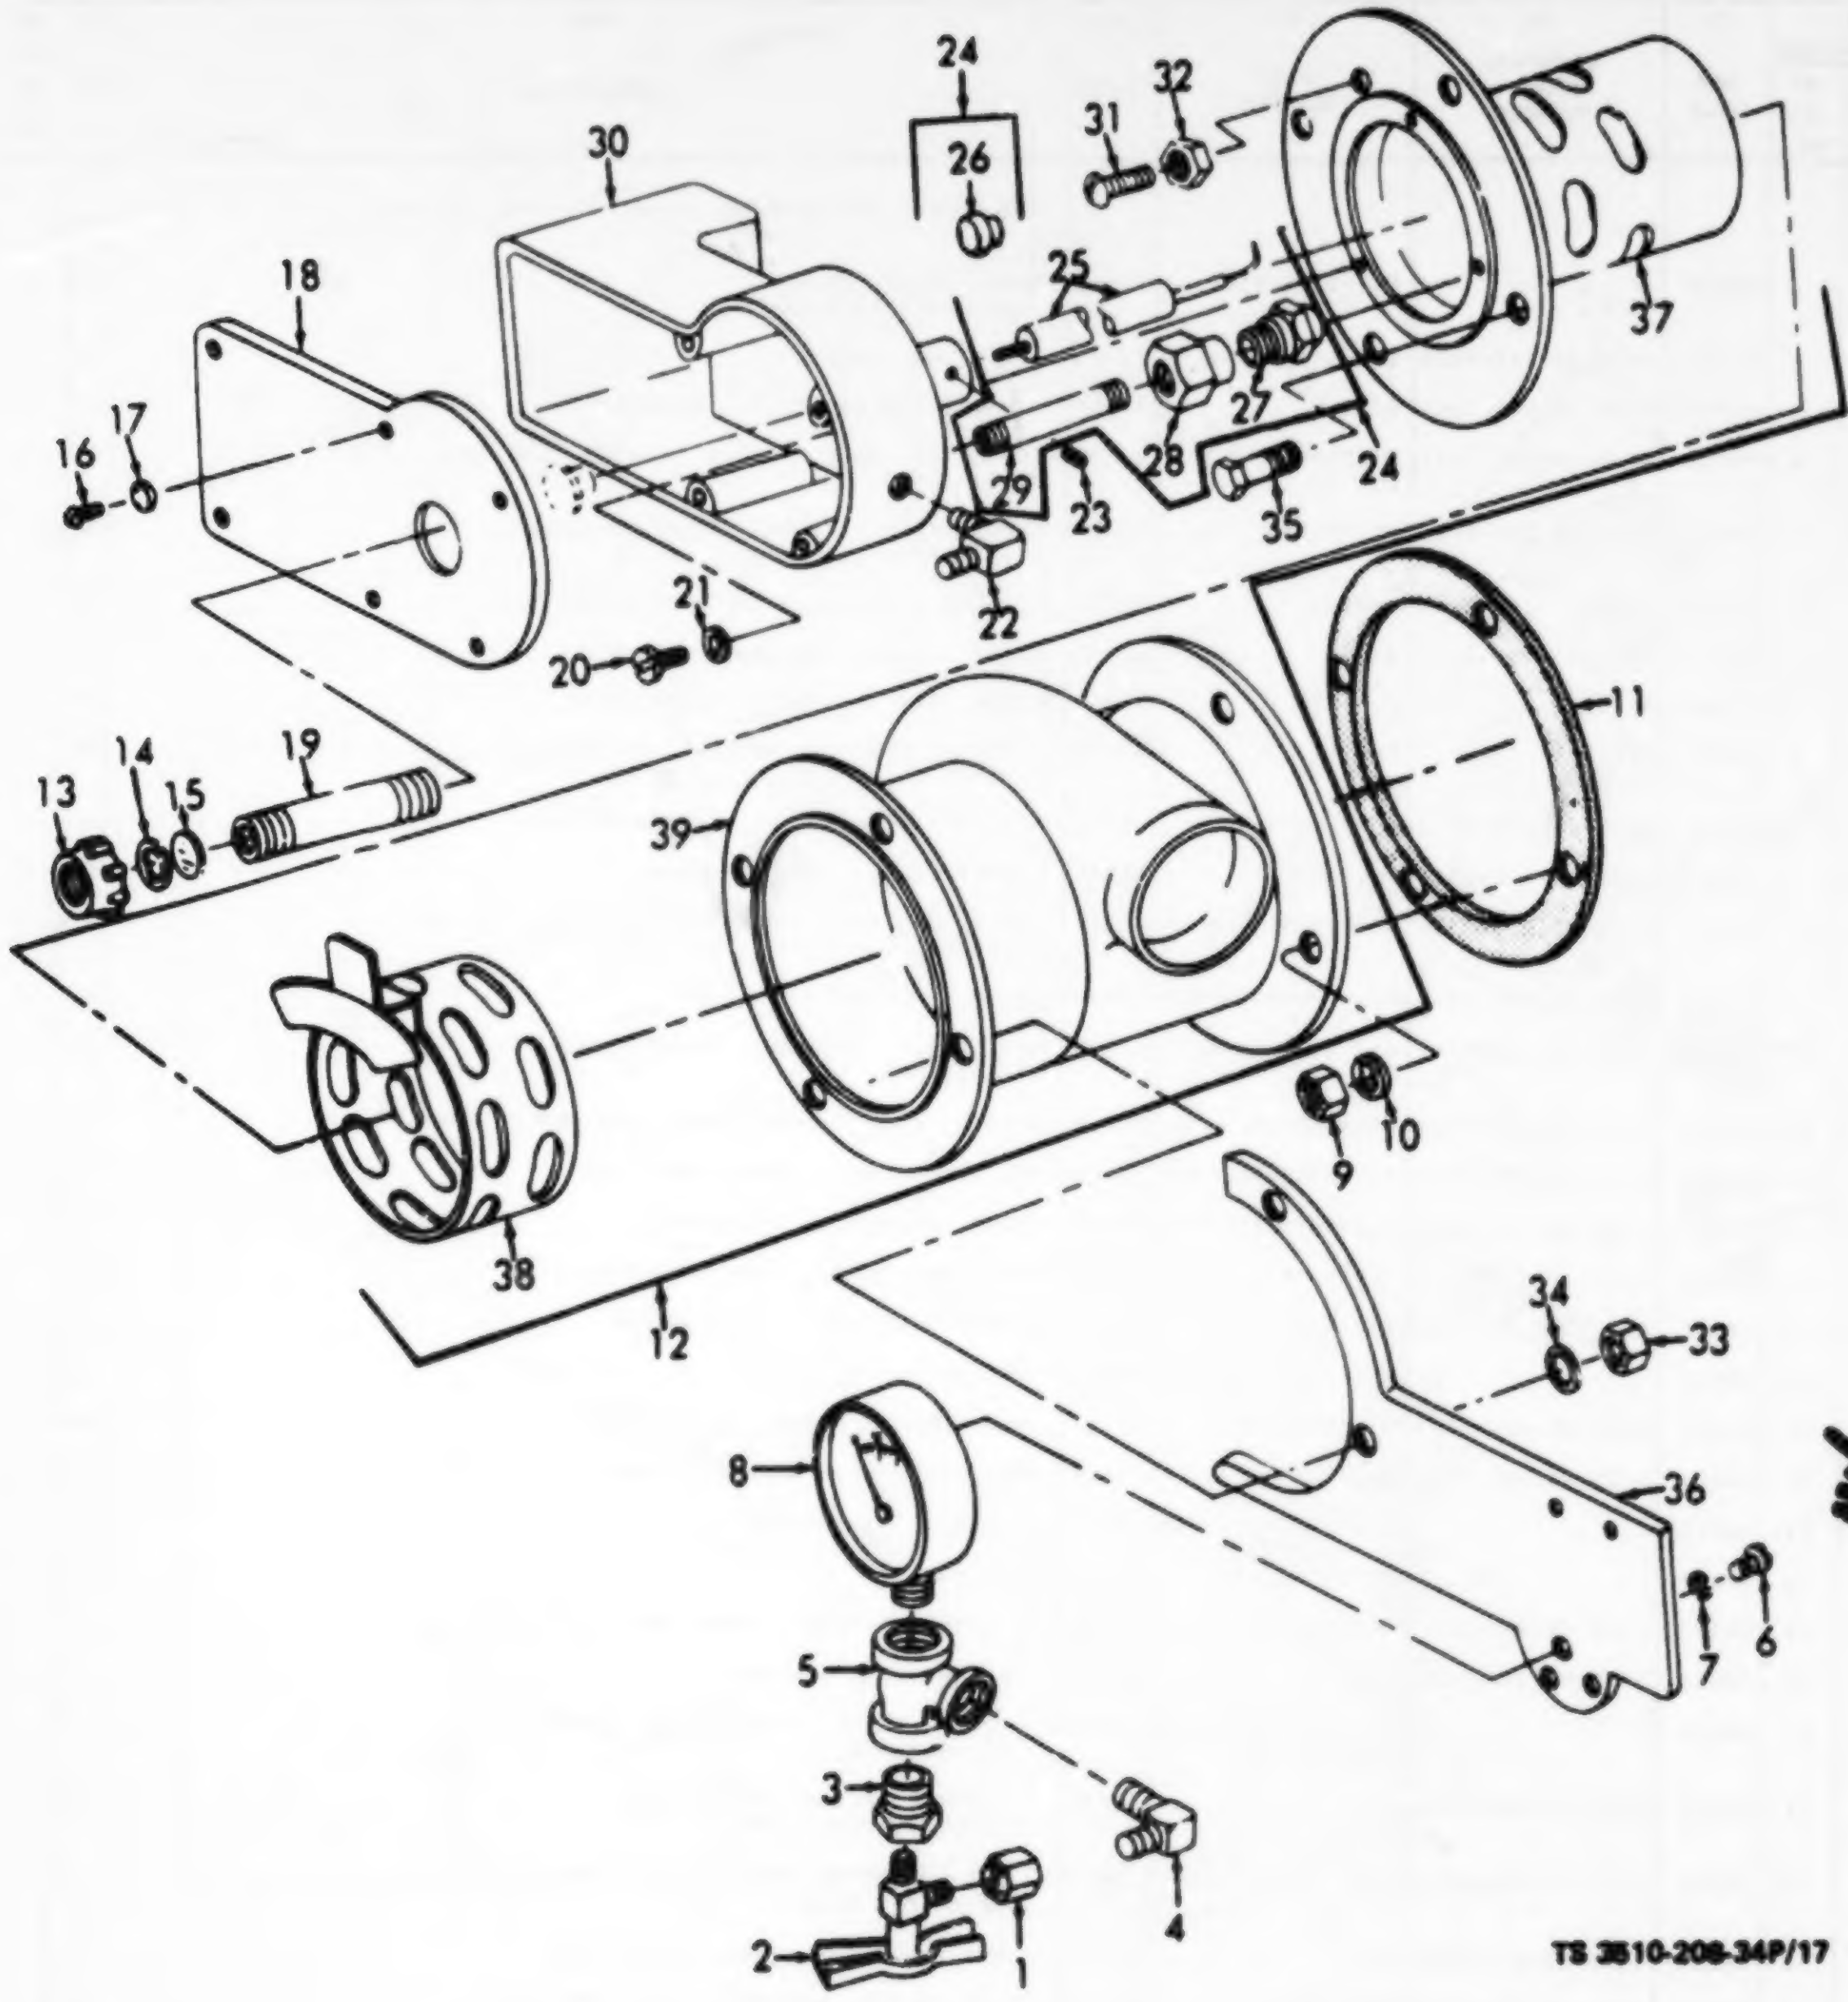
24
26
31
32
30
25
37
18
27
16
17
29
28
24
23
35
22
21
20
11
14
13
15
19
39
9
10
38
12
34
33
8
36
7
6
5
3
4
2
1
TS 3510-208-34P/17

Figure 17. Tumbler Burner.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 10 - TUMBLER BURNER		
17	1	PAOZZ	4730-00-278-5467	QQS633	81348	NUT, TUBE: DRAIN COCK, 1/4 IN.	EA	1
17	2	PAOZZ	4820-00-289-2153	A6845	04255	COCK, SHUT-OFF, SCREW: FUEL DRAIN, TUMBLER BURNER	EA	1
17	3	PAOZZ	4730-00-202-6491	WWP471TYPE1	81348	BUSHING: TEE TO DRAIN COCK, 1/4 IN. FEMALE, 3/8 IN. MALE	EA	1
17	4	PAOZZ	4730-00-062-0085	6-1-2363-20-403A	72869	ELBOW, MALE: INTAKE FUEL LINE, 1/4 X 1/4	EA	1
17	5	PAOZZ	4730-00-786-4255	6-1-2363-20-421A	72869	TEE: DRAIN COCK, 1/4 IN. NPT	EA	1
17	6	XBOZZ		6-1-2363-20-404A	72869	SCREW: GAGE MTG	EA	3
17	7	XBOZZ		6-1-2363-20-410A	72869	WASHER, STAR: GAGE MTG	EA	3
17	8	PAOZZ	6685-00-949-4876	P6315	61349	GAGE, PRESSURE: TUMBLER BURNER	EA	1
17	9	PAOZZ	5310-00-826-8965	MS55310-6	08288	NUT, SELF-LOCKING, HEXAGON HEAD: TUMBLER BURNER MTG	EA	6
17	10	PAOZZ	5310-00-550-1130	MS35333-40	96906	WASHER, LOCK: TUMBLER BURNER MTG	EA	6
17	11	PAOZZ	3510-00-359-9353	530601033	45035	GASKET: TUMBLER BURNER MTG	EA	1
17	12	PAOZF	3510-00-460-6100	6-1-1910-20-369A	72869	BURNER, TUMBLER	EA	1
17	13	PAOZZ	5975-00-152-1095	6-1-2363-20-384A	72869	BUSHING, PEEP HOLE	EA	1
17	14	PAOZZ	5330-00-599-9428	130605012	45035	WASHER, NONMETALLIC: PEEP HOLE	EA	1
17	15	PAOZZ	4530-00-359-9510	132802004	45035	GLASS, PEEP HOLE	EA	1
17	16	PAOZZ	5305-00-068-0500	MS90725-3	96906	SCREW, CAP, HEXAGON HEAD: ELECTRODE COVER MTG	EA	6
17	17	PAOZZ	5305-00-082-0650	MS45904-70	96906	WASHER, LOCK, INTERNAL TOOTH: ELECTRODE COVER MTG SCREW	EA	6
17	18	PAOZZ	3510-00-359-9478	621016005	45035	COVER, ELECTRODE	EA	1
17	19	XBOZZ		6-1-2363-20-383A	72869	NIPPLE, PIPE: PEEP HOLE, 1/2 IPS, 13-1/2 IN. LG	EA	1
17	20	XBOZZ		6-1-2363-20-406A	72869	SCREW, FILLISTER HEAD: BASE TO NOZZLE, 1/4-20 X 3/4 STL	EA	3
17	21	PAOZZ	5310-00-167-0721	6-1-2363-20-411A	72869	WASHER, LOCK, INTERNAL TOOTH: BASE TO NOZZLE MTG SCREW	EA	3
17	22	PAOZZ	4730-00-062-0085	6-1-2363-20-430A	72869	ELBOW, PIPE TO TUBE: BURNER BASE, 1/4 X 1/4	EA	1
17	23	PAOZZ	5305-00-728-6275	MS51973-51	96906	SETSCREW: ELECTRODE MTG, 1/4-20 THD SIZE X 3/16 IN. LG	EA	4
17	24	XBOZZ		6-1-2363-20-370A	72869	ELECTRODE AND NOZZLE	EA	1
17	25	PAOZZ	5977-00-359-9494	324901001	45035	ELECTRODE	EA	2
17	26	XBOZZ		6-1-2363-20-371A	72869	NUT, PLASTIC, INSULATING: ELECTRODE	EA	2
17	27	PAOZZ	4530-00-359-9556	F80PLP2-25-60	76444	NOZZLE, OIL BURNER: TUMBLER BURNER	EA	1
17	28	PAOZZ	4530-00-467-5773	100601001	45035	ADAPTER: NOZZLE	EA	1
17	29	PAOZZ	4730-00-278-0084	WWN351TYPEA	81348	NIPPLE, PIPE: NOZZLE	EA	1
17	30	XBOZZ		6-1-2363-20-372A	72869	BASE, BURNER	EA	1
17	31	PAOZZ	5305-00-988-1727	6-1-2363-20-407A	72869	SCREW, MACHINE: SHUTTER LOCKING	EA	1
17	32	PAOZZ	5310-00-826-8965	MS55310-6	08288	NUT, SELF-LOCKING HEAD: SHUTTER LOCKING SCREW	EA	1
17	33	PAOZZ	5310-00-176-8141	6-1-2363-20-415A	72869	NUT, PLAIN, HEXAGON: AIR NOZZLE MTG SCREW	EA	4
17	34	PAOZZ	5310-00-901-0279	MS45904-74	96906	WASHER, LOCK: AIR NOZZLE MTG SCREW	EA	4
17	35	PAOZZ	5306-00-655-6170	MS35307-38	96906	SCREW, CAP, HEXAGON HEAD: AIR NOZZLE MTG, 5/16-18 UNC-2A, THD SIZE X 1-1/2 IN. LG	EA	4
17	36	XBOZZ		6-1-2363-20-393A	72869	BRACKET, SOLENOID	EA	1
17	37	PAOZZ	4530-00-214-3360	649201115	45035	NOZZLE, AIR	EA	1
17	38	PAOZZ	4530-00-214-3364	567401003	45035	SHUTTER, AIR BURNER	EA	1
17	39	PAOZZ	4530-00-214-3362	755702131	45035	PLENUM, CHAMBER: TUMBLER BURNER	EA	1

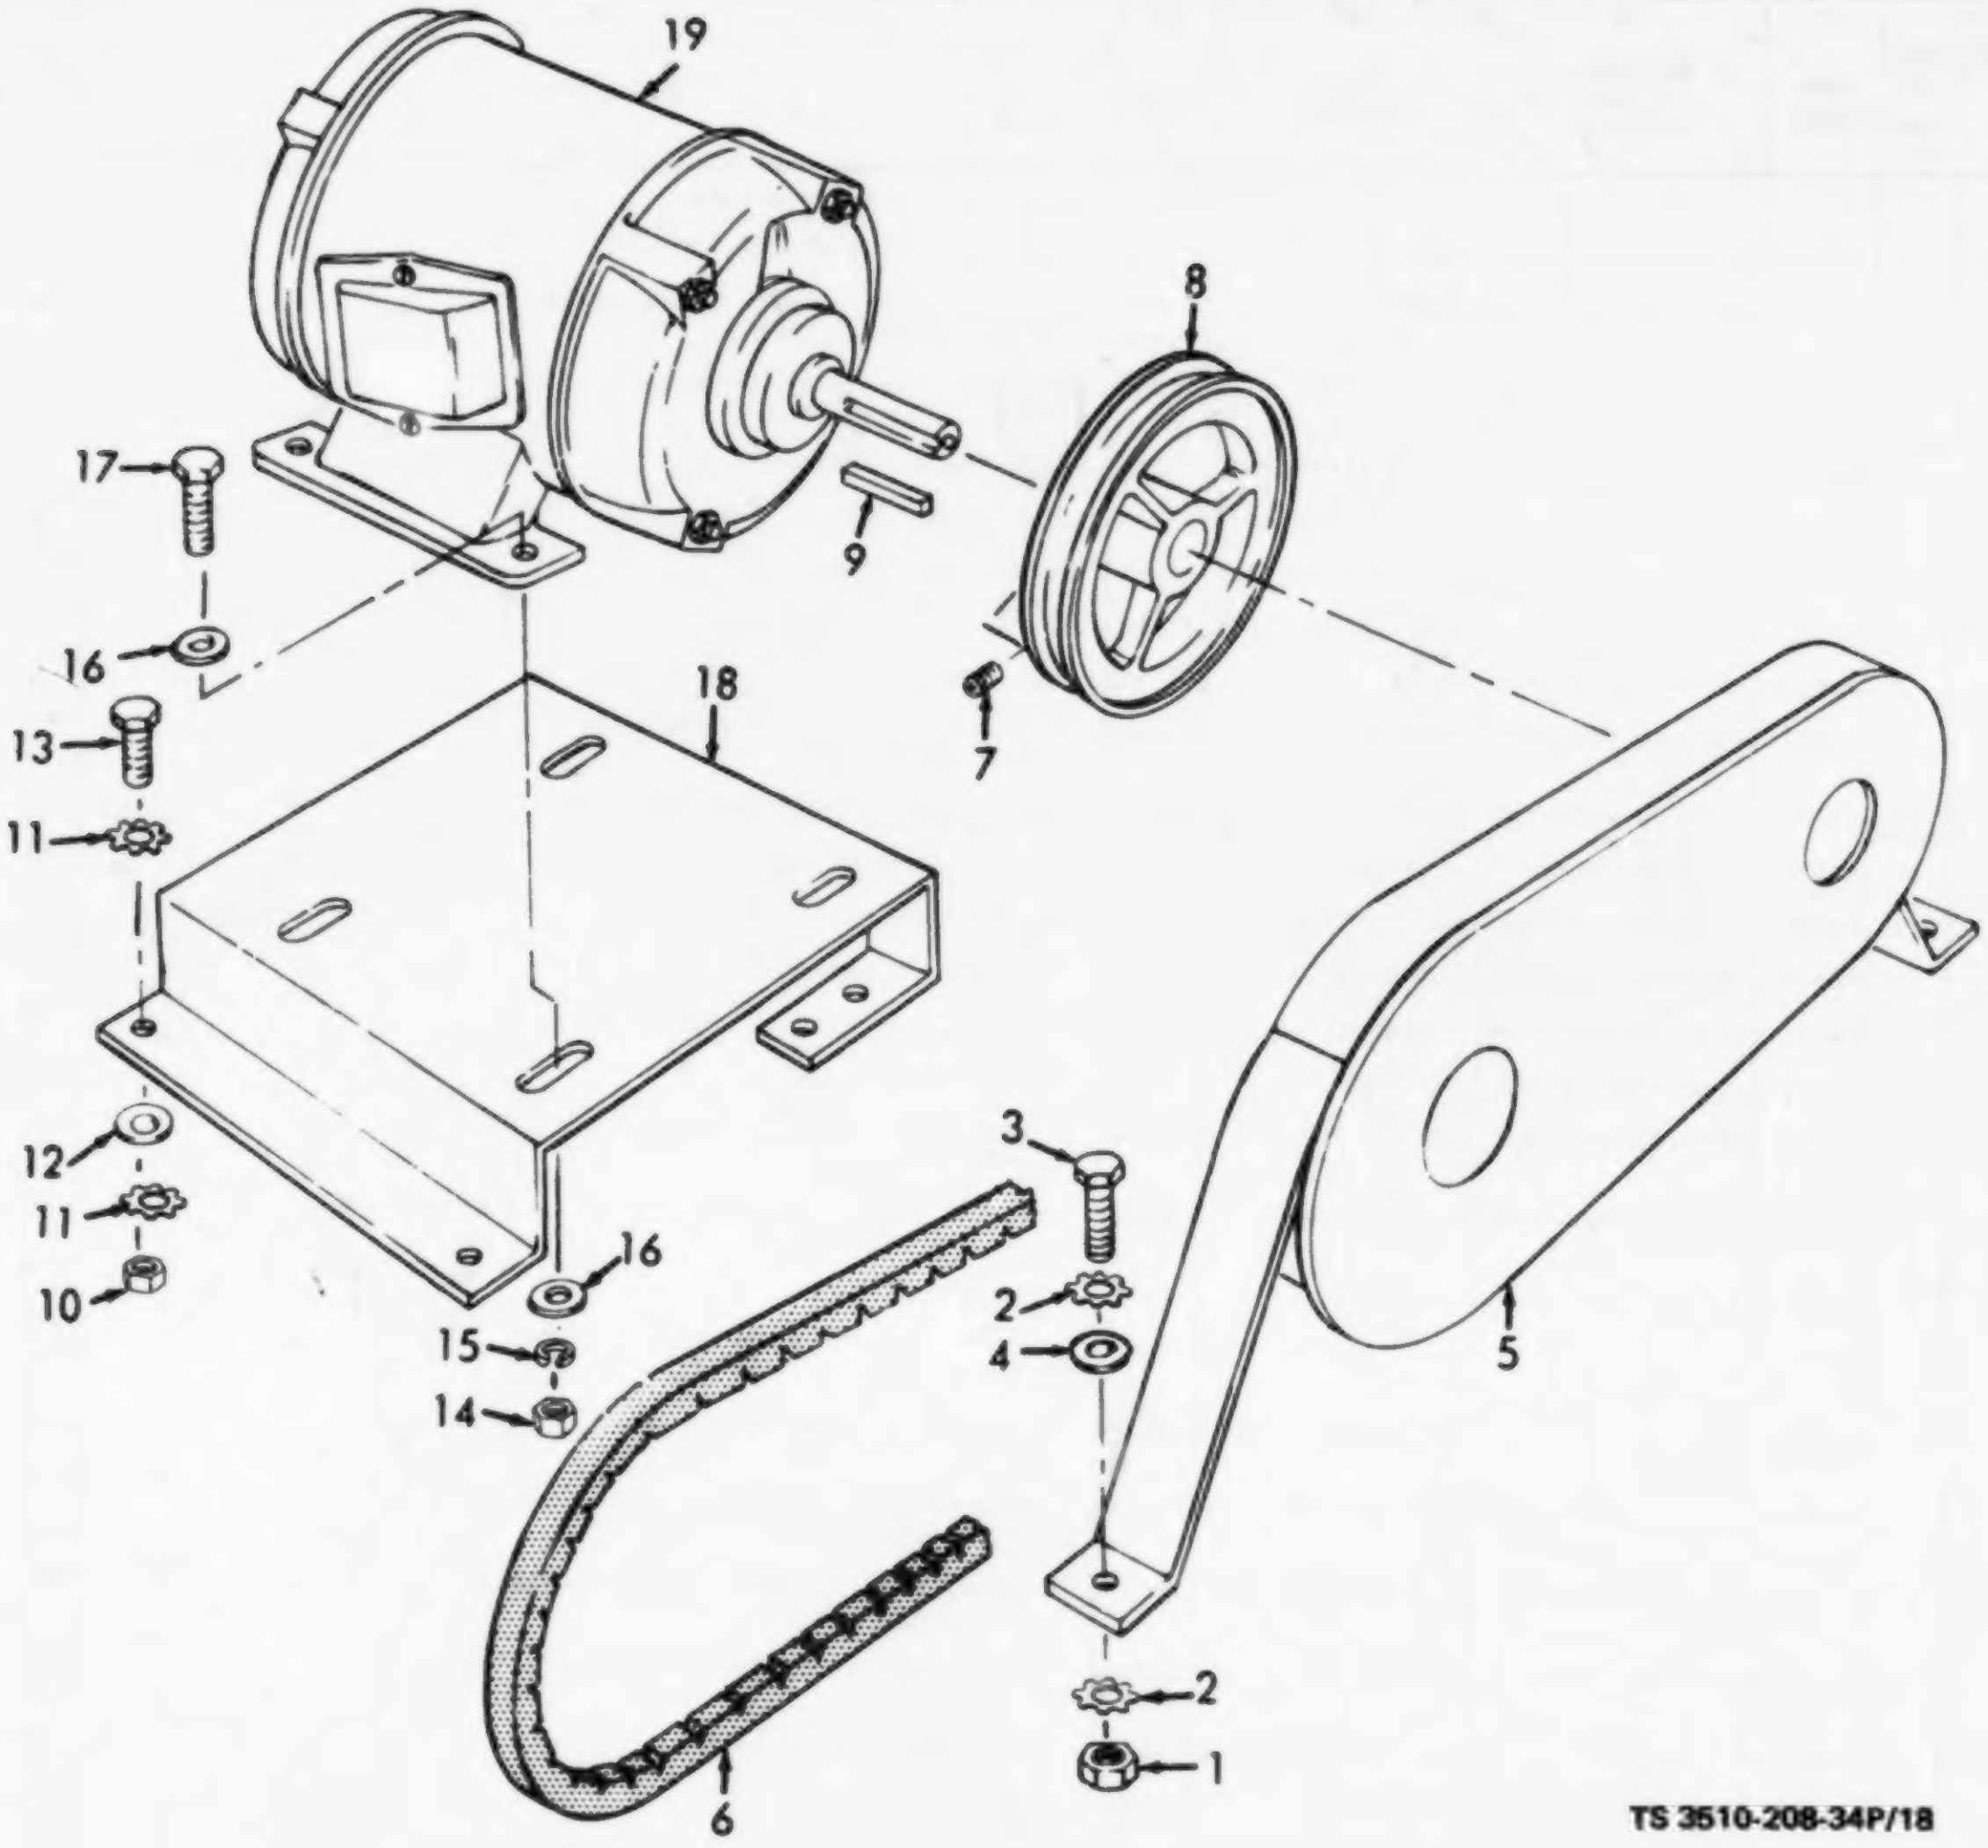
19
8
17
9
16
18
7
13
11
12
11
10
16
15
14
3
2
4
5
6
2
1

TS 3510-208-34P/18

Figure 18. Exhaust Motor, Mounting Bracket and Belt Guard.

7

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 11 - TUMBLER EXHAUST MOTOR AND RELATED PARTS		
18	1	PAOZZ	5310-00-732-0558	MS51967-8	96906	NUT, PLAIN, HEXAGON: GUARD MTG	EA	2
18	2	PAOZZ	5310-00-061-1258	MS45904-76	96906	WASHER, LOCK, INT-EXT TEETH: BELT GUARD MTG	EA	4
18	3	PAOZZ	5305-00-269-3213	MS90725-62	96906	SCREW, CAP, HEXAGON HEAD: GUARD MTG	EA	2
18	4	PAOZZ	5310-00-012-0388	6-1-2304-20-524A	72869	WASHER, FLAT: BELT GUARD MTG, 7/16 IN. ID, 1 IN. OD, 3/32 IN., THK	EA	2
18	5	PBOZZ	3510-00-214-3355	634-30102	45035	GUARD, BELT, WELDMENT	EA	1
18	6	PAOZZ	3030-00-529-0348	MS39255A38	96906	BELT, V	EA	1
18	7	PAOZZ	5305-00-724-5835	MS51963-88	96906	SETSCREW: PULLEY MTG, SOCKET HEAD, CUP POINT	EA	1
18	8	PBOZZ	3020-00-437-6976	6-1-2304-20-261A	72869	PULLEY, BELT	EA	1
18	9	PAOZZ	5315-00-057-6607	QQS633TYPEFS1019	81348	KEY, MACHINE: PULLEY MTG	EA	1
18	10	PAOZZ	5310-00-656-0341	MS35691-608	96906	NUT, PLAIN, HEXAGON: TUMBLER EXHAUST MOTOR BASE MTG	EA	4
18	11	XBOZZ		6-1-2304-20-521A	72869	WASHER, STAR: TUMBLER EXHAUST MOTOR BASE MTG	EA	8
18	12	PAOZZ	5310-00-087-7493	MS27183-13	96906	WASHER, FLAT: TUMBLER EXHAUST MOTOR BASE MTG	EA	4
18	13	PAOZZ	5306-00-167-4129	6-1-2304-20-522A	72869	BOLT, MACHINE: TUMBLER EXHAUST MOTOR BASE MTG	EA	4
18	14	PAOZZ	5310-00-957-7127	6-1-2304-20-260A	72869	NUT, SELF-LOCKING, HEXAGON: TUMBLER EXHAUST MOTOR TO BASE MTG	EA	4
18	15	XBOZZ		6-1-2304-20-240A	72869	WASHER, LOCK: TUMBLER EXHAUST MOTOR TO BASE MTG	EA	4
18	16	XBOZZ		6-1-2304-20-245A	72869	WASHER, FLAT: EXHAUST MOTOR MTG	EA	4
18	17	PAOZZ	5305-00-882-3259	6-1-2304-20-259A	72869	SCREW, CAP, HEXAGON HEAD: TUMBLER EXHAUST MOTOR TO BASE MTG	EA	4
18	18	XBOZZ		6-1-2304-20-252A	72869	BASE: TUMBLER EXHAUST MOTOR	EA	1
18	19	PAOZZ	6105-00-952-6547	6-330477SPEC 55434	11349	MOTOR, ALTERNATING CURRENT: WITH ADAPTER PLATES	EA	1

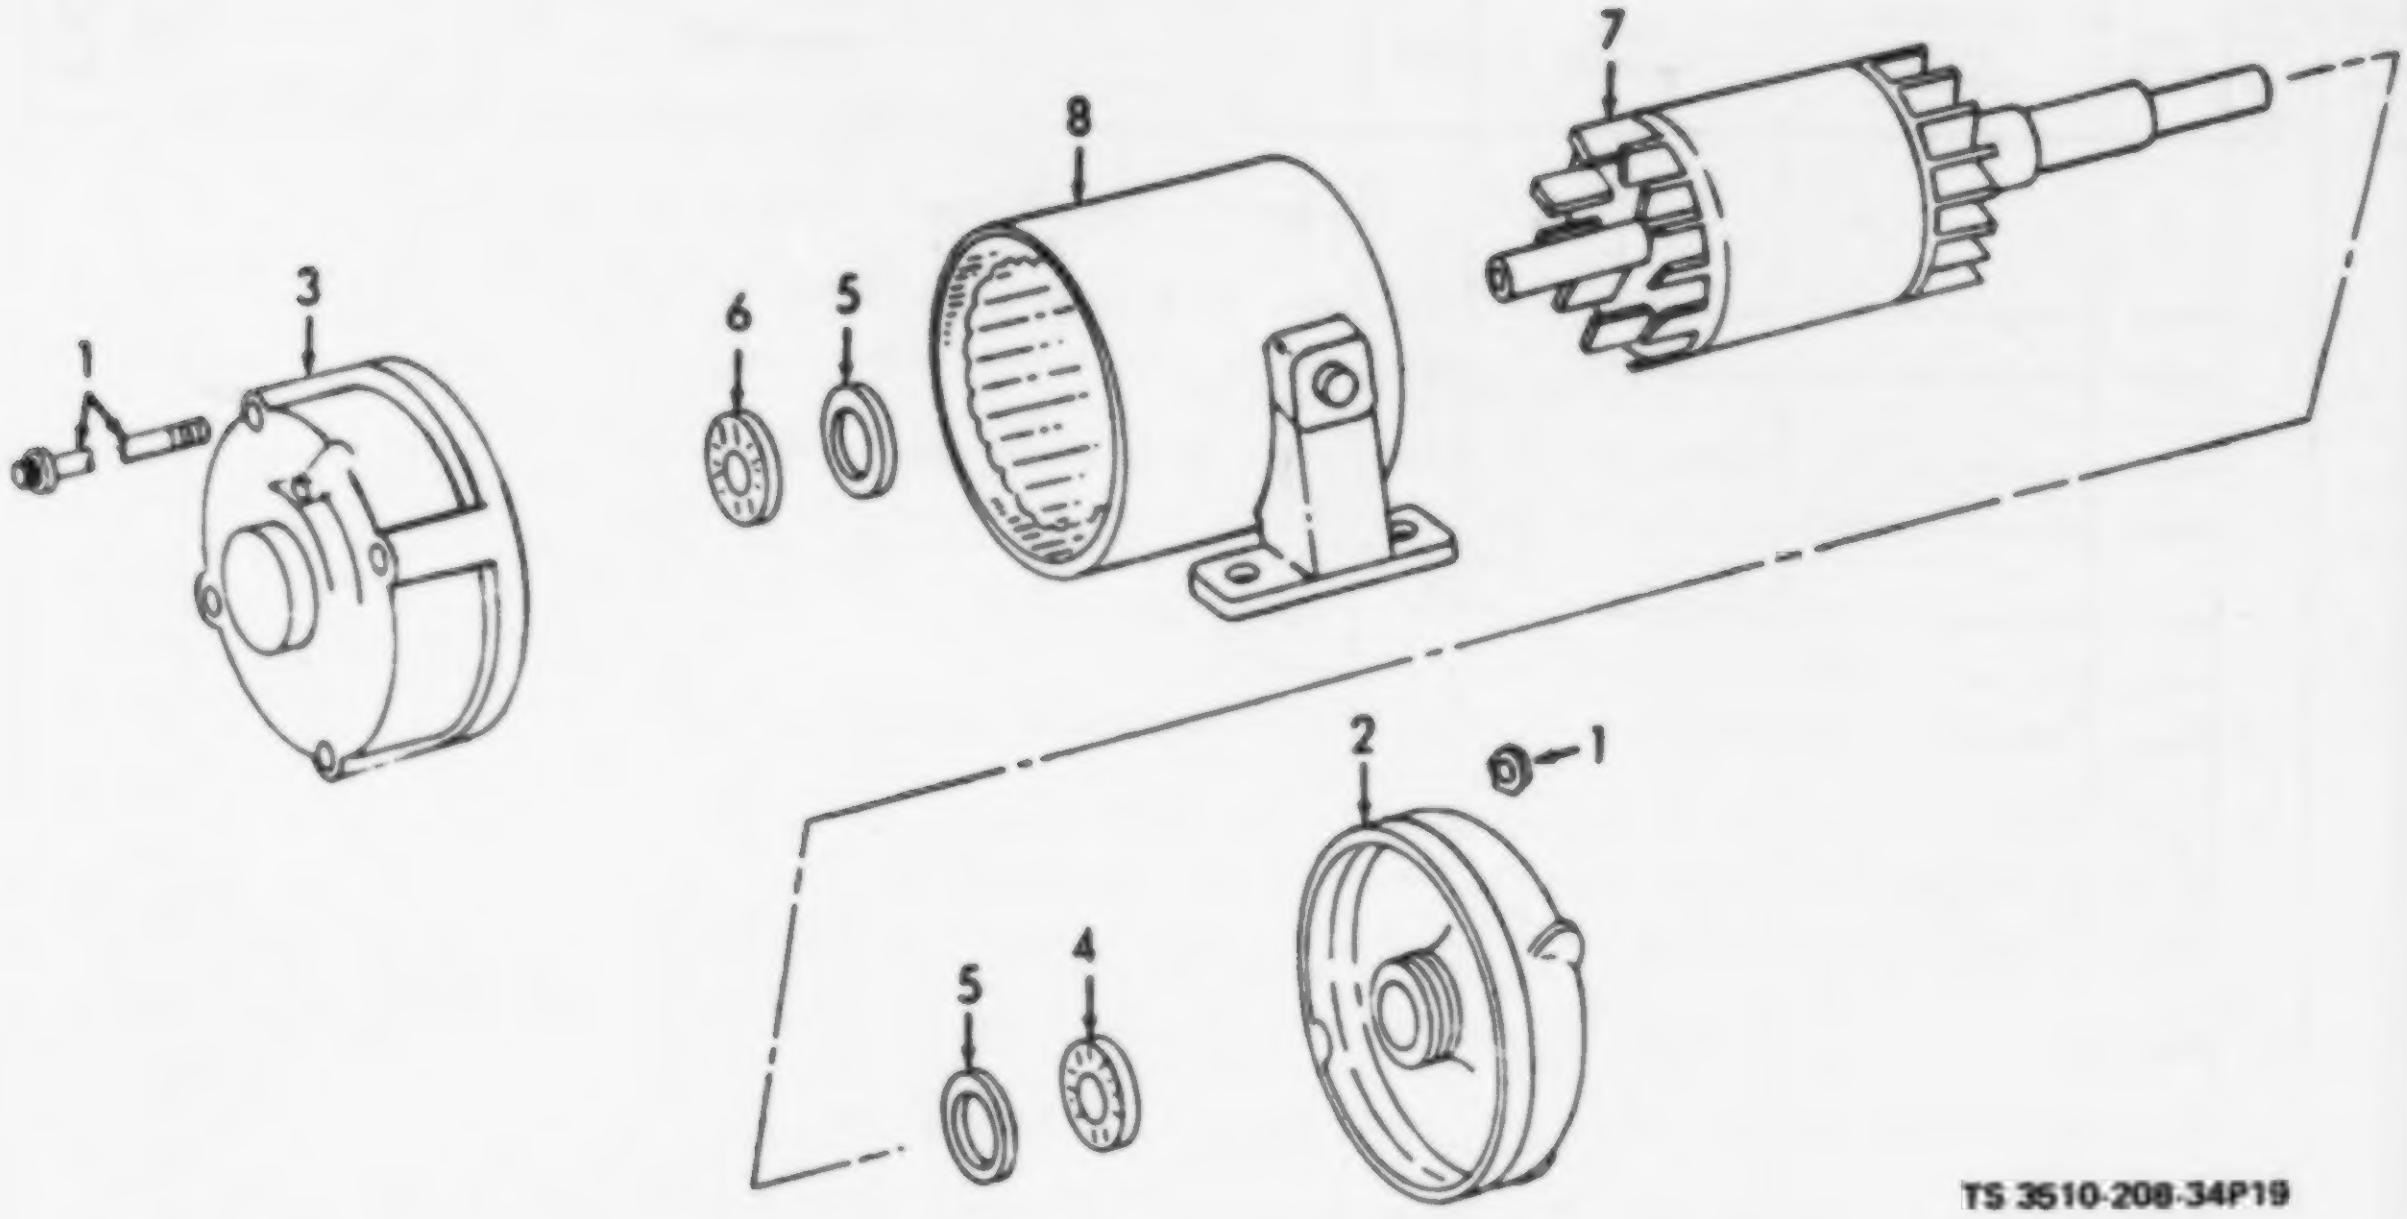

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
19	1	XBFZZ		301273-12	11349	BOLT, THRU: MOTOR, TUMBLER EXHAUST (SET OF FOUR W/NUTS)	ST	1
19	2	XBFZZ		300943-02	11349	END BRACKET ASSEMBLY: REAR	EA	1
19	3	XBFZZ		314298-01	11349	END BRACKET ASSEMBLY: FRONT	EA	1
19	4	PAFZZ	3110-00-144-9001	100004-12	11349	BEARING, BALL, REAR: TUMBLER EXHAUST MOTOR	EA	1
19	5	XBFZZ		5411	11349	SEAL, GREASE	EA	2
19	6	PAFZZ	3110-00-293-9163	100003-12	11349	BEARING, BALL, FRONT: TUMBLER EXHAUST MOTOR	EA	1
19	7	XAFZZ		ROTOR29-23-81-01	11349	ROTOR ASSEMBLY	EA	1
19	8	XAFZZ		29-23-81-01	11349	STATOR ASSEMBLY	EA	1

Figure 19. Tumbler Drive Motor.

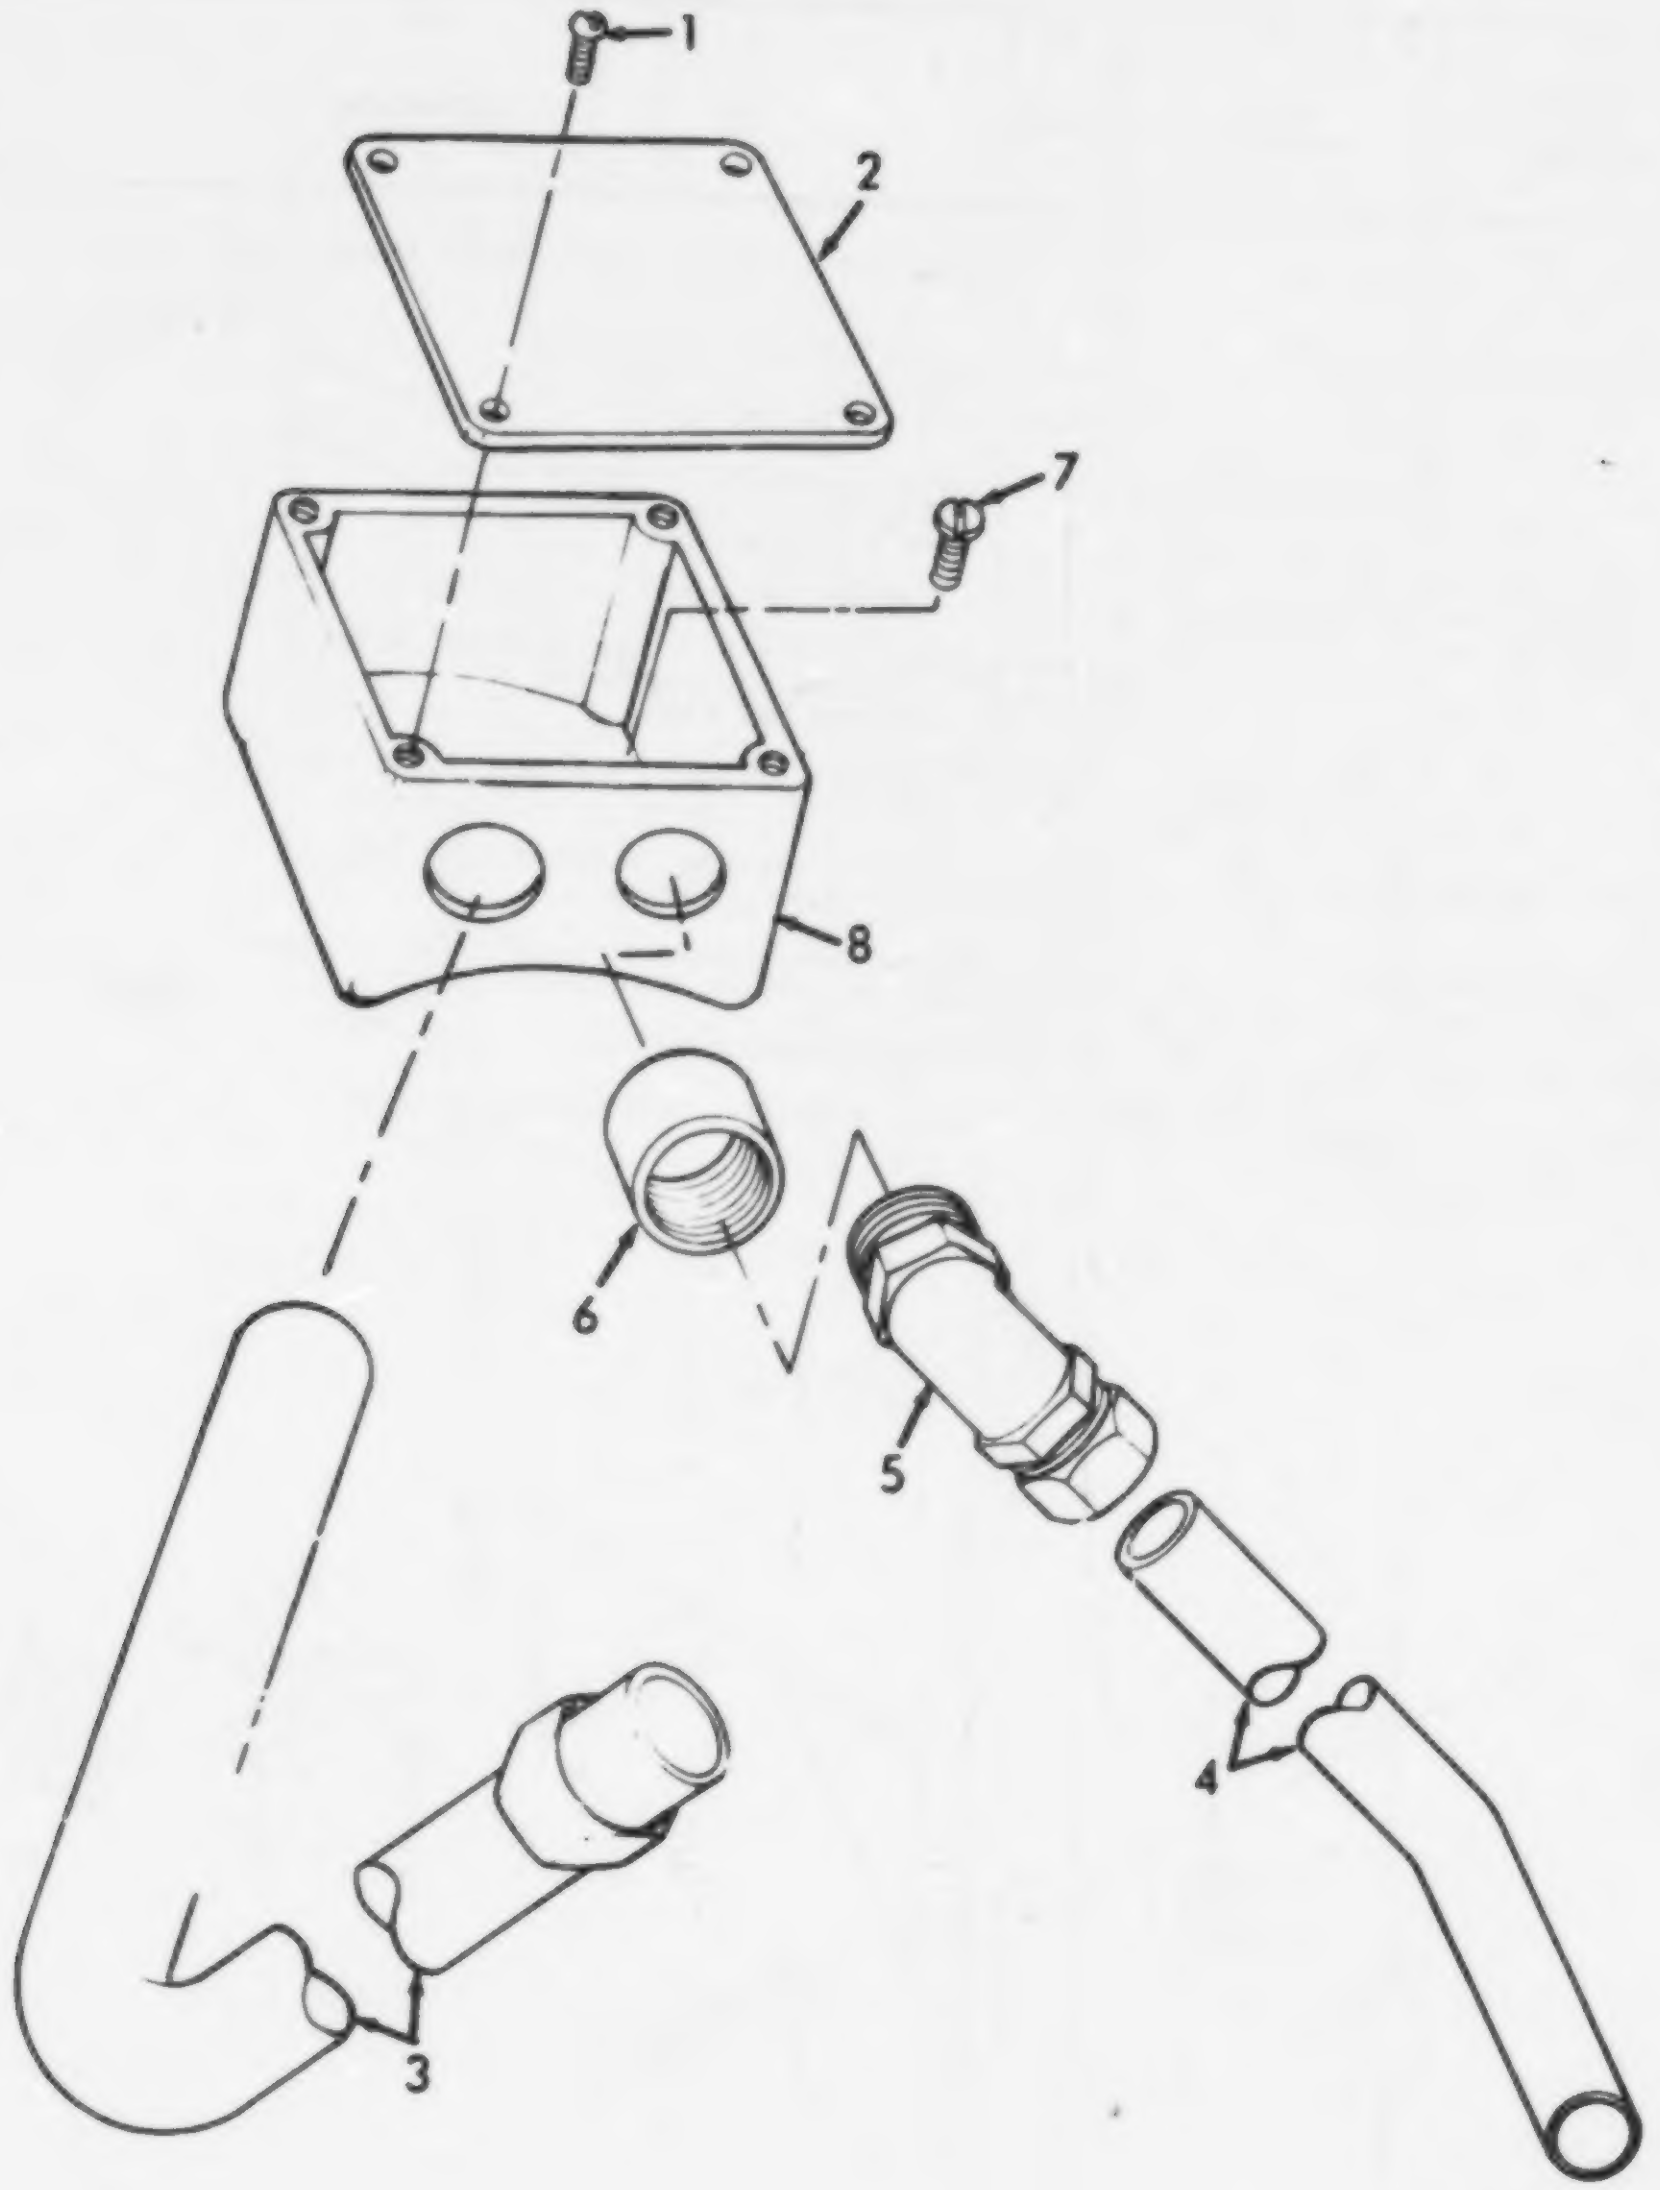

TS 3510-208-34P/20

Figure 20. Tumbler Drive Motor Conduit Box and, Related Parts.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 12 - TUMBLER DRIVE MOTOR CONDUIT BOX		
20	1	PAOZZ	5305-00-933-7227	C4316	29633	SCREW, COVER: CONDUIT BOX	EA	4
20	2	XBOZZ		A4865	29633	COVER, CONDUIT BOX	EA	1
20	3	MOOOO		6-1-2337-20-457A	72869	CONDUIT, RIGID: TUMBLER DRIVE MOTOR TO CONTROL PANEL MANUFACTURE FROM:	EA	1
20		PAOZZ	5975-00-178-1216	WWC563SIZE3-4	81349	CONDUIT, RIGID: 3/4 IN., 37 IN. REQUIRED	FT	V
20	4	MOOOO		6-1-2337-20-456A	72869	CONDUIT, RIGID: TUMBLER DRIVE MOTOR TO TUMBLER EXHAUST MOTOR MANUFACTURE FROM:	EA	1
20		PAOZZ		WWC563SIZE1-2	81349	CONDUIT, RIGID: 1/2 IN., 31-1/2 IN. REQUIRED	FT	V
20	5	PAOZZ	5975-00-179-0098	5121	59730	ELBOW, CONNECTOR, ELECTRICAL: CONDUIT BOX TO EXHAUST MOTOR	EA	2
20	6	PAOZZ	5935-00-317-3116	5221	59730	CONNECTOR, STRAIGHT, ELECTRICAL: CONDUIT BOX TO CONDUIT AND EXHAUST MOTOR	EA	2
20	7	PAOZZ	5305-00-933-7229	F4334	29633	SCREW, CONDUIT BOX MTG	EA	2
20	8	XBOZZ		A4864	29633	BOX, CONDUIT: TUMBLER DRIVE MOTOR	EA	1

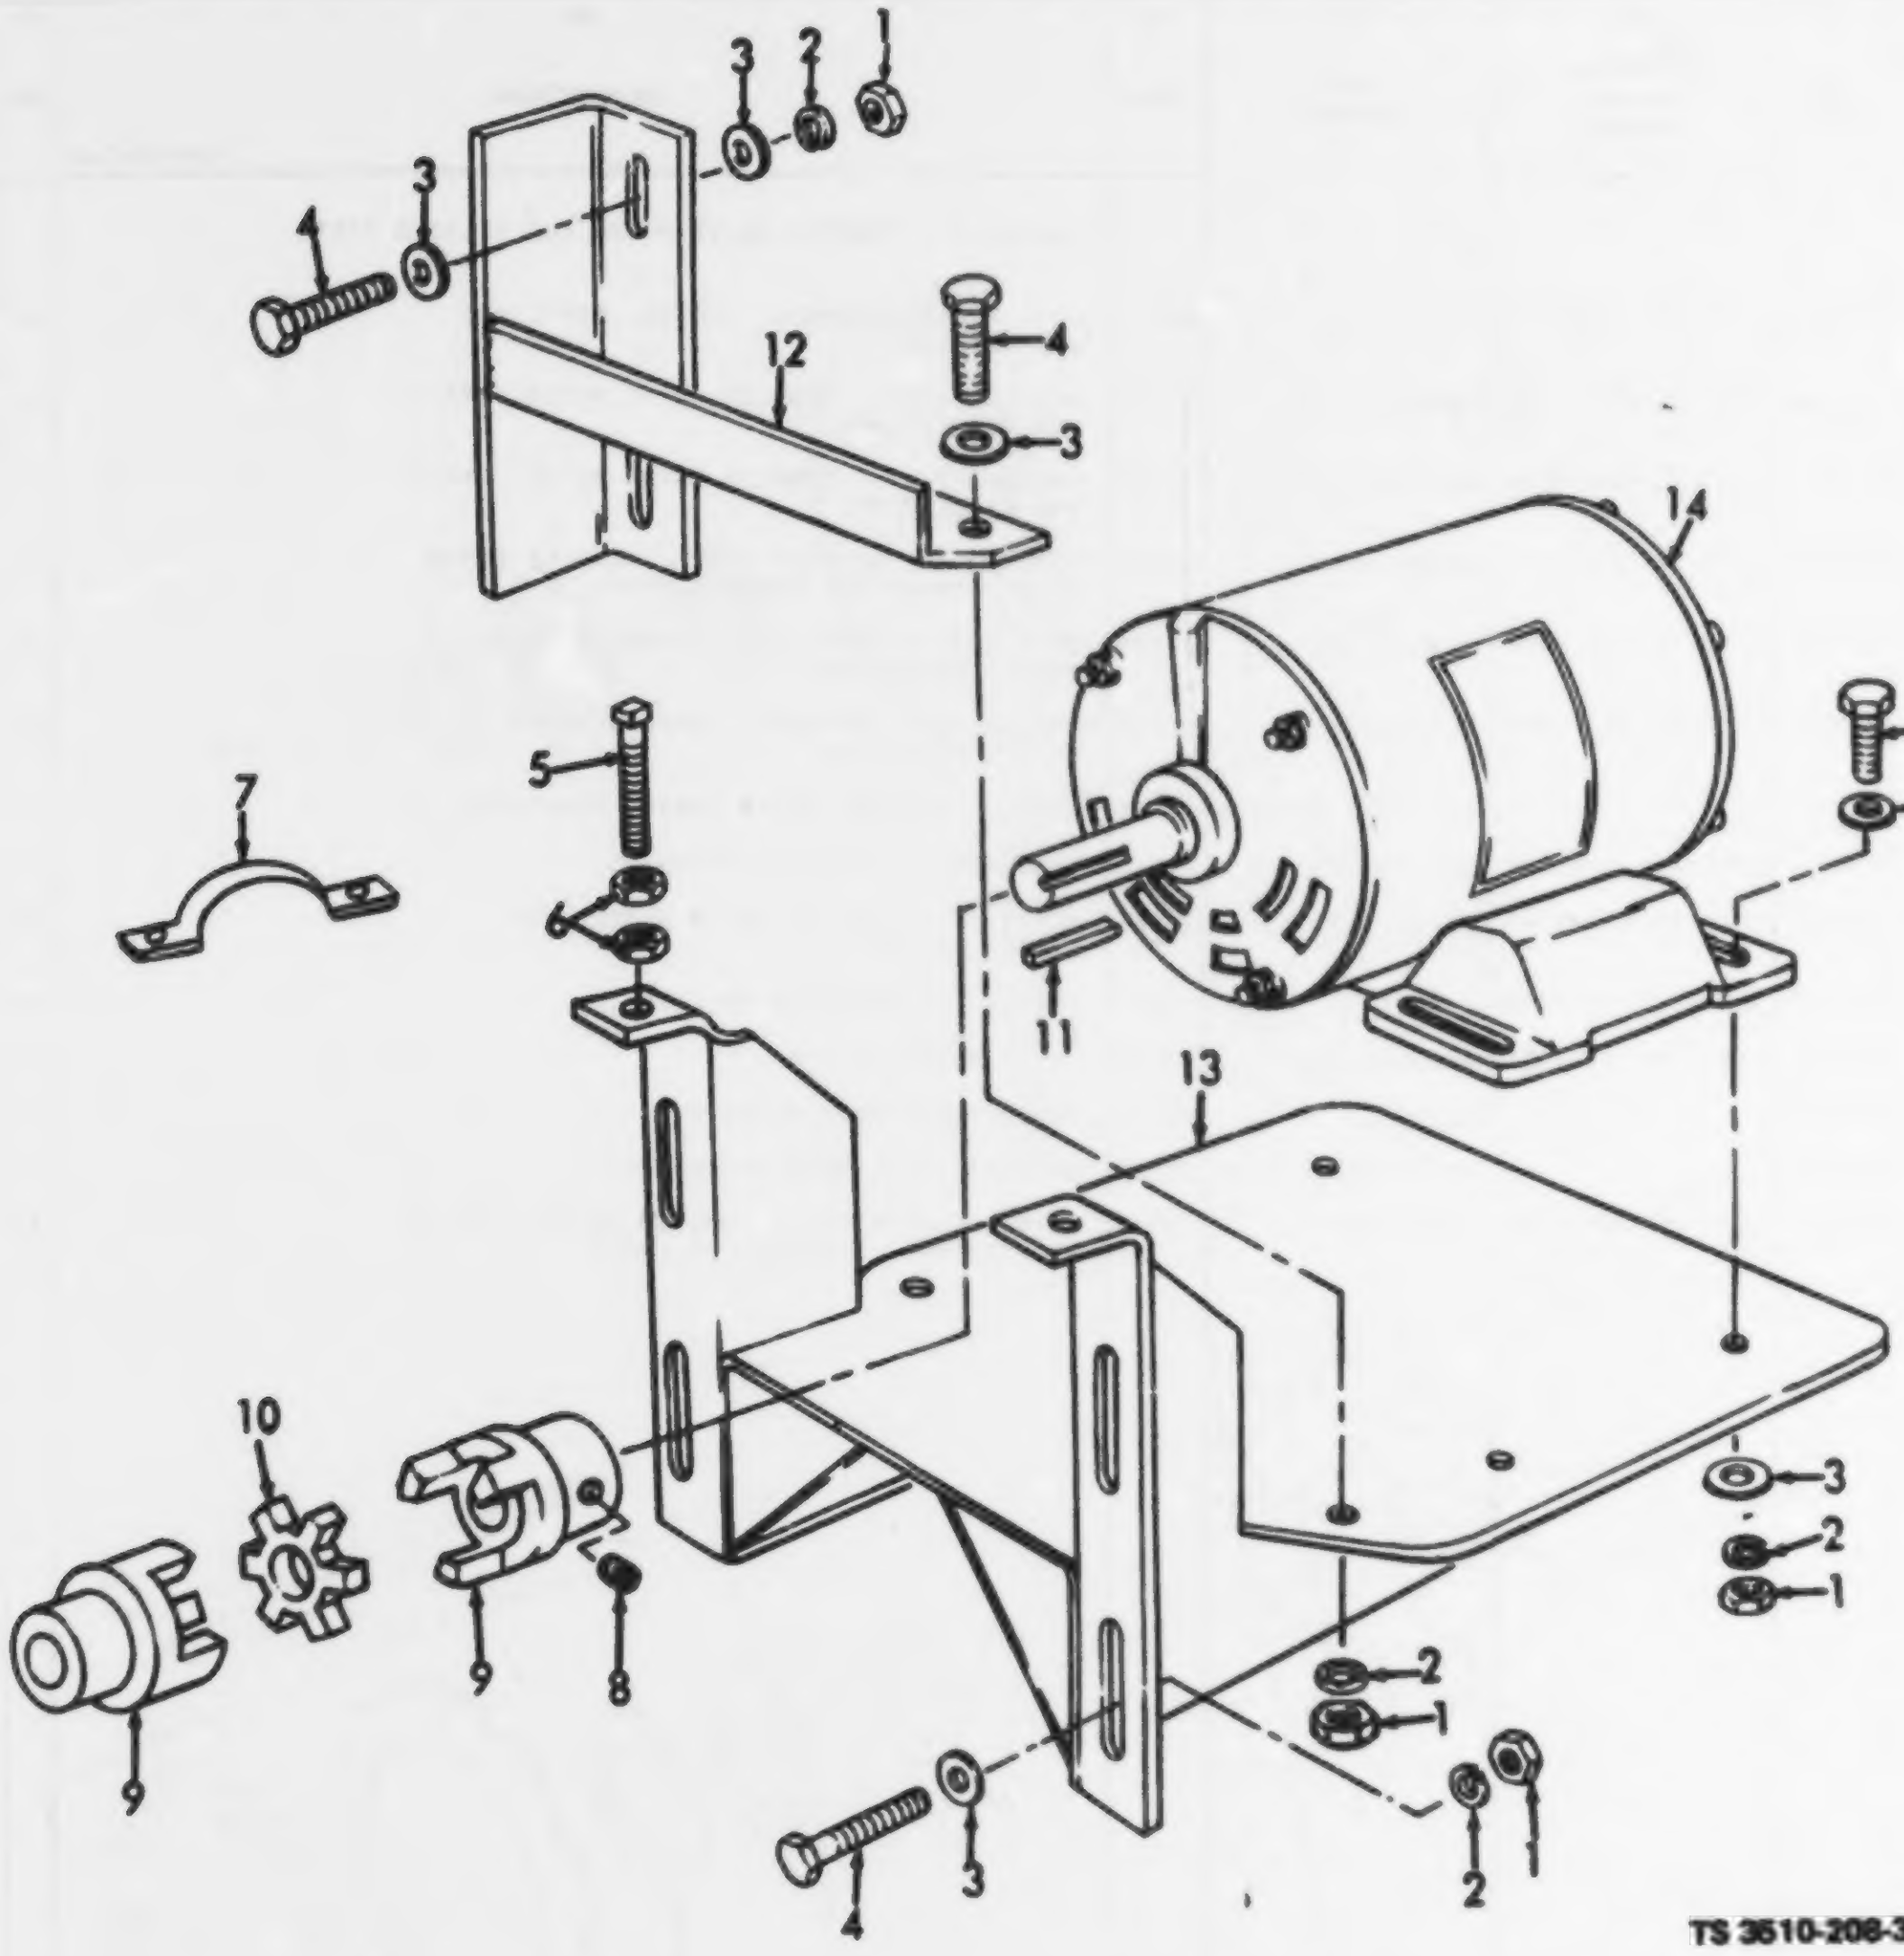
1
2
3
3
4
12
4
3
14
4
3
5
7
6
11
13
10
9
8
9
3
2
1
2
1
2
1
4
3

TS 3510-208-34P/21

Figure 21. Tumbler Drive Motor and Mounting Bracket.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 13 - TUMBLER DRIVE MOTOR AND RELATED PARTS		
21	1	PAOZZ	5310-00-732-0558	MS51967-8	96906	NUT, PLAIN, HEXAGON: MOTOR, BRACE AND BRACKET MTG	EA	11
21	2	PAOZZ	5310-00-637-9541	MS35338-46	96906	WASHER, LOCK: TUMBLER DRIVE MOTOR, BRACE AND BRACKET MTG	EA	11
21	3	PAOZZ	5310-00-809-4061	MS27183-15	96906	WASHER, FLAT: TUMBLER DRIVE MOTOR, BRACE AND BRACKET MTG	EA	13
21	4	PAOZZ	5305-00-269-3213	MS90725-62	96906	SCREW, CAP, HEXAGON HEAD: TUMBLER DRIVE MOTOR, BRAKE AND BRACKET MTG	EA	13
21	5	PAOZZ	5305-00-058-0763	MS55305-29	08288	SETSCREW, SQUARE HEAD: TUMBLER DRIVE CHAIN, ADJUSTING	EA	2
21	6	PAOZZ	5310-00-761-6882	MS51967-2	96906	NUT, PLAIN, HEXAGON: TUMBLER DRIVE CHAIN, ADJUSTING	EA	4
21	7	XBOZZ		6-1-2330-20-156A	72869	GUARD: TUMBLER DRIVE CHAIN, ADJUSTING	EA	1
21	8	PAOZZ	5305-00-724-5896	MS51964-41	96906	SETSCREW: COUPLING RETAINING	EA	2
21	9	PAOZZ	3010-00-430-9223	FCN15-5-81NX3-4IN	71041	COUPLING: TUMBLER DRIVE MOTOR WITH SPIDER ASSEMBLY	EA	1
21	10	PAOZZ	3010-00-138-7995	SCB815	71041	SPIDER: TUMBLER MOTOR COUPLING	EA	1
21	11	PAOZZ	5315-00-781-1996	MS20068-102	96906	KEY: COUPLING MTG	EA	1
21	12	XBOZZ		ML148	29679	BRACE: CYLINDER MOTOR MTG	EA	1
21	13	XBOZZ		6-1-2330-20-144A	72869	BRACKET: CYLINDER MOTOR MTG	EA	1
21	14	PAOFF	6105-00-136-8475	38A545161	29633	MOTOR, ELECTRICAL: TUMBLER DRIVE, 1/2 HP, 208/220/440, 3 PHASE, 60 CYCLE	EA	1

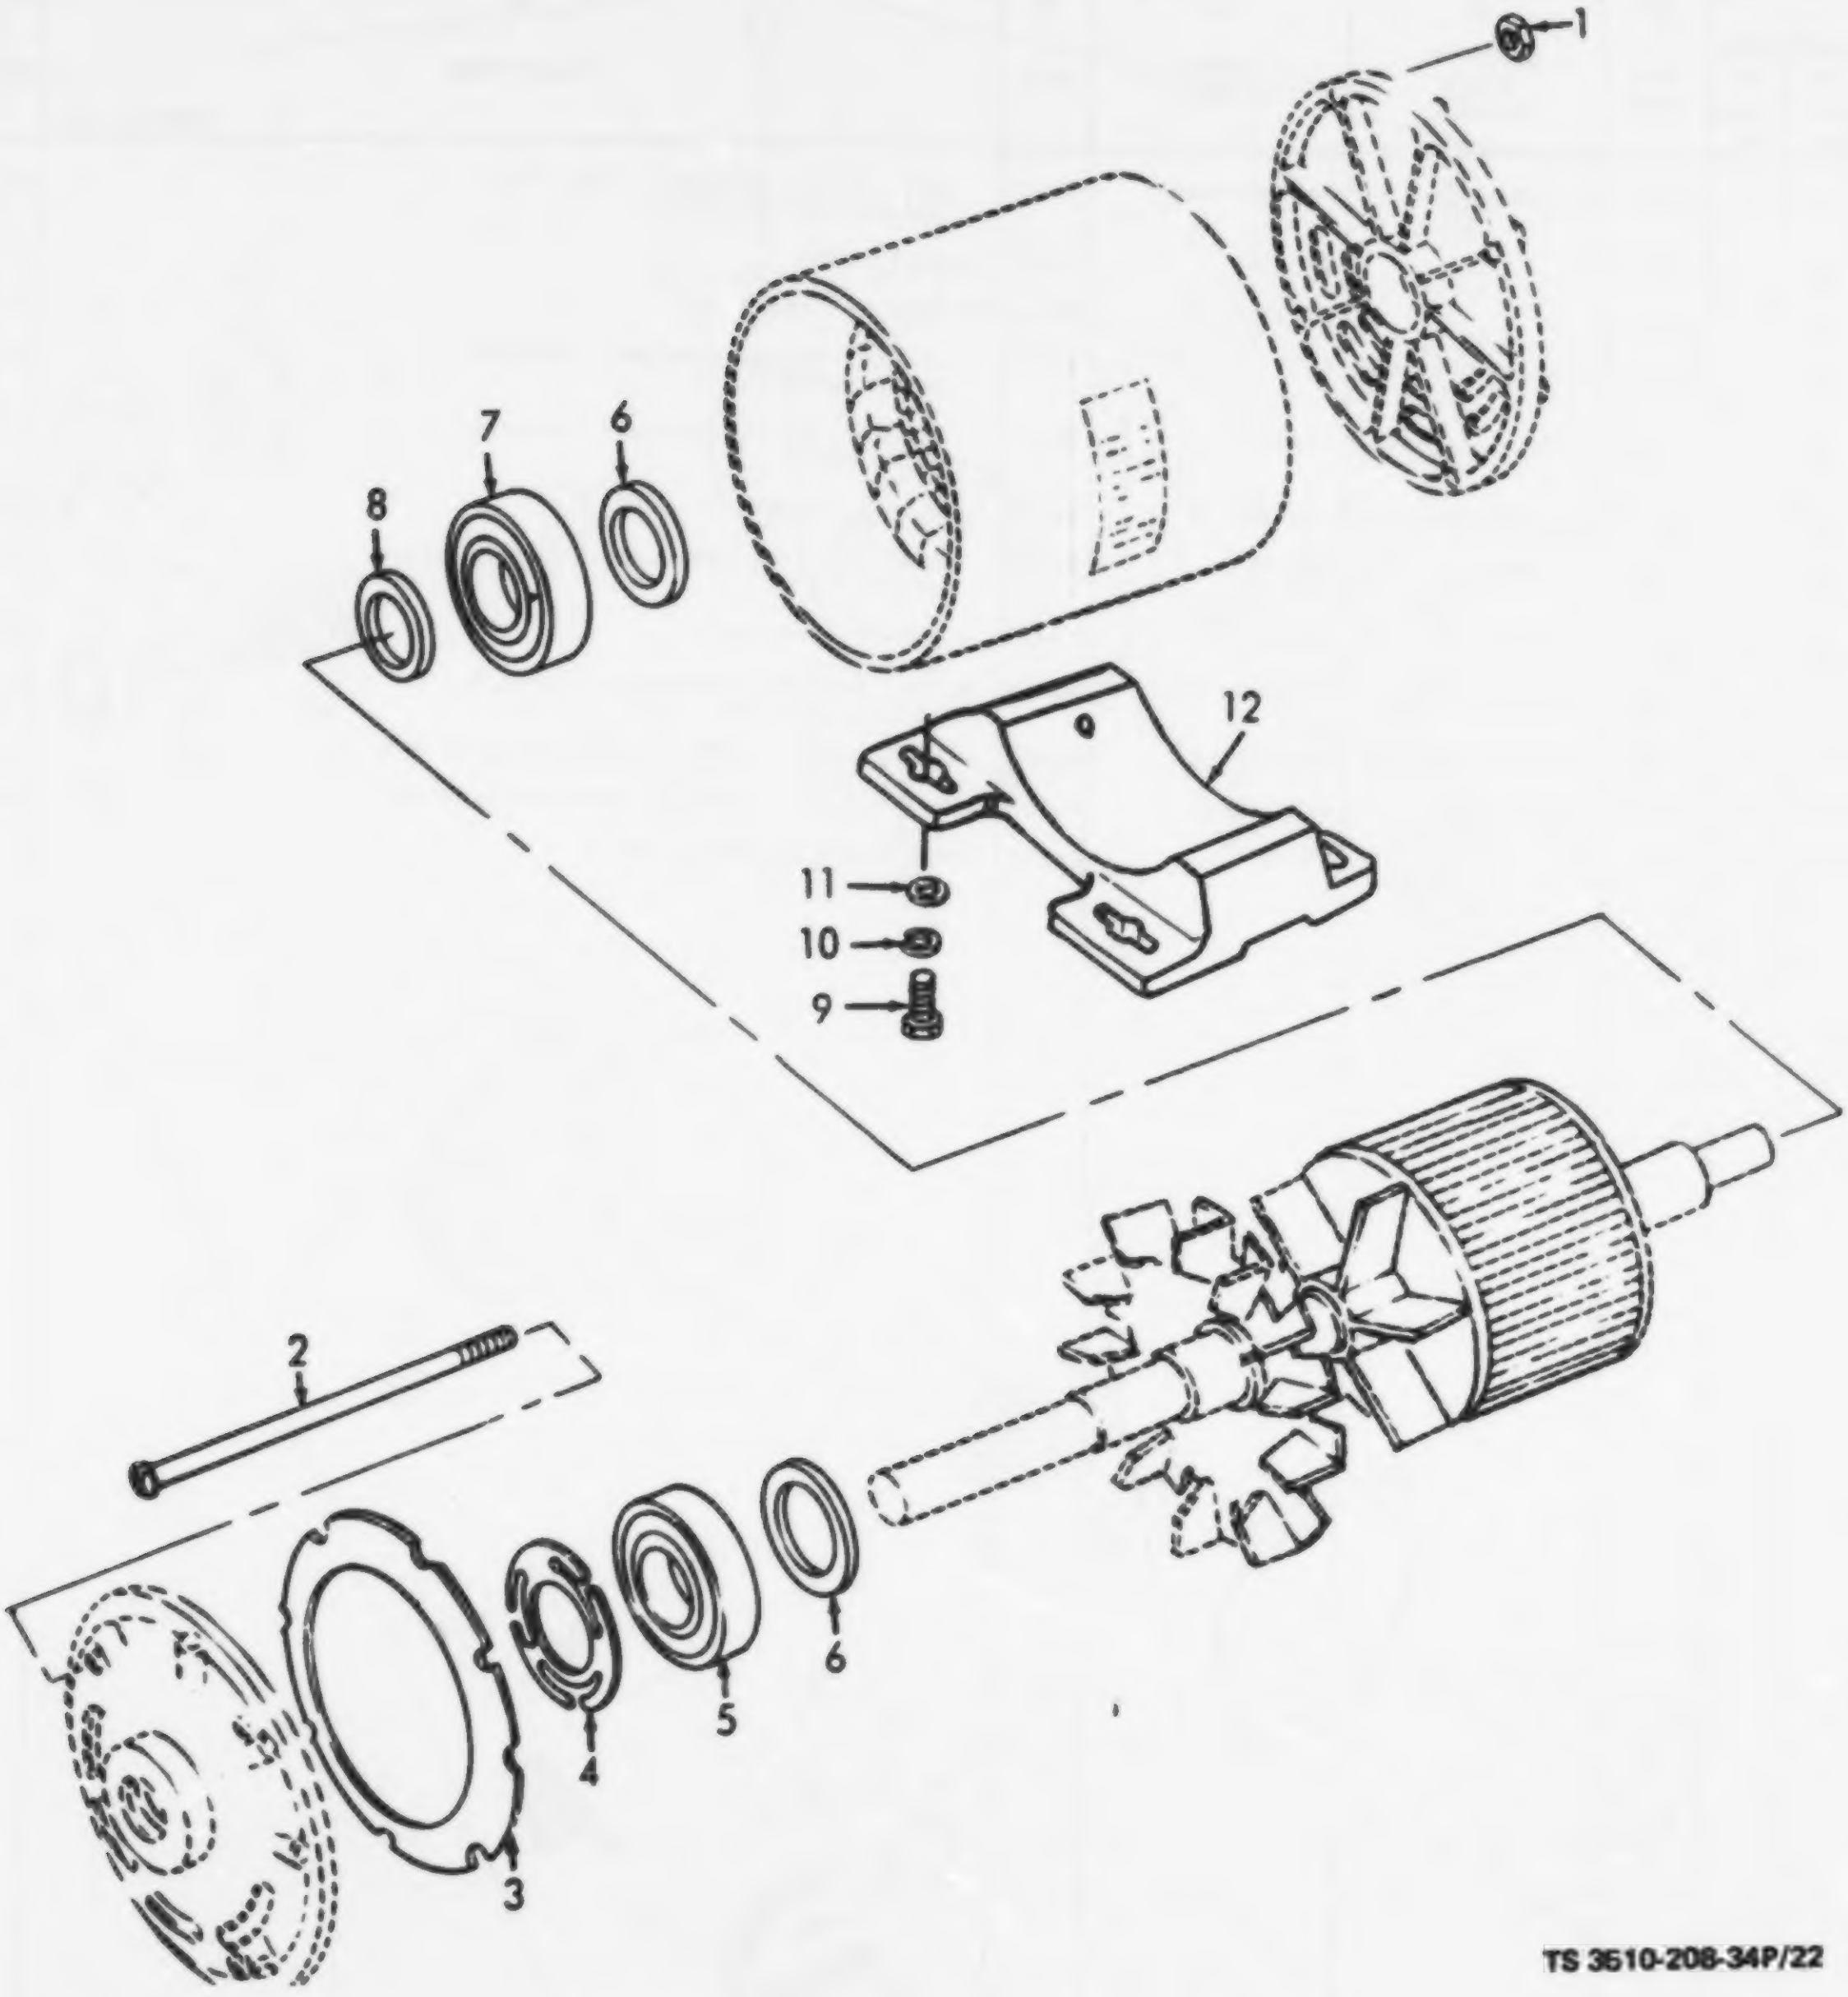
1
2
3
4
5
6
6
7
8
9
10
11
12

TS 3510-208-34P/22

Figure 22. Tumbler Drive Motor.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
22	1	PAFZZ	5310-00-616-3777	SK6112-29D20	29633	NUT, PLAIN, HEXAGON: THRU BOLT, TUMBLER DRIVE MOTOR	EA	4
22	2	XBFZZ		AC1828	29633	BOLT, THRU	EA	1
22	3	XBFZZ		C4954	29633	SHIELD: FRONT END	EA	1
22	4	PAFZZ	5310-00-905-3091	C355	29633	WASHER, SPRING TENSION: TUMBLER DRIVE MOTOR	EA	1
22	5	PAFZZ	3110-00-144-8589	G2595	29633	BEARING, BALL, ANNULAR: TUMBLER DRIVE MOTOR	EA	1
22	6	PAFZZ	5310-00-274-4697	MS55310-36	08288	WASHER, FRONT	EA	2
22	7	PAFZZ	3110-00-144-8622	AG2595	29633	BEARING, BALL, ANNULAR: TUMBLER DRIVE MOTOR	EA	1
22	8	PAFZZ	5310-00-917-2796	AZ3010	29633	WASHER, SPECIAL	EA	1
22	9	PAOZZ	5305-00-057-9613	MS24621-32	96906	SCREW, TAPPING, THREADED: TUMBLER MOTOR TO BASE MTG	EA	4
22	10	PAOZZ	5310-00-407-9566	MS35338-45	96906	WASHER, LOCK: TUMBLER MOTOR TO BASE MTG	EA	2
22	11	PAOZZ	5310-00-087-7493	MS27183-13	96906	WASHER, FLAT: TUMBLER MOTOR TO BASE MTG	EA	2
22	12	XBOZZ		47950	29633	BASE: TUMBLER MOTOR MTG	EA	1

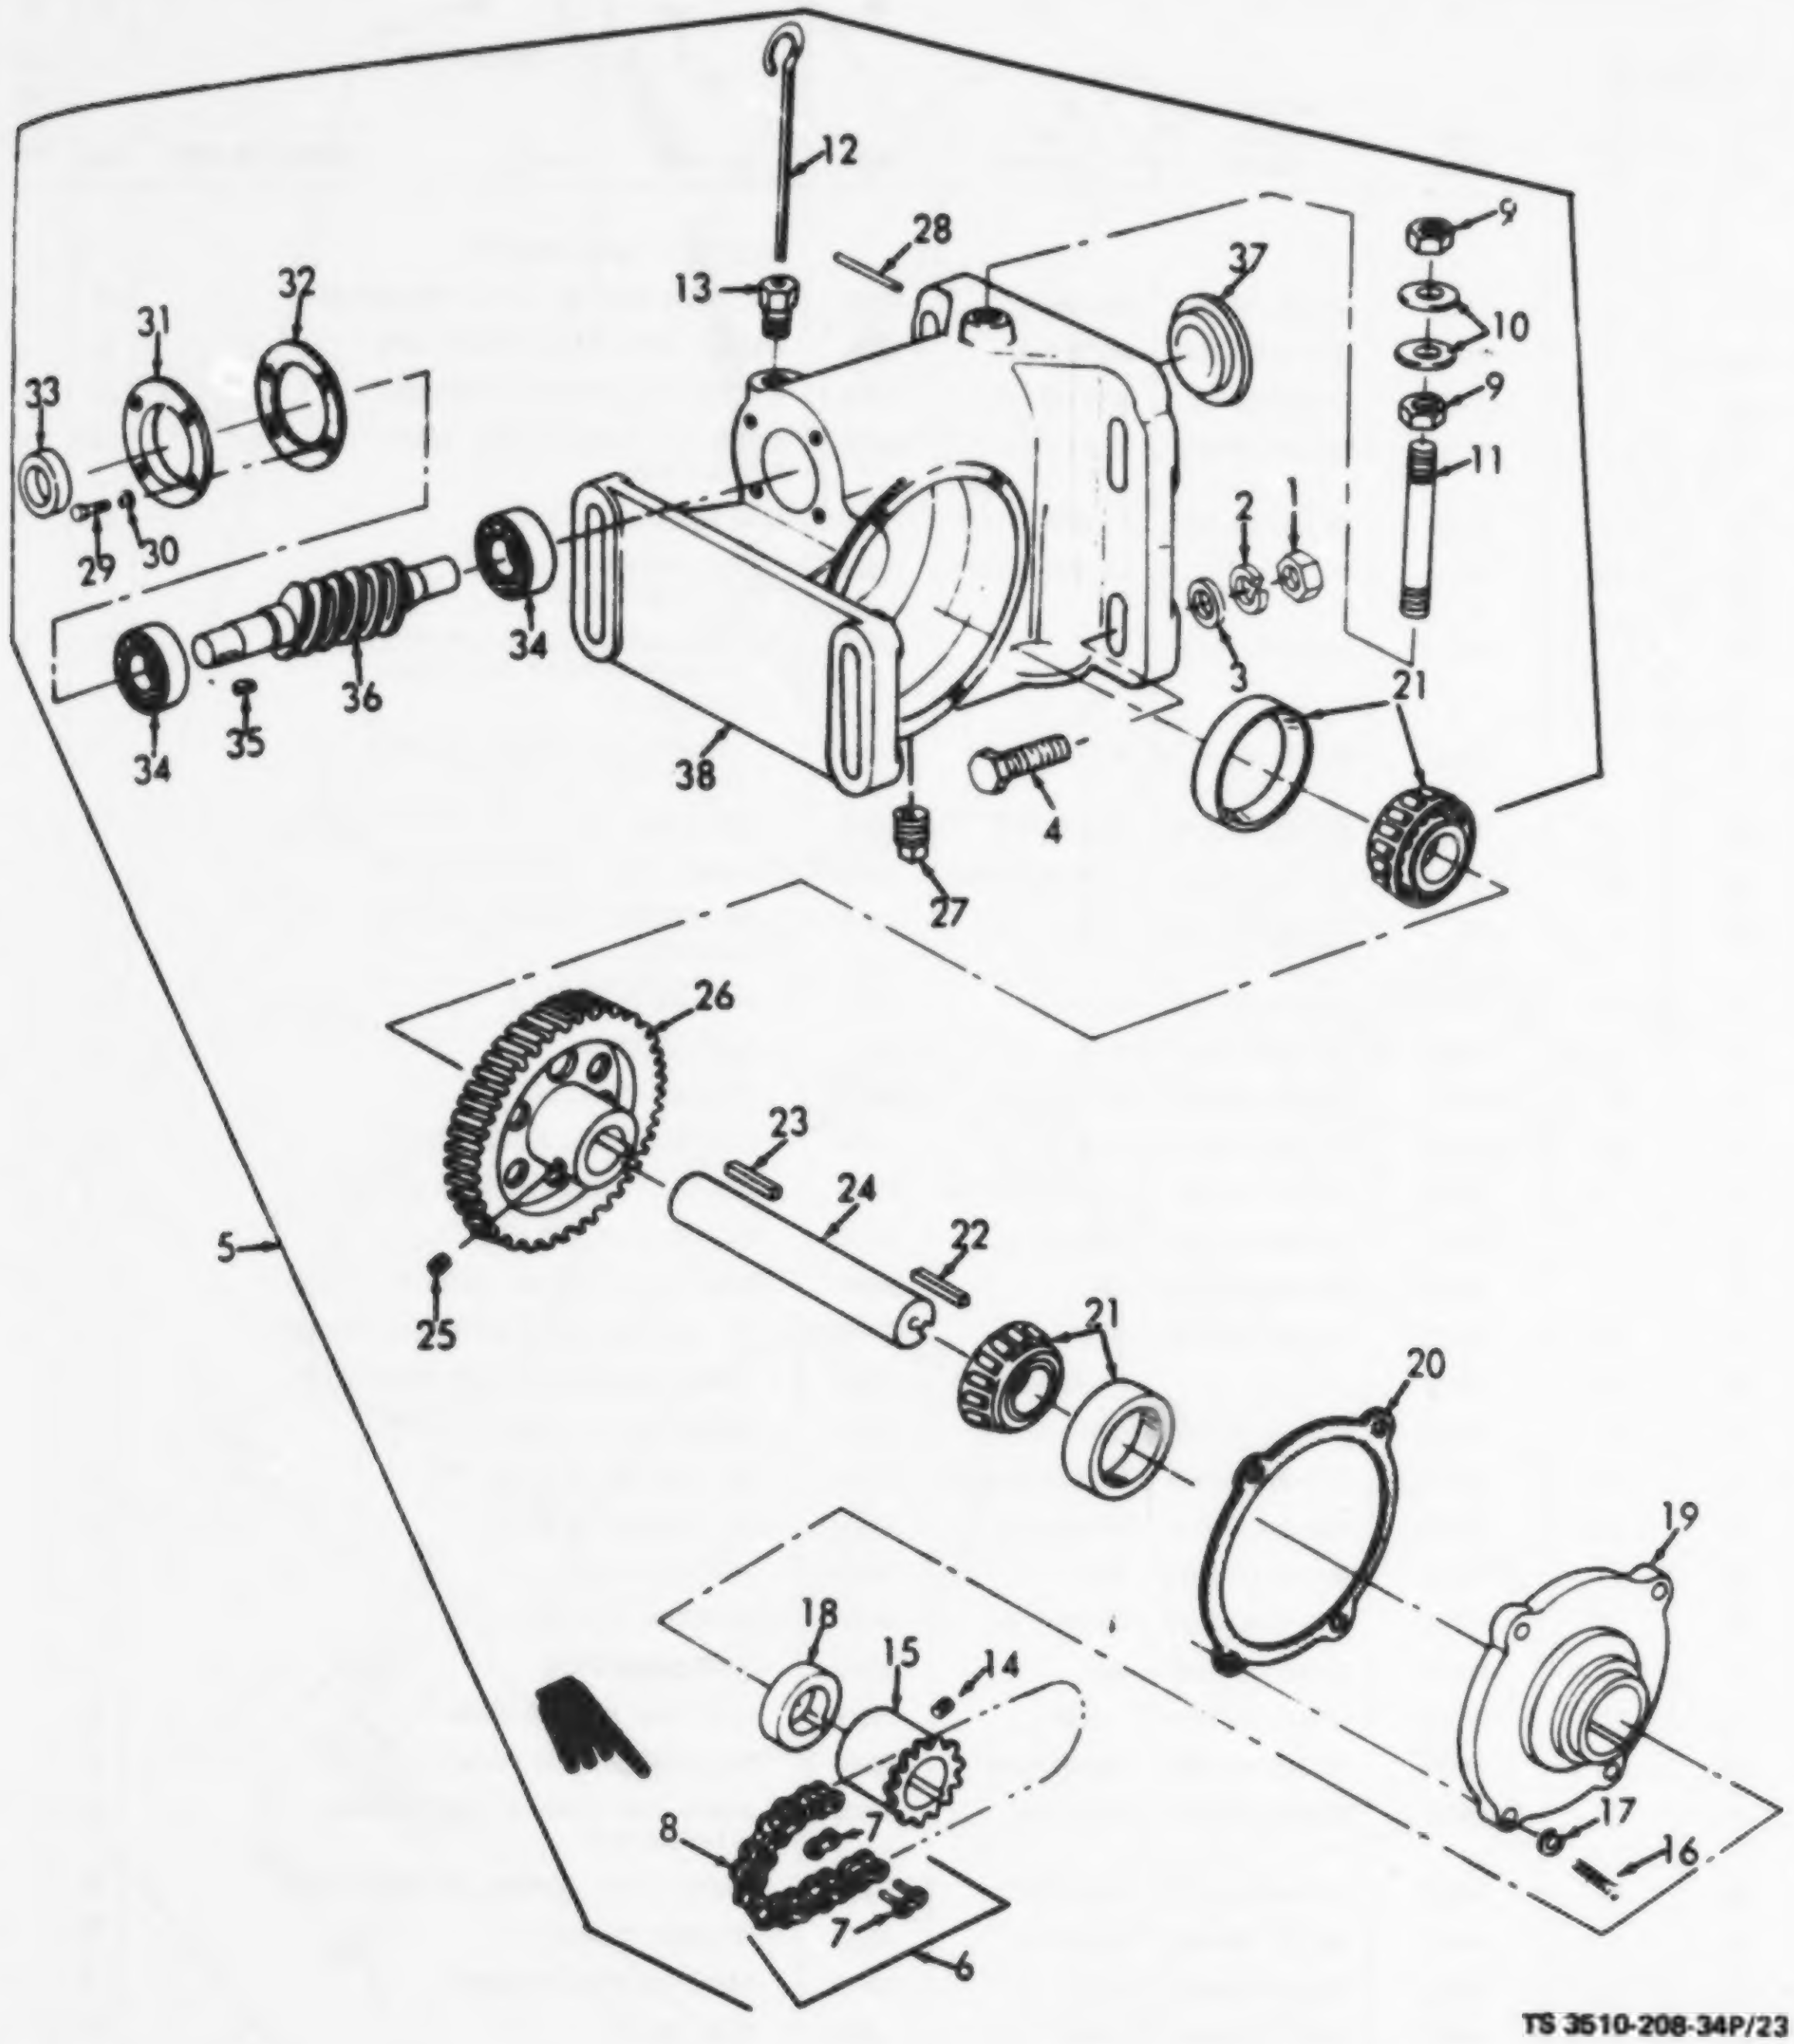
12
28
13
37
9
32
31
10
33
9
11
29
30
2
1
34
36
3
21
34
35
38
4
27
26
23
24
22
5
25
21
20
19
18
15
14
8
7
17
16
7
6

TS 3510-208-34P/23

Figure 23. Speed Reducer.

(1)		(2)	(3)	(4)	(5)	(6)	(7)	(8)
ILLUSTRATION						DESCRIPTION		QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	
						GROUP 14 — SPEED REDUCER		
23	1	PAFZZ	5310-00-732-0558	MS51967-8	96906	NUT, PLAIN, HEXAGON: SPEED REDUCER MTG	EA	4
23	2	PAFZZ	5310-00-637-9541	MS35338-46	96906	WASHER, LOCK: SPEED REDUCER MTG	EA	4
23	3	PAFZZ	5310-00-809-4061	MS27183-15	96906	WASHER, FLAT: SPEED REDUCER MTG	EA	4
23	4	PAFZZ	5305-00-269-3213	MS90725-62	96906	SCREW, CAP, HEXAGON HEAD: SPEED REDUCER MTG	EA	4
23	5	PBFFF	3010-00-933-7932	6-1-2304-20-143A	72869	GEAR ASSEMBLY, SPEED	EA	1
23	6	AFFZZ		6-1-2304-20-233A	72869	CHAIN ASSEMBLY, TUMBLER 31-½ IN. REQUIRED	FT	V
23	7	PAFZZ	3020-00-231-8734	08492	61368	LINK, MASTER, CONNECTING ROLLER, TUMBLER CYLINDER DRIVE CHAIN, AS REQUIRED	FT	V
23	8	PAFZZ	3020-00-580-7827	66-14L	72625	LINK, ROLLER, TUMBLER CYLINDER DRIVE CHAIN, AS REQUIRED	FT	V
23	9	PAFZZ	5310-00-768-0318	MS35690-803	96906	NUT, PLAIN, HEXAGON: HOUSING ADJUSTING	EA	2
23	10	PAFZZ	5310-00-595-6521	6-1-2330-20-188A	72869	WASHER, FLAT: HOUSING ADJUSTING	EA	2
23	11	PAFZZ	5315-00-472-6156	ML86	29679	PIN, STRAIGHT, THREADED: HOUSING ADJUSTING	EA	1
23	12	PAOZZ	6680-00-152-8259	ML25	29679	GAGE, OIL BAYONET	EA	1
23	13	PAOZZ	4730-00-467-5505	ML89	29679	PLUG, GAGE ROD	EA	1
23	14	PAFZZ	5305-00-723-9383	MS51963-67	96906	SETSCREW: SPROCKET MTG	EA	2
23	15	PAFZZ	3510-00-359-9375	ML19	29679	SPROCKET, WHEEL: SPEED REDUCER	EA	1
23	16	PAFZZ	5305-00-206-1065	6-1-2330-20-179A	72869	SCREW, CAP, HEXAGON HEAD: CAP MTG	EA	1
23	17	PAFZZ	5310-00-012-0214	MS35338-26	96906	WASHER, LOCK: CAP MTG	EA	4
23	18	PAFZZ	5330-00-313-7954	750	24981	SEAL, PLAIN, ENCASED: WORM SHAFT GEAR	EA	1
23	19	PBFZZ	3510-00-153-6649	ML17	29679	CAP, HOUSING: WORM GEAR SHAFT BEARING	EA	1
23	20	PAFZZ		6-1-2330-20-161A	72869	GASKET: WORM GEAR SHAFT BEARING CAP	EA	1
23	21	PAFZZ	3110-00-155-7458	09074-09194	08162	BEARING, ROLLER: GEAR TO SHAFT	EA	2
23	22	PAFZZ	5315-00-058-6608	6-1-2330-20-171A	72869	KEY, MACHINE: SPROCKET MTG	EA	1
23	23	PAFZZ	5315-00-814-9424	MS20066-171	96906	KEY, MACHINE: GEAR MTG	EA	1
23	24	PAFZZ	3510-00-152-8290	ML14	29679	SHAFT, STRAIGHT	EA	1
23	25	PAFZZ	5305-00-058-0783	MS51955-19	96906	SETSCREW: GEAR MTG	EA	2
23	26	PAFZZ	3510-00-152-8256	ML9	29679	GEAR: WORM DRIVE	EA	1
23	27	PAOZZ	4730-00-042-6318	219198	24617	PLUG, PIPE: HOUSING DRAIN	EA	1
23	28	PAFZZ	5315-00-198-5969	MS24692-214	96906	PIN, TAPERED, PLAIN: PIN MTG	EA	1
23	29	PAFZZ	5305-00-068-0501	MS90725-5	96906	SCREW, CAP, HEXAGON HEAD: BEARING RETAINING MTG	EA	4
23	30	PAFZZ	5310-00-042-6758	MS35338-82	96906	WASHER, LOCK: BEARING RETAINER MTG	EA	4
23	31	PBFZZ	3510-00-152-8269	MSS3510-4	08288	RETAINER, BEARING	EA	1
23	32	PAFZZ	3510-00-152-8258	ML18	29679	GASKET: BEARING RETAINER	EA	4
23	33	PAFZZ	5330-00-285-9441	50009L	76680	SEAL, OIL	EA	4
23	34	PAFZZ	3110-00-108-9247	6203-2RS	52676	BEARING, BALL, ANNULAR: WORM SHAFT	EA	2
23	35	PAFZZ	5315-00-616-5522	MS35756-12	96906	KEY, WOODRUFF: WORM GEAR SHAFT TO COUPLING	EA	1
23	36	PAFZZ	3510-00-152-8279	ML8	29679	WORM AND SHAFT: SPEED REDUCER	EA	1
23	37	PBFZZ	3510-00-153-6643	ML100	29679	CAP: SPEED REDUCER	EA	1
23	38	PBFZZ	3510-00-460-6112	6-1-2330-20-154A	72869	HOUSING	EA	1

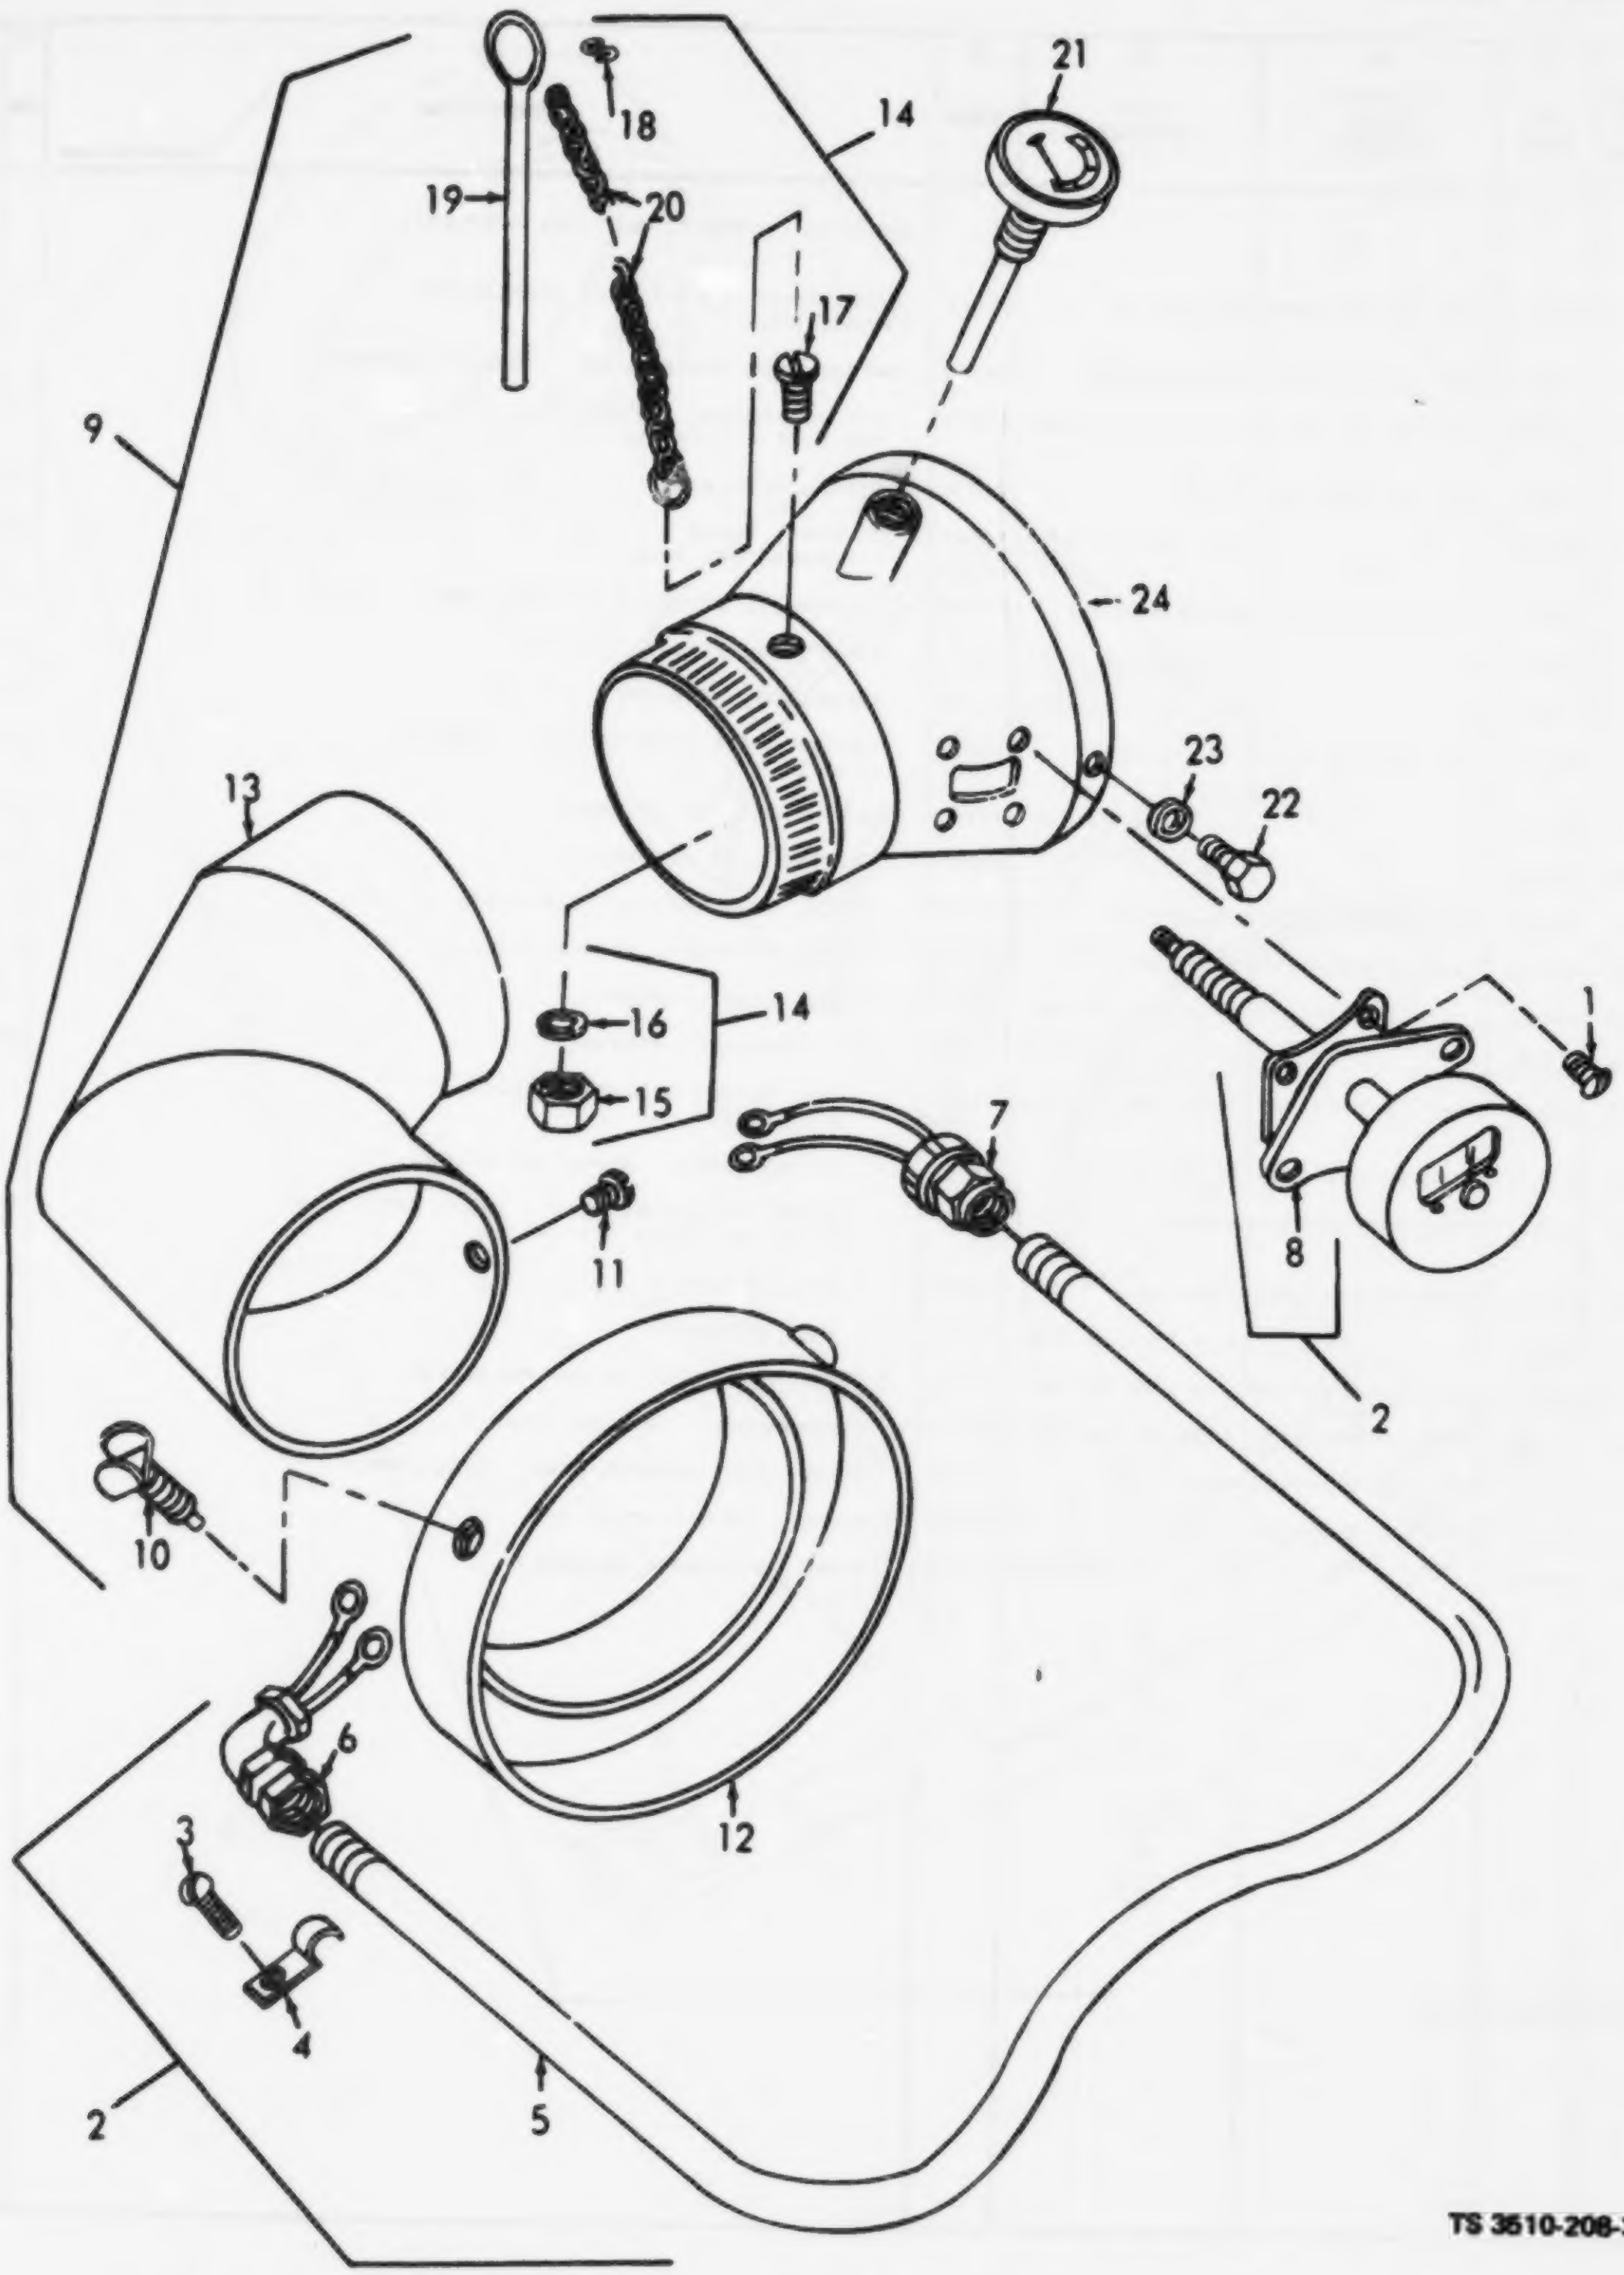
21
18
14
19
20
17
9
24
23
22
13
16
14
15
7
1
11
8
2
10
6
12
3
4
2
5

TS 3510-208-34P/24

Figure 24. Exhaust Duct and Adapter.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 15 - EXHAUST DUCT AND ADAPTER		
24	1	PAOZZ	5305-00-012-5978	MS55305-10	08288	SCREW, SHEET METAL: AIR TEMPERATURE CONTROL MTG	EA	2
24	2	XDOOO	6685-00-472-5764	M41SPEC23720	39709	CONTROL, AIR TEMPERATURE: TUMBLER EXHAUST		
24	3	PAOZZ	5305-00-292-8875	6-1-2337-20-496A	72869	SCREW, MACHINE: STRAP MTG, 1/4-20 THD SIZE X 1 IN. LG	EA	1
24	4	PAOZZ	5340-00-200-6139	4176	59730	STRAP, RETAINING	EA	1
24	5	MOOOO		6-1-2337-20-458A	72869	CONDUIT, RIGID MANUFACTURE FROM:	EA	1
24		PAOZZ	5975-00-178-1216	WWC563SIZE1-2	81348	CONDUIT, RIGID, 4 FT. REQUIRED	FT	V
24	6	XBOZZ		6-1-2337-20-468A	72869	CONNECTOR, ELBOW: 1/2 IN.	EA	1
24	7	XBOZZ		6-1-2337-20-466A	72869	CONNECTOR, STRAIGHT: 1/2 IN.	EA	1
24	8	PAOZZ	6685-00-472-5764	M41SPEC23720	39709	CONTROL, AIR TEMPERATURE: TUMBLER EXHAUST	EA	1
24	9	XDOOO		6-1-2328-20-93A	72869	SPOUT, DISCHARGE ASSEMBLY	EA	1
24	10	XBOZZ		6-0-325A	93084	LOCKING CLIP ASSEMBLY	EA	2
24	11	PAOZZ	5305-00-012-5978	MS55305-10	08288	SCREW, SHEET METAL: ELBOW MTG	EA	2
24	12	PAOZZ	3510-00-871-7354	6-1-1911-20-2A	60883	FLANGE ASSEMBLY, TUMBLER EXHAUST	EA	1
24	13	PAOZZ	3510-00-411-2670	6-1-1910-20-50A	72869	ELBOW, FLUE, EXHAUST	EA	1
24	14	XBOOO		6-1-2328-20-94A	72869	PIN, RETAINER, ASSEMBLY	EA	1
24	15	PAOZZ	5310-00-815-1087	6-1-2308-20-100A	72869	NUT, PLAIN, HEXAGON: CHAIN MTG SCREW	EA	1
24	16	PAOZZ	5310-00-834-7606	MS35340-48	96906	WASHER, LOCK: CHAIN MTG SCREW	EA	1
24	17	PAOZZ	5305-00-614-0274	MS35265-63	96906	SCREW, FILLISTER HEAD: CHAIN MTG, 10-24 THD SIZE, 1/2 IN. LG	EA	1
24	18	PAOZZ	4030-00-281-1683	MS54030-6	08288	HOOK, CHAIN, S	EA	1
24	19	XBOZZ		6-1-2308-20-95A	72869	PIN, RETAINER	EA	1
24	20	PAOZZ	4010-00-221-0738	6-1-2308-20-96A	72869	CHAIN, WELDED, 14 IN. REQUIRED	FT	V
24	21	PAOZZ	6685-00-949-3339	4300-50-500-61NS	65092	THERMOMETER: TUMBLER EXHAUST	EA	1
24	22	PAOZZ	5305-00-068-0498	MS35291-1	96906	SCREW, CAP, HEXAGON HEAD: SPOUT MTG	EA	4
24	23	PAOZZ	5310-00-042-6758	MS35338-82	96906	WASHER, LOCK: SPOUT MTG	EA	4
24	24	XBOZZ		6-1-2328-20-93A	72869	SPOUT, DISCHARGE ASSEMBLY	EA	1

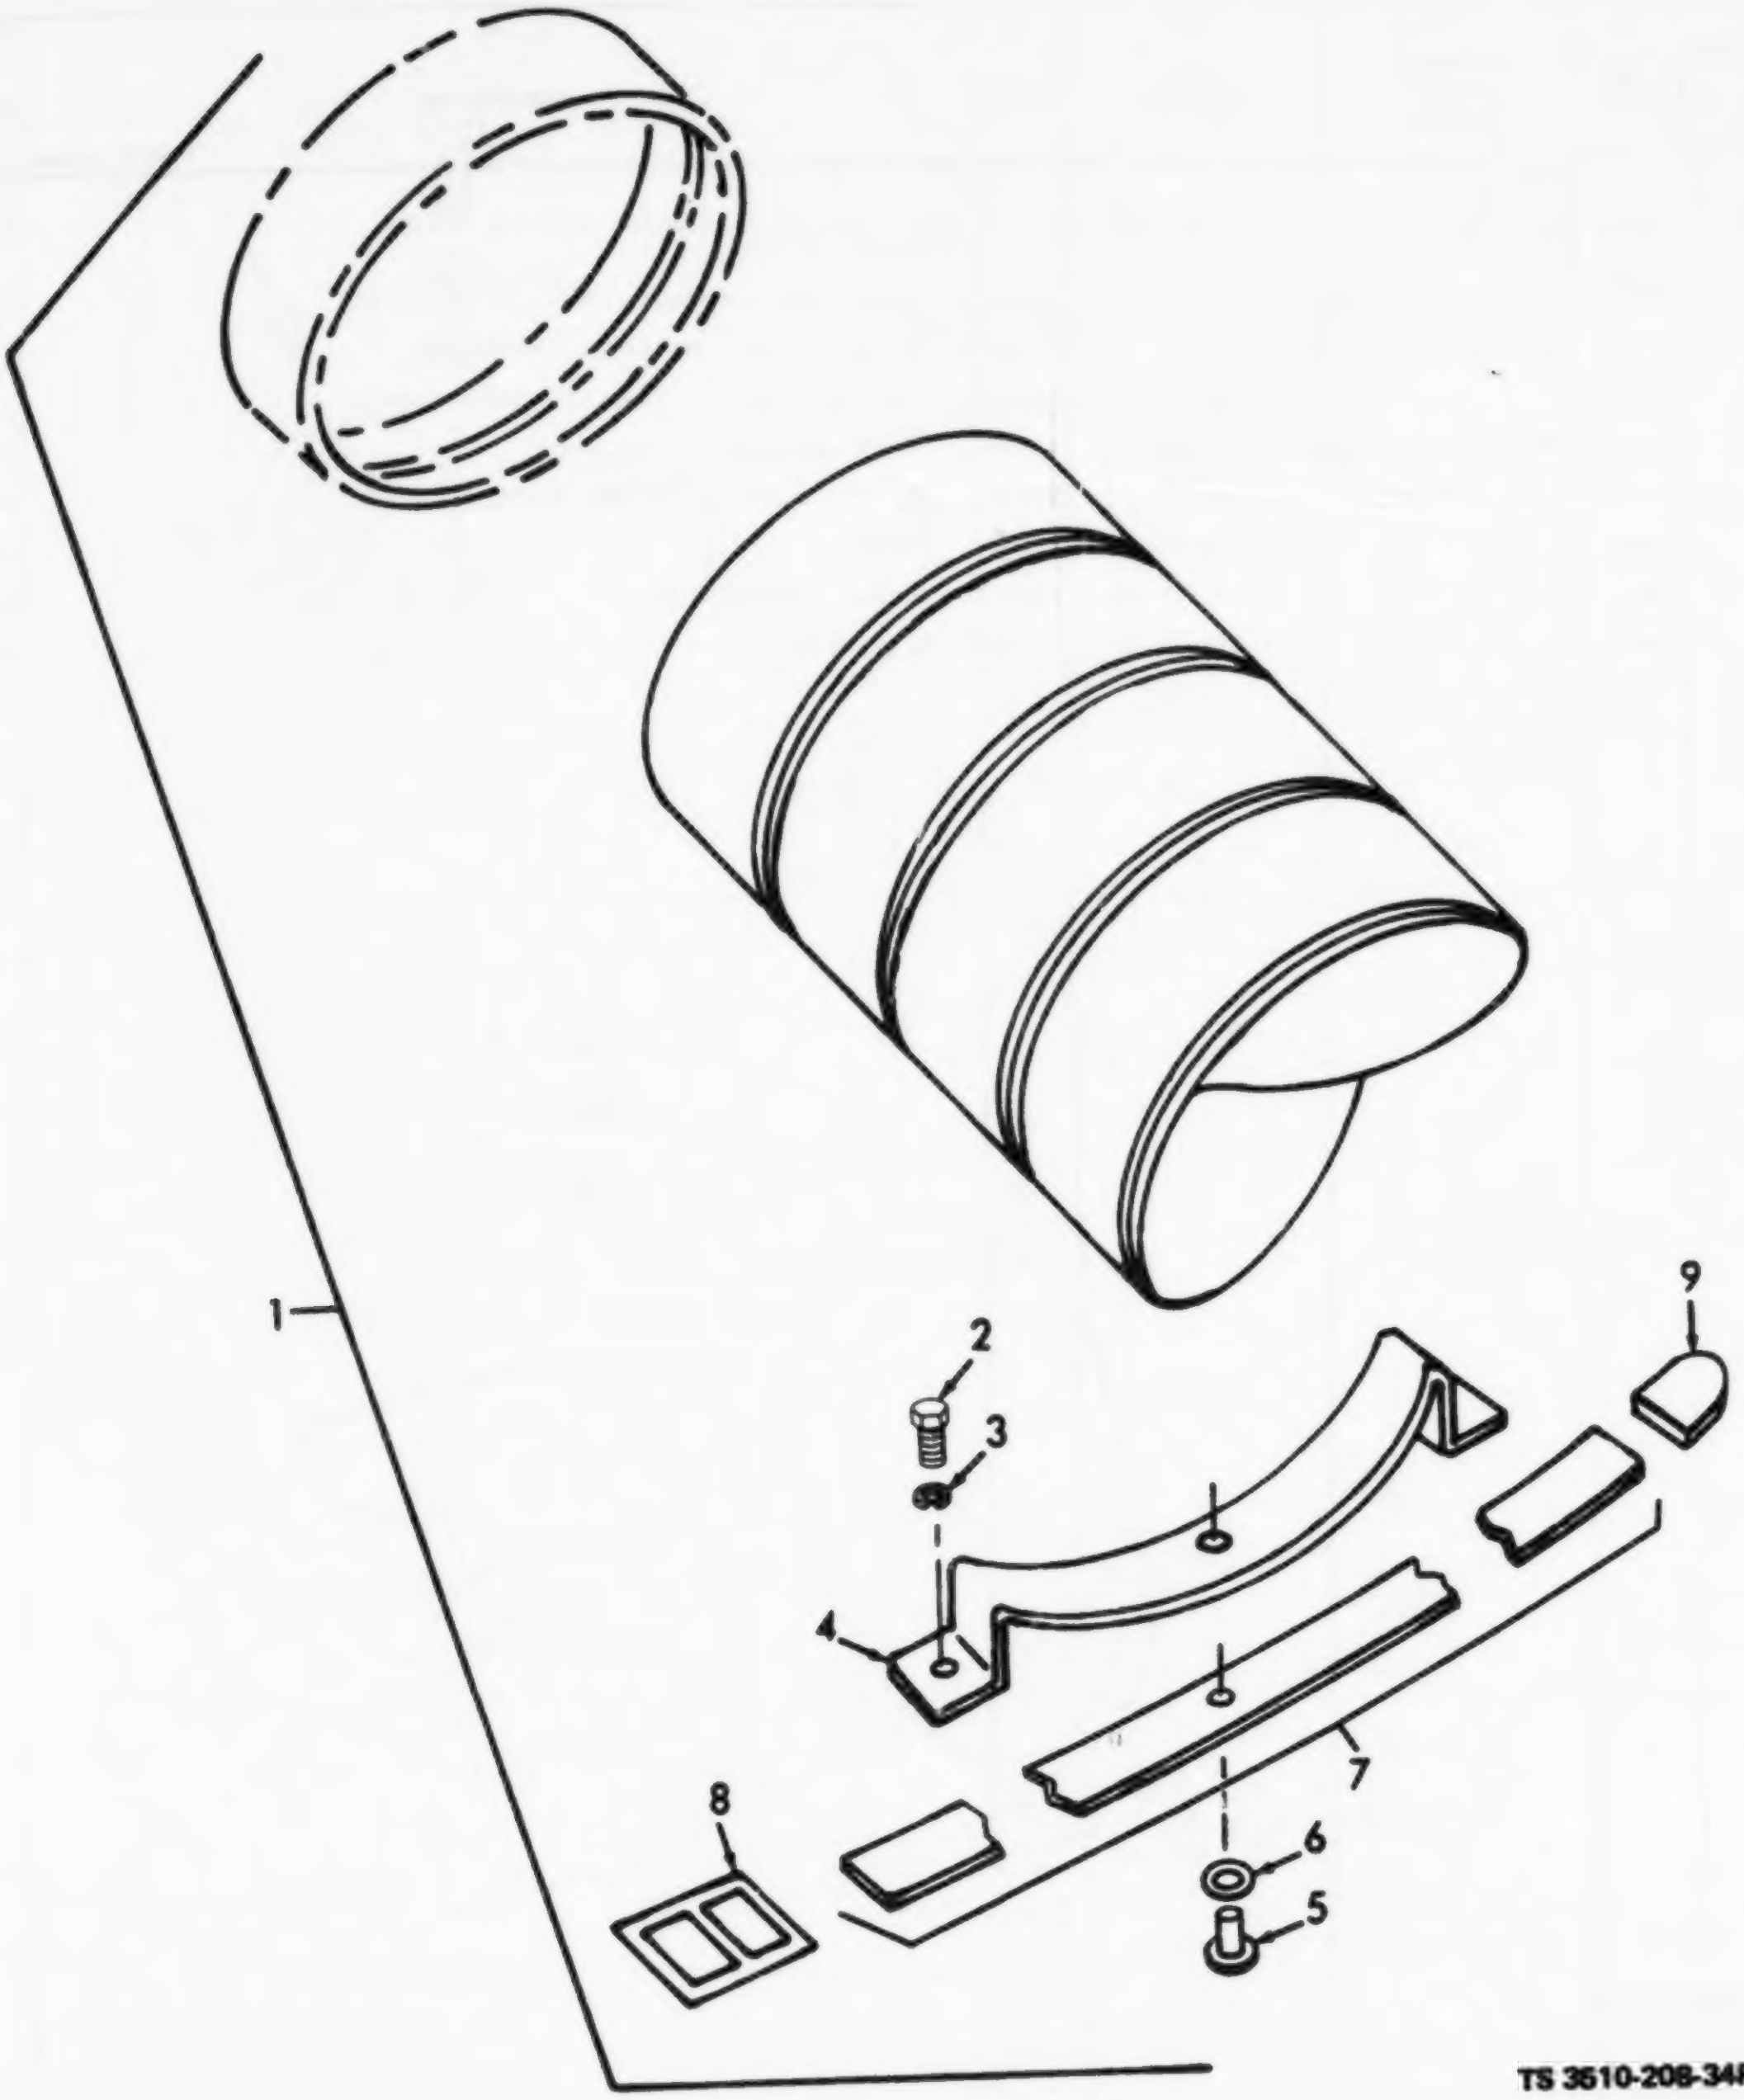

TS 3510-208-34P/25

Figure 25. Tumbler Heater Exhaust Duct and Retainer.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
25	1	PAOOO	4520-00-300-0333	5-13-2090-32	81337	DUCT ASSEMBLY: CANVAS, TUMBLER HEATER EXHAUST, 12 IN.	EA	1
25	2	PAOZZ	5305-00-068-0502	MS90725-6	96906	SCREW, CAP, HEXAGON HEAD: RETAINER MTG	EA	8
25	3	PAOZZ	5310-00-582-5965	MS35338-44	96906	WASHER, LOCK: RETAINER MTG SCREW	EA	8
25	4	XBOZZ		6-1-1900-28A	72869	RETAINER, DUCT: TUMBLER HEATER EXHAUST	EA	4
25	5	PAOZZ	5320-00-829-0493	MS20613-6P6	96906	RIVET, PAN HEAD: RETAINER	EA	4
25	6	PAOZZ	5310-00-880-5977	MS15795-811	96906	WASHER, FLAT: RETAINER RIVET	EA	9
25	7	XBOZZ		6-1-1978-28-2A	72869	STRAP	EA	4
25	8	PAOZZ		6-1-1978-29-5A	72869	BUCKLE, TONGUELESS	EA	2
25	9	PAOZZ		6-1-1978-28-6A	72869	CLIP, END	EA	2

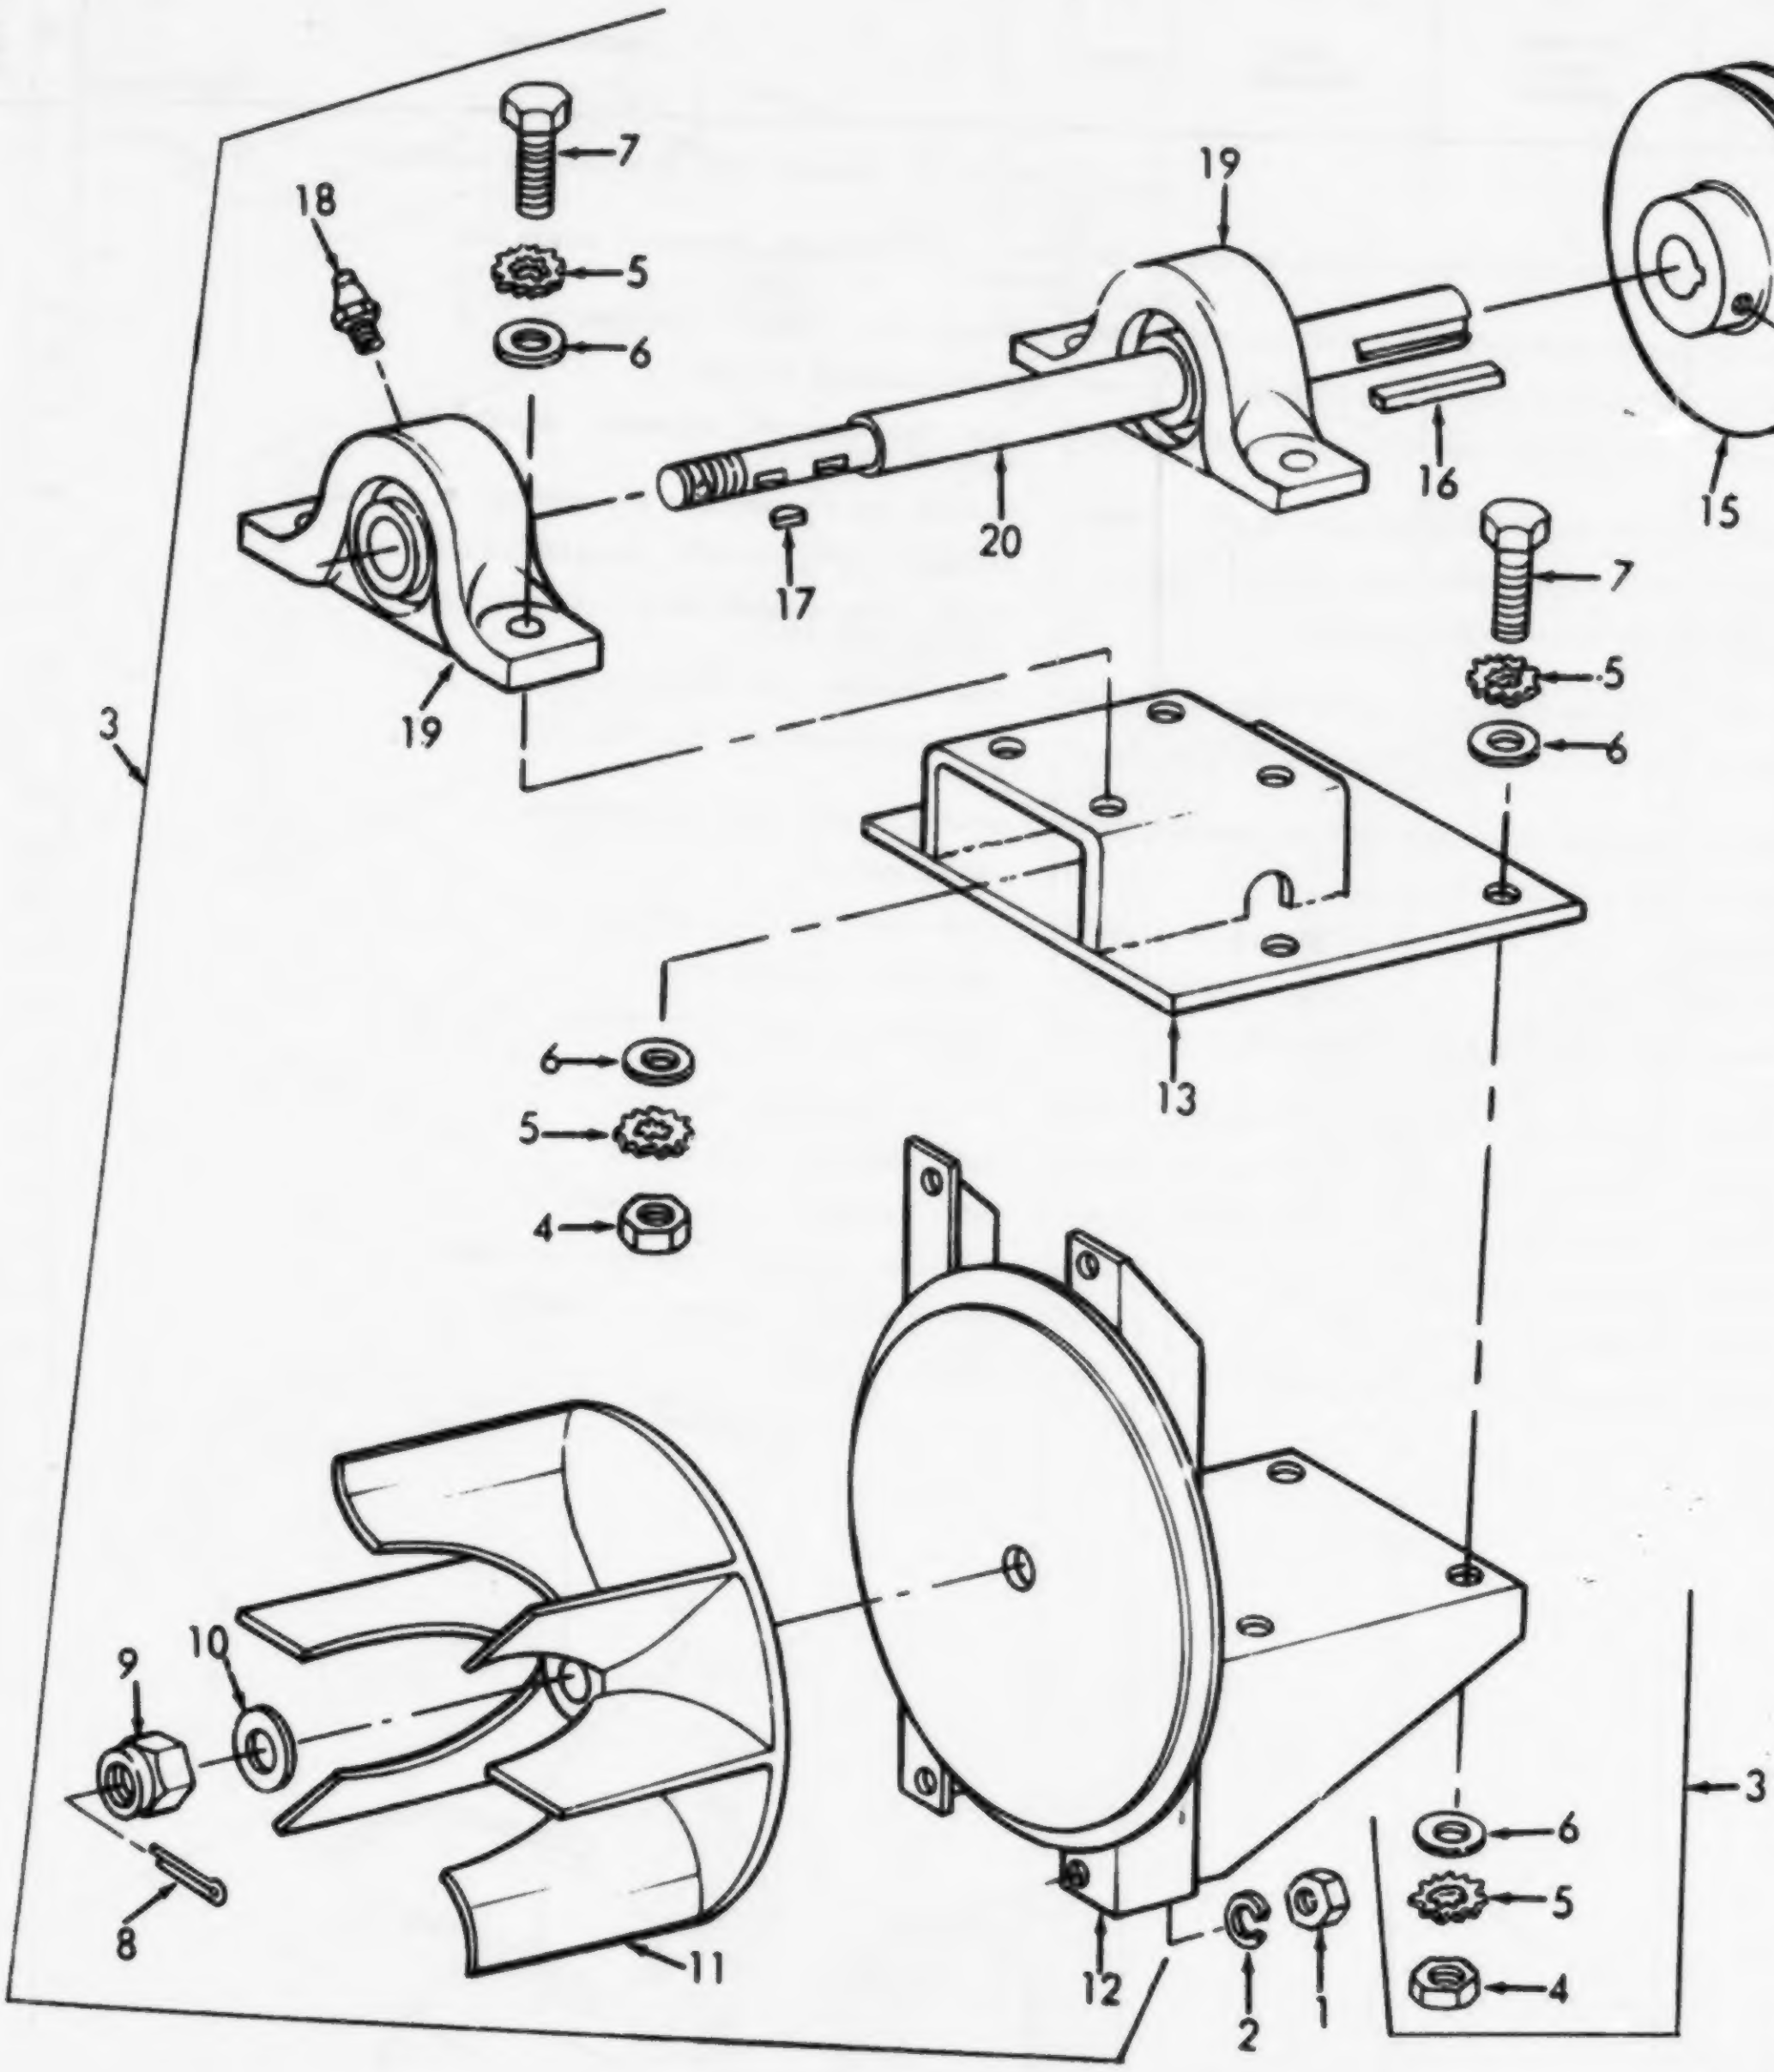
18
7
5
6
19
20
17
16
15
14
3
19
7
5
6
13
6
5
4
9
10
8
11
12
2
1
6
5
4
3

TS 3510-208-34P/26

Figure 26. Exhaust Fan, Bracket and Jackshaft.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 16 - EXHAUST FAN, BRACKET AND JACKSHAFT		
26	1	PAOZZ	5310-00-297-2540	6-1-2322-20-93A	72869	NUT, SELF-LOCKING, HEXAGON: COVER AND BRACKET MTG	EA	2
26	2	PAOZZ	5310-00-261-7340	6-1-2322-20-91A	72869	WASHER, LOCK: BRACKET TO HOUSING	EA	2
26	3	PAOOO	3510-00-253-0590	6-1-2328-20-77A	72869	BLOWER, EXHAUST ASSEMBLY	EA	1
26	4	PAOZZ	5310-00-297-2540	6-1-2322-20-93A	72869	NUT, SELF-LOCKING, HEXAGON: BRACKET AND BEARING UNIT MTG	EA	8
26	5	PAOZZ	5310-00-061-1250	MS45904-76	96906	WASHER, LOCK: BRACKET AND BEARING UNIT MTG	EA	16
26	6	PAOZZ	5310-00-809-4061	MS27183-15	96906	WASHER, FLAT: BRACKET AND BEARING UNIT MTG	EA	16
26	7	PAOZZ	5305-00-269-3213	MS35297-62	96906	SCREW, CAP, HEXAGON HEAD: BEARING UNIT AND BRACKET MTG	EA	8
26	8	PAOZZ	5315-00-816-1794	6-1-2322-20-82A	72869	PIN, COTTER: FAN MTG, 3/32 X 1 IN. LG	EA	1
26	9	PAOZZ	5310-00-269-6250	6-1-2322-20-85A	72869	NUT, CASTELLATED: FAN MTG, 9/16-18 THD SIZE	EA	1
26	10	PAOZZ	5310-00-933-7232	6-1-2322-20-84A	72869	WASHER, FLAT: FAN TO SHAFT MTG	EA	2
26	11	PAOZZ	3510-00-359-9351	HL5	29679	FAN, EXHAUST	EA	1
26	12	XBOZZ		6-1-2322-20-78A	72869	COVER AND BRACKET: EXHAUST FAN	EA	1
26	13	XBOZZ		6-1-2322-20-83A	72869	BRACKET: EXHAUST FAN	EA	1
26	14	PAOZZ	5305-00-724-5835	MS51963-88	96906	SETSCREW: PULLEY MTG, SOCKET HEAD, CUP POINT	EA	1
26	15	PAOZZ	3020-00-214-3357	6-1-2322-20-88A	72869	PULLEY, EXHAUST, FAN	EA	1
26	16	PAOZZ	5315-00-815-9499	6-1-2322-20-81A	72869	KEY, MACHINE: PULLEY MTG	EA	1
26	17	PAOZZ	5315-00-616-5526	6-1-2322-20-87A	72869	KEY, WOODRUFF: FAN TO SHAFT MTG	EA	2
26	18	PAOZZ	2930-00-900-1580	MS15003-1	96906	FITTING, GREASE: JACKSHAFT ASSEMBLY	EA	2
26	19	PAOZZ	3130-00-116-9031	P212	56384	BEARING UNIT: JACKSHAFT ASSEMBLY	EA	2
26	20	PAOZZ	3510-00-214-3358	565301023	45035	SHAFT, BLOWER	EA	1

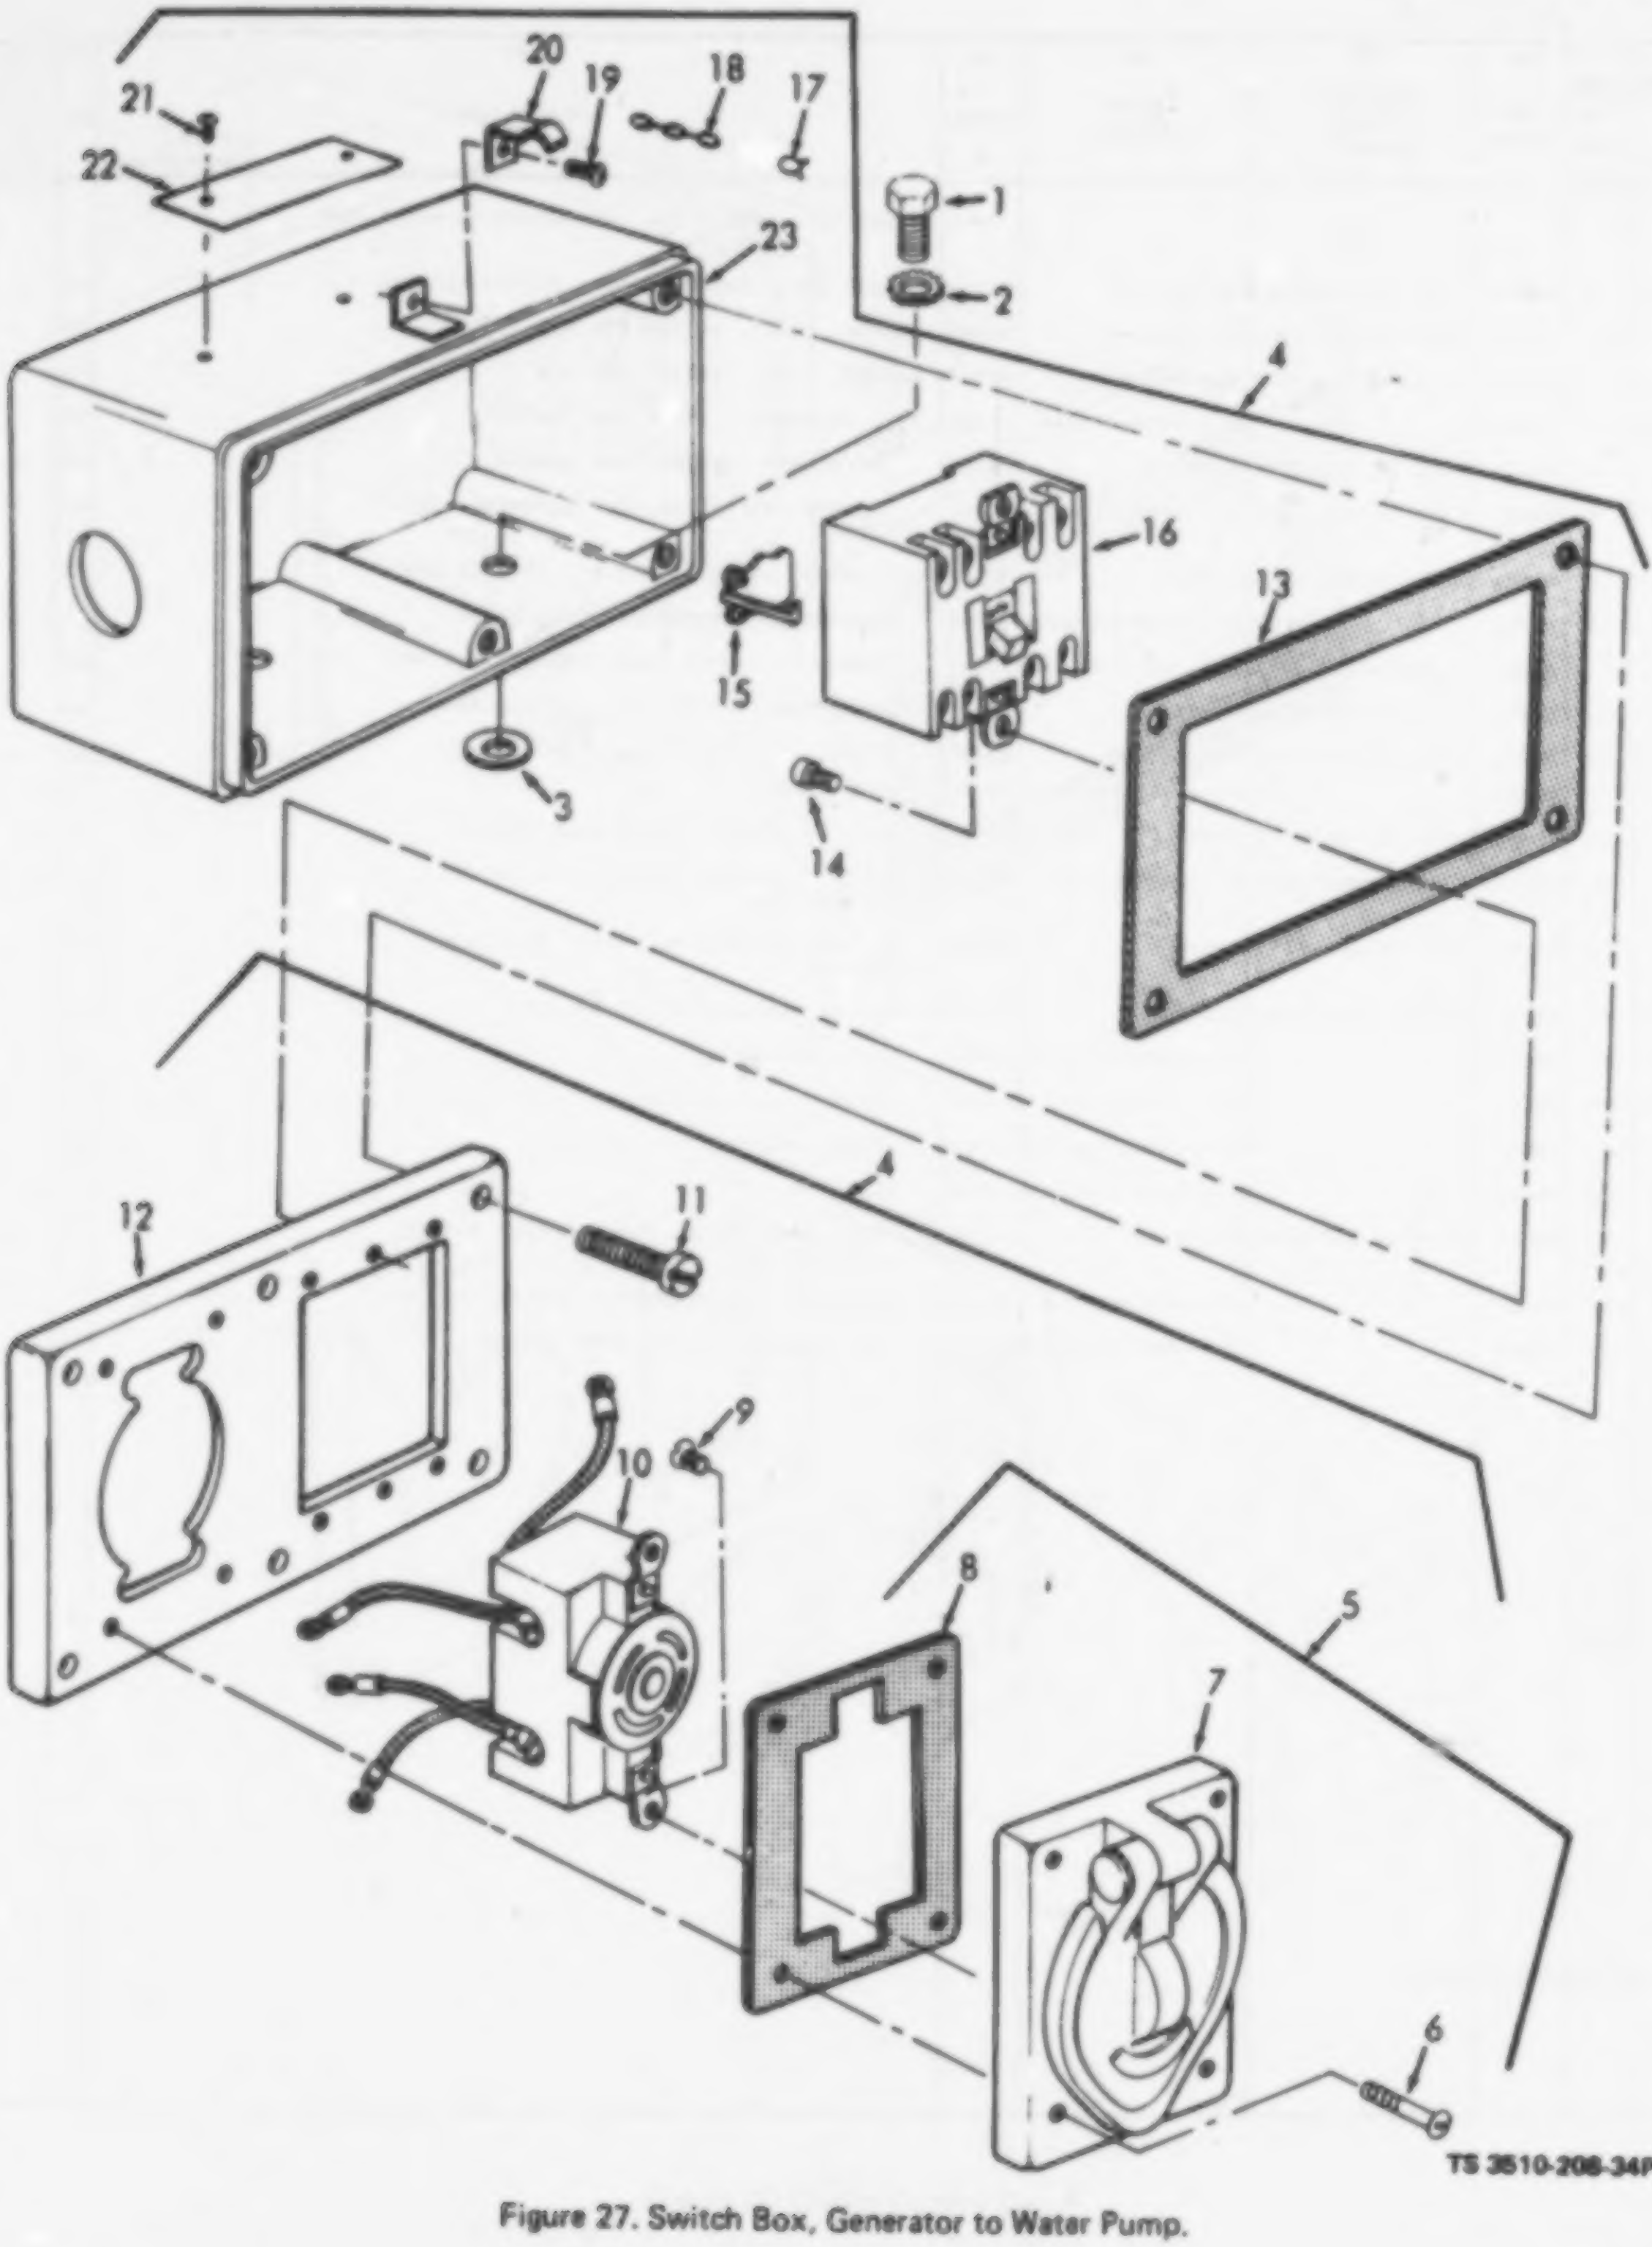
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
4

TS 3510-208-34P/27

Figure 27. Switch Box, Generator to Water Pump.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 17 - SWITCH BOX, GENERATOR TO WATER PUMP		
27	1	PAOZZ	5305-00-068-0502	MS90725-6	96906	SCREW, CAP, HEXAGON HEAD: SWITCH BOX MTG	EA	2
27	2	PAOZZ	5310-00-582-5965	MS35338-44	96906	WASHER, LOCK: SWITCH BOX MTG	EA	2
27	3	PAOZZ	5310-00-880-5977	MS15795-811	96906	WASHER, FLAT: SWITCH BOX MTG	EA	2
27	4	PAOOO		6-1-1909-21-56A	72869	BOX, ASSEMBLY: WATER PUMP SWITCH	EA	1
27	5	PAOZZ	5975-00-006-0355	94781	79466	COVER, BOX: WATER PUMP SWITCH	EA	1
27	6	PAOZZ	5305-00-013-1904	6-1-1909-21-62A	72869	SCREW, FILLISTER HEAD: COVERPLATE MTG	EA	8
27	7	PAOZZ	5975-00-040-5844	7420	74545	COVER, CONDUIT, OUTLET: SWITCH BOX	EA	2
27	8	XAOZZ		6-1-1909-21-62A3	72869	GASKET, COVERPLATE: SWITCH BOX	EA	2
27	9	PAOZZ	5305-00-151-3051	6-1-744-2-9-12A	72869	SCREW, FILLISTER HEAD: RECEPTACLE MTG	EA	2
27	10	PAOZZ	5935-00-936-3605	7410G	74545	CONNECTOR, RECEPTACLE: SWITCH BOX	EA	1
27	11	PAOZZ	5305-00-013-2056	MS55305-33	08288	SCREW, FILLISTER HEAD: COVER MTG	EA	6
27	12	XBOZZ		6-1-1909-21-99A	72869	COVER, BOX	EA	1
27	13	PAOZZ	5330-00-454-7528	94782	79466	GASKET, COVER: WATER PUMP SWITCH	EA	1
27	14	PAOZZ	5305-00-012-1880	6-1-1909-21-63A	72869	SCREW, FILLISTER HEAD: CIRCUIT BREAKER MTG	EA	2
27	15	PAOZZ	5950-00-674-5783	42118	04009	HEATER, THERMAL RELEASE: SWITCH BOX, DUPLEX	EA	1
27	16	PAOZZ	5925-00-300-4448	LL032U	04009	CIRCUIT BREAKER: SWITCH BOX	EA	1
27	17	XBOZZ		6-1-1909-21-576A	72869	CLIP, CHAIN	EA	1
27	18	XBOZZ		6-1-1909-21-578A	72869	CHAIN, 11 IN. REQUIRED	FT	V
27	19	XBOZZ		6-1-1909-21-577A	72869	SCREW, MACHINE: CLAMP MTG	EA	2
27	20	XBOZZ		6-1-1909-21-574A	72869	CLAMP	EA	2
27	21	PAOZZ	5305-00-408-0127	D760347	04773	SCREW, PAN HEAD: PUMP SERVICE OUTLET NAMEPLATE MTG	EA	2
27	22	XBOZZ		6-1-1912-21-23A	72869	NAMEPLATE, PUMP SERVICE OUTLET	EA	1
27	23	XBOZZ		6-1-1909-21-56A	72869	BOX, CONDUIT, WATER PUMP SWITCH	EA	1

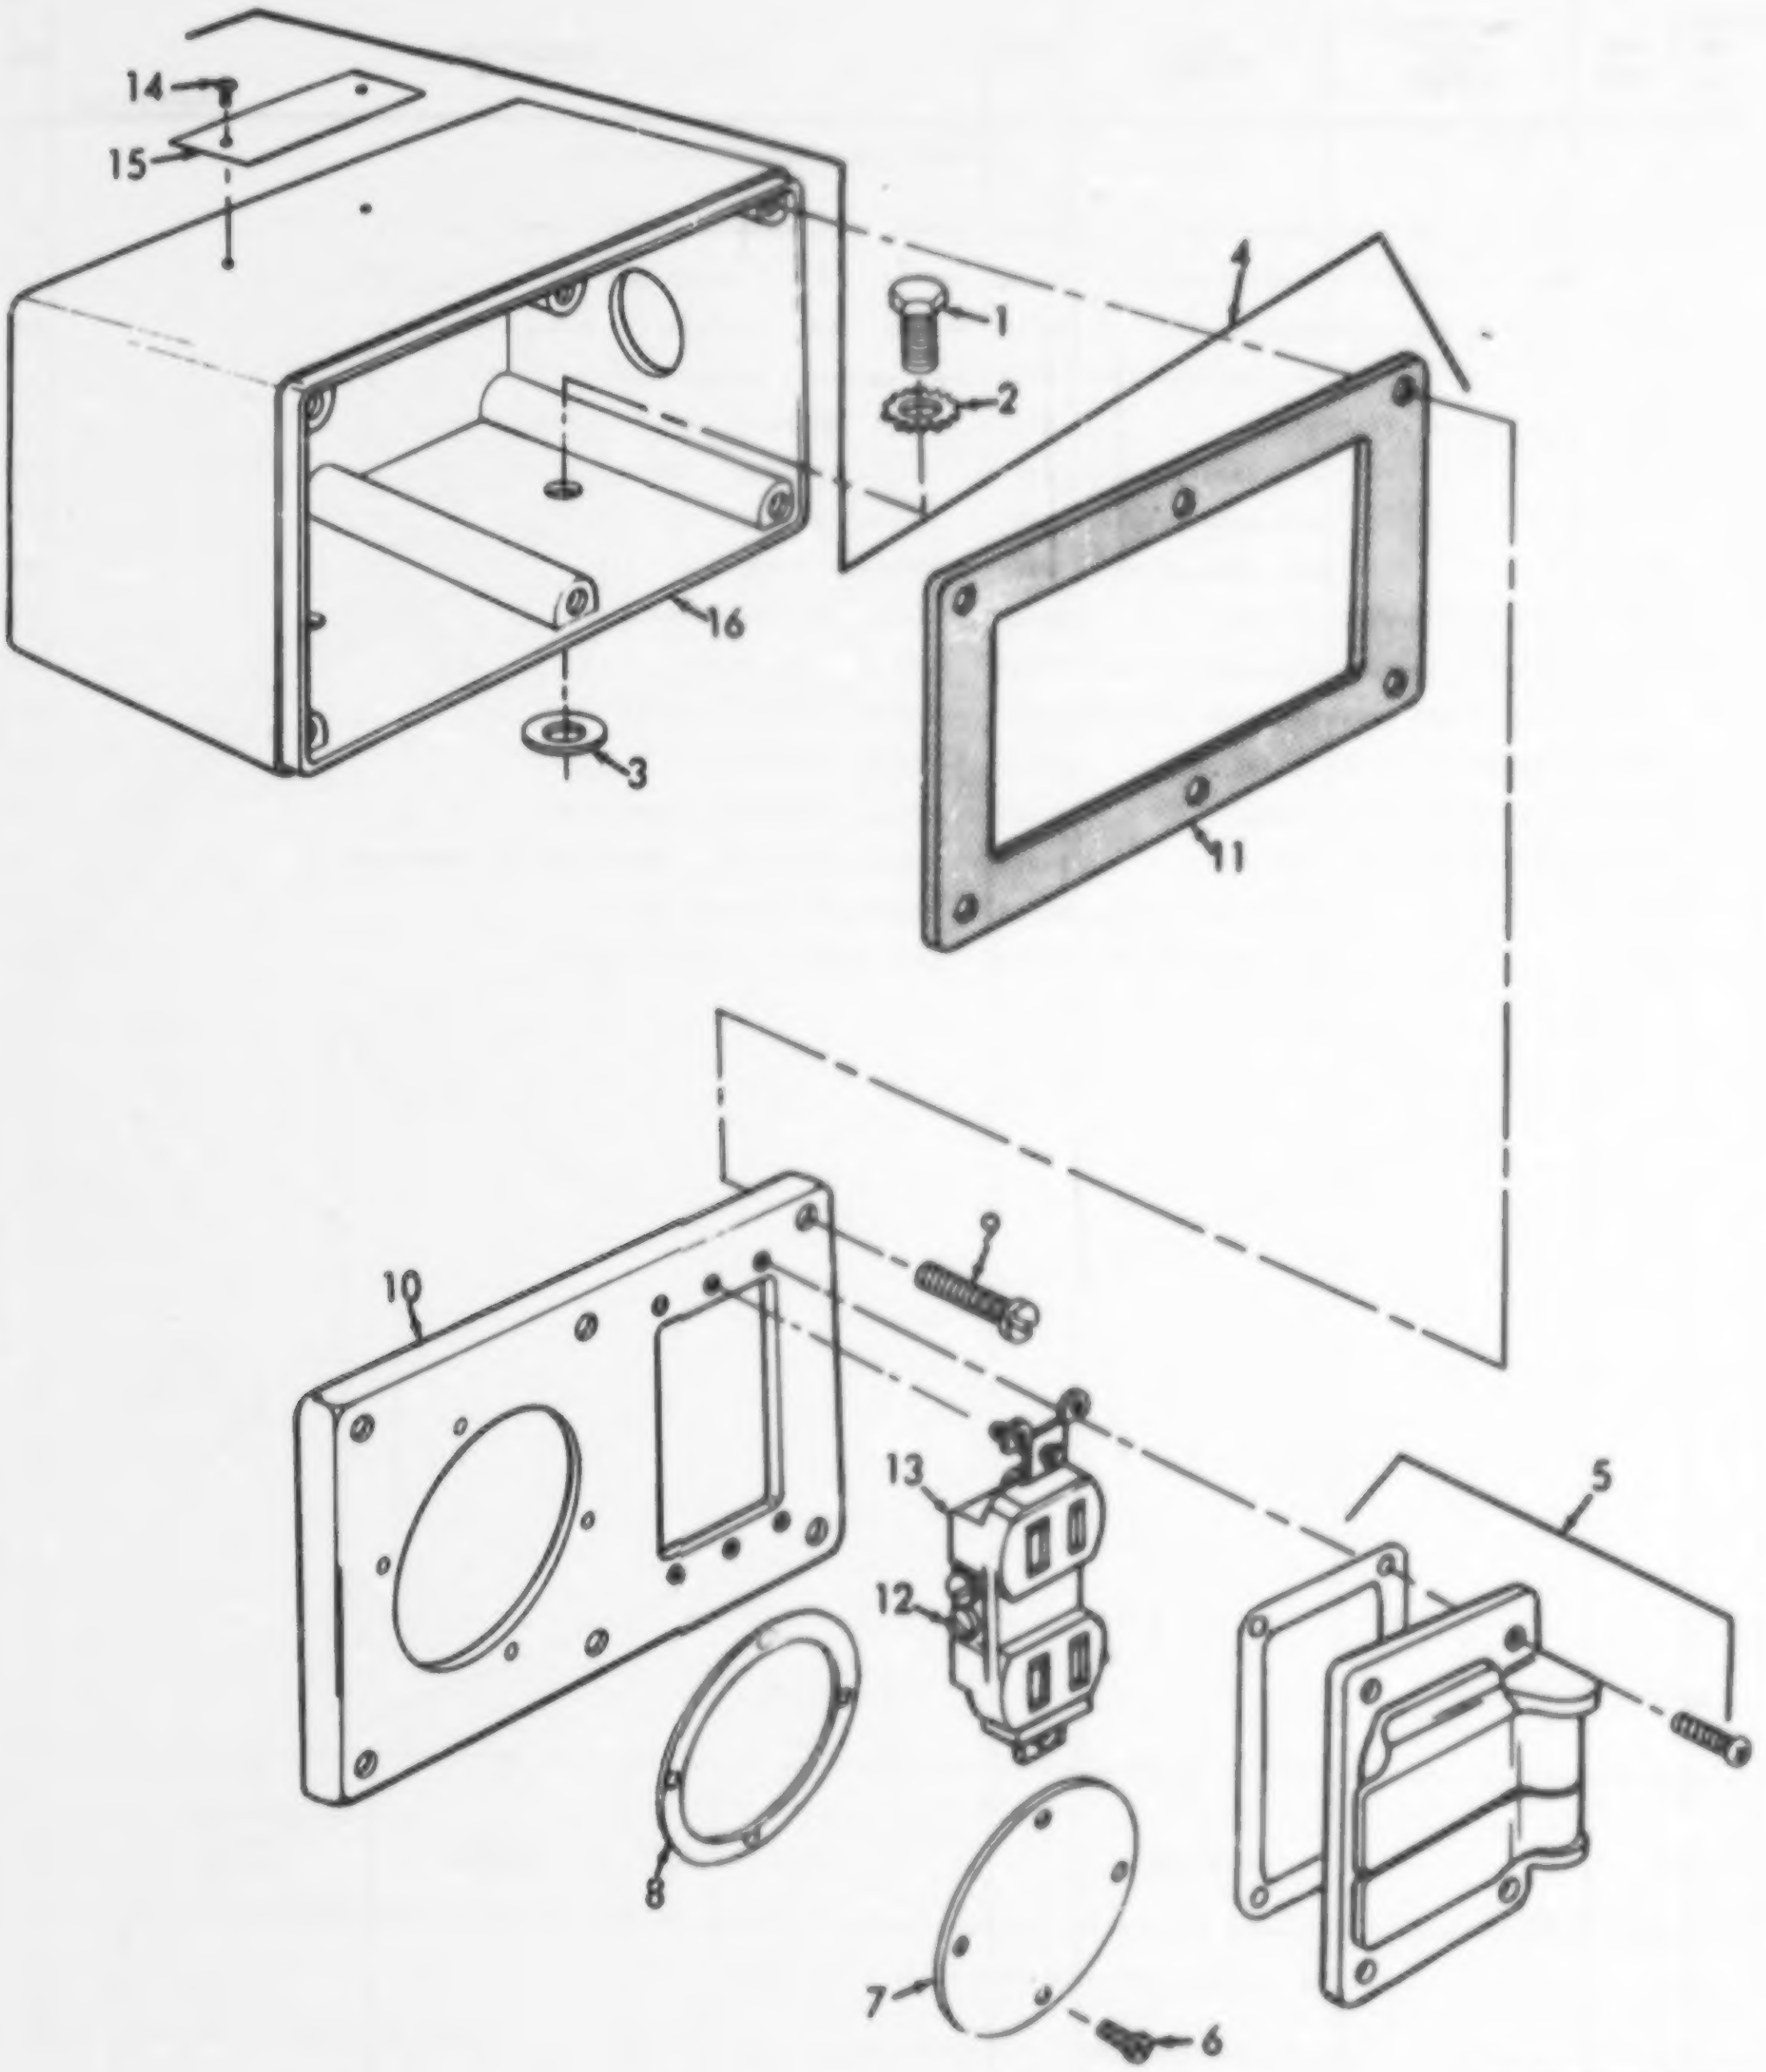
14
15
1
2
4
16
3
11
10
9
13
5
12
8
7
6

TS 3510-208-34P/28

Figure 28. Outlet Duplex Box.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 18 - OUTLET DUPLEX BOX		
28	1	PAOZZ	5305-00-068-0502	MS90725-6	96906	SCREW, CAP, HEXAGON HEAD: DUPLEX BOX MTG	EA	2
28	2	PAOZZ	5310-00-042-6758	MS35338-82	96906	WASHER, LOCK: DUPLEX BOX MTG	EA	2
28	3	PAOZZ	5310-00-880-5977	MS15795-811	96906	WASHER, FLAT: DUPLEX BOX MTG	EA	2
28	4	XBOZZ		6-1-1909-19-33A	72869	BOX, CONDUIT, DUPLEX OUTLET	EA	1
28	5	PAOZZ	5975-00-581-0768	D570G	15235	COVER, CONDUIT, OUTLET: DUPLEX BOX	EA	2
28	6	XBOZZ		6-1-1909-19-42A	72869	SCREW, MACHINE: COVER MTG	EA	4
28	7	XBOZZ		6-1-1909-19-41A	72869	PLATE, COVER	EA	1
28	8	XBOZZ		6-1-1909-19-40A	72869	GASKET: PLATE	EA	1
28	9	PAOZZ	5305-00-543-4925	MS35265-66	96906	SCREW, MACHINE: COVER MTG	EA	6
28	10	PAOZZ	5975-00-713-8321	6-1-1909-21-39A	72869	COVER: DUPLEX BOX	EA	1
28	11	PAOZZ	5330-00-703-1402	6-1-1909-21-58A	72869	GASKET, COVER: DUPLEX BOX	EA	1
28	12	PAOZZ	5950-00-674-5783	42118	04009	HEATER, OVERLOAD	EA	1
28	13	PAOZZ	5925-00-300-4448	LLU32U	04009	CIRCUIT BREAKER: LOAD LIMIT	EA	1
28	14	PAOZZ	5305-00-408-0127	D760347	04773	SCREW, PAN HEAD: DUPLEX OUTLET NAMEPLATE	EA	2
28	15	XBOZZ		6-1-1912-12-21A	60883	NAMEPLATE, DUPLEX OUTLET	EA	1
28	16	XBOZZ		6-1-1909-19-34A	72869	BOX, CONDUIT, DUPLEX OUTLET	EA	1

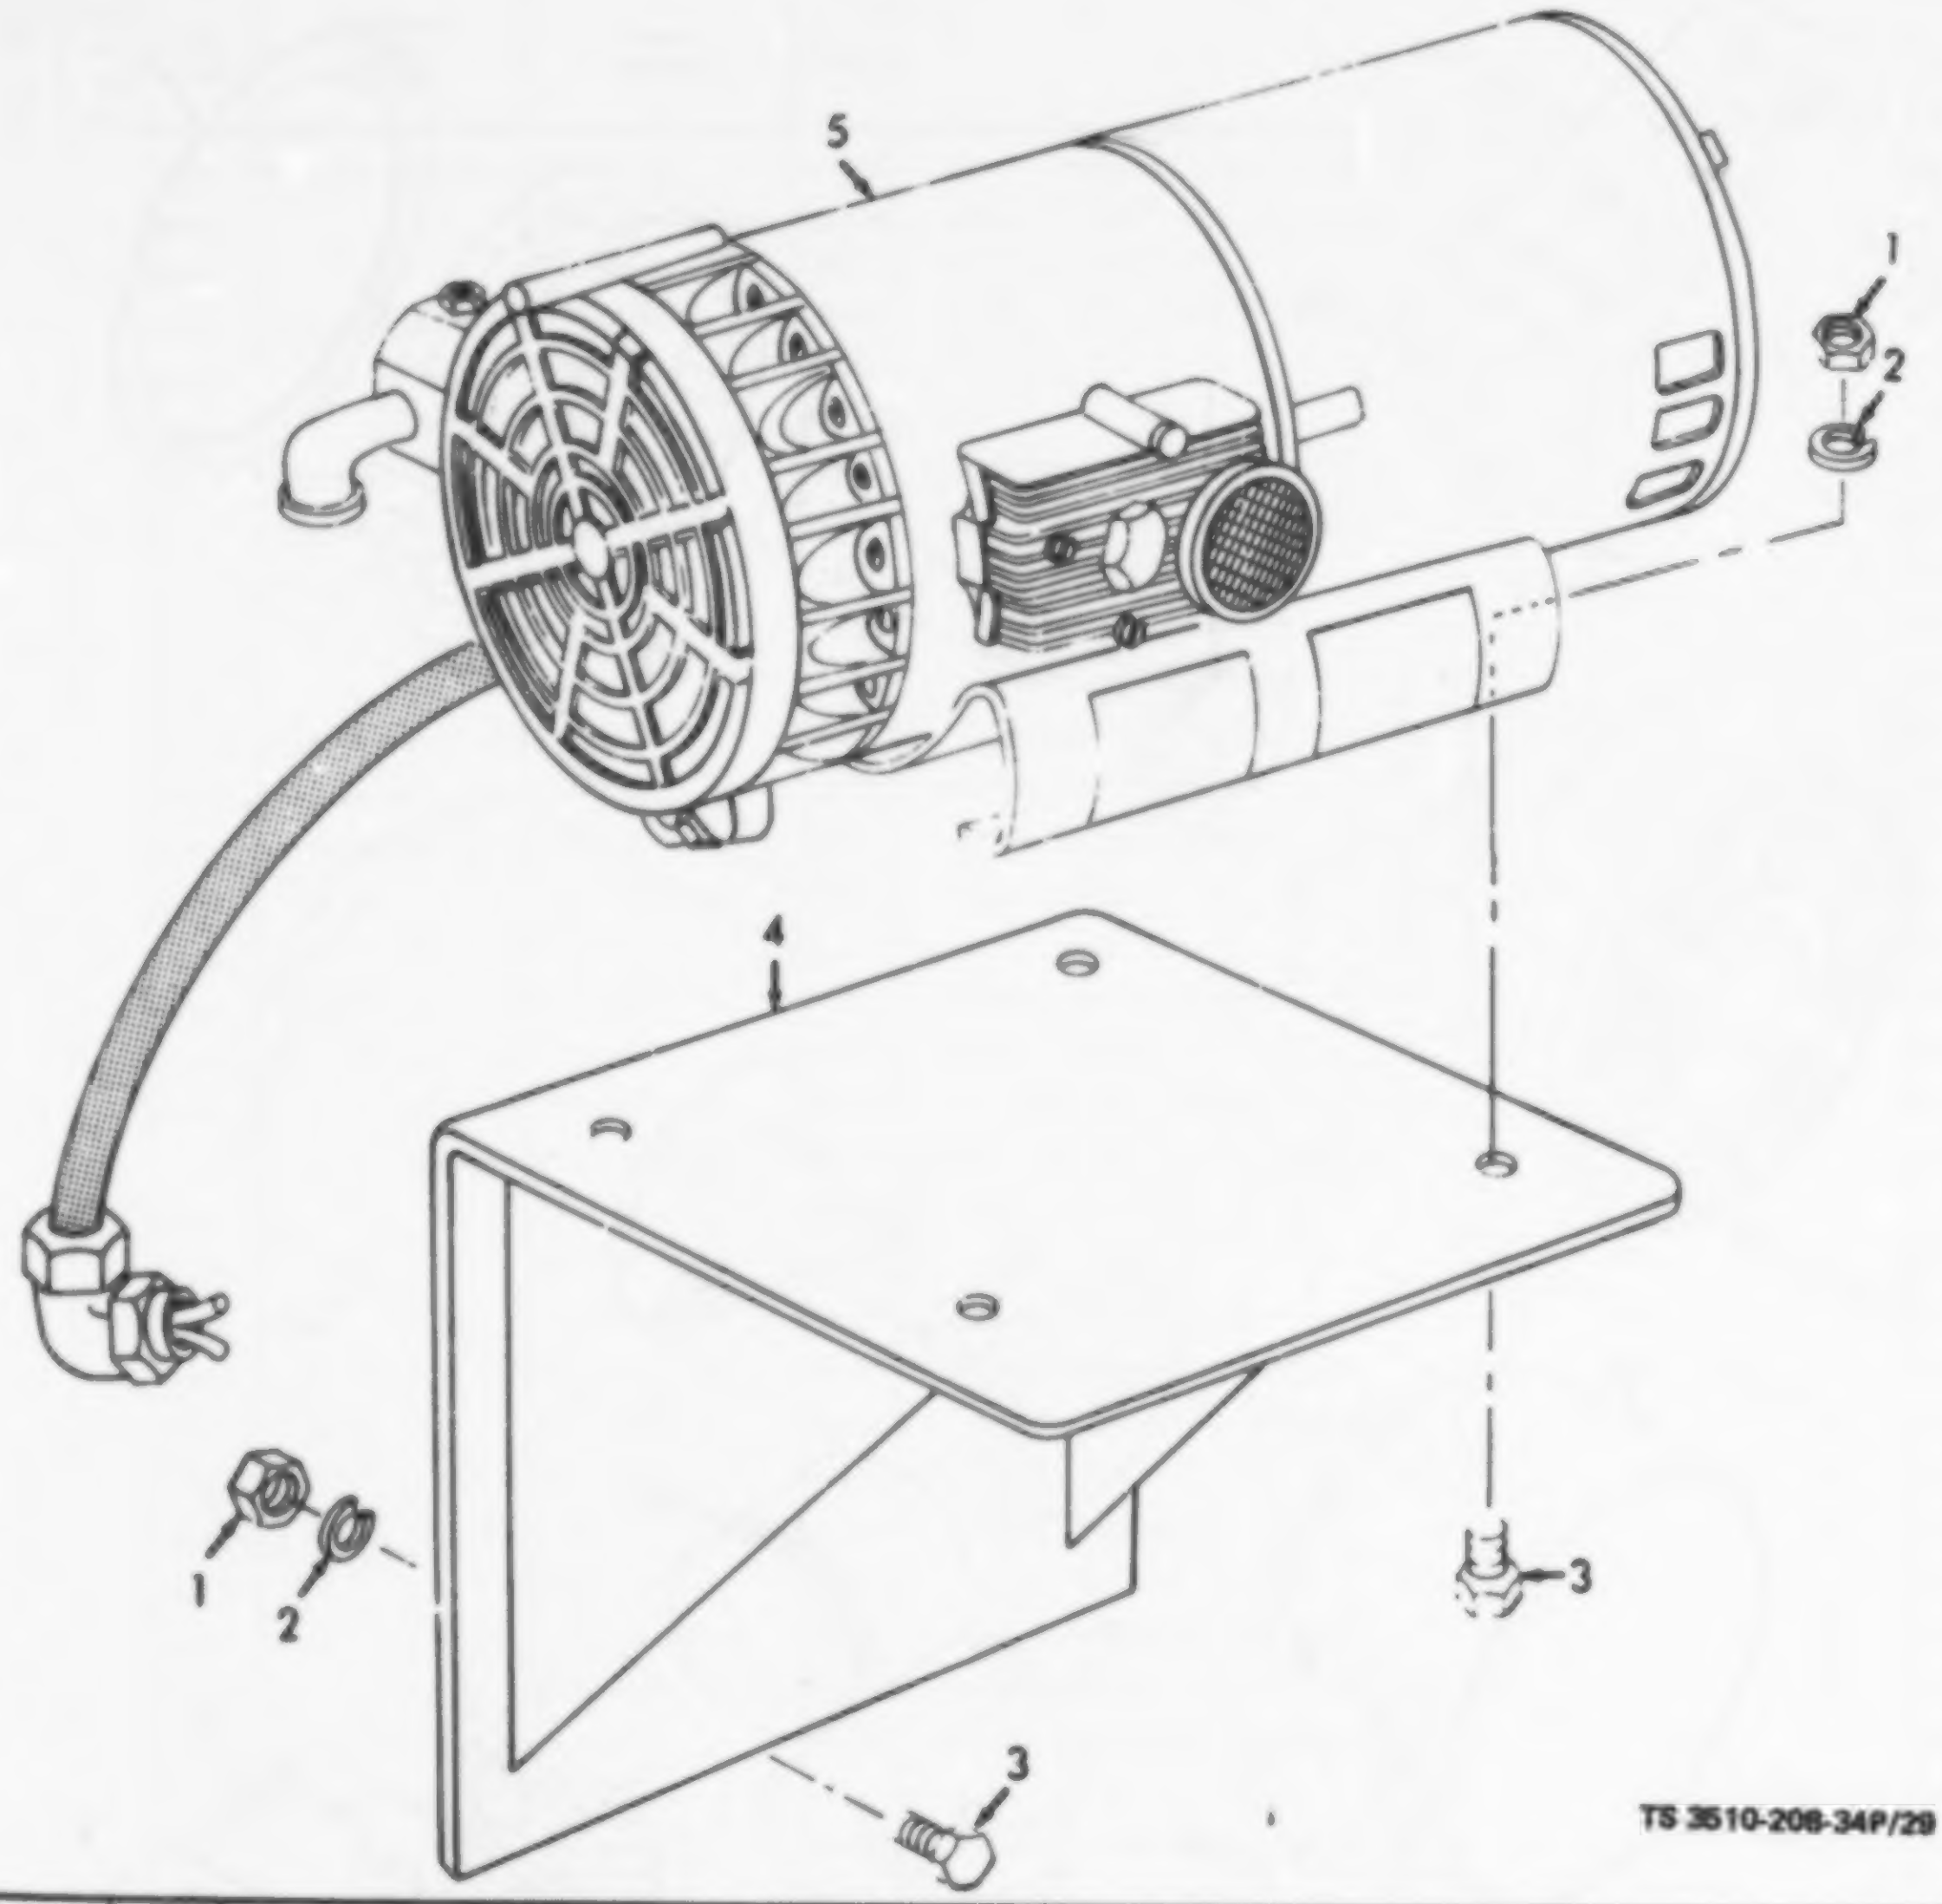

TS 3510-208-34P/29

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 19 - AIR COMPRESSOR AND MOUNTING BRACKET		
29	1	PAOZZ	5310-00-761-6882	MS51967-2	96906	NUT, PLAIN, HEXAGON: COMPRESSOR AND BRACKET MTG	EA	8
29	2	PAOZZ	5310-00-042-6758	MS35338-82	96906	WASHER, LOCK: COMPRESSOR AND BRACKET MTG	EA	8
29	3	PAOZZ	5305-00-225-3839	MS55305-21	08288	SCREW, CAP, HEXAGON HEAD: COMPRESSOR AND BRACKET MTG	EA	8
29	4	XBOZZ		6-1-1910-20-51A	60883	BRACKET: COMPRESSOR MTG	EA	1
29	5	PAOFF	4310-00-055-0666	SYC12-1	06631	COMPRESSOR ASSEMBLY, AIR	EA	1

Figure 29. Air Compressor and Mounting Bracket.

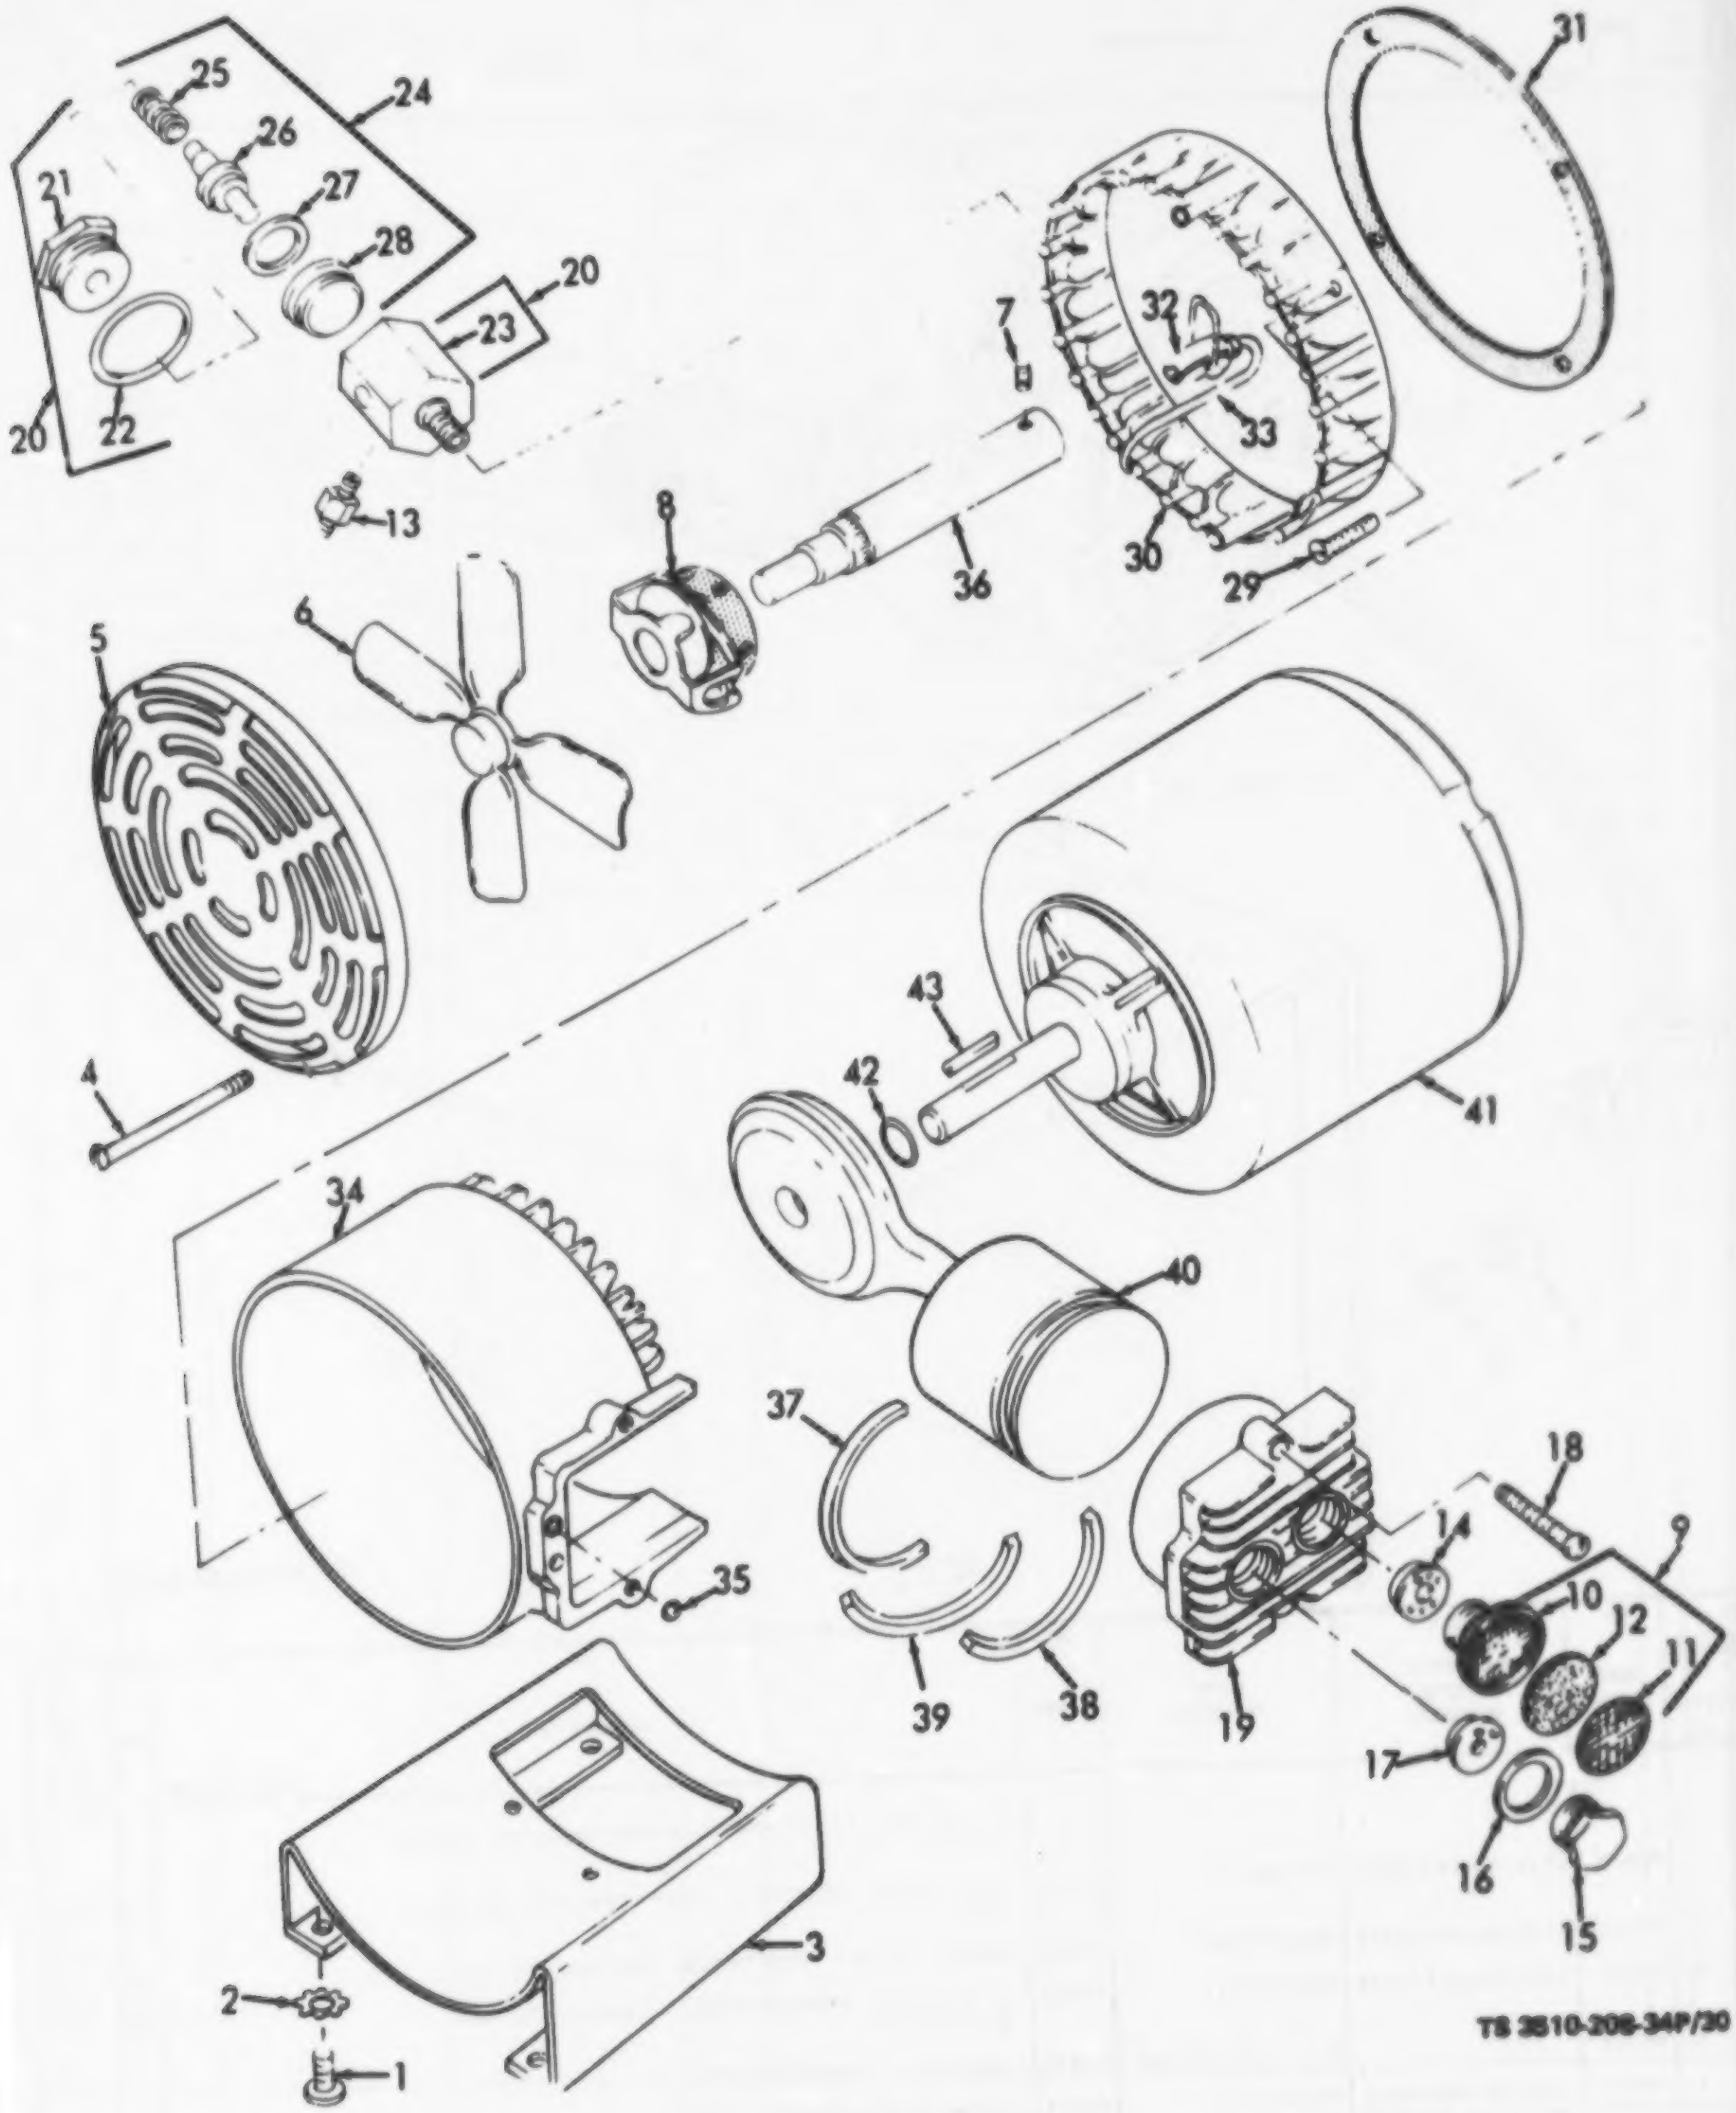
25
24
26
21
27
28
20
23
20
22
7
31
32
33
30
29
13
8
36
6
5
43
42
41
4
34
40
37
18
14
9
10
12
11
35
39
38
19
17
16
15
3
2
1

TS 3510-208-34P/30

Figure 30. Air Compressor.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
30	1	PAFZZ	4310-00-609-9615	P4267	06631	SCREW, MACHINE: BASE PLATE MTG	EA	4
30	2	XBFZZ		6-1-1910-20-49A	72869	WASHER, STAR: BASE PLATE MTG	EA	4
30	3	XBFZZ		SYC6-188	06631	PLATE, COMPRESSOR	EA	1
30	4	PAFZZ	5305-00-609-9613	SYC4-1187	06631	SCREW: GRILLE MTG	EA	2
30	5	XBFZZ		SYC2213	06631	GRILLE	EA	1
30	6	XBFZZ		C12002303	06631	FAN	EA	1
30	7	PAFZZ	5305-00-121-7889	SHP37-1165T	06631	SETSCREW: SHAFT	EA	1
30	8	PAFZZ	5930-00-919-7796	SYC22631	06631	SWITCH ASSEMBLY: FAN SHAFT	EA	1
30	9	PAOOO	4310-00-739-1603	SYC12195	06631	INTAKE CLEANER	EA	2
30	10	XBOZZ		SYC3-195	06631	CASE, FILTER, INTAKE	EA	2
30	11	XBOZZ		SYC1-1213	06631	INTAKE, FILTER SCREEN	EA	2
30	12	PAOZZ	4310-00-606-9913	SYC1-196	06631	FILTER, FELT	EA	2
30	13	PAOZZ	4820-00-739-1635	SYRA2-1	06631	VALVE, SAFETY RELIEF	EA	1
30	14	PAOZZ	4310-00-608-5785	SYCZ178	06631	INTAKE VALVE ASSEMBLY	EA	2
30	15	XBOZZ		SYC3-192	06631	VALVE, PLUG	EA	1
30	16	PAOZZ	4310-00-609-9616	SYC4-154	06631	GASKET, PLUG	EA	2
30	17	PAOZZ	4310-00-608-5782	SYC12178	06631	EXHAUST VALVE ASSEMBLY	EA	2
30	18	PAFZZ	5305-00-808-9977	SYC2816	06631	SCREW, MACHINE	EA	6
30	19	PAFZZ	4310-00-736-2018	SYC32194	06631	CYLINDER HEAD AND SLEEVE ASSEMBLY	EA	2
30	20	PAOOO	4310-00-756-9563	SYC621275	06631	BODY, VALVE: AIR COMPRESSOR	EA	1
30	21	XBOZZ		SYC3-192	06631	VALVE, PLUG	EA	2
30	22	XBOZZ		SYC4-154	06631	GASKET, PLUG	EA	1
30	23	XBOZZ		SYC12-12758R	06631	BODY, VALVE, CHECK	EA	1
30	24	PAOZZ	4310-00-756-9564	SYC21315	06631	VALVE ASSEMBLY, COMPRESSOR	EA	1
30	25	XAOZZ		SYG112655	06631	SPRING, HELICAL, COMPRESSION	EA	1
30	26	XAOZZ		SYC131655	06631	STEM, VALVE	EA	1
30	27	XAOZZ		SYC1177	06631	RING, RETAINING	EA	1
30	28	XAOZZ		SYC1317BR	06631	SEAT, VALVE	EA	1
30	29	XBFZZ		SYC11187CD	06631	SCREW, CRANKCASE	EA	16
30	30	XBFZZ		S7C1-184	06631	PLATE, CRANKCASE	EA	1
30	31	PAFZZ	4320-00-949-5615	SYC156	06631	GASKET, CRANKCASE	EA	1
30	32	PAFZZ	4310-00-736-2021	SYC221308	06631	TUBE, VALVE	EA	1
30	33	XBFZZ		SYC21309	06631	UNLOADING ARM ASSEMBLY	EA	1
30	34	PAFZZ	4310-00-463-7529	SYC12184	06631	HOUSING: AIR COMPRESSOR	EA	1
30	35	PAOZZ	5330-00-739-9087	SYC7-154	06631	PACKING, PREFORMED	EA	4
30	36	XBFZZ		C40010604	06631	SHAFT, FAN	EA	1
30	37	PAFZZ	4310-00-608-5786	SYC1179	06631	SPRING, PISTON RING	EA	4
30	38	PAFZZ	4310-00-609-9619	SYC1143	06631	PISTON RING	EA	2
30	39	XBFZZ		SYC1143-1	06631	EXPANDER STRIP	EA	1
30	40	PAFZZ	4310-00-736-2027	SYC921180	06631	PISTON ROD AND BEARING	EA	2
30	41	PAOZF	6105-00-933-7926	MV100DS1068	06631	MOTOR, ALTERNATING	EA	1
30	42	PAFZZ	4310-00-019-4220	SYC1163	06631	RING: COMPRESSOR MOTOR	EA	1
30	43	PAFZZ	4310-00-608-5787	SYC1138	06631	KEY, MACHINE: SHAFT	EA	1

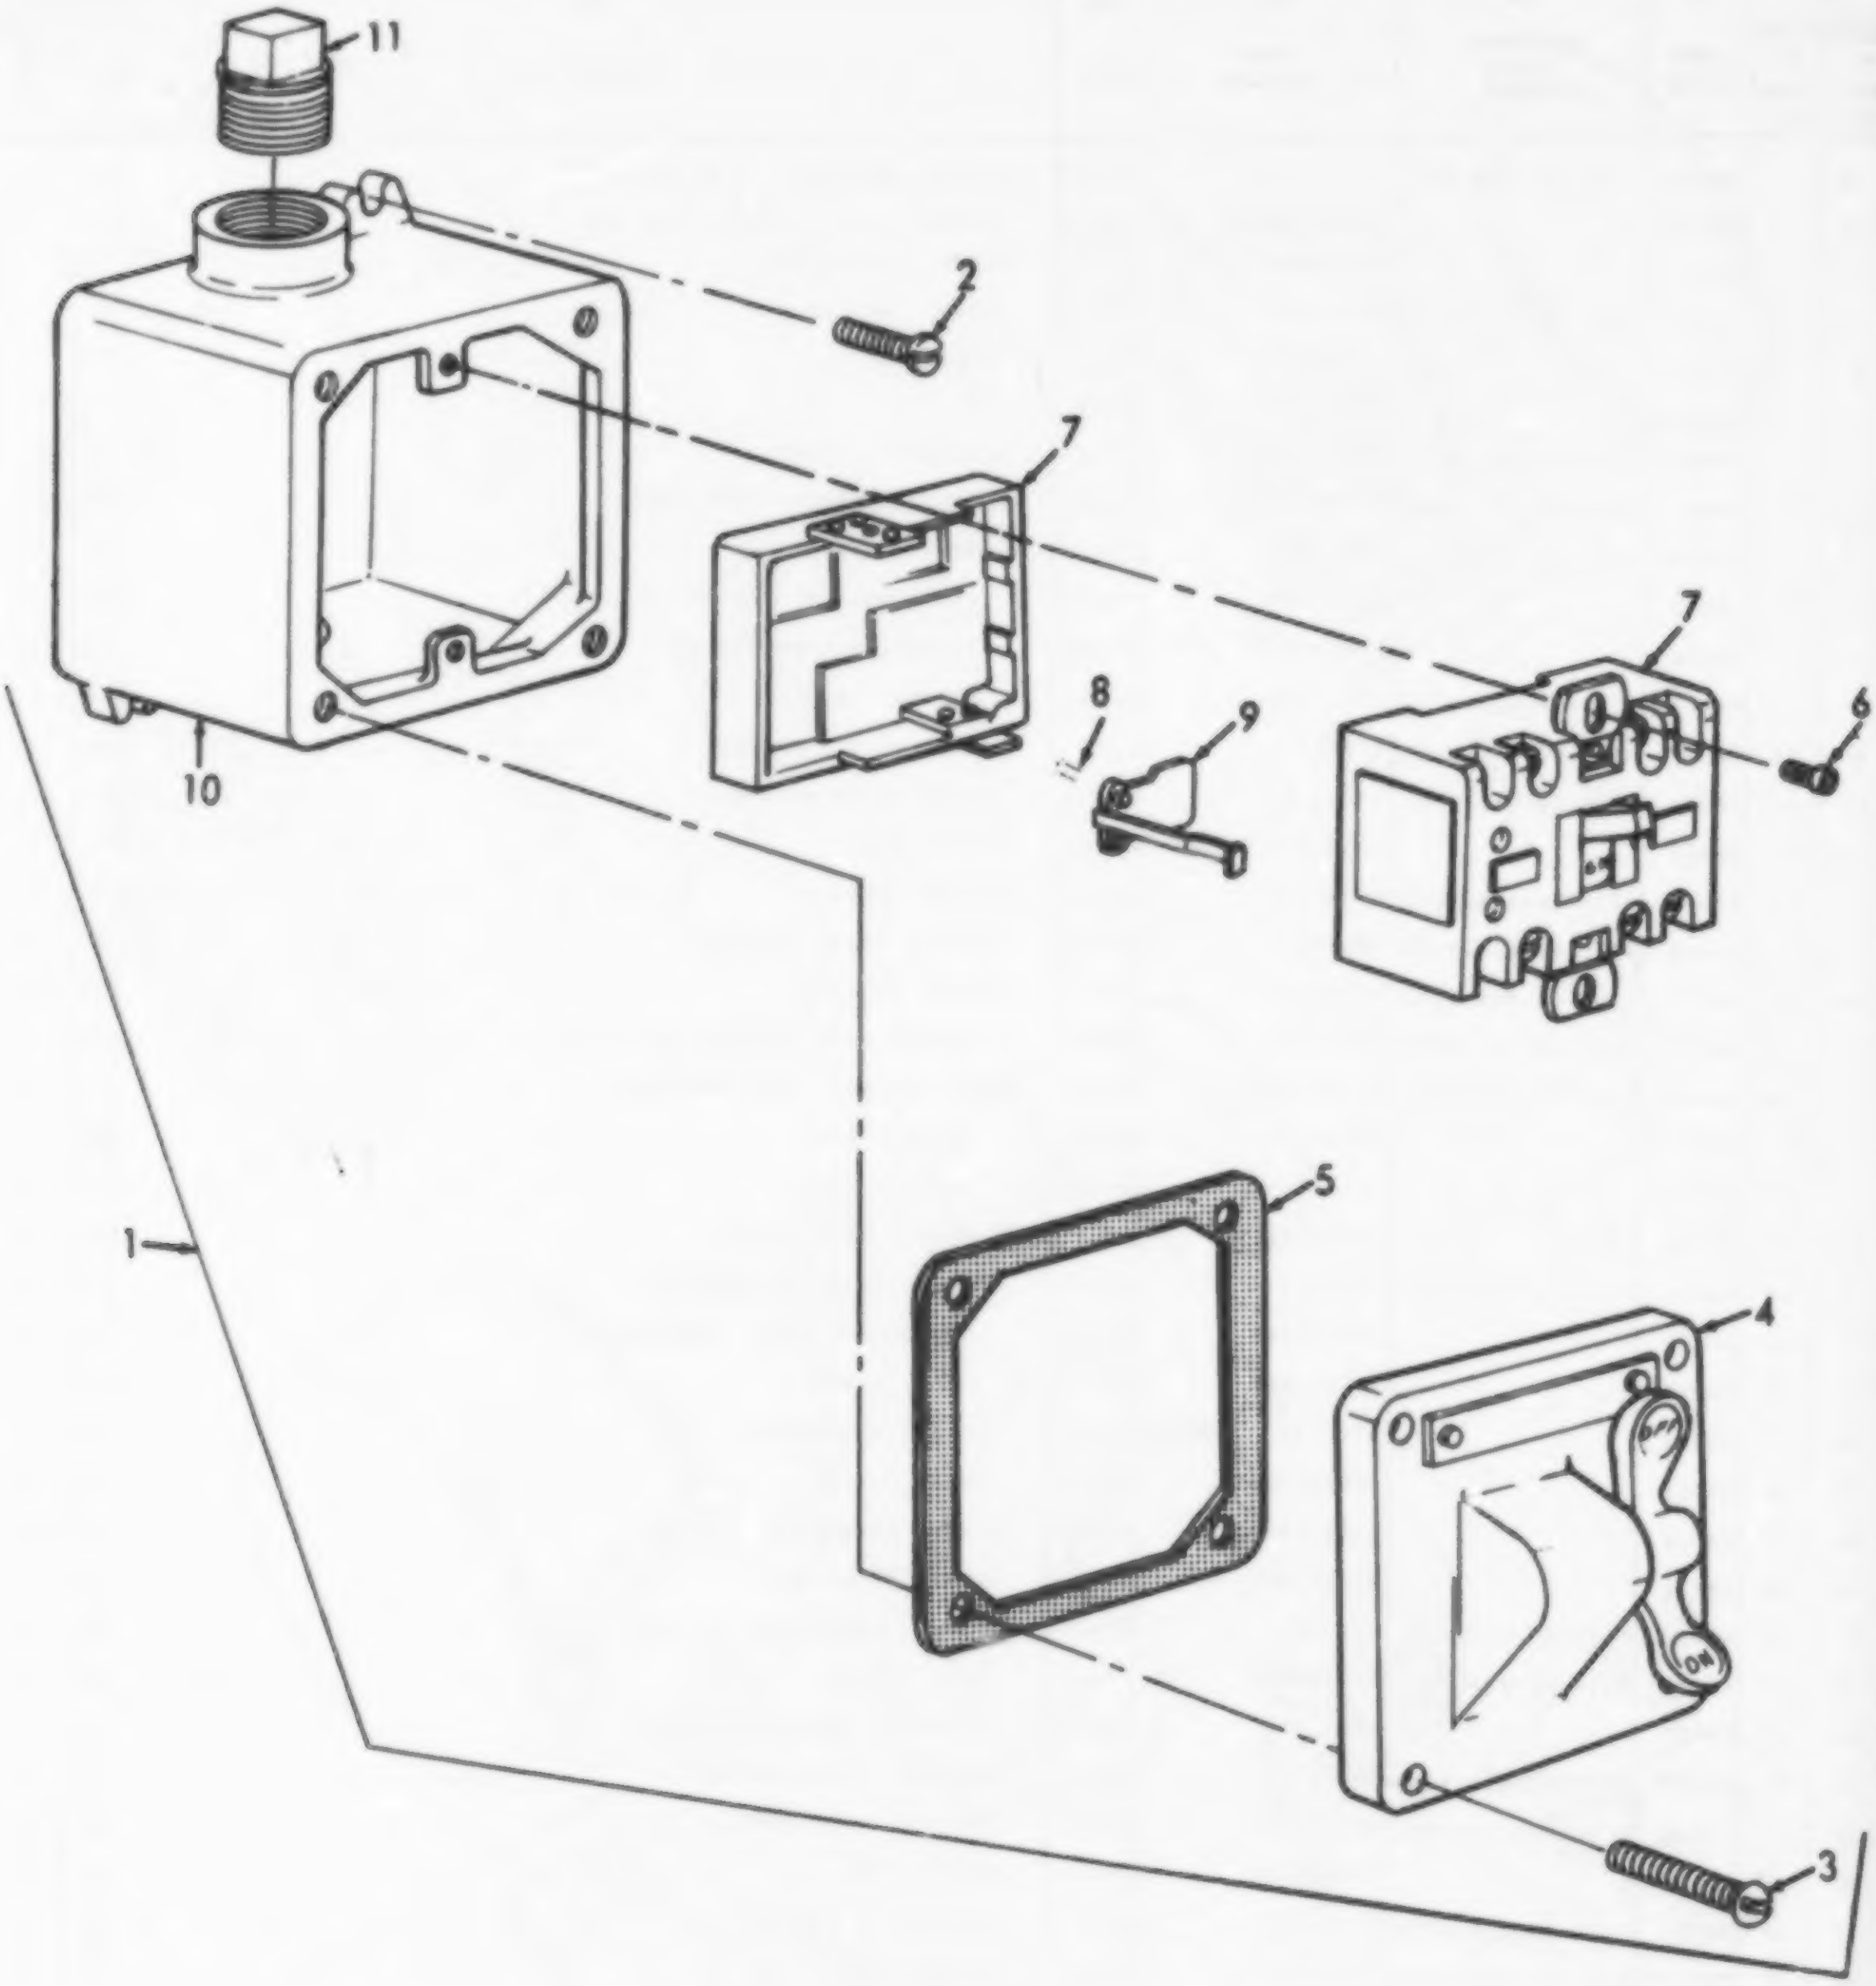
11
2
7
7
6
8
9
10
5
1
4
3
OFF
ON

TS 3510-208-34P/31

Figure 31. Air Compressor Starter Switch

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 20 - AIR COMPRESSOR STARTER SWITCH		
31	1	XBOZZ		LL032W	04009	SWITCH ASSEMBLY, STARTER: COMPRESSOR	EA	1
31	2	PAOZZ	5305-00-988-1727	MS35206-283	96906	SCREW, MACHINE: SWITCH BOX MTG, COMPRESSOR	EA	2
31	3	PAOZZ	5305-00-042-4509	MBOES424509	08288	SCREW ASSEMBLED WASHER: COVER MTG	EA	4
31	4	XBOZZ		39161-12	04009	COVER, SWITCH: COMPRESSOR STARTER	EA	1
31	5	XBOZZ		6-1-1909-21-58A	72869	GASKET: SWITCH COVER MTG	EA	1
31	6	PAOZZ	5305-00-515-8228	MBOES420427	08288	SCREW ASSEMBLED WASHER: SWITCH MTG	EA	2
31	7	PAOZZ	5925-00-300-4448	LL032U	04009	SWITCH, COMPRESSOR STARTER	EA	1
31	8	XBOZZ		6-1-744-2-9-10A	72869	SCREW, MACHINE: THERMAL RELEASE MTG	EA	4
31	9	PAOZZ	3510-00-906-9079	42115	04009	HEATER, THERMAL RELEASE: COMPRESSOR STARTER	EA	1
31	10	XBOZZ		39161-11	04009	BOX, SWITCH: COMPRESSOR STARTER	EA	1
31	11	PAOZZ	4730-00-263-3122	WWP471TYPE1	81349	PLUG, PIPE: SWITCH BOX	EA	1

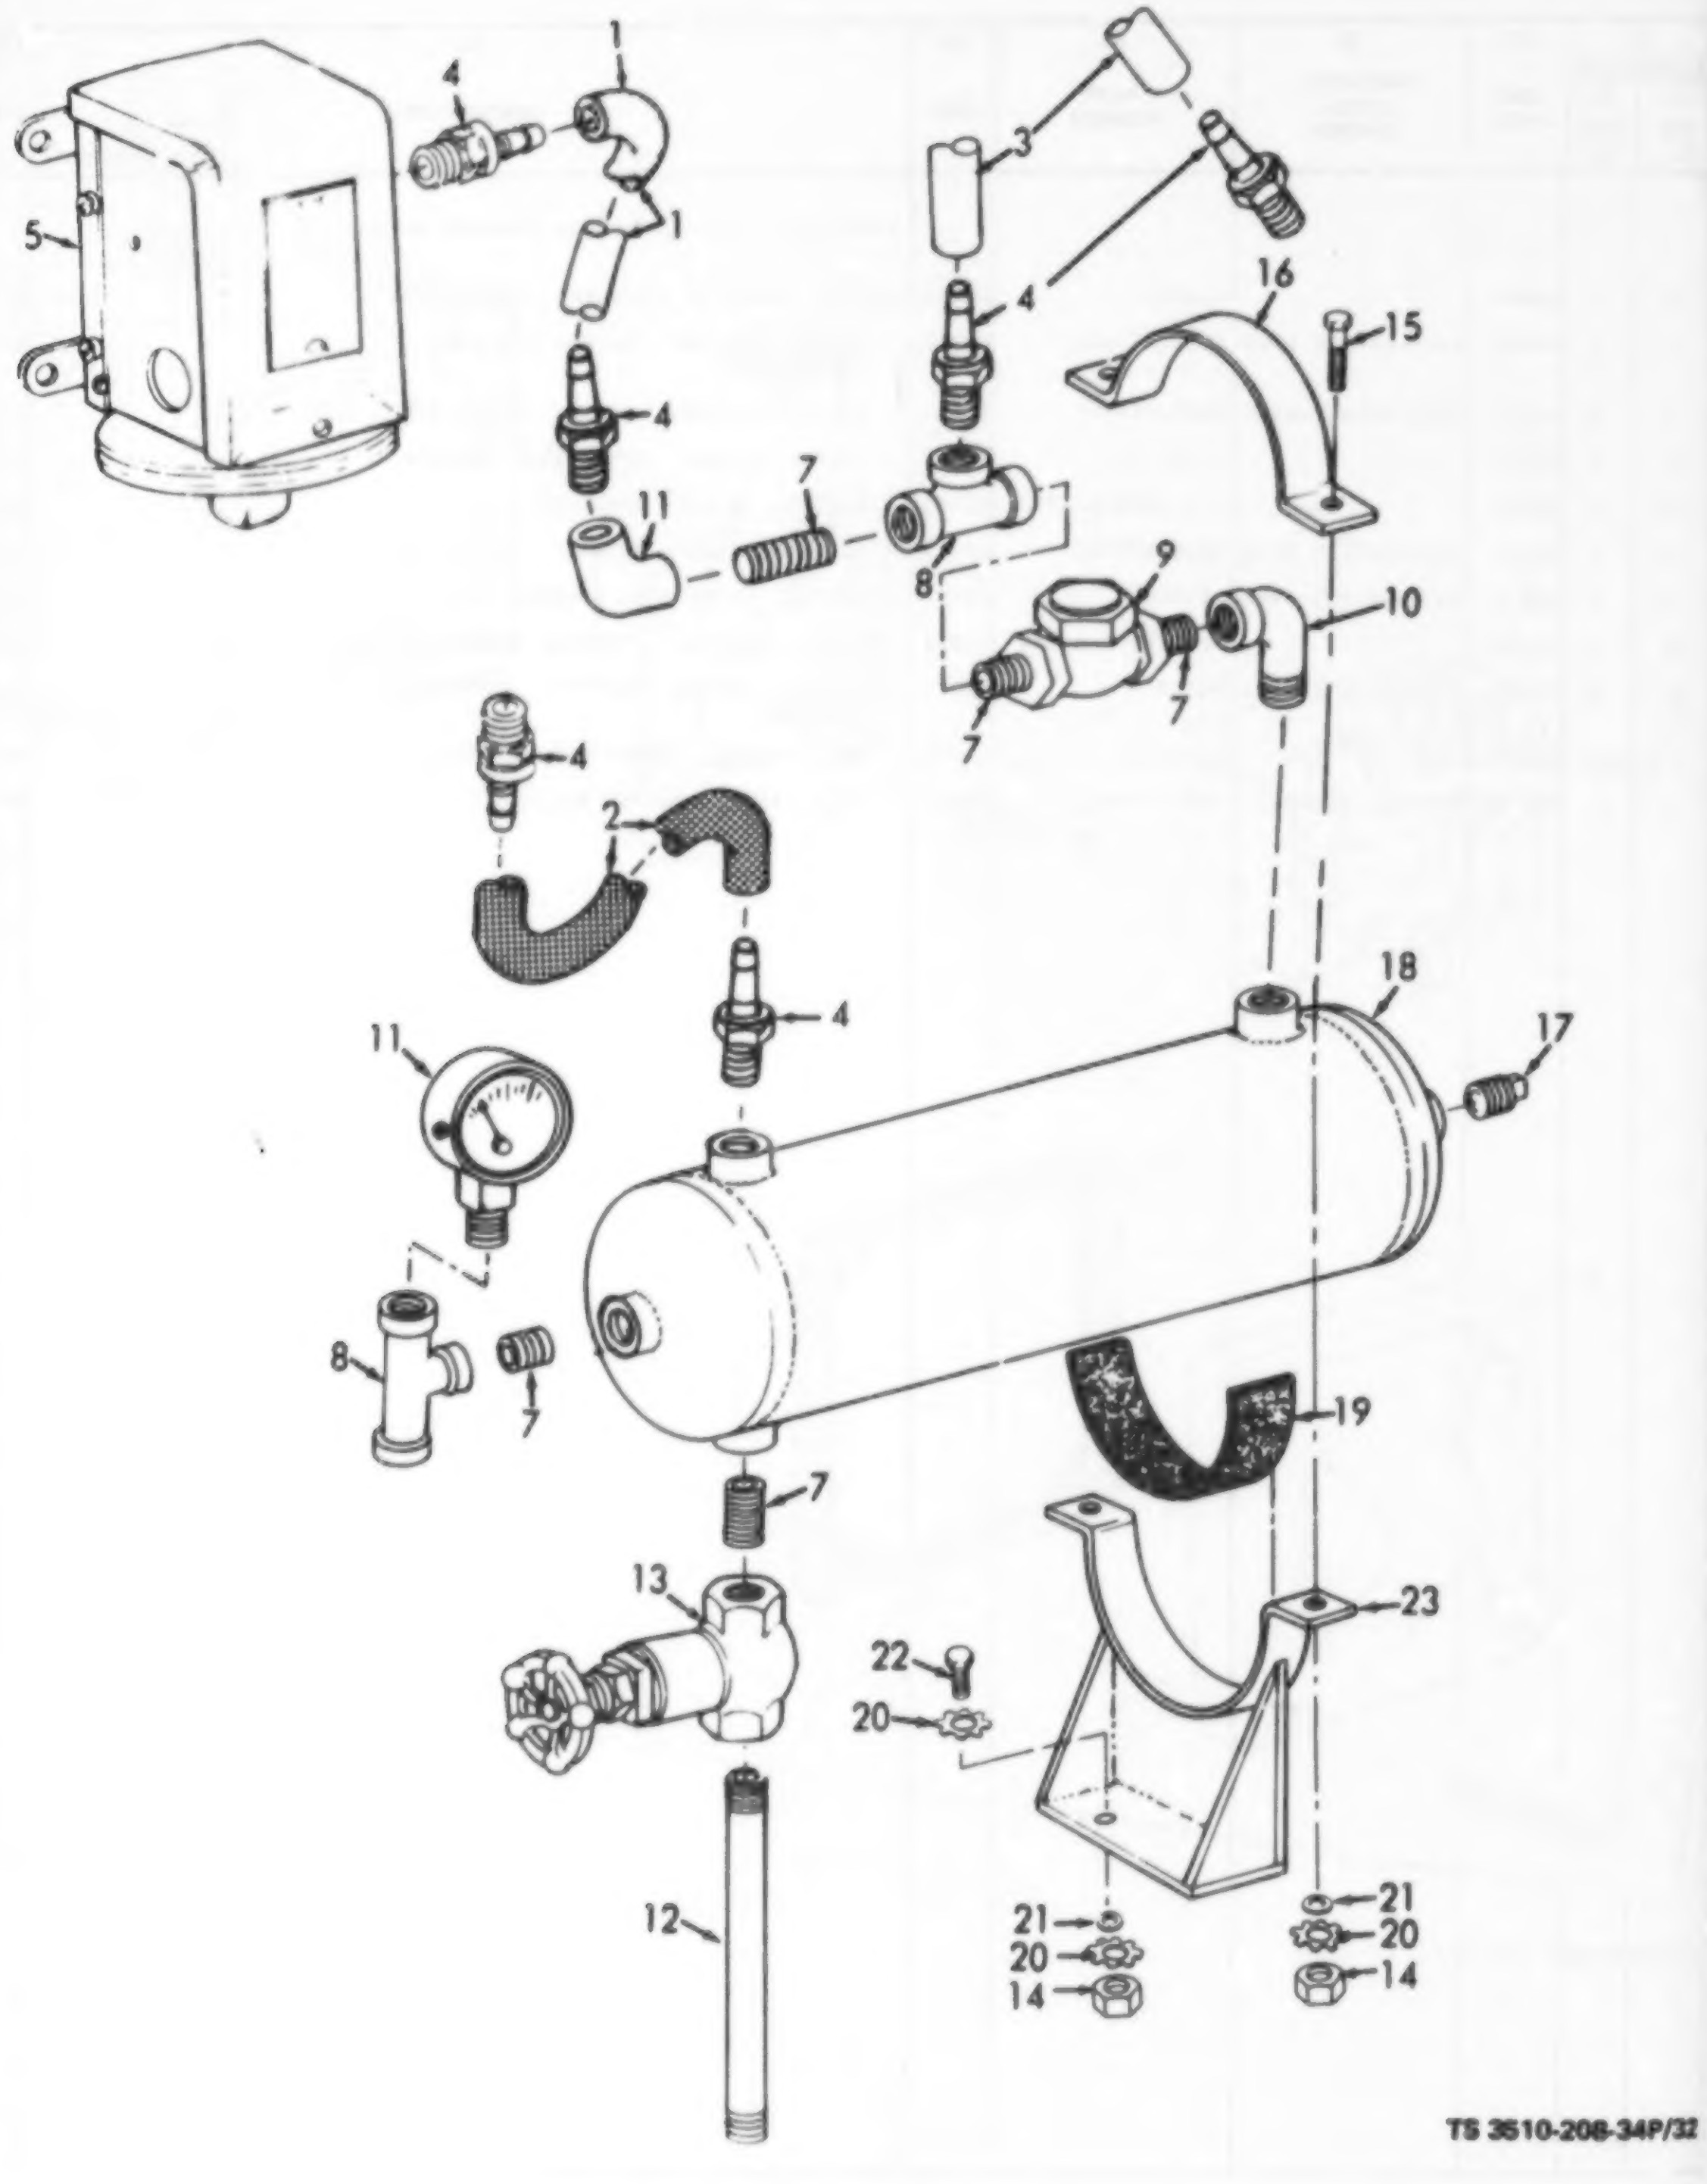
1
4
1
5
4
3
4
16
15
4
11
7
8
9
10
7
7
7
4
2
4
18
17
11
8
7
19
7
13
23
22
20
21
20
14
12
21
20
14
TS 3510-208-34P/32

Figure 32. Air Cylinder and Related Parts.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 21 - AIR CYLINDER AND RELATED PARTS		
32	1	PAOZZ	4720-00-847-1710	2556-4	01276	HOSE, RUBBER: SWITCH TO TANK, UPPER, 10 IN. REQUIRED	FT	V
32	2	PAOZZ	4720-00-847-1710	2556-4	01276	HOSE, RUBBER: SWITCH TO TANK, LOWER, 10 IN. REQUIRED	FT	V
32	3	PAOZZ	4720-00-847-1710	2556-4	01276	HOSE, RUBBER: TANK TO COMPRESSOR, 30 IN. REQUIRED	FT	V
32	4	PAOZZ	4730-00-028-7021	4738-4-4B	00624	CONNECTOR, HOSE	EA	6
32	5	PAOZZ	5930-00-967-8796	9013AMG6	90211	SWITCH, PRESSURE	EA	1
32	6	PAOZZ	4730-00-426-8253	6-1-1910-20-40A	72869	ELBOW: TANK TO LIFT VALVE	EA	1
32	7	PAOZZ	4730-00-277-9642	6-1-1910-2L 5A	72869	NIPPLE, CLOSE: 1/4 IN. NPT	EA	5
32	8	PAOZZ	4730-00-257-2117	WWP521TYPE2	81348	TEE, PIPE: 1/4 IN. NPT, GAGE MTG, HOSE TO SWITCH	EA	2
32	9	PAOZZ	4820-00-933-5987	132-1-4-400LB	88733	VALVE, LIFT	EA	1
32	10	XBOZZ		6-1-1910-20-41A	72869	ELBOW, STREET, 90 DEGREES	EA	1
32	11	PAOZZ	6685-00-949-4876	P6315	61349	GAGE, PRESSURE, DIAL: COMPRESSOR TANK	EA	1
32	12	XBOZZ		6-1-1910-20-43A	72869	PIPE, DRAIN: TANK DRAIN, 1/4 NPT	EA	1
32	13	PAOZZ	4820-00-962-5834	410SIZE1-4IN	14959	VALVE, GATE	EA	1
32	14	PAOZZ	5310-00-761-6882	MS51967-2	96906	NUT, HEXAGON HEAD: RECEIVER TANK COLLAR MTG	EA	8
32	15	PAOZZ	5305-00-071-2241	MS35291-10	96906	SCREW, CAP, HEXAGON HEAD: TANK COLLAR TO BRACKET	EA	4
32	16	XBOZZ		6-1-1910-20-10A	72869	COLLAR, RECEIVER TANK	EA	2
32	17	PAOZZ	4730-00-947-0890	6-1-1910-20-13A	72869	PLUG, TANK: 1/4 IN. NPT	EA	2
32	18	PAOZZ	4520-00-933-7944	200-198REVA	96480	TANK, RECEIVER, AIR	EA	1
32	19	PAOZZ	8305-00-261-8850	6-1-1910-20-8A	72869	WEBBING, COTTON: TANK MTG, 1-1/4 IN. W, 9 IN. LG	YD	2
32	20	XBOZZ		6-1-1910-20-21A	72869	WASHER, EXTERNAL TOOTH: RECEIVER TANK BRACKET MTG	EA	8
32	21	PAOZZ	5310-00-838-6056	MS55310-32	08288	WASHER, FLAT: RECEIVER TANK BRACKET MTG	EA	4
32	22	PAOZZ	5305-00-225-3840	MS90725-7	96906	SCREW, CAP, HEXAGON HEAD: RECEIVER TANK BRACKET	EA	4
32	23	XBOZZ		6-1-1910-20-14A	72869	BRACKET, RECEIVER TANK	EA	2

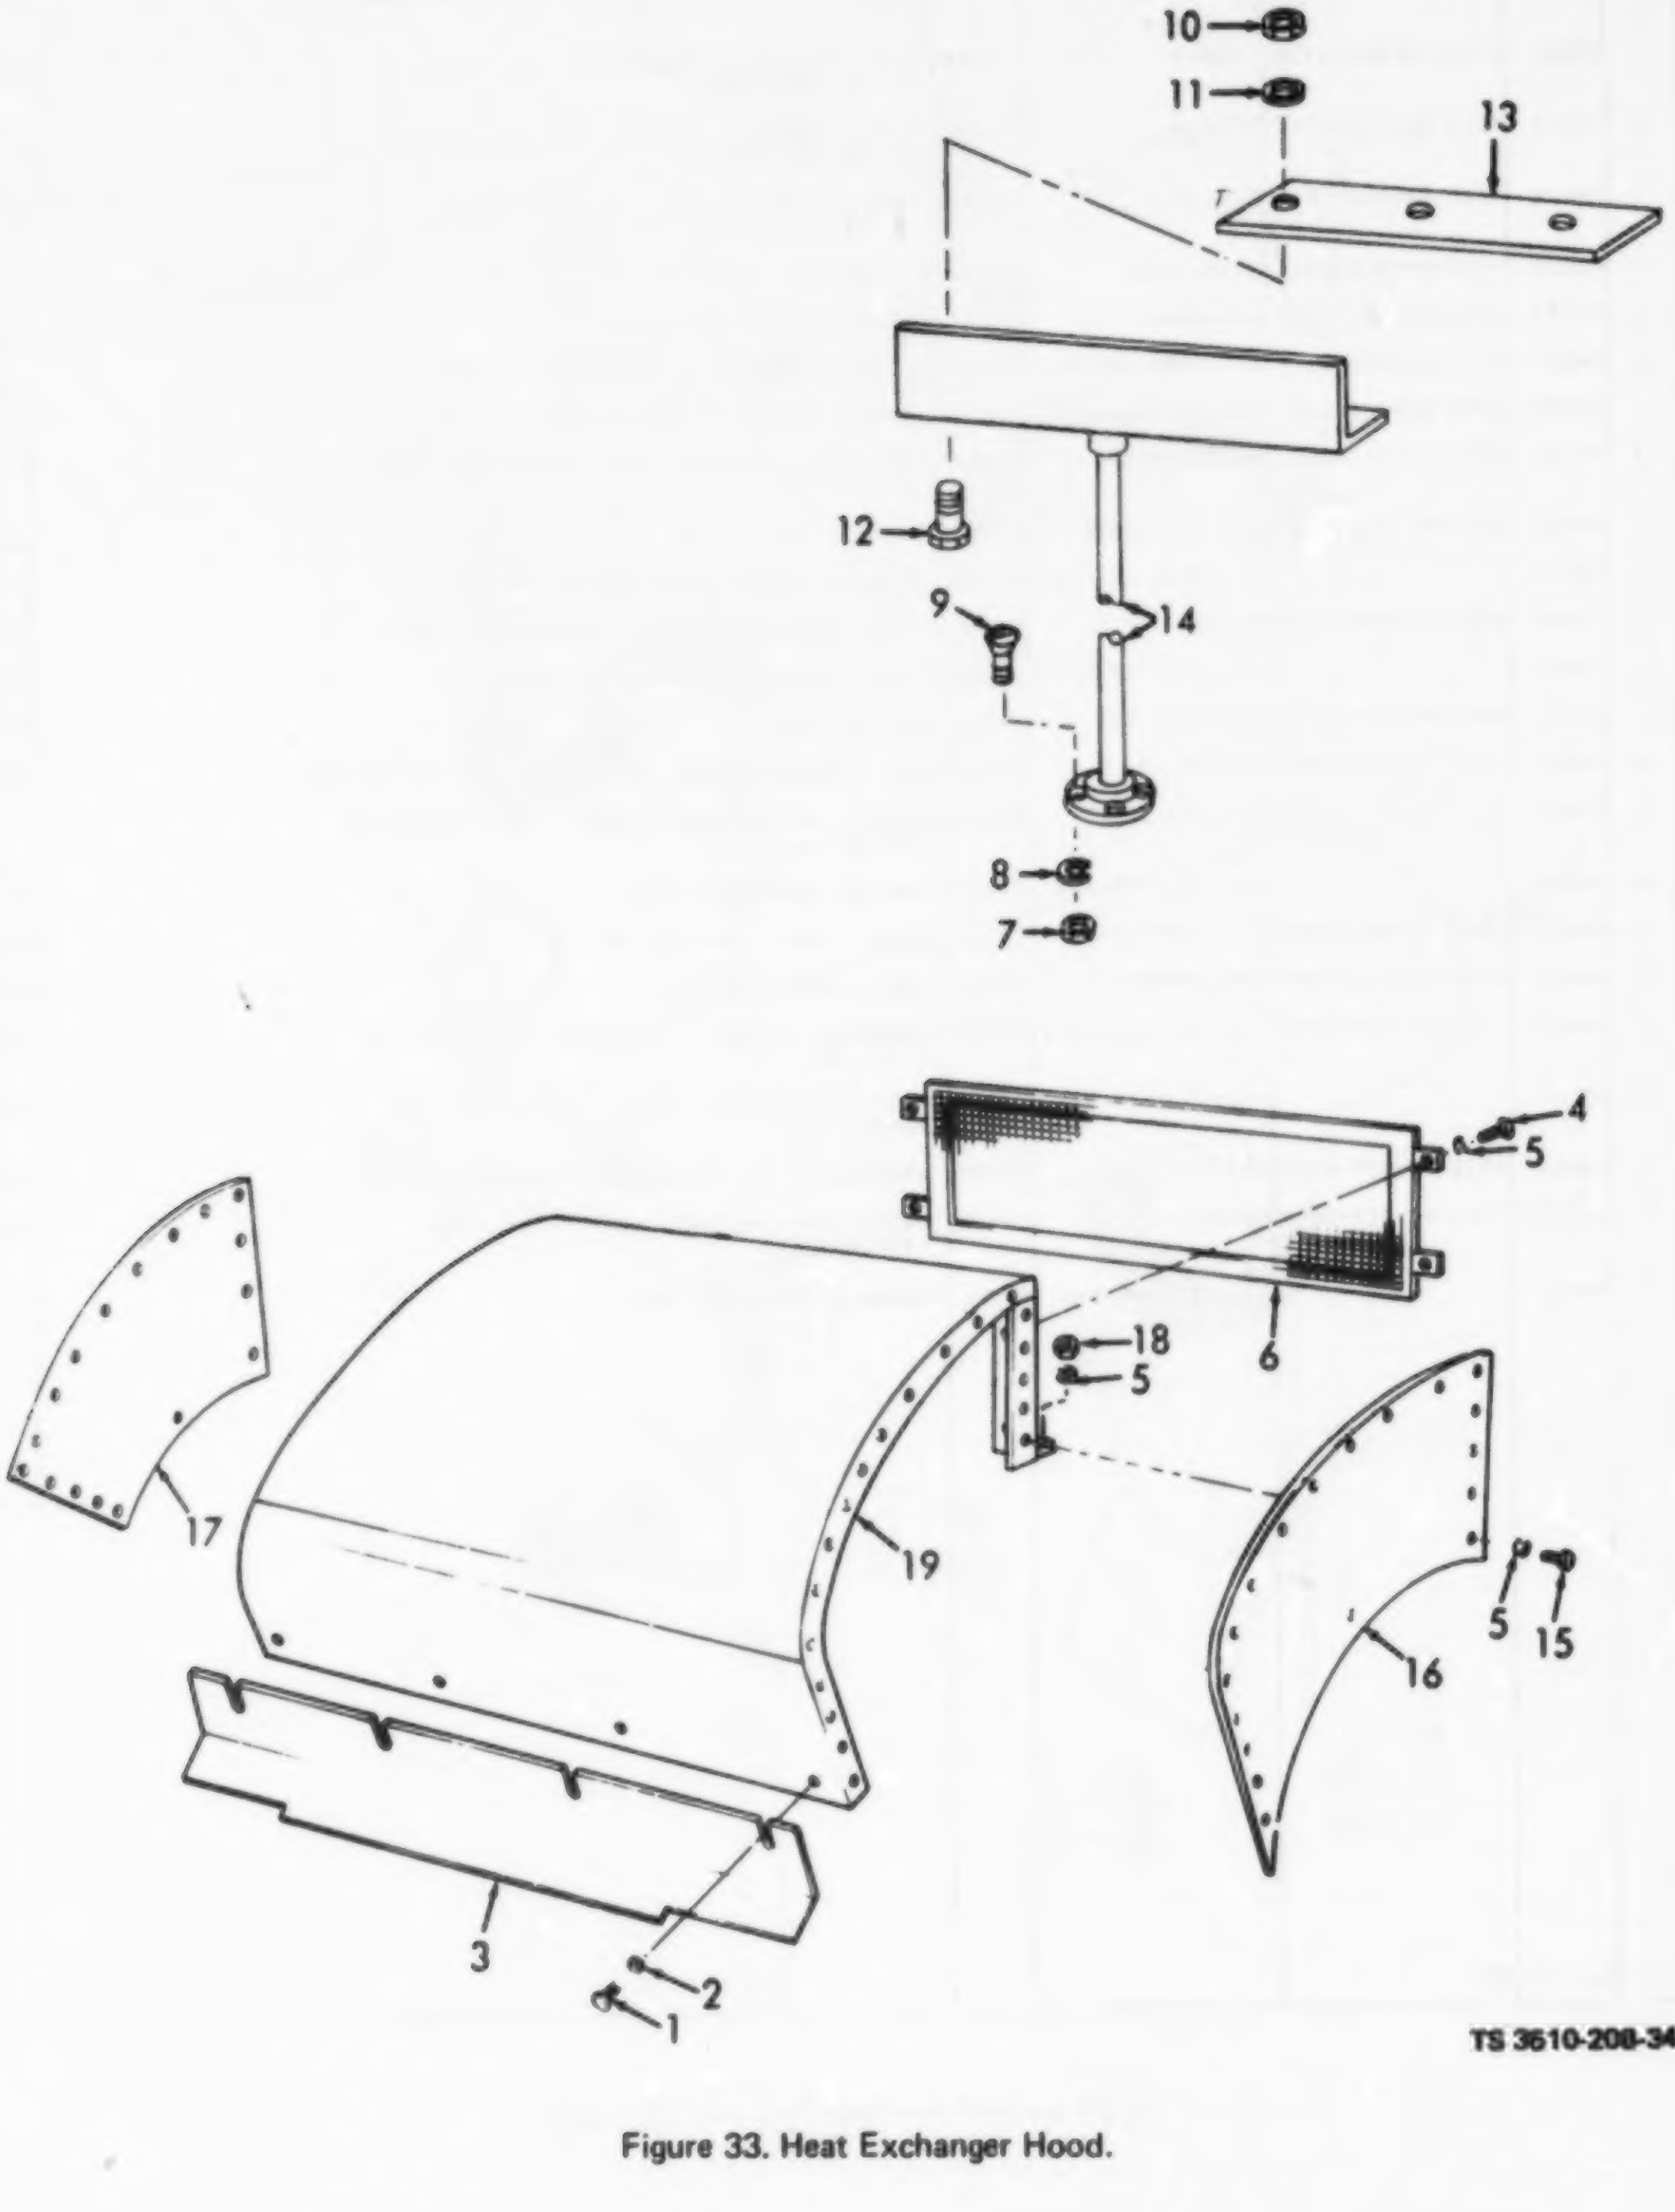
10
11
13
12
9
14
8
7
4
5
18
5
6
17
19
5
15
16
3
2
1

TS 3610-208-34P/33

Figure 33. Heat Exchanger Hood.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 22 - HEAT EXCHANGER HOOD		
33	1	PAOZZ	5305-00-016-9496	MS55305-10	08288	SCREW, SHEET METAL: PLATE MTG	EA	4
33	2	PAOZZ	5310-00-834-7606	MS35340-48	96906	WASHER, LOCK: PLATE MTG	EA	4
33	3	PAOZZ	3510-00-460-6092	6-1-2339-20-352A	72869	PLATE, COVER	EA	1
33	4	PAOZZ	5305-00-614-0274	MS35265-63	96906	SCREW, MACHINE: SCREEN MTG	EA	4
33	5	PAFZZ	5310-00-042-6758	MS35338-82	96906	WASHER, LOCK: SCREEN, COVER, AND HOOD MTG	EA	45
33	6	PAOZZ	3510-00-359-9373	563902007	45035	SCREEN: HOOD VENTILATION	EA	1
33	7	PAOZZ	5310-00-088-1251	MS51922-1	96906	NUT, SELF-LOCKING, SUPPORT STRUT MTG	EA	4
33	8	PAOZZ	5310-00-550-1130	MS35333-40	96906	WASHER, LOCK: INTERNAL TOOTH, SUPPORT STRUT MTG	EA	4
33	9	PAOZZ	5305-00-719-5007	MS51959-83	96906	SCREW, FLAT HEAD: SUPPORT STRUT MTG	EA	4
33	10	PAOZZ	5310-00-087-4652	MS51922-17	96906	NUT, SELF-LOCKING: SUPPORT STRUT MTG	EA	3
33	11	PAOZZ	5310-00-616-7998	MS35334-21	96906	WASHER, LOCK: INTERNAL TOOTH, SUPPORT STRUT MTG	EA	3
33	12	PAOZZ	5305-00-782-9489	MS90728-66	96906	SCREW, MACHINE, HEXAGON HEAD, SELF-LOCKING: SUPPORT STRUT MTG	EA	3
33	13	XBOZZ		6-1-1910-20-57A	72869	PLATE, BACK-UP: HEAT EXCHANGER SUPPORT STRUT	EA	1
33	14	XBOZZ		6-1-1910-20-56A	72869	STRUT: HEAT EXCHANGER SUPPORT	EA	1
33	15	PAOZZ	5305-00-068-0500	MS90725-3	96906	SCREW, CAP, HEXAGON HEAD: COVER MTG	EA	37
33	16	PAOZZ	3510-00-152-8237	6-1-2361-20-295A	72869	COVER, REAR	EA	1
33	17	PAOZZ	3510-00-026-0410	6-1-2361-20-293A	72869	COVER, FRONT	EA	1
33	18	PAFZZ	5310-00-761-6882	MS51967-2	96906	NUT, PLAIN, HEXAGON: HOOD MTG	EA	4
33	19	PAFZZ	3510-00-460-6083	6-1-2339-20-287A	72869	HOOD ASSEMBLY	EA	1

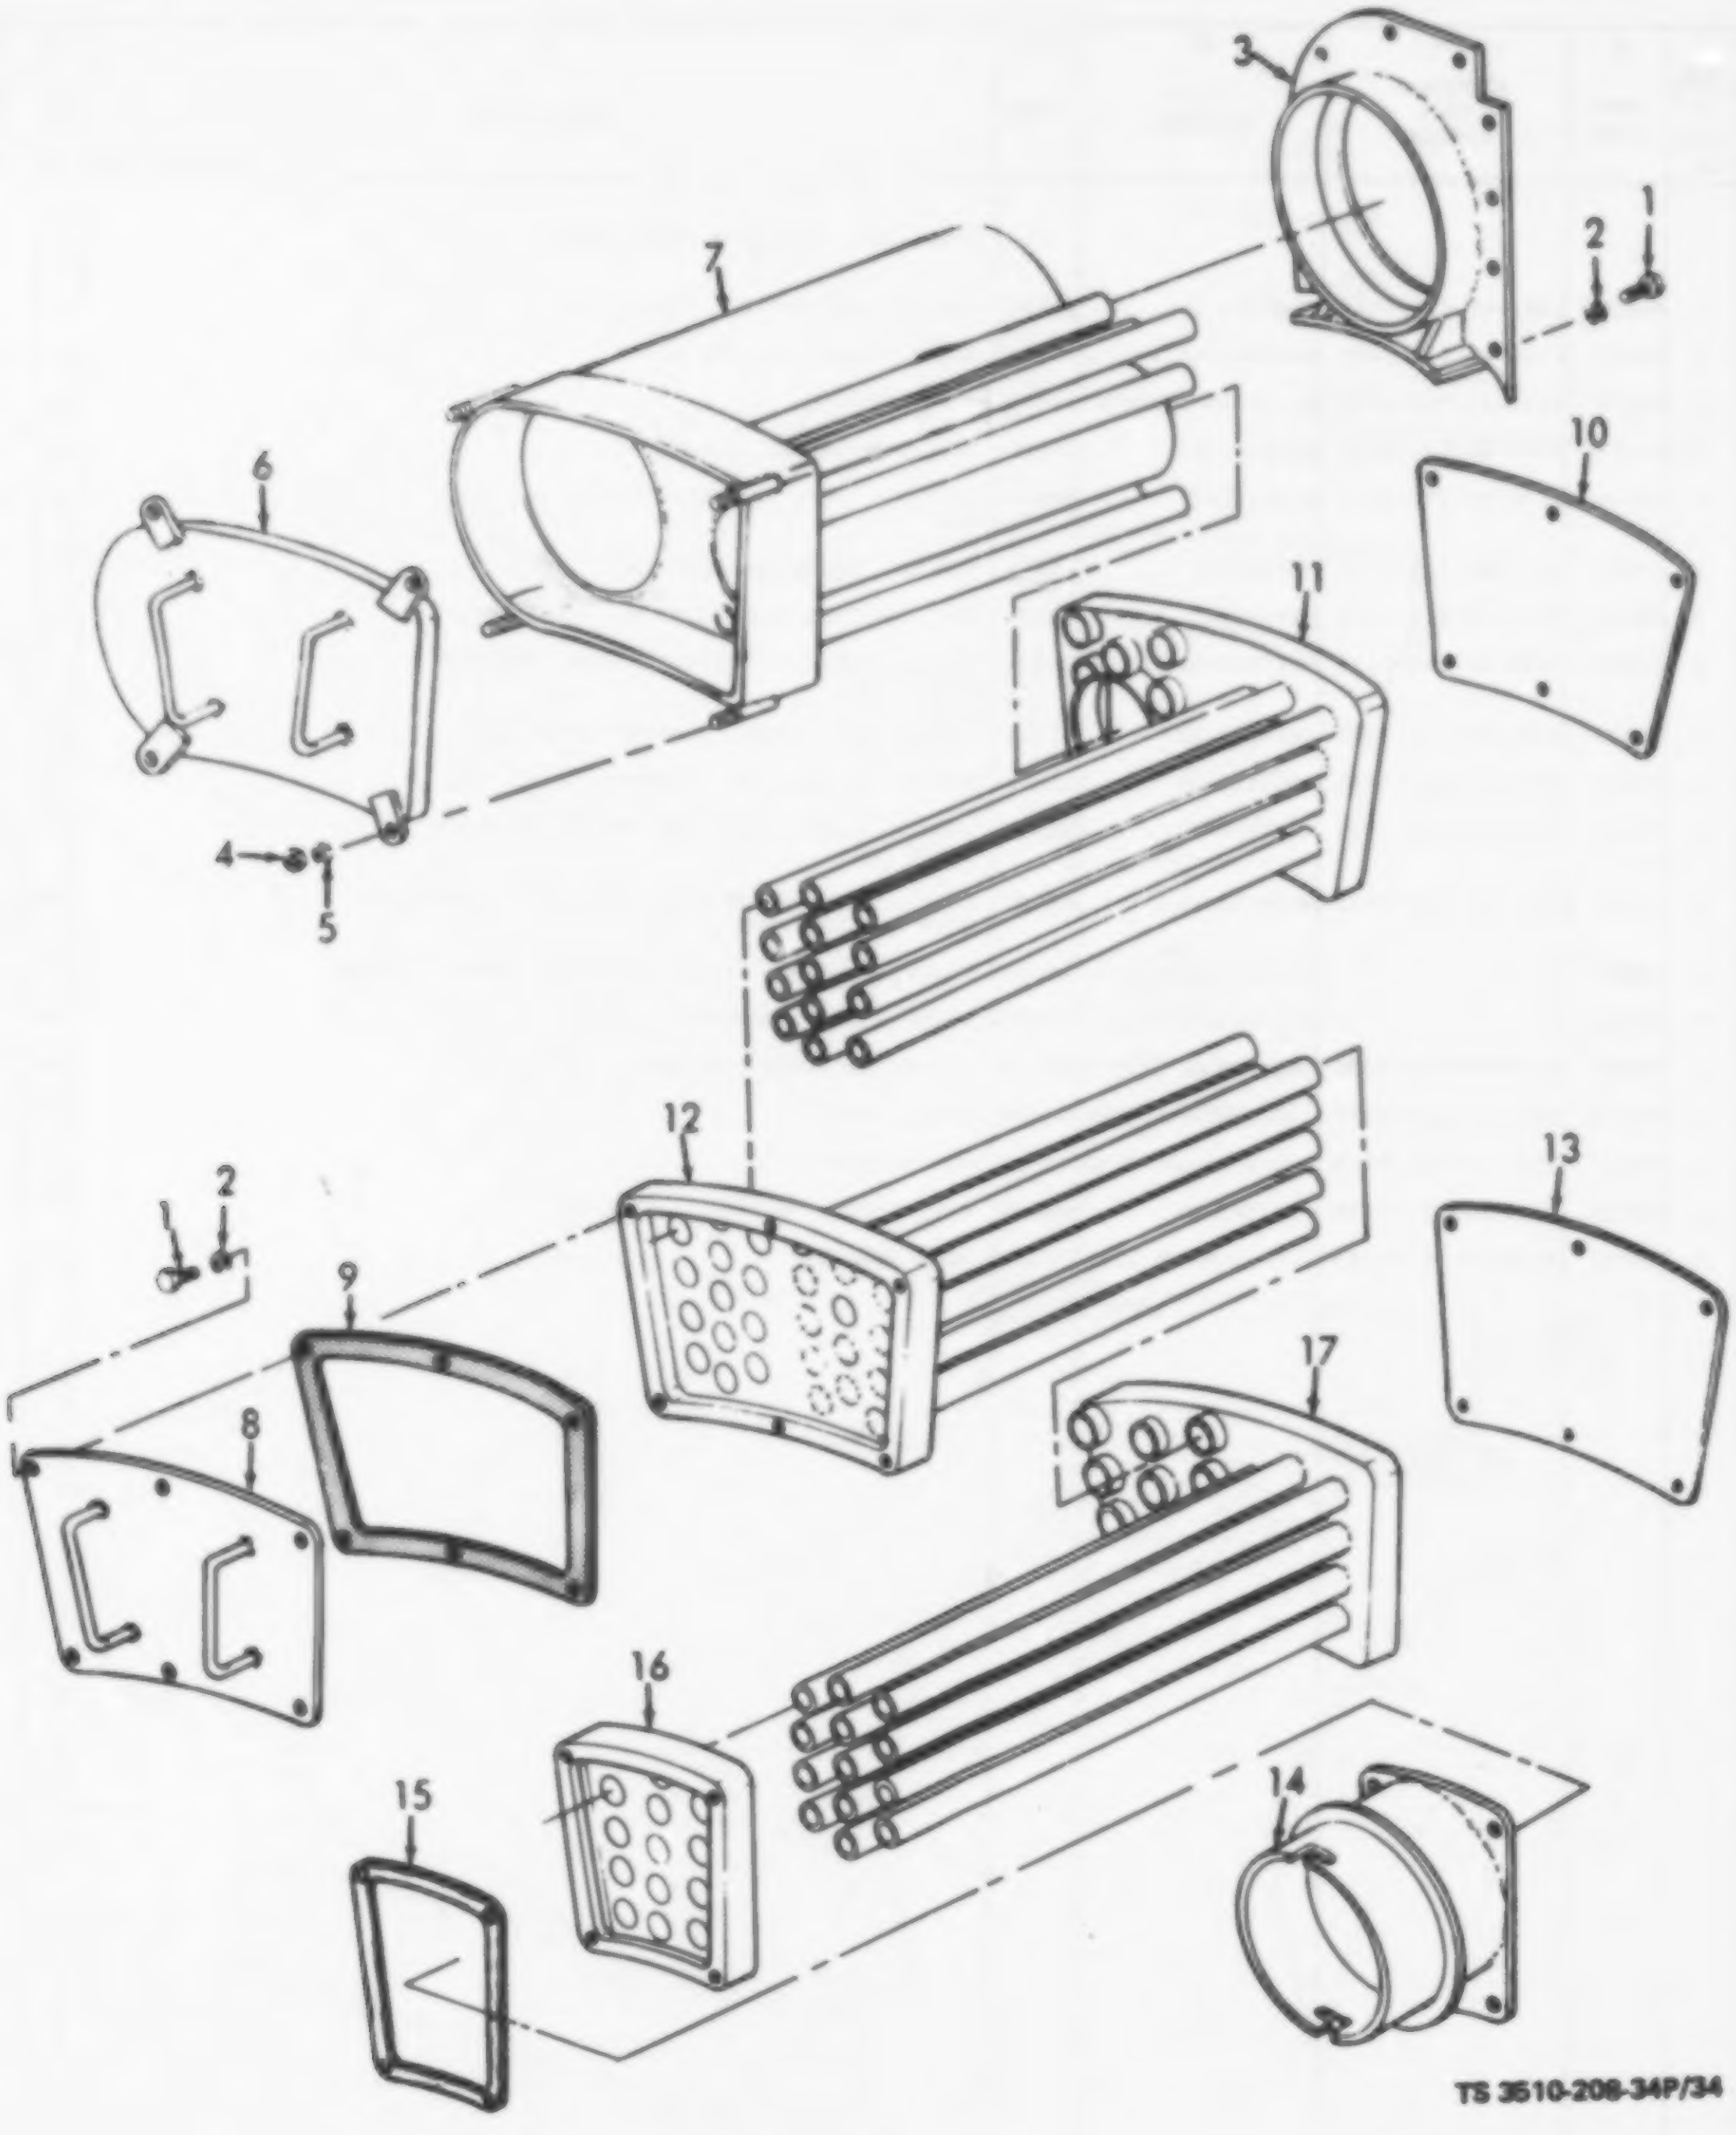
3
1
2
7
6
10
11
4
5
12
1
2
13
9
17
8
16
15
14
TS 3510-208-34P/34

Figure 34. Tumbler Air Heater.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 23 - TUMBLER AIR HEATER		
34		PAFFF	3510-00-253-0587	6-1-2339-20-271A	72869	HEATER, AIR TUMBLER ASSEMBLY	EA	1
34	1	PAFZZ	5305-00-021-3618	6-1-2339-20-359A	72869	SCREW, CAP, HEXAGON HEAD: PLATE AND RETURN AIR BOXES MTG	EA	22
34	2	PAFZZ	5310-00-042-6758	MS35338-82	96906	WASHER, LOCK: COVER MTG	EA	22
34	3	PAFZZ	4530-00-214-3363	6-1-2339-20-301A	72869	PLATE, MOUNTING, BURNER	EA	1
34	4	PAFZZ	5310-00-550-1645	MS35691-510	96906	NUT, HEXAGON: COVER MTG, BOX NO. 1	EA	4
34	5	PAFZZ	5310-00-042-6759	6-1-2339-20-369A	72869	WASHER, LOCK: COVER MTG, BOX NO. 1	EA	4
34	6	PAFZZ	3510-00-214-3354	721109007	45035	COVER: BOX NO. 1	EA	1
34	7	PAFZZ	3510-00-214-3352	706906005	45035	BOX, AIR RETURN NO. 1	EA	1
34	8	PAFZZ	3510-00-359-9344	6-1-2352-20-335A	72869	COVER: BOX NO. 3	EA	1
34	9	MFFFF		6-1-2346-20-345A	72869	GASKET: RETURN AIRBOX 1,2,3 AND 4 MANUFACTURE FROM:	EA	4
34		PAFZZ	5330-00-301-1081	25014-15-19	92878	GASKET, 24 IN. REQUIRED FOR EACH GASKET	FT	V
34	10	PAFZZ	3510-00-359-9343	621109002	45035	COVER: BOX NO. 2	EA	1
34	11	PAFZZ	3510-00-214-3353	706906006	45035	BOX, AIR RETURN NO. 2	EA	1
34	12	PAFZZ	3510-00-359-9338	706906003	45035	BOX, AIR RETURN NO. 3	EA	1
34	13	PAFZZ	3510-00-359-9345	621109004	45035	COVER: BOX NO. 4	EA	1
34	14	PAFZZ	3510-00-359-9346	621109006	45035	COVER: BOX NO. 5	EA	1
34	15	MFFFF		6-1-2343-20-351A	72869	GASKET: AIR RETURN BOX NO. 5 MANUFACTURE FROM:	EA	1
34		PAFZZ	5330-00-301-1081	25014-15-19	92878	GASKET, ASBESTOS, 18 IN. REQUIRED	FT	V
34	16	PAFZZ	3510-00-359-9335	607007104	45035	BOX, AIR RETURN NO. 5	EA	1
34	17	PAFZZ	3510-00-359-9339	706906004	45035	BOX, AIR RETURN NO. 4	EA	1

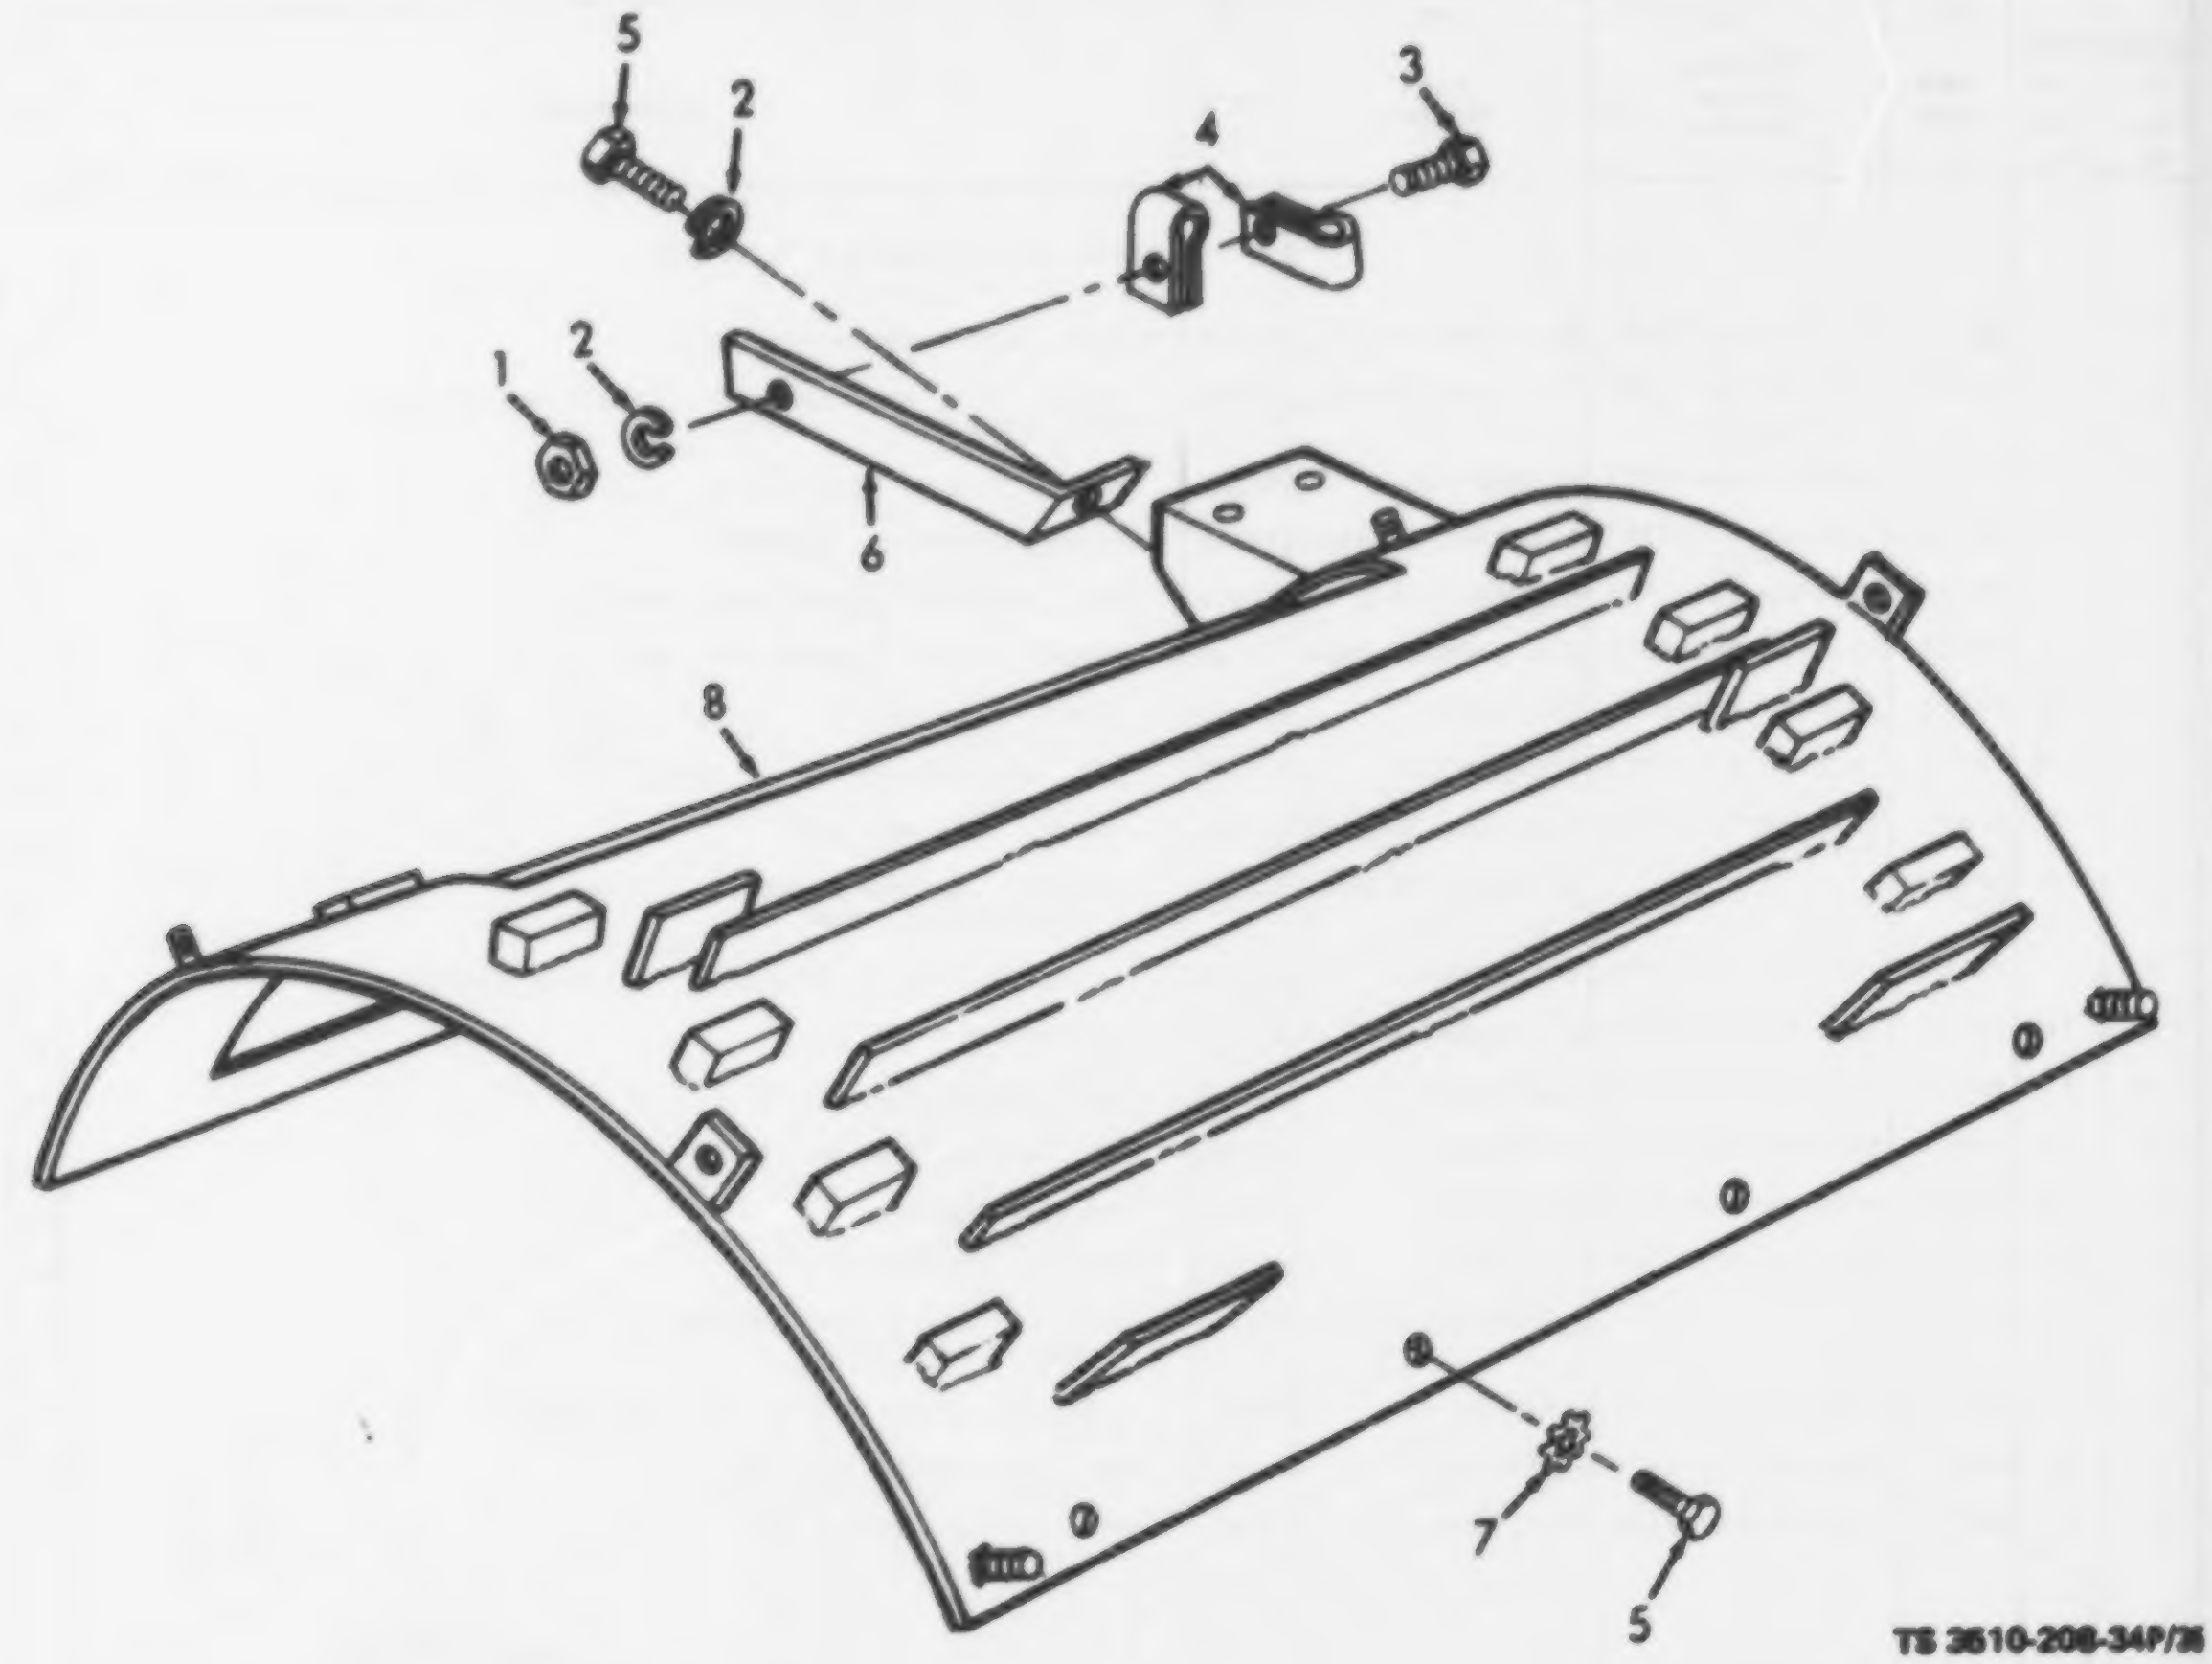

TS 3510-208-34P/35

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.							
						GROUP 24 - AIR HEATER MOUNTING PLATE AND FUEL LINE SUPPORT		
35	1	PAOZZ	5310-00-851-2674	MS35691-1	96906	NUT, PLAIN, HEXAGON: CLAMP MTG, 1/4-20 THD SIZE	EA	1
35	2	PAOZZ	5310-00-582-5965	MS35338-44	96906	WASHER, LOCK: CLAMP AND FUEL LINE SUPPORT MTG	EA	11
35	3	PAOZZ	5305-00-225-3840	MS35291-7	96906	SCREW, CAP, HEXAGON HEAD: CLAMP MTG, 1/4-20 THD SIZE, 7/8 IN. LG	EA	1
35	4	PAOZZ	5340-00-200-6139	QQ1666	81349	CLAMP: TUMBLER FUEL LINE MTG, 1/2 IN.	EA	2
35	5	PAOZZ	5305-00-068-0501	MS90725-5	96906	SCREW, CAP, HEXAGON HEAD: PLATE AND FUEL LINE SUPPORT MTG	EA	14
35	6	XBOZZ		6-1-900-83A	72869	SUPPORT, FUEL LINE: TUMBLER BURNER FUEL LINE	EA	1
35	7	PAOZZ	5310-00-988-7516	MS45904-87	96906	WASHER, LOCK, INTERNAL, EXTERNAL TOOTH: PLATE MTG, 1/2 IN.	EA	4
35	8	XBFZZ		6-1-2339-20-272A	72869	PLATE, MOUNTING	EA	1

Figure 35. Air Heater Mounting Plate and Fuel Line Support.

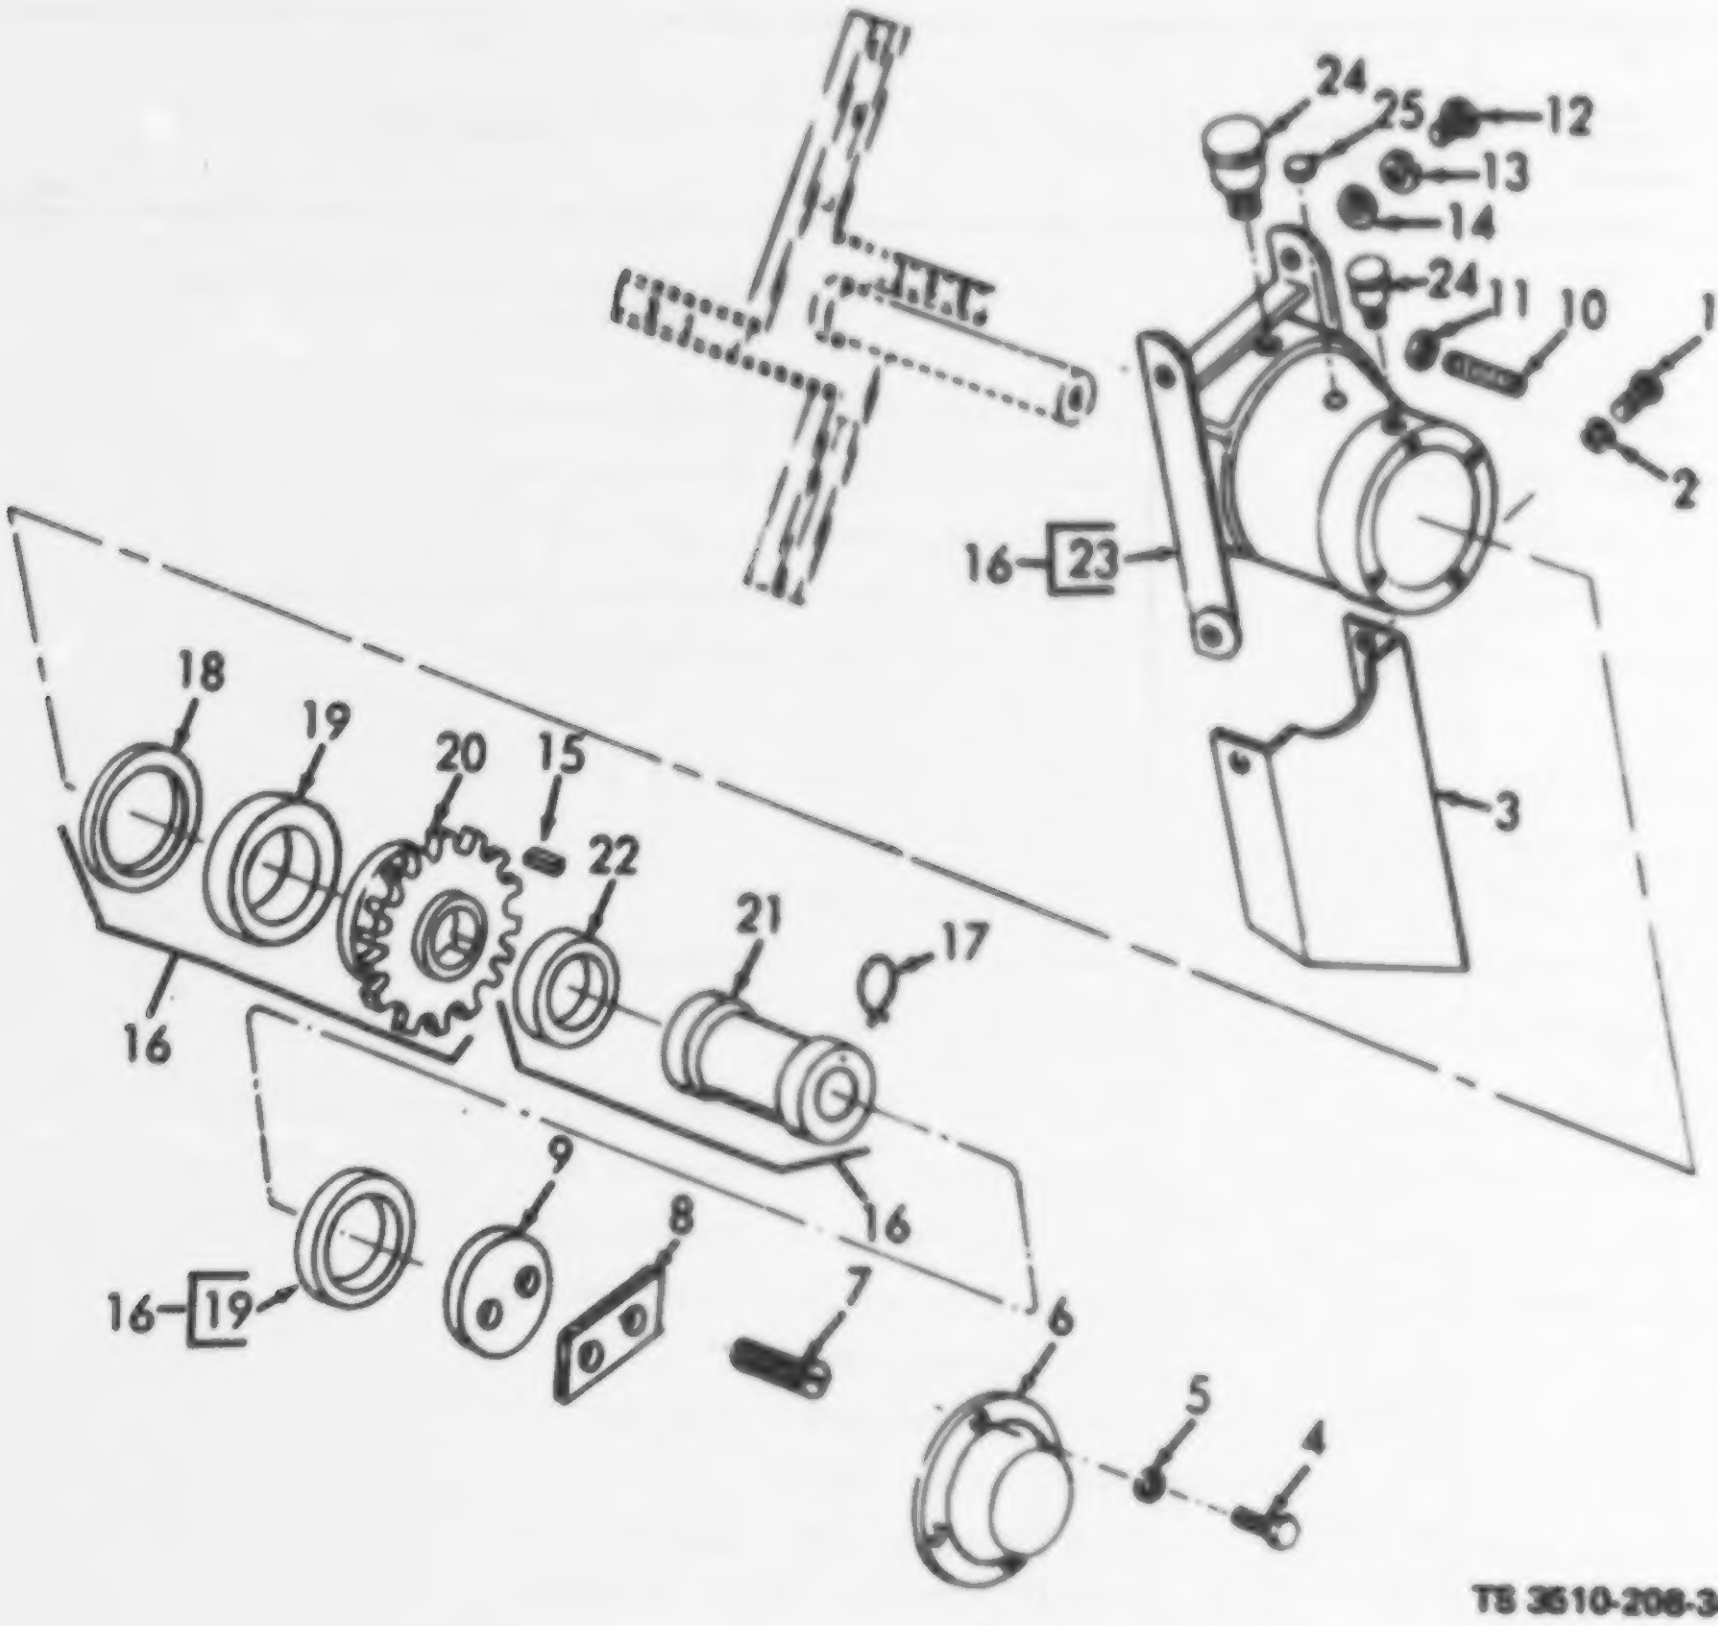
24
25
12
13
14
24
11
10
1
2
16
23
3
18
19
20
15
22
21
17
16
16
9
8
16
19
7
6
5
4

TS 3510-208-34P/36

Figure 36. Trunnion.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 25 - TUMBLER CYLINDER, BASE, CONTROL PANEL, AND RELATED PARTS		
36	1	PAFZZ	5305-00-614-0274	MS25265-63	96906	SCREW, MACHINE: CHAIN GUARD MTG	EA	3
36	2	PAFZZ	5310-00-834-7606	MS35340-48	96906	WASHER, LOCK: CHAIN GUARD MTG	EA	3
36	3	PAFZZ	3510-00-359-9356	ML73	29679	GUARD, CHAIN	EA	1
36	4	PAFZZ	5305-00-068-0502	MS90725-6	96906	SCREW, CAP, HEXAGON HEAD: BEARING CAP MTG	EA	3
36	5	PAFZZ	5310-00-889-2528	MS45904-68	96906	WASHER, LOCK: BEARING CAP MTG	EA	3
36	6	XBFZZ		ML55	29679	CAP, BEARING	EA	1
36	7	PAFZZ	5306-00-225-9081	MS35291-36	96906	BOLT, MACHINE: BEARING RETAINER	EA	2
36	8	PAFZZ	3510-00-460-6108	6-1-2315-20-207A	72869	PLATE, LOCK	EA	1
36	9	PAFZZ	3110-00-933-9896	6-1-2315-20-208A	72869	RETAINER, BEARING	EA	1
36	10	PAFZZ	5305-00-058-0770	MS51959-41	96906	SETSCREW: TRUNNION ADJUSTING	EA	2
36	11	PAFZZ	5310-00-732-0558	MS51967-8	96906	NUT, PLAIN, HEXAGON: TRUNNION ADJUSTING SCREW	EA	2
36	12	PAFZZ	5305-00-782-9495	MS90725-111	96906	SCREW, CAP, HEXAGON HEAD: TRUNNION MTG	EA	4
36	13	PAFZZ	5310-00-988-7516	MS45904-87	96906	WASHER, LOCK: TRUNNION MTG	EA	4
36	14	PAFZZ	5310-00-809-5998	MS27183-18	96906	WASHER, FLAT: TRUNNION MTG	EA	4
36	15	PAOZZ	5315-00-358-9291	6-1-2312-20-199A	72869	KEY: 5/16 SQ X 1-3/8 SPROCKET	EA	1
36	16	PAFZZ	3510-00-152-8274	ML42	29679	TRUNNION ASSEMBLY	EA	1
36	17	PAFZZ	5340-00-933-5910	6-1-2315-20-209A	72869	RING, SNAP: TRUNNION	EA	2
36	18	PAFZZ	3510-00-152-8271	6-1-2315-20-210A	72869	SEAL, GREASE	EA	1
36	19	PAFZZ	3110-00-144-8534	ML47	29679	BEARING, BALL, ANNULAR	EA	2
36	20	PAFZZ	3510-00-467-5516	ML48M	29679	SPROCKET, WELD: TRUNNION	EA	1
36	21	PAFZZ	3510-00-152-8276	6-1-1638-40-172A	60883	SPACER: TRUNNION	EA	1
36	22	PAFZZ	3510-00-153-6647	ML50	29679	COLLAR: TRUNNION	EA	1
36	23	XBFFF		6-1-2315-20-202A	72869	HOUSING	EA	1
36	24	PAOZZ	4730-00-640-5665	60	76022	CUP, GREASE	EA	2
36	25	PAOZZ	4730-00-534-6934	112	24981	CUP, OIL	EA	1

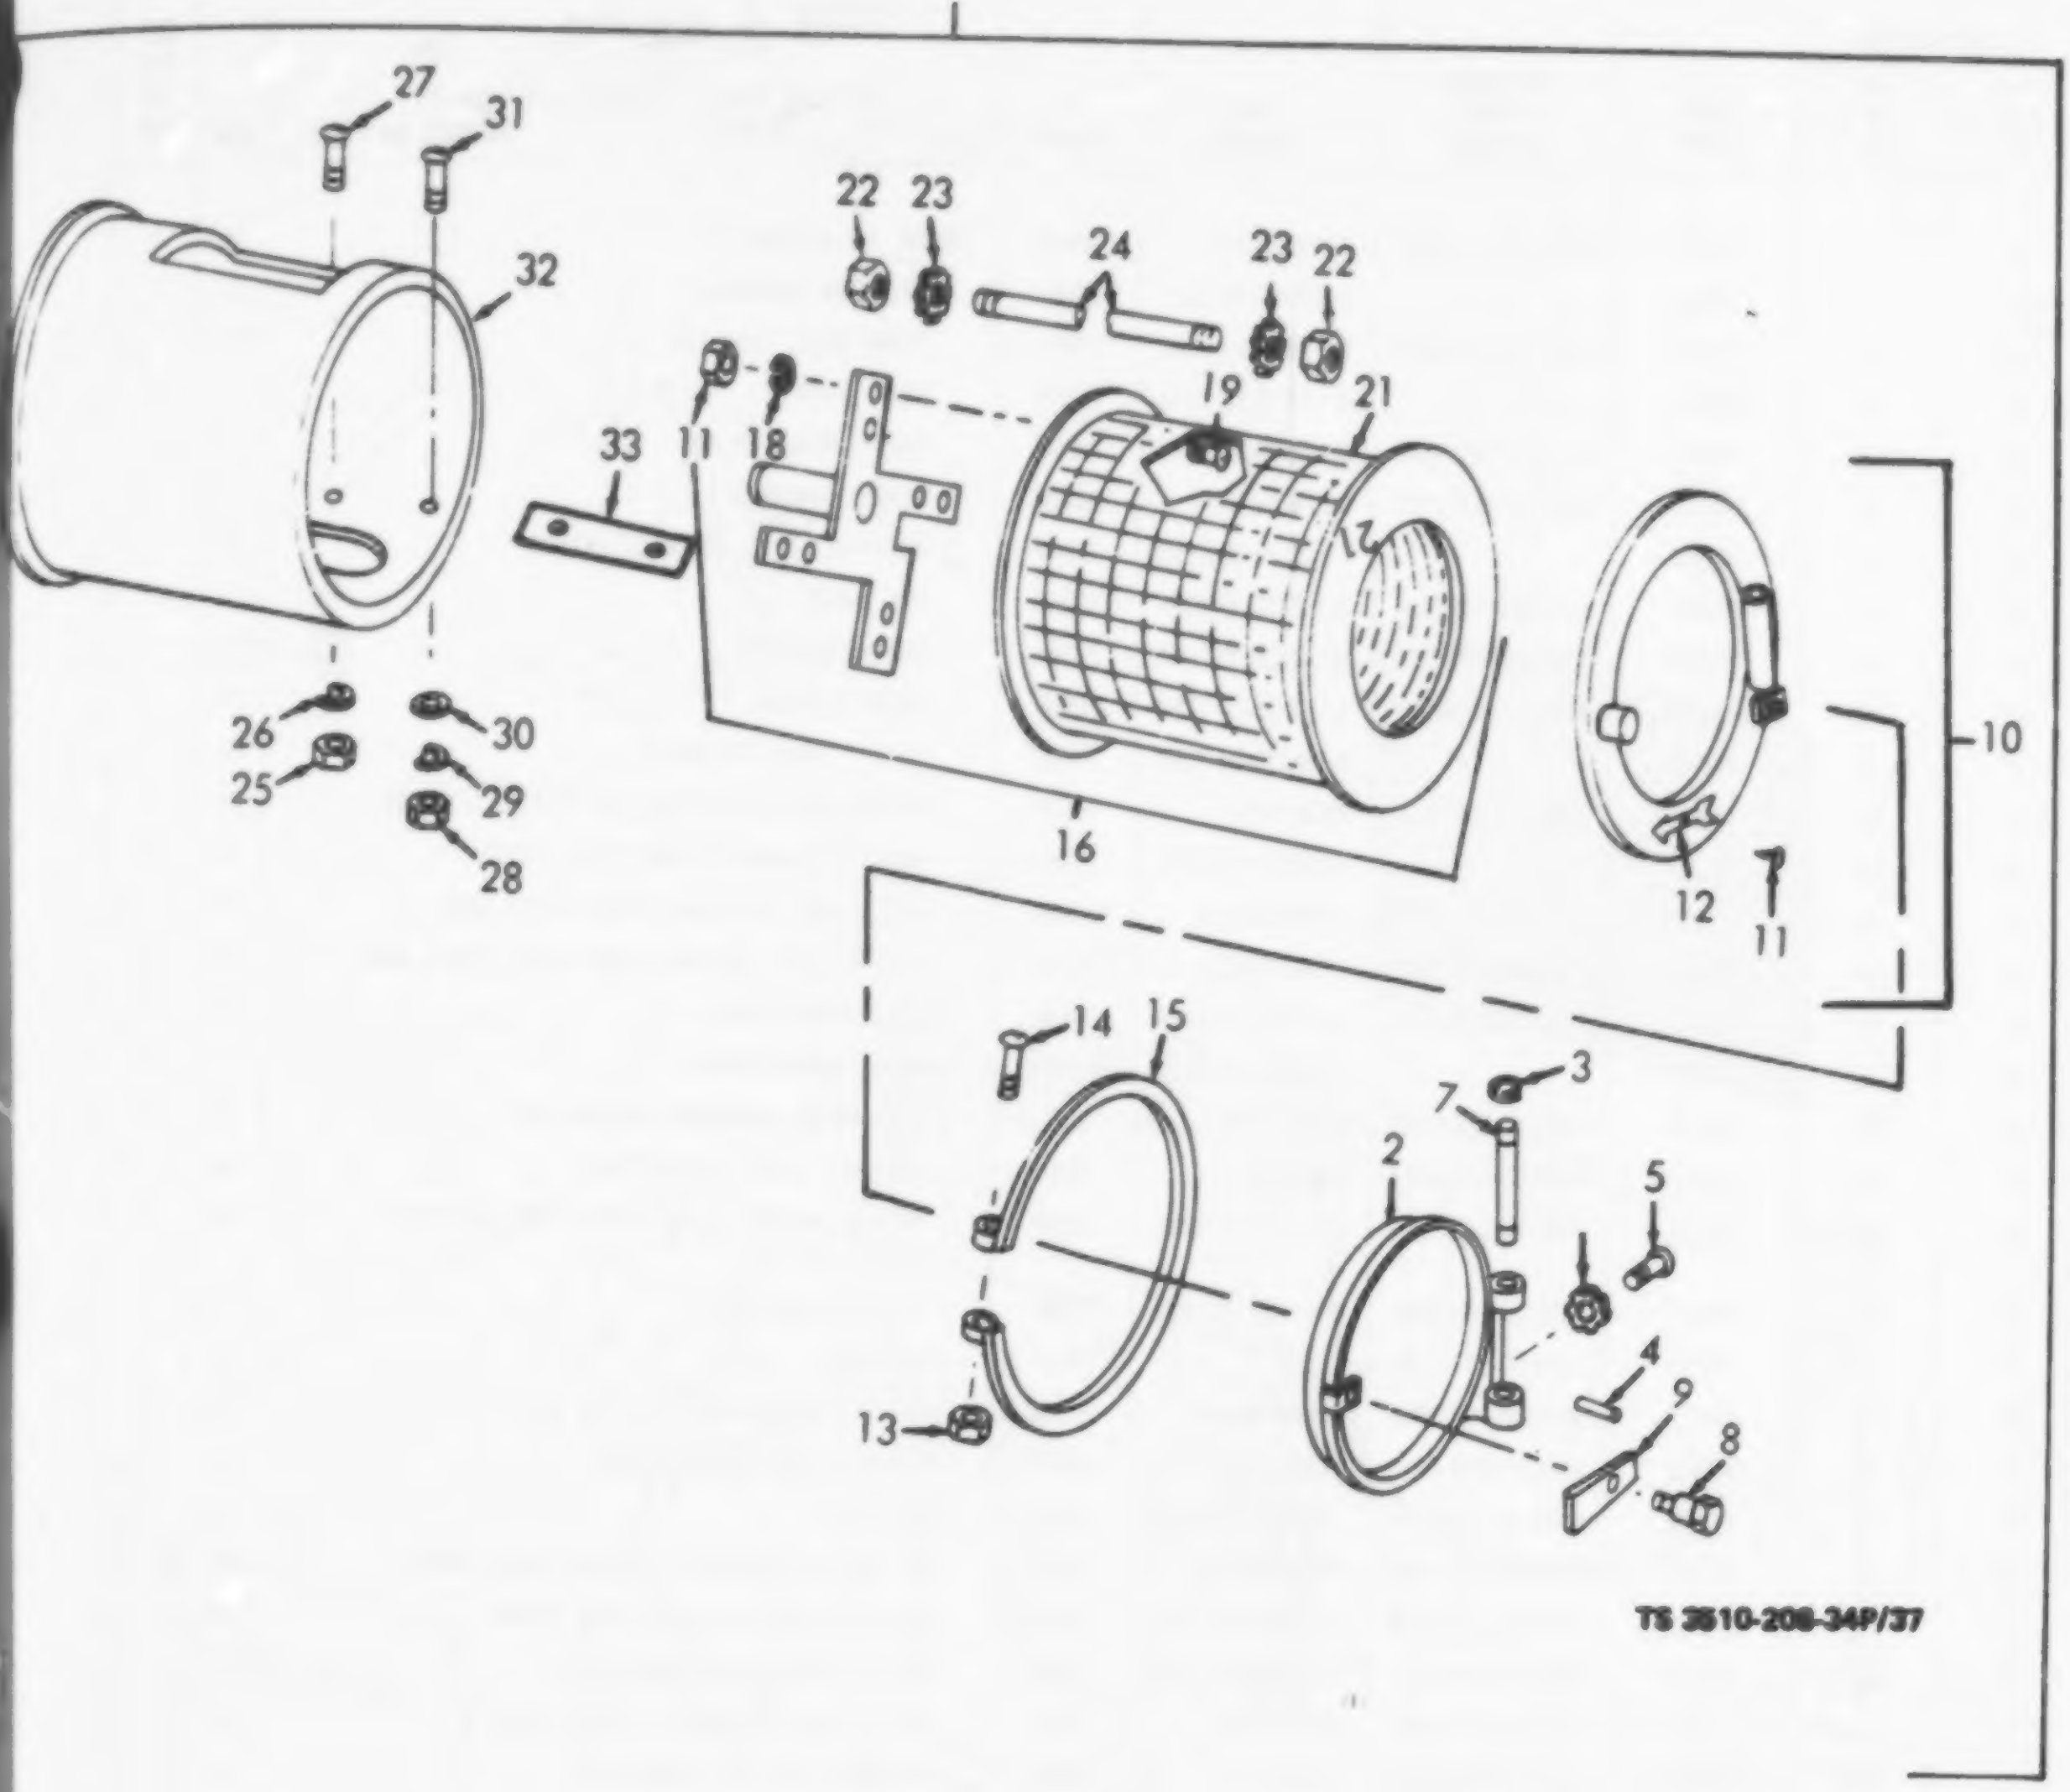
27
31
32
22
23
24
23
22
19
21
33
11
18
16
10
12
11
26
25
30
29
28
14
15
3
7
2
5
4
9
8
13
TS 3510-208-34P/37

Figure 37. Tumbler Cylinder, Tumbler Barrel, Door Assembly and Related Parts.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	QTY INC IN UNIT
37		PAFFF	3510-00-253-0593	6-1-1900-20A	60883	DRYER, AIR ASSEMBLY	EA	1
37	1	XBFFF		6-2-2329-20-109	72869	CYLINDER ASSEMBLY	EA	1
37	2	XDOOO	3510-00-460-6074	6-1-2329-20-123A	72869	DOOR ASSY, TUMBLER	EA	1
37	3	XBOZZ		6-1-2329-20-137A	72869	RING, SNAP	EA	1
37	4	PAOZZ	5315-00-221-6006	6-1-2329-20-138A	72869	PIN, TAPERED, PLAIN	EA	1
37	5	PAOZZ	5305-00-988-1720	MS35206-276	96906	SCREW, MACHINE	EA	1
37	6	XBOZZ		6-1-2329-20-513A	72869	WASHER, LOCK: EXTERNAL TOOTH	EA	1
37	7	PAOZZ	5315-00-168-2942	6-1-2329-20-136A	72869	PIN, HINGE	EA	1
37	8	PAOZZ	5305-00-933-7226	6-1-2329-20-139A	72869	SCREW, HANDLE	EA	1
37	9	PAOZZ	5340-00-195-5651	6-1-2329-20-128A	72869	HANDLE, DOOR	EA	1
37	10	XBFZZ		6-1-2329-20-116A	72869	SHELL, FRONT CYLINDER	EA	1
37	11	PAOZZ	5305-00-175-3230	MS21318-14	96906	SCREW, DRIVE: INSTRUCTION PLATE, TUMBLER	EA	2
37	12	XBOZZ		6-1-2324-20-121A	72869	ARROW: TUMBLER, DIRECTION, FRONT	EA	1
37	13	PAFZZ	5310-00-934-9760	MS35649-204	96906	NUT, PLAIN, HEXAGON: RING, SHELL MTG	EA	1
37	14	PAFZZ	5305-00-071-2229	MS90725-22	96906	SCREW, CAP, HEXAGON HEAD: RING, SHELL MTG	EA	1
37	15	PAFZZ	3510-00-460-6076	6-1-2329-20-115A	72869	RING, FRONT SHELL	EA	1
37	16	XBFFF		6-1-2332-20-222A	72869	BARREL SUBASSEMBLY	EA	1
37	17	PAFZZ	5310-00-732-0558	MS51967-8	96906	NUT, PLAIN, HEXAGON: SPIDER MTG	EA	4
37	18	PAFZZ	5310-00-637-9541	MS35338-46	96906	WASHER, LOCK: SPIDER MTG	EA	4
37	19	PAFZZ	5305-00-052-2221	6-1-2332-20-228A	72869	SCREW, ROUND HEAD: SPIDER MTG, 3/8 THD SIZE, 1 IN. LG	EA	4
37	20	PAFZZ	3510-00-253-0584	6-1-2332-20-219A	72869	SPIDER, WELDMENT	EA	1
37	21	PAFFF	3510-00-212-1283	MLM2	29679	CYLINDER	EA	1
37	22	PAFZZ	5310-00-768-0318	MS35690-603	96906	NUT, PLAIN, HEXAGON: TIE ROD MTG	EA	8
37	23	PAFZZ	5310-00-988-7516	MS45904-87	96906	WASHER, LOCK: TIE ROD MTG	EA	8
37	24	PAFZZ	5340-00-406-3226	6-1-2332-20-227A	72869	ROD, TIE	EA	4
37	25	PAFZZ	5310-00-934-9760	MS35649-204	96906	NUT, PLAIN, HEXAGON: CYLINDER MTG SCREW	EA	7
37	26	PAFZZ	5310-00-043-2226	6-1-2304-20-242A	72869	WASHER, LOCK: CYLINDER MTG SCREW	EA	7
37	27	PAFZZ	5305-00-984-6210	6-1-2304-20-236A	72869	SCREW, MACHINE: CYLINDER MTG	EA	7
37	28	PAFZZ	5310-00-761-6882	MS51967-2	96906	NUT, PLAIN, HEXAGON: CYLINDER MTG	EA	8
37	29	PAFZZ	5310-00-042-6758	MS35338-82	96906	WASHER, LOCK: CYLINDER MTG	EA	8
37	30	PAFZZ	5310-00-880-5977	MS15795-811	96906	WASHER, FLAT: CYLINDER MTG	EA	8
37	31	PAFZZ	5305-00-933-9882	6-1-2304-20-237A	72869	SCREW, MACHINE: CYLINDER MTG, TRUSS HEAD, 1/4-20 THD SIZE, 1 IN. LG	EA	8
37	32	PAFZZ	3510-00-460-6081	6-2- 2329-20-110	81337	CYLINDER SHELL ASSEMBLY	EA	1
37	33	XBFZZ		6-1-2310-20-543A	72869	STRIP, REINFORCING: CYLINDER SHELL	EA	2

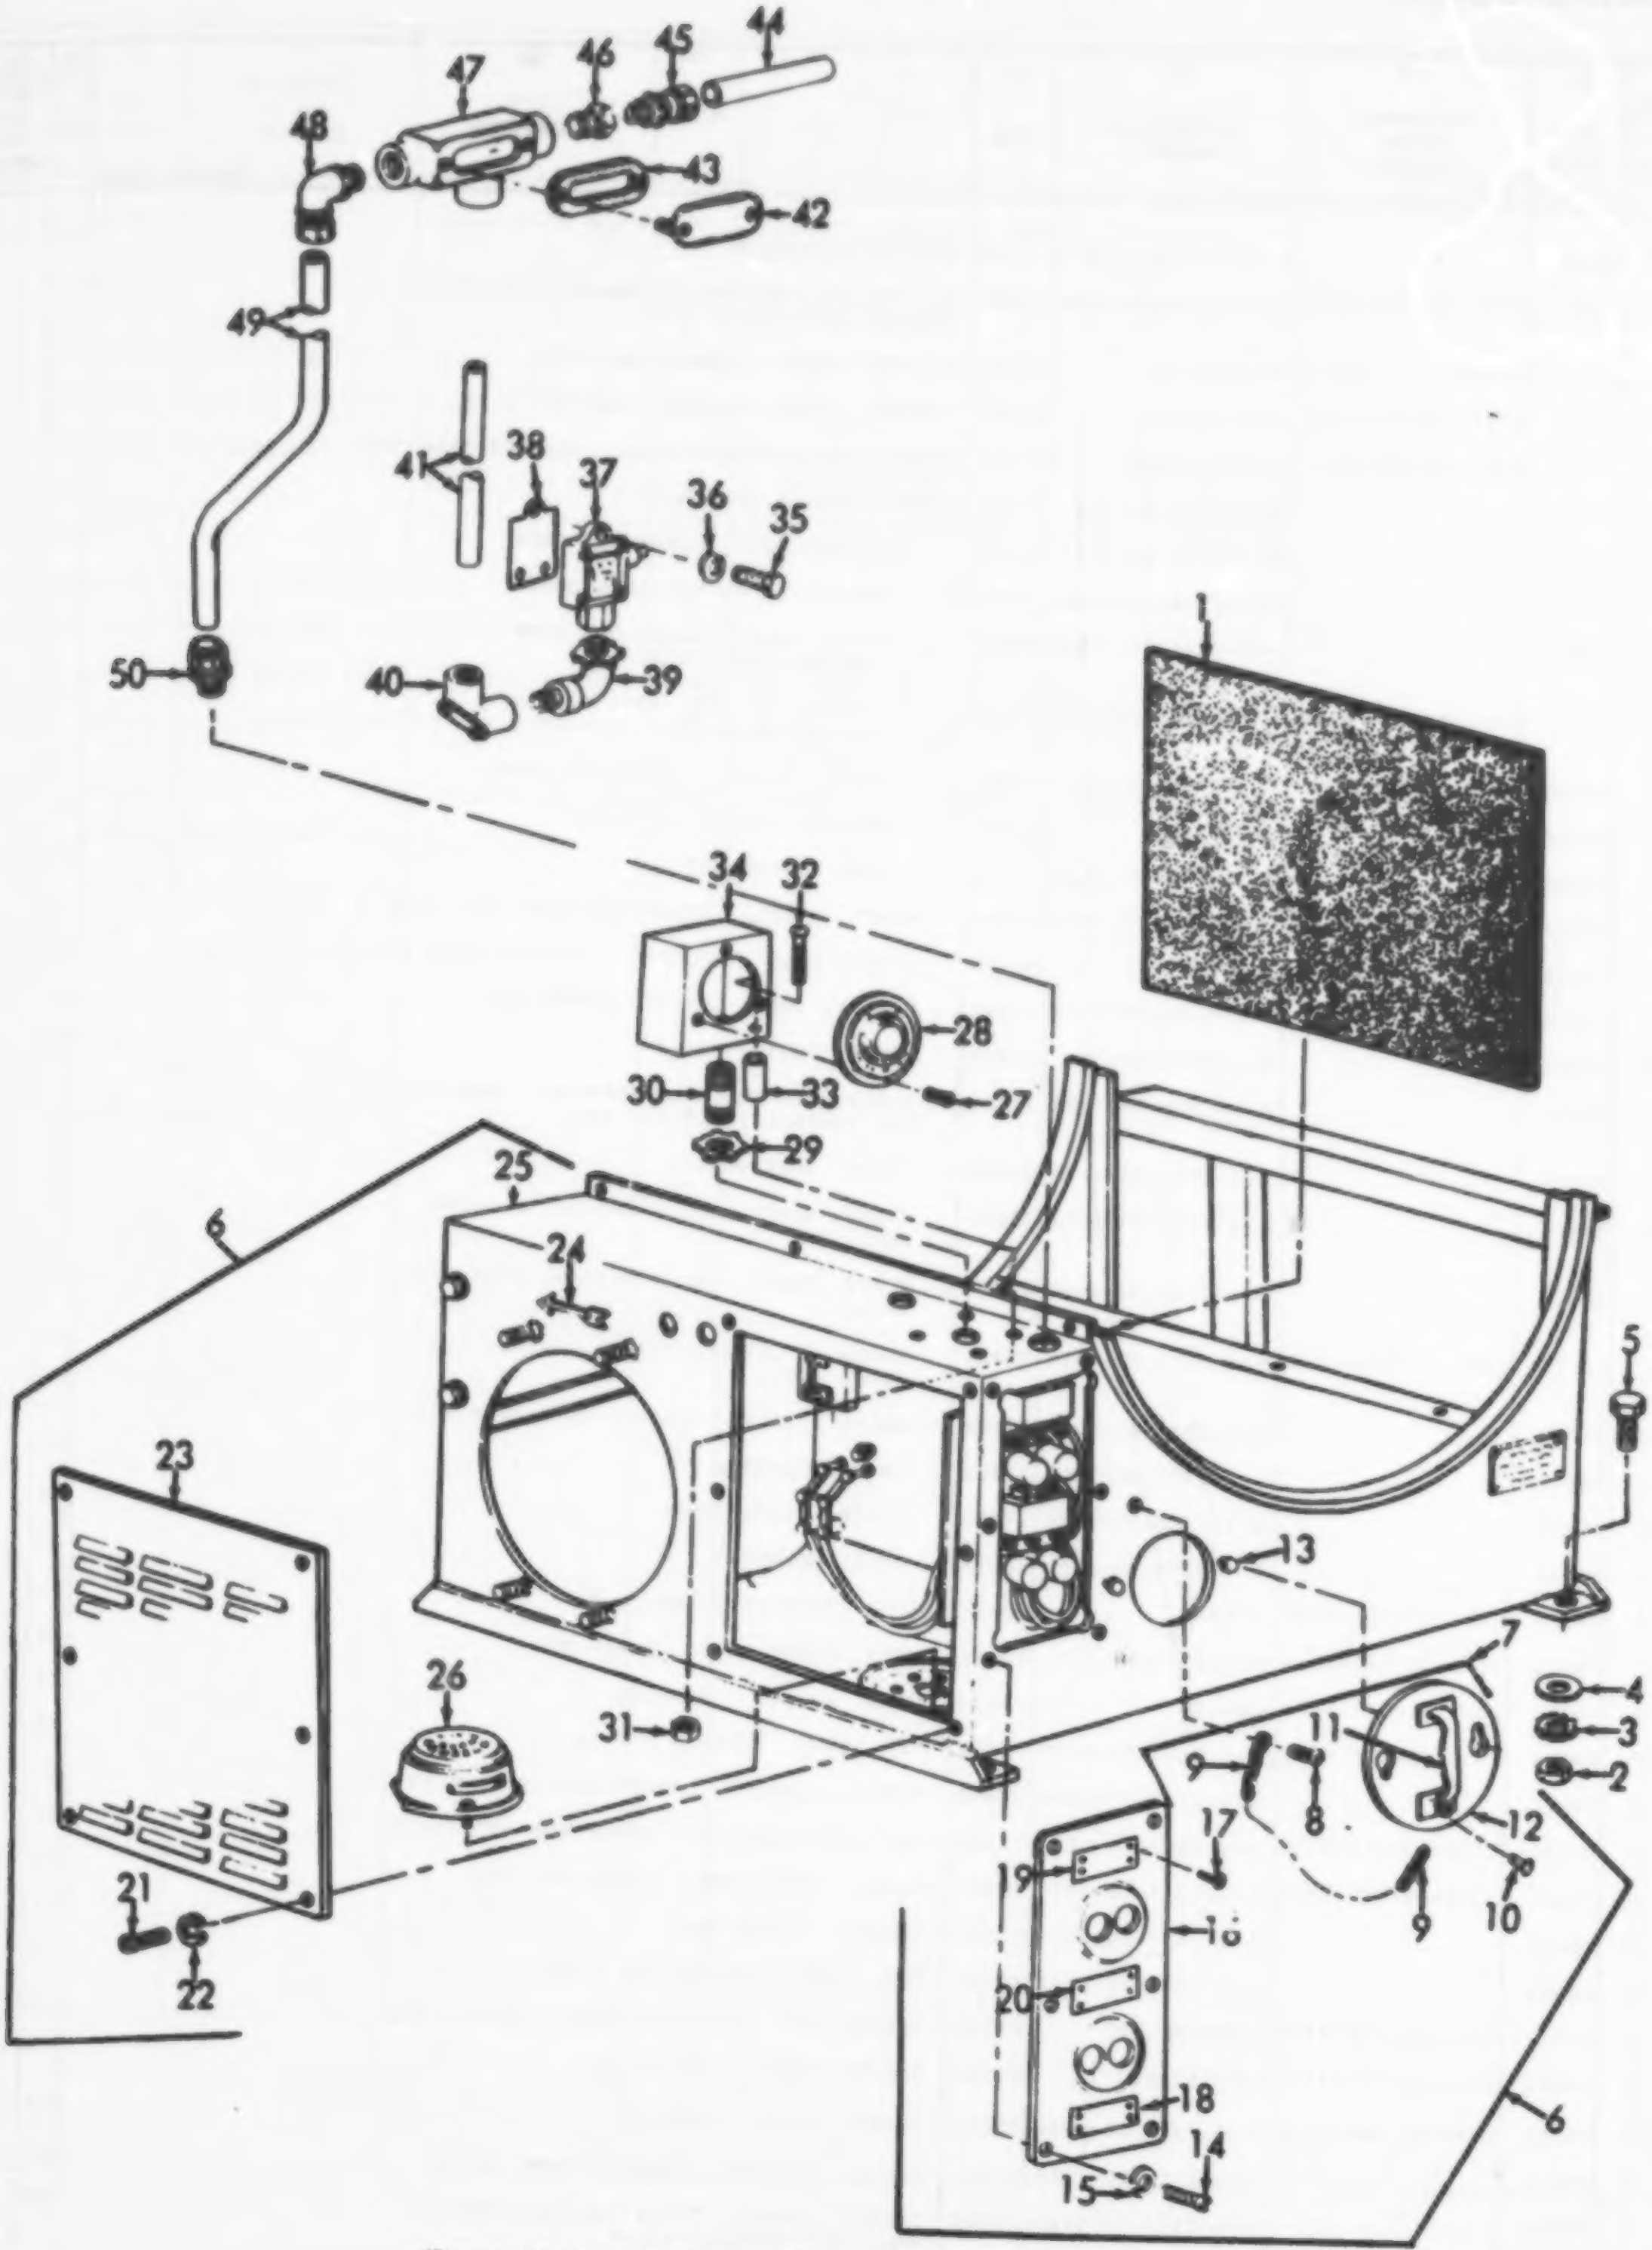
44
45
46
47
48
43
42
49
41
38
37
36
35
50
40
39
1
34
32
28
30
33
27
29
25
6
24
5
23
13
7
4
3
2
26
11
31
9
8
12
17
19
10
9
21
16
22
20
18
6
14
15

Figure 38. Tumbler Base, Control Panel and Related Parts.

TS 3510-208-34P/38

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
38	1	XBFZZ		6-1-2319-20-73A	72869	PLATE, INSULATING	EA	1
38	2	PAFZZ	5310-00-266-0404	6-1-2304-20-523A	72869	NUT, PLAIN, HEXAGON: TUMBLER BASE MTG, 1/2-13, UNC-2B THD SIZE	EA	4
38	3	PAFZZ	5310-00-584-5272	MS35338-48	96906	WASHER, LOCK: TUMBLER BASE MTG	EA	12
38	4	PAFZZ	5310-00-809-5998	MS27183-18	96906	WASHER, FLAT TUMBLER BASE MTG	EA	4
38	5	PAFZZ	5305-00-042-6417	MS35291-113	96906	SCREW, CAP, HEXAGON HEAD: TUMBLER BASE MTG	EA	4
38	6	XBFFF		6-1-2304-20-58A	72869	BASE, TUMBLER ASSEMBLY	EA	1
38	7	XBOOO		6-1-2319-20-262A	72869	COVER ASSEMBLY, CLEAN OUT DOOR	EA	1
38	8	XBOZZ		6-1-2319-20-531A	72869	RIVET: CLEAN OUT DOOR CHAIN	EA	1
38	9	MOOOO		6-1-2319-20-270A	72869	CHAIN, LINK: CLEAN OUT DOOR MANUFACTURE FROM:	EA	1
38		PAOZZ	4010-00-221-0738	6-1-2319-20-271A	72869	CHAIN, WELDED, TWISTED LINK: 10 IN. REQUIRED	FT	V
38	10	PAOZZ	5320-00-933-7945	6-1-2319-20-269A	72869	RIVET, SOLID: CLEAN OUT DOOR	EA	4
38	11	XAOZZ		C58055	60883	HANDLE: CLEAN OUT DOOR	EA	1
38	12	XBOZZ		6-1-2319-20-263A	72869	DOOR, CLEAN OUT	EA	1
38	13	PAOZZ	5320-00-933-7945	6-1-2319-20-269A	72869	RIVET, STEEL: CLEAN OUT DOOR FASTENING	EA	2
38	14	PAOZZ	5305-00-984-6212	MS35266-265	96906	SCREW, FILLISTER HEAD: SWITCH COVER MTG	EA	6
38	15	PAOZZ	5310-00-043-2226	6-1-2328-20-548A	72869	WASHER, LOCK: SWITCH COVER MTG	EA	6
38	16	XBOZZ		6-1-2328-20-76A	72869	COVER, SWITCH BOX	EA	1
38	17	XBOZZ		6-1-1910-20-542A	72869	SCREW, TAPPING, THD FORMING: NAMEPLATES AND INSTRUCTION PLATE MTG	EA	12
38	18	XBOZZ		6-1-1910-20-541A	72869	PLATE, INSTRUCTION	EA	1
38	19	XBOZZ		6-1-1910-20-539A	72869	PLATE, NAME: NO. 1 SWITCH, BLOWERS, IGNITION	EA	1
38	20	XBOZZ		6-1-1910-20-540A	72869	PLATE, NAME: NO. 2 SWITCH, DRUM, FUEL VALVE	EA	1
38	21	PAOZZ	5305-00-984-6212	6-1-2328-20-102A	72869	SCREW, FILLISTER HEAD: CONTROL BOX COVER MTG	EA	6
38	22	XBOZZ		6-1-2328-20-104A	72869	WASHER, LOCK: CONTROL BOX COVER MTG	EA	6
38	23	XBOZZ		6-1-2328-20-75A	72869	COVER, CONTROL BOX	EA	1
38	24	XBOZZ		6-1-2328-20-101A	72869	PLATE, DIRECTIONAL	EA	1
38	25	XAFZZ		6-1-2328-20-59A	72869	BASE, WELDMENT	EA	1
38	26	PAOZZ	5965-00-867-4559	374A	19557	HORN: TUMBLER SIGNAL	EA	1
38	27	PAOZZ	5305-00-993-1849	MS35207-259	96906	SCREW, ROUND HEAD: TIMER MTG	EA	3
38	28	PAOZZ	6645-00-917-6225	00-13M	30703	TIMER, MINUTE: TUMBLER	EA	1
38	29	PAOZZ	5310-00-189-9145	6-1-2337-20-509A	72869	NUT, LOCK: CONDUIT NIPPLE	EA	4
38	30	XBOZZ		6-1-2337-20-508A	72869	NIPPLE, CONDUIT: TIMER BOX TO TUMBLER BASE	EA	1
38	31	PAOZZ	5310-00-208-5235	6-1-2337-20-503A	72869	NUT, HEXAGON HEAD: TIMER BOX MTG SCREW	EA	4
38	32	PAOZZ	5305-00-984-6216	6-1-2337-20-507A	72869	SCREW, ROUND HEAD: TIMER BOX MTG	EA	4
38	33	XBOZZ		6-1-2337-20-501A	72869	SPACER: TIMER BOX	EA	4
38	34	XBOZZ		6-1-2337-20-505A	72869	BOX, TIMER: EXTRACTOR TIMER	EA	1
38	35	PAOZZ	5305-00-716-8192	MS90726-107	96906	SCREW, CAP, FILLISTER HEAD: SWITCH MTG	EA	1
38	36	PAOZZ	5310-00-550-1130	MS3533-40	96906	WASHER, LOCK: SWITCH MTG	EA	1
38	37	PAOZZ	5930-00-960-7650	6-1-2337-20-480A	72869	SWITCH, DOOR: TUMBLER	EA	1
38	38	XBOZZ		6-1-2324-20-120A	72869	PLATE, TAPPING: TUMBLER DOOR SWITCH	EA	1
38	39	XBOZZ		6-1-2337-20-528A	72869	ELBOW: CONDUIT TO SWITCH, 90 DEGREES, MALE AND FEMALE, 1/2 IN.	EA	1

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
38	40	XBOZZ		6-1-2337-20-526A	72869	ADAPTER, FEMALE: CONDUIT TO SWITCH, 90 DEGREES, 1/2 IN.	EA	1
38	41	PAOZZ		6-1-2337-20-460A	72869	CONDUIT, RIGID: SWITCH TO OUTLET, 22-1/2 IN. REQUIRED	FT	V
38	42	PAOZZ	5975-00-839-5322	T27	15235	CONDUIT OUTLET	EA	1
38	43	PAOZZ	5330-00-933-7249	GASK470	15235	GASKET, CONDUIT COVER	EA	1
38	44	PAOZZ	5975-00-244-7807	WF408TYPE1CLASS2 KIND1	81349	CONDUIT, RIGID: OUTLET TO HANDY BOX, 5 IN. REQUIRED	FT	V
38	45	XBOZZ		6-1-2337-20-466A	72869	CONNECTOR, STRAIGHT: CONDUIT ATTACHING, 1/2 IN.	EA	3
38	46	PAOZZ	5975-00-805-7433	1250	59730	ADAPTER, ELECTRICAL: CONDUIT TO OUTLET	EA	2
38	47	PAOZZ	5975-00-839-5322	T27	15235	CONDUIT, OUTLET: TUMBLER	EA	1
38	48	PAOZZ	5975-00-893-8544	6-1-2337-20-469A	72869	BOX CONNECTOR, ELECTRICAL: TUMBLER CONDUIT	EA	2
38	49	PAOZZ	5975-00-244-7807	6-1-2337-20-459A	72869	CONDUIT, RIGID: CONTROL BOX TO OUTLET, 24 IN. REQUIRED	FT	V
38	50	XBOZZ		6-1-2337-20-467A	72869	CONNECTOR, STRAIGHT: CONDUIT TO CONTROL BOX, 3/4 IN.	EA	1

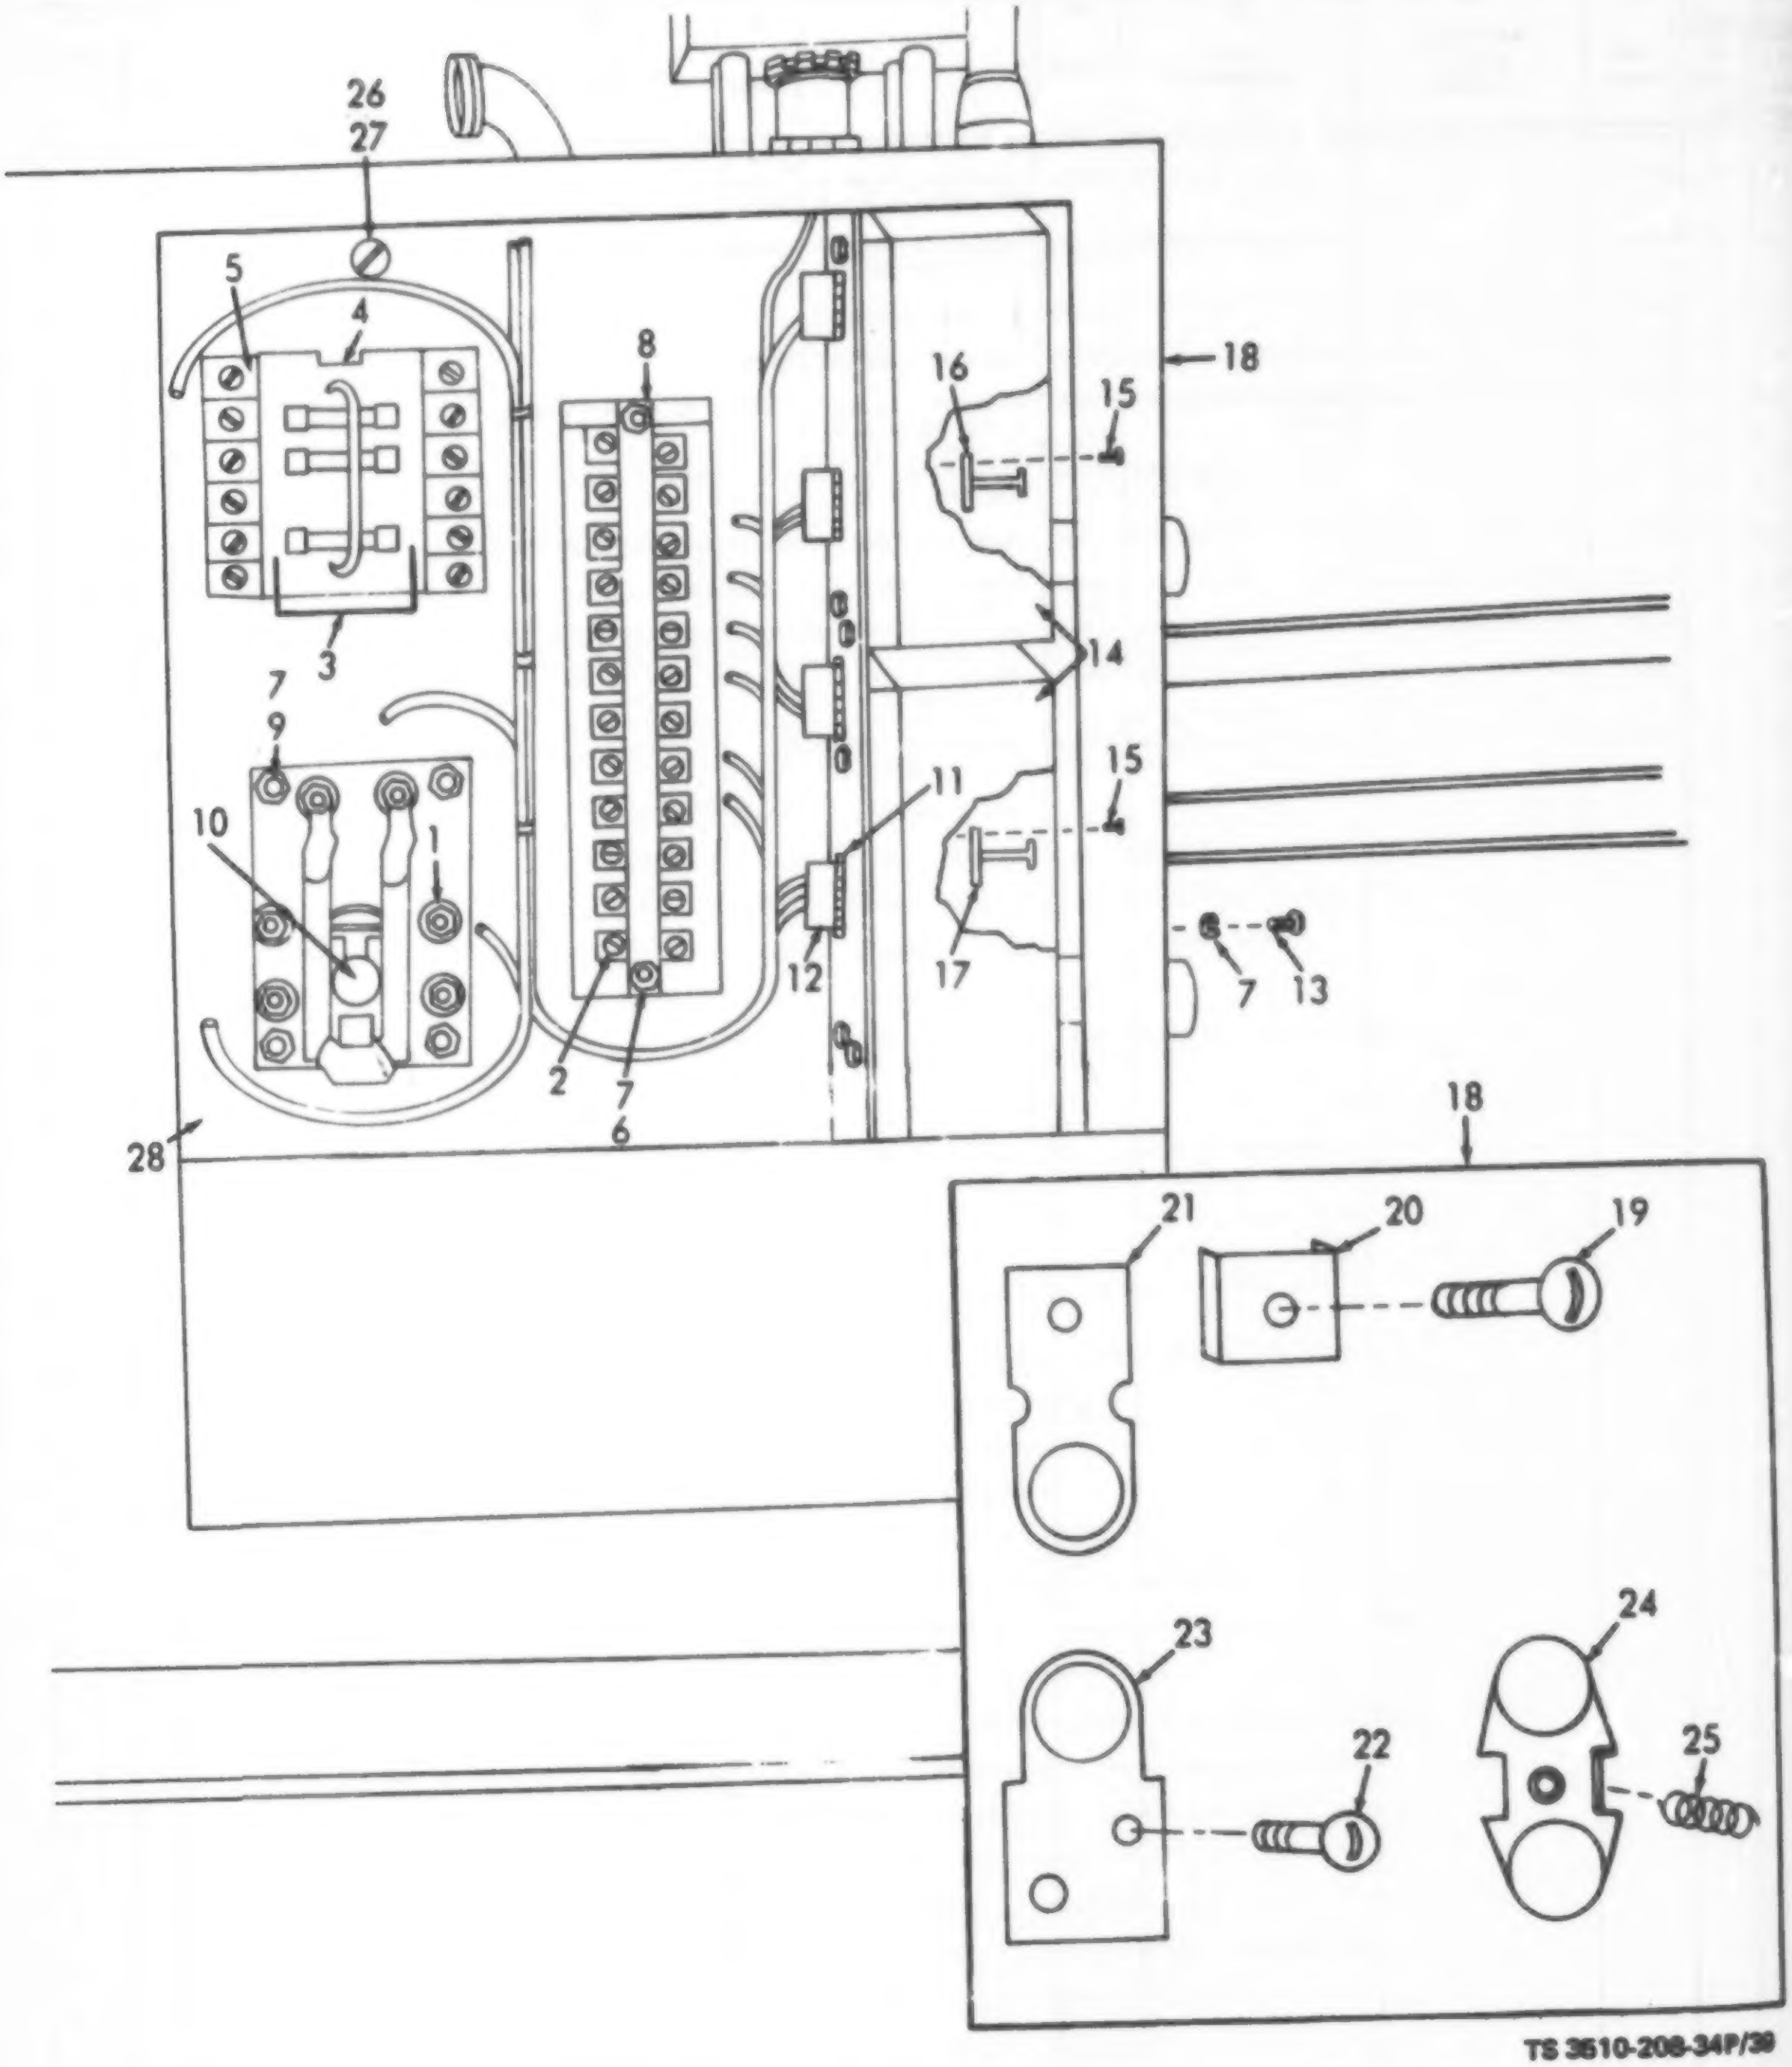
26
27
5
4
8
18
16
15
3
14
7
9
15
10
1
11
12
17
7
13
2
7
6
28
18
21
20
19
23
24
22
25

TS 3610-208-34P/39

Figure 39. Tumbler Control Panel.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
39		PAOOO		6-1-2337-20-454A	72869	PANEL: TUMBLER CONTROL	EA	1
39	1	PAOZZ	5940-00-310-2583	6-1-2337-20-478A	72869	TERMINAL LUG, WIRING	EA	7
39	2	PAOZZ	5940-00-310-2584	6-1-2337-20-488A	72869	TERMINAL LUG, WIRING: RELAY	EA	1
39	3	PAOZZ	5920-00-280-5003	REN15	71400	FUSE, CARTRIDGE	EA	3
39	4	PAOZZ	5305-00-984-6212	MS35206-265	96906	SCREW, MACHINE: FUSE BLOCK MTG	EA	2
39	5	PAOZZ	5920-00-221-5665	MS55920-02	08288	BLOCK, FUSE	EA	1
39	6	XBOZZ		6-1-2337-20-492A	72869	SCREW, MACHINE, FILLISTER HEAD: NO. 10-24 X 3/4 L, TERMINAL BLOCK MTG	EA	2
39	7	XBOZZ		6-1-2337-20-512A	72869	WASHER, LOCK, NO. 10 SCREW SIZE: TERMINAL BLOCK, POWER RELAY AND STARTER MTG	EA	12
39	8	PAOZZ	5940-00-472-6040	MS55940-12	08288	BLOCK, TERMINAL	EA	1
39	9	XBOZZ		6-1-2337-20-493A	72869	SCREW, MACHINE, FILLISTER HEAD: NO. 10-24 X 3/4 IN. LG., POWER RELAY MTG	EA	4
39	10	PAOZZ	5945-00-251-7403	88XX146	78290	RELAY, POWER	EA	1
39	11	XBOZZ		6-1-2337-20-463A	72869	NUT, LOCK, CONDUIT: 1/2 IN.	EA	4
39	12	PAOZZ	5975-00-280-8558	842	59730	CHASE NIPPLE, CONDUIT: STARTER	EA	4
39	13	XBOZZ		6-1-2337-1-522A	72869	SCREW, CAP, FILLISTER HEAD: NO. 10-32 UNF-2AX1-1/8 LG, STARTER MTG	EA	6
39	14	PAOZZ	6110-00-951-9824	9115H168	15605	STARTER, MOTOR	EA	2
39	15	XBOZZ		11-482-2	15605	SCREW: NO. 10-32 X 5/16 INCH, THERMAL RELEASE HEATER MTG	EA	8
39	16	PAOZZ	5999-00-672-9212	10177H1036	15606	HEATER, THERMAL RELEASE	EA	2
39	17	PAOZZ	5999-00-707-8706	10177H1023	15605	HEATER, THERMAL RELEASE	EA	2
39	18	PAOZZ	5945-00-937-0768	6-200	15605	CONTACT SET, RELAY	EA	2
39	19	XBOZZ		11-1619-2	15605	SCREW: NO. 8-32	EA	12
39	20	XBOZZ		55-1501	15605	TERMINAL CLAMP	EA	12
39	21	XDOZZ		23-3114	15605	CONTACTS, STATIONARY	EA	6
39	22	XBOZZ		11-1142	15605	SCREW: NO. 8-32 X 3/8 ROUND HEAD SEMS.	EA	12
39	23	XDOZZ		23-3133	15605	CONTACTS, STATIONARY	EA	6
39	24	XDOZZ		23-3112	15605	CONTACTS, MOVABLE	EA	6
39	25	XDOZZ		69-2261	15605	SPRING, CONTACT	EA	6
39	26	XBOZZ		6-1-2337-20-496A	72869	SCREW, CAP, FILLISTER HEAD: 1/4 X 20 X 1 IN. LG, TUMBLER CONTROL PANEL MTG	EA	4
39	27	XBOZZ		6-1-2337-20-498A	72869	WASHER, LOCK, EXTERNAL TOOTH: 1/4 IN., TUMBLER CONTROL PANEL MTG	EA	4
39	28	XBOZZ		6-1-2337-20-454A	72869	PANEL: TUMBLER CONTROL	EA	1

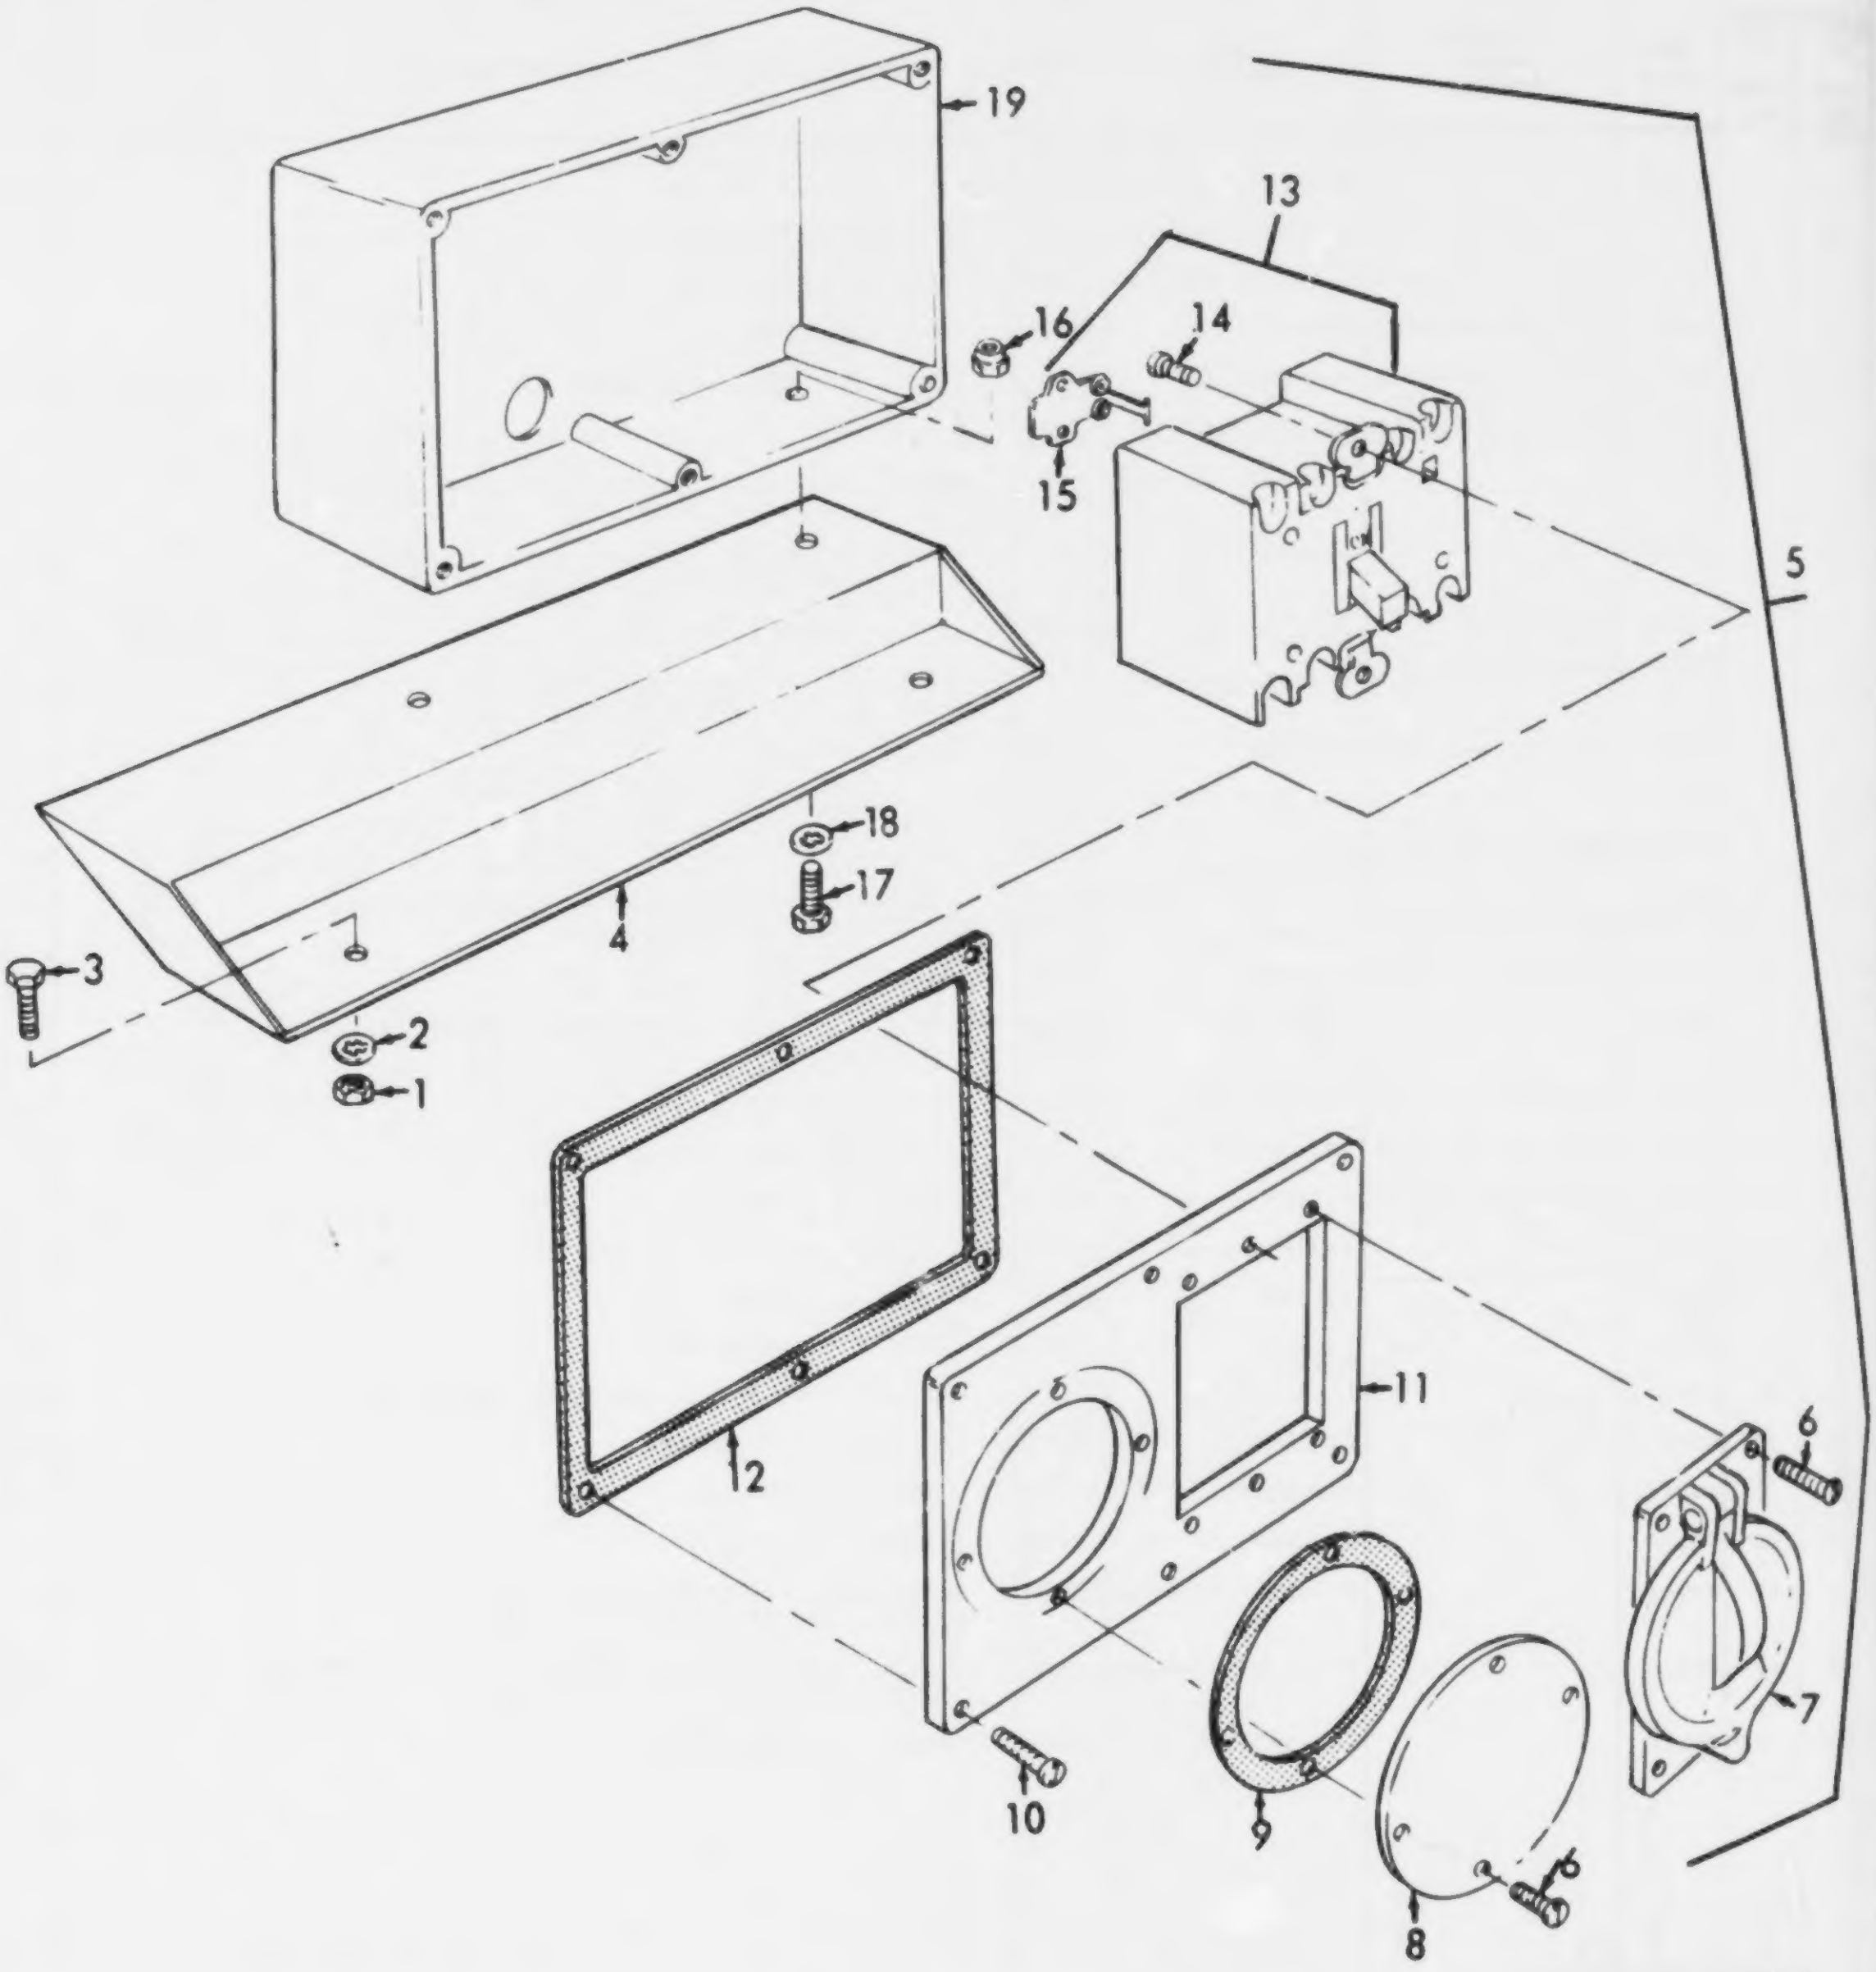
19
13
16
14
15
5
18
17
4
3
2
1
11
12
6
7
10
9
6
8

TS 3510-208-34P/40

Figure 40. Water Heater Panel Board.

best copy available

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 26 - WATER HEATER PANEL BOARD		
40	1	PAOZZ	5310-00-761-6882	MS51967-2	96906	NUT, PLAIN, HEXAGON: BRACKET MTG, PANEL BOARD	EA	2
40	2	PAOZZ	5310-00-550-1130	MS35333-40	96906	WASHER, LOCK: BRACKET MTG, PANEL BOARD	EA	2
40	3	PAOZZ	5305-00-068-0502	MS90725-6	96906	SCREW, CAP, HEXAGON HEAD: BRACKET MTG, PANEL BOARD	EA	2
40	4	XBOZZ		47862	79466	BRACKET, PANEL BOARD MOUNTING	EA	1
40	5	XBOOO		116494	79466	PANEL BOARD ASSEMBLY	EA	1
40	6	PAOZZ	5305-00-013-1904	6-1-733-1-32A	72869	SCREW, MACHINE: SWITCH COVER AND PLATE MTG	EA	8
40	7	PAOZZ	5975-00-840-5844	6-1-744-2-9-9A	72869	COVER, CONDUIT OUTLET: SWITCH	EA	1
40	8	XBOZZ		91563	79466	PLATE, COVER: SWITCH BOX	EA	1
40	9	PAOZZ	5330-00-542-1806	49283	79466	GASKET: SWITCH BOX PLATE	EA	1
40	10	PAOZZ	5305-00-543-4925	6-1-744-2-9-11A	72869	SCREW, FILLISTER HEAD: SWITCH BOX COVER MTG	EA	6
40	11	XBOZZ		116492	79466	COVER, SWITCH BOX	EA	1
40	12	PAOZZ	5330-00-703-1402	47878	79466	GASKET, SWITCH BOX COVER	EA	1
40	13	PAOZZ	5925-00-300-4448	LL032U	04009	CIRCUIT BREAKER	EA	1
40	14	PAOZZ	5305-00-151-3051	6-1-744-2-9-10A	72869	SCREW, FILLISTER: SWITCH MTG	EA	2
40	15	PAOZZ	5950-00-674-5783	42118	04009	HEATER, THERMAL RELEASE	EA	2
40	16	PAOZZ	5310-00-207-9074	AN365-1024C	88044	NUT, HEXAGON, SELF-LOCKING: BOX MTG	EA	2
40	17	PAOZZ	5305-00-614-0245	67309	79466	SCREW, MACHINE: BOX MTG	EA	2
40	18	PAOZZ	5310-00-527-3288	6-1-733-1-28A	72869	WASHER, LOCK: BOX MTG	EA	2
40	19	XBOZZ		91565C	79466	BOX, SWITCH: WATER HEATER	EA	1

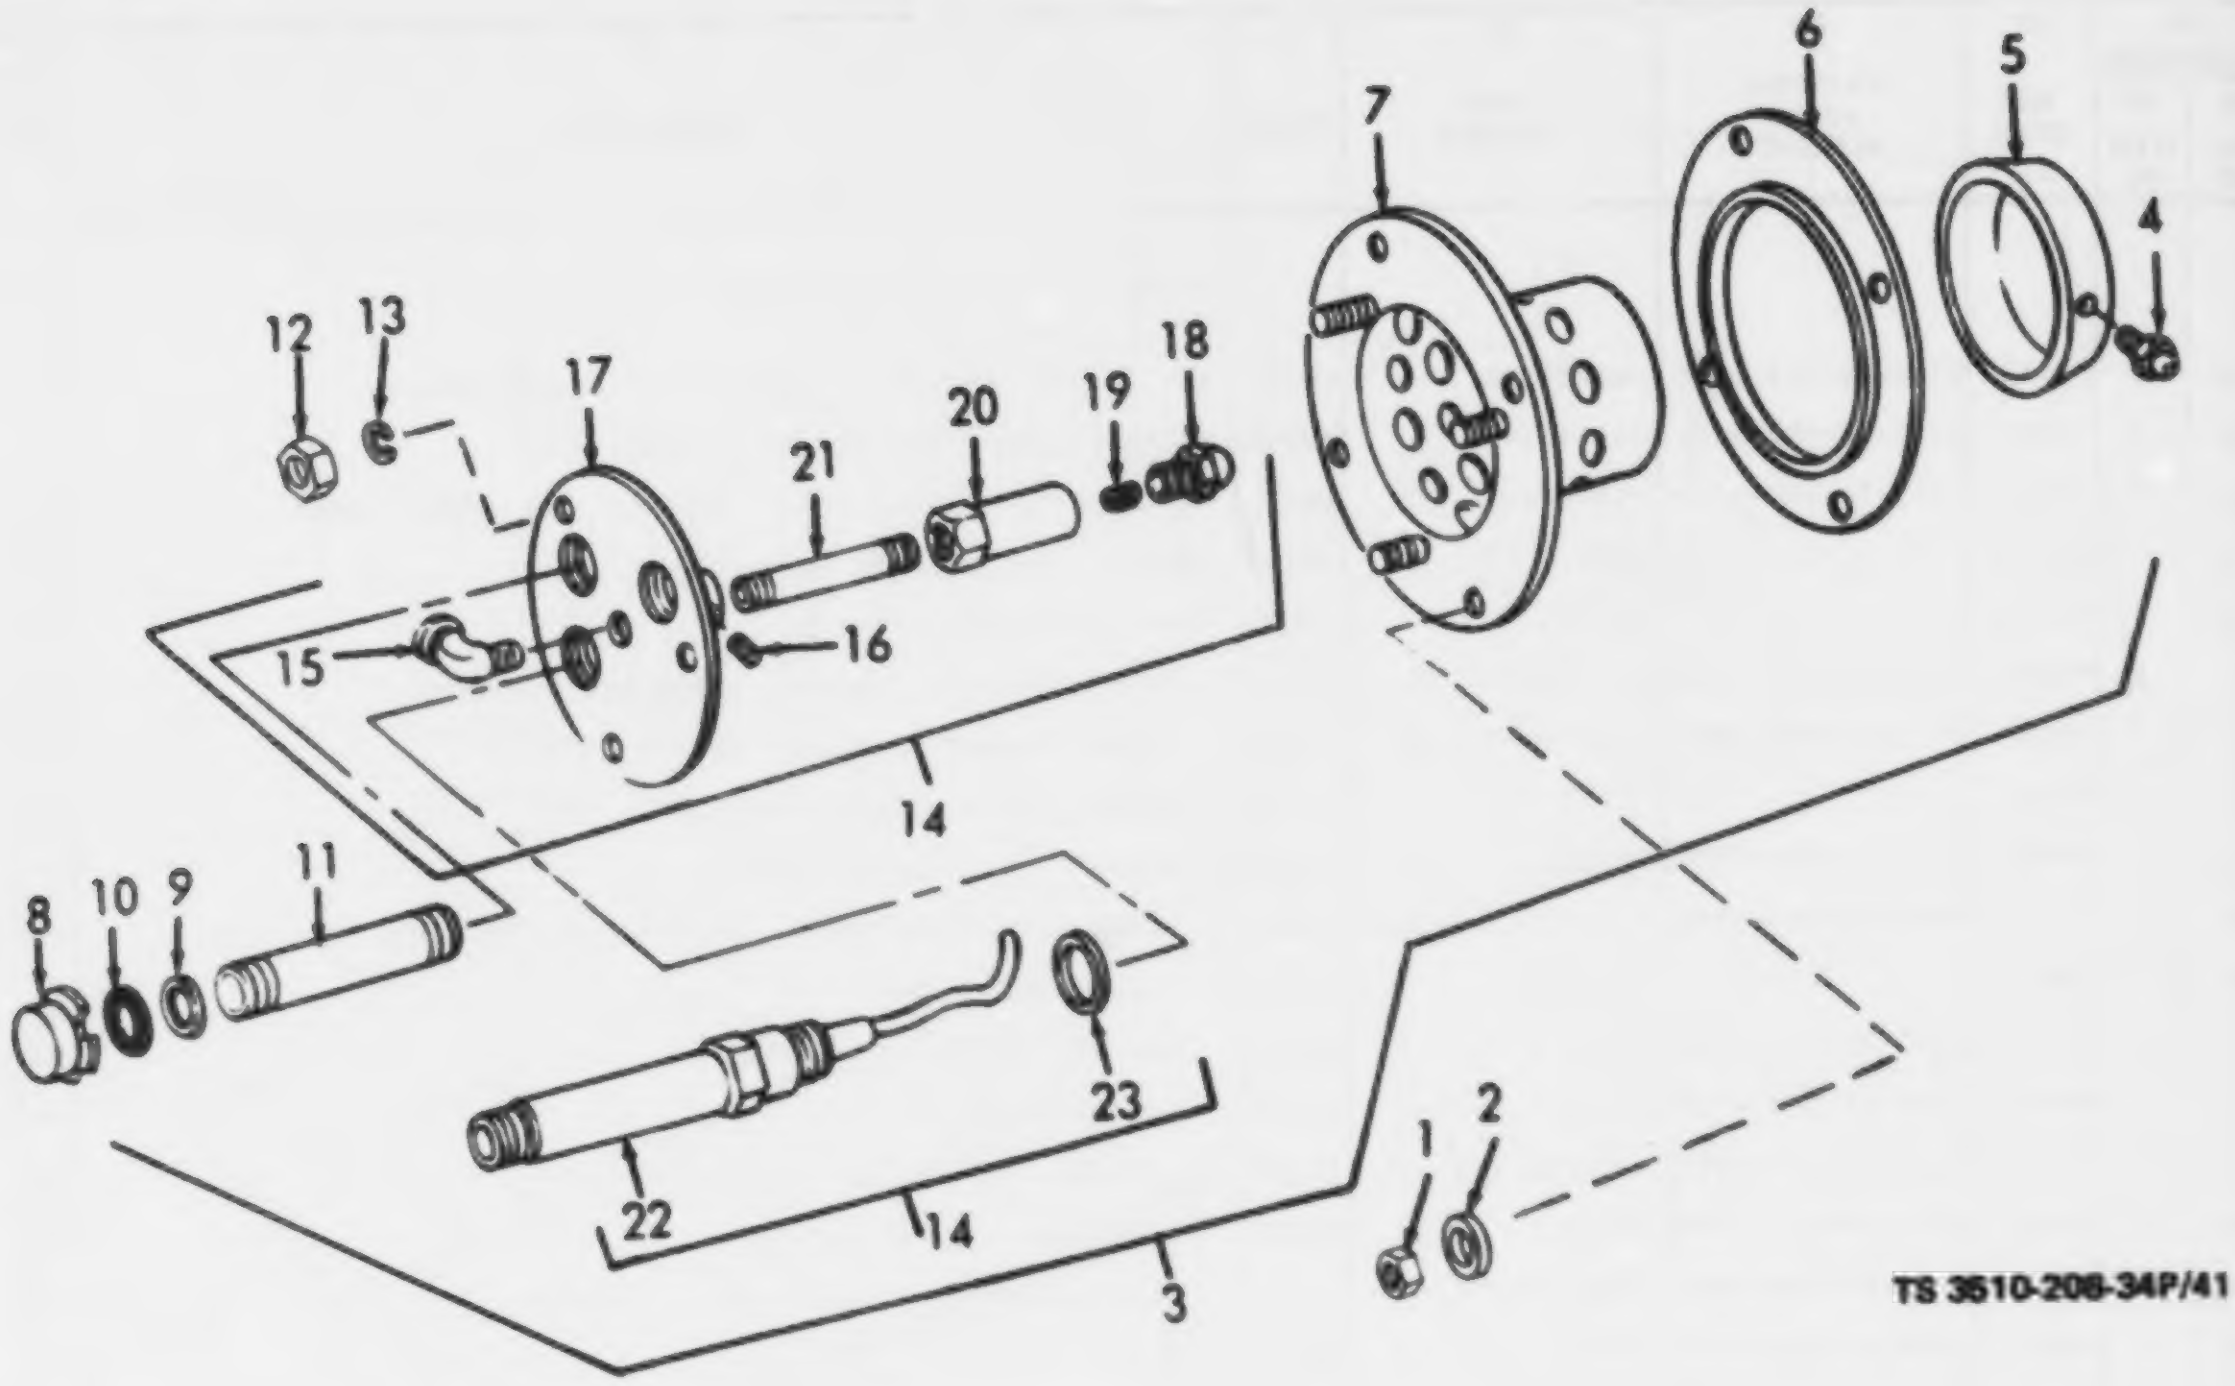
6
5
7
4
12
13
17
18
20
19
21
15
16
14
8
10
9
11
23
22
14
3
1
2

TS 3510-208-34P/41

Figure 41. Water Heater Burner.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 27 - WATER HEATER BURNER AND RELATED PARTS		
41	1	PAOZZ	5310-00-761-6882	MS51967-2	96906	NUT, PLAIN, HEXAGON: BURNER MTG	EA	4
41	2	XBOZZ		6-1-733-1-35A	72869	WASHER, FLAT: BURNER MTG	EA	4
41	3	PAOOO	4530-00-708-5458	47540	79466	BURNER ASSEMBLY: WATER HEATER	EA	1
41	4	PAOZZ	5305-00-803-9738	67328	79466	SCREW, MACHINE: AIR NOSE MTG	EA	2
41	5	PAOZZ	4530-00-708-5459	47543	79466	AIR NOSE: BURNER	EA	1
41	6	PAOZZ	4530-00-981-8673	49367	79466	GASKET, BURNER HEAD	EA	1
41	7	XBOZZ		6-1-742-1-8-1A	72869	BURNER TUBE	EA	1
41	8	XBOZZ		6-1-742-1-8-11A	72869	CAP: SIGHT HOLE, 1/2 IN.	EA	1
41	9	PAOZZ	4530-00-359-9510	47910	79466	GLASS: SIGHT HOLE, BURNER, 11/16 DIA.	EA	1
41	10	PAOZZ	5330-00-542-1800	47909	79466	GASKET: SIGHT HOLE LENS, ASBESTOS, 13/16 OD. X 1/2 IN. THK	EA	1
41	11	XBOZZ		6-1-742-1-8-10A	72869	NIPPLE, PIPE: SIGHT HOLE	EA	1
41	12	PAOZZ	5310-00-761-6882	MS51967-2	96906	NUT, PLAIN, HEXAGON: ELECTRODE AND NOZZLE HOLDER MTG	EA	3
41	13	PAOZZ	5310-00-550-1130	MS35333-40	96906	WASHER, LOCK: ELECTRODE AND NOZZLE HOLDER MTG	EA	3
41	14	XBOOO		47870	79466	NOZZLE AND ELECTRODE	EA	1
41	15	PAOZZ	4730-00-541-2784	5886X5	79470	ELBOW, PIPE TO TUBE: BURNER HOLDER	EA	1
41	16	PAOZZ	5305-00-933-9885	67203	79466	SETSCREW: NIPPLE MTG	EA	2
41	17	XBOZZ		49364	79466	HOLDER, NOZZLE AND ELECTRODE	EA	1
41	18	PAOZZ	4730-00-706-2966	61196	79466	NOZZLE	EA	1
41	19	XBOZZ		N47870C5	79466	STRAINER, NOZZLE	EA	1
41	20	PAOZZ	4510-00-707-5965	67263	79466	ADAPTER, NOZZLE	EA	1
41	21	PAOZZ	4730-00-196-1483	67201	79466	NIPPLE, PIPE: BURNER	EA	1
41	22	PAOZZ	5977-00-708-3693	OK18-3	11583	ELECTRODE	EA	2
41	23	PAOZZ	5330-00-467-3553	M674	11583	GASKET: ELECTRODE MTG	EA	2

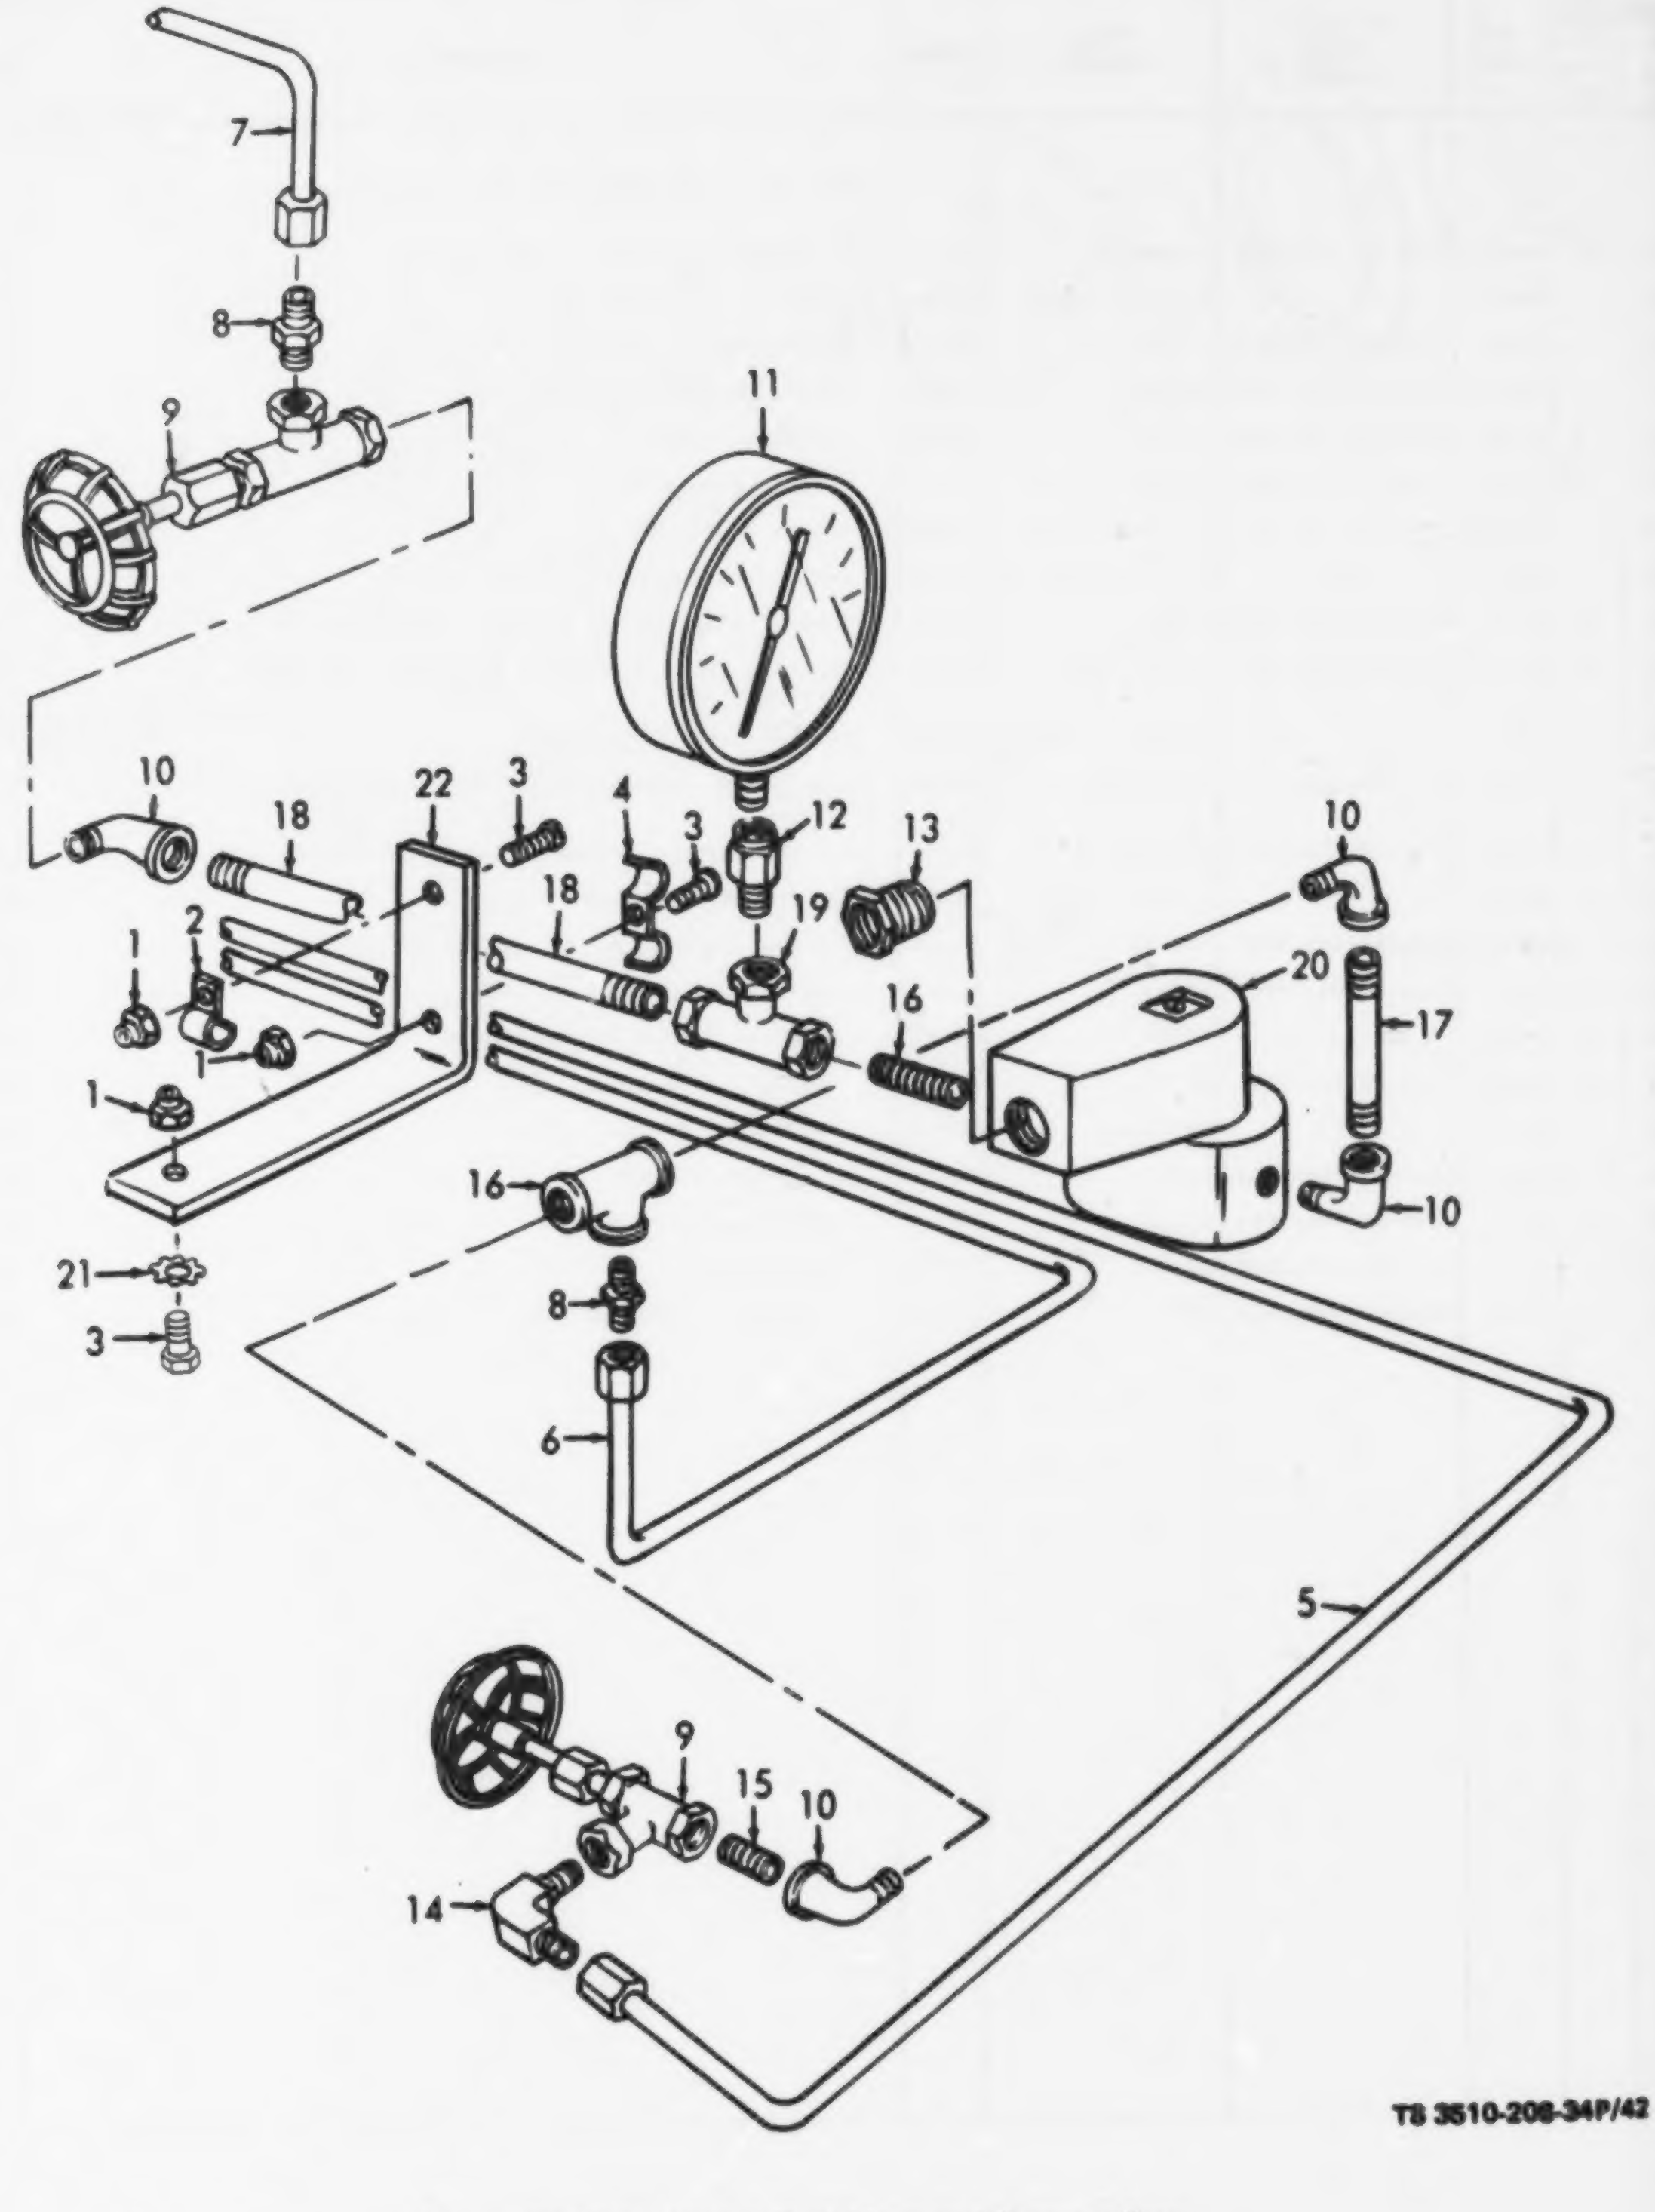
7
8
9
11
10
22
3
4
3
12
13
10
18
18
19
2
1
20
16
17
1
1
16
10
21
8
3
6
5
9
15
10
14
TS 3510-208-34P/42

Figure 42. Water Heater Fuel Lines and Pressure Gage.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
42	1	PAOZZ	5310-00-933-7238	67316	79466	NUT, SELF-LOCKING: BRACKET MTG	EA	3
42	2	PAOZZ	5340-00-703-0078	6925	93736	STRAP, RETAINING: NIPPLE, NEEDLE VALVE	EA	1
42	3	PAOZZ	5305-00-933-7225	67315	79466	SCREW, FILLISTER HEAD: BRACKET MTG	EA	3
42	4	PAOZZ	5340-00-703-0079	67317	79466	STRAP, RETAINING: FUEL LINES	EA	1
42	5	PAOZZ	4510-00-708-1348	80370	79466	LINE ASSEMBLY: FUEL RETURN	EA	1
42	6	PAOZZ	4510-00-708-1347	80369	79466	LINE ASSEMBLY: FUEL	EA	1
42	7	PAOZZ	4510-00-708-1345	81114	79466	TUBE, ALUMINUM: NEEDLE VALVE	EA	1
42	8	PAOZZ	4730-00-540-1998	6-1-1908-19-51A	72869	ADAPTER, STRAIGHT, PIPE TO TUBE: NEEDLE VALVE	EA	2
42	9	PAOZZ	4820-00-203-0054	987-1-8	37239	VALVE, NEEDLE	EA	2
42	10	PAOZZ	4730-00-287-1649	67301	79466	ELBOW, PIPE: SOLENOID VALVE	EA	4
42	11	PAOZZ	6685-00-492-6230	6-1-1908-19-45A	81337	GAGE, PRESSURE, DIAL	EA	1
42	12	PAOZZ	6685-00-063-9722	67304	79466	DAMPER, FLUID, PRESSURE: GAGE	EA	1
42	13	PAOZZ	5975-00-280-8558	67313	79466	NIPPLE, CHASE: SOLENOID VALVE	EA	1
42	14	PAOZZ	4730-00-203-3012	5822X5	79470	ELBOW, PIPE TO TUBE	EA	1
42	15	PAOZZ	4730-00-196-1464	6-1-1908-19-55A	72869	NIPPLE, CLOSE: VALVE TO ELBOW AND VALVE TO TEE	EA	2
42	16	PAOZZ	4730-00-257-2116	67300	79466	TEE, PIPE: FUEL LINE	EA	1
42	17	PAOZZ	4730-00-196-1483	6-1-1908-19-54A	72869	NIPPLE, PIPE: SOLENOID VALVE	EA	1
42	18	PAOZZ	4730-00-277-9641	67305	79466	NIPPLE, PIPE: NEEDLE VALVE TO GAGE	EA	1
42	19	PAOZZ	4730-00-706-2968	67303	79466	TEE, REDUCING: GAGE TO SOLENOID VALVE	EA	1
42	20	PAOZZ	4810-00-707-1356	V400181L1	48931	VALVE, SOLENOID	EA	1
42	21	PAOZZ	5310-00-045-3296	MS35338-43	96906	WASHER, LOCK: BRACKET MTG	EA	1
42	22	XBOZZ		M116494C28	79466	BRACKET, FUEL LINE	EA	1

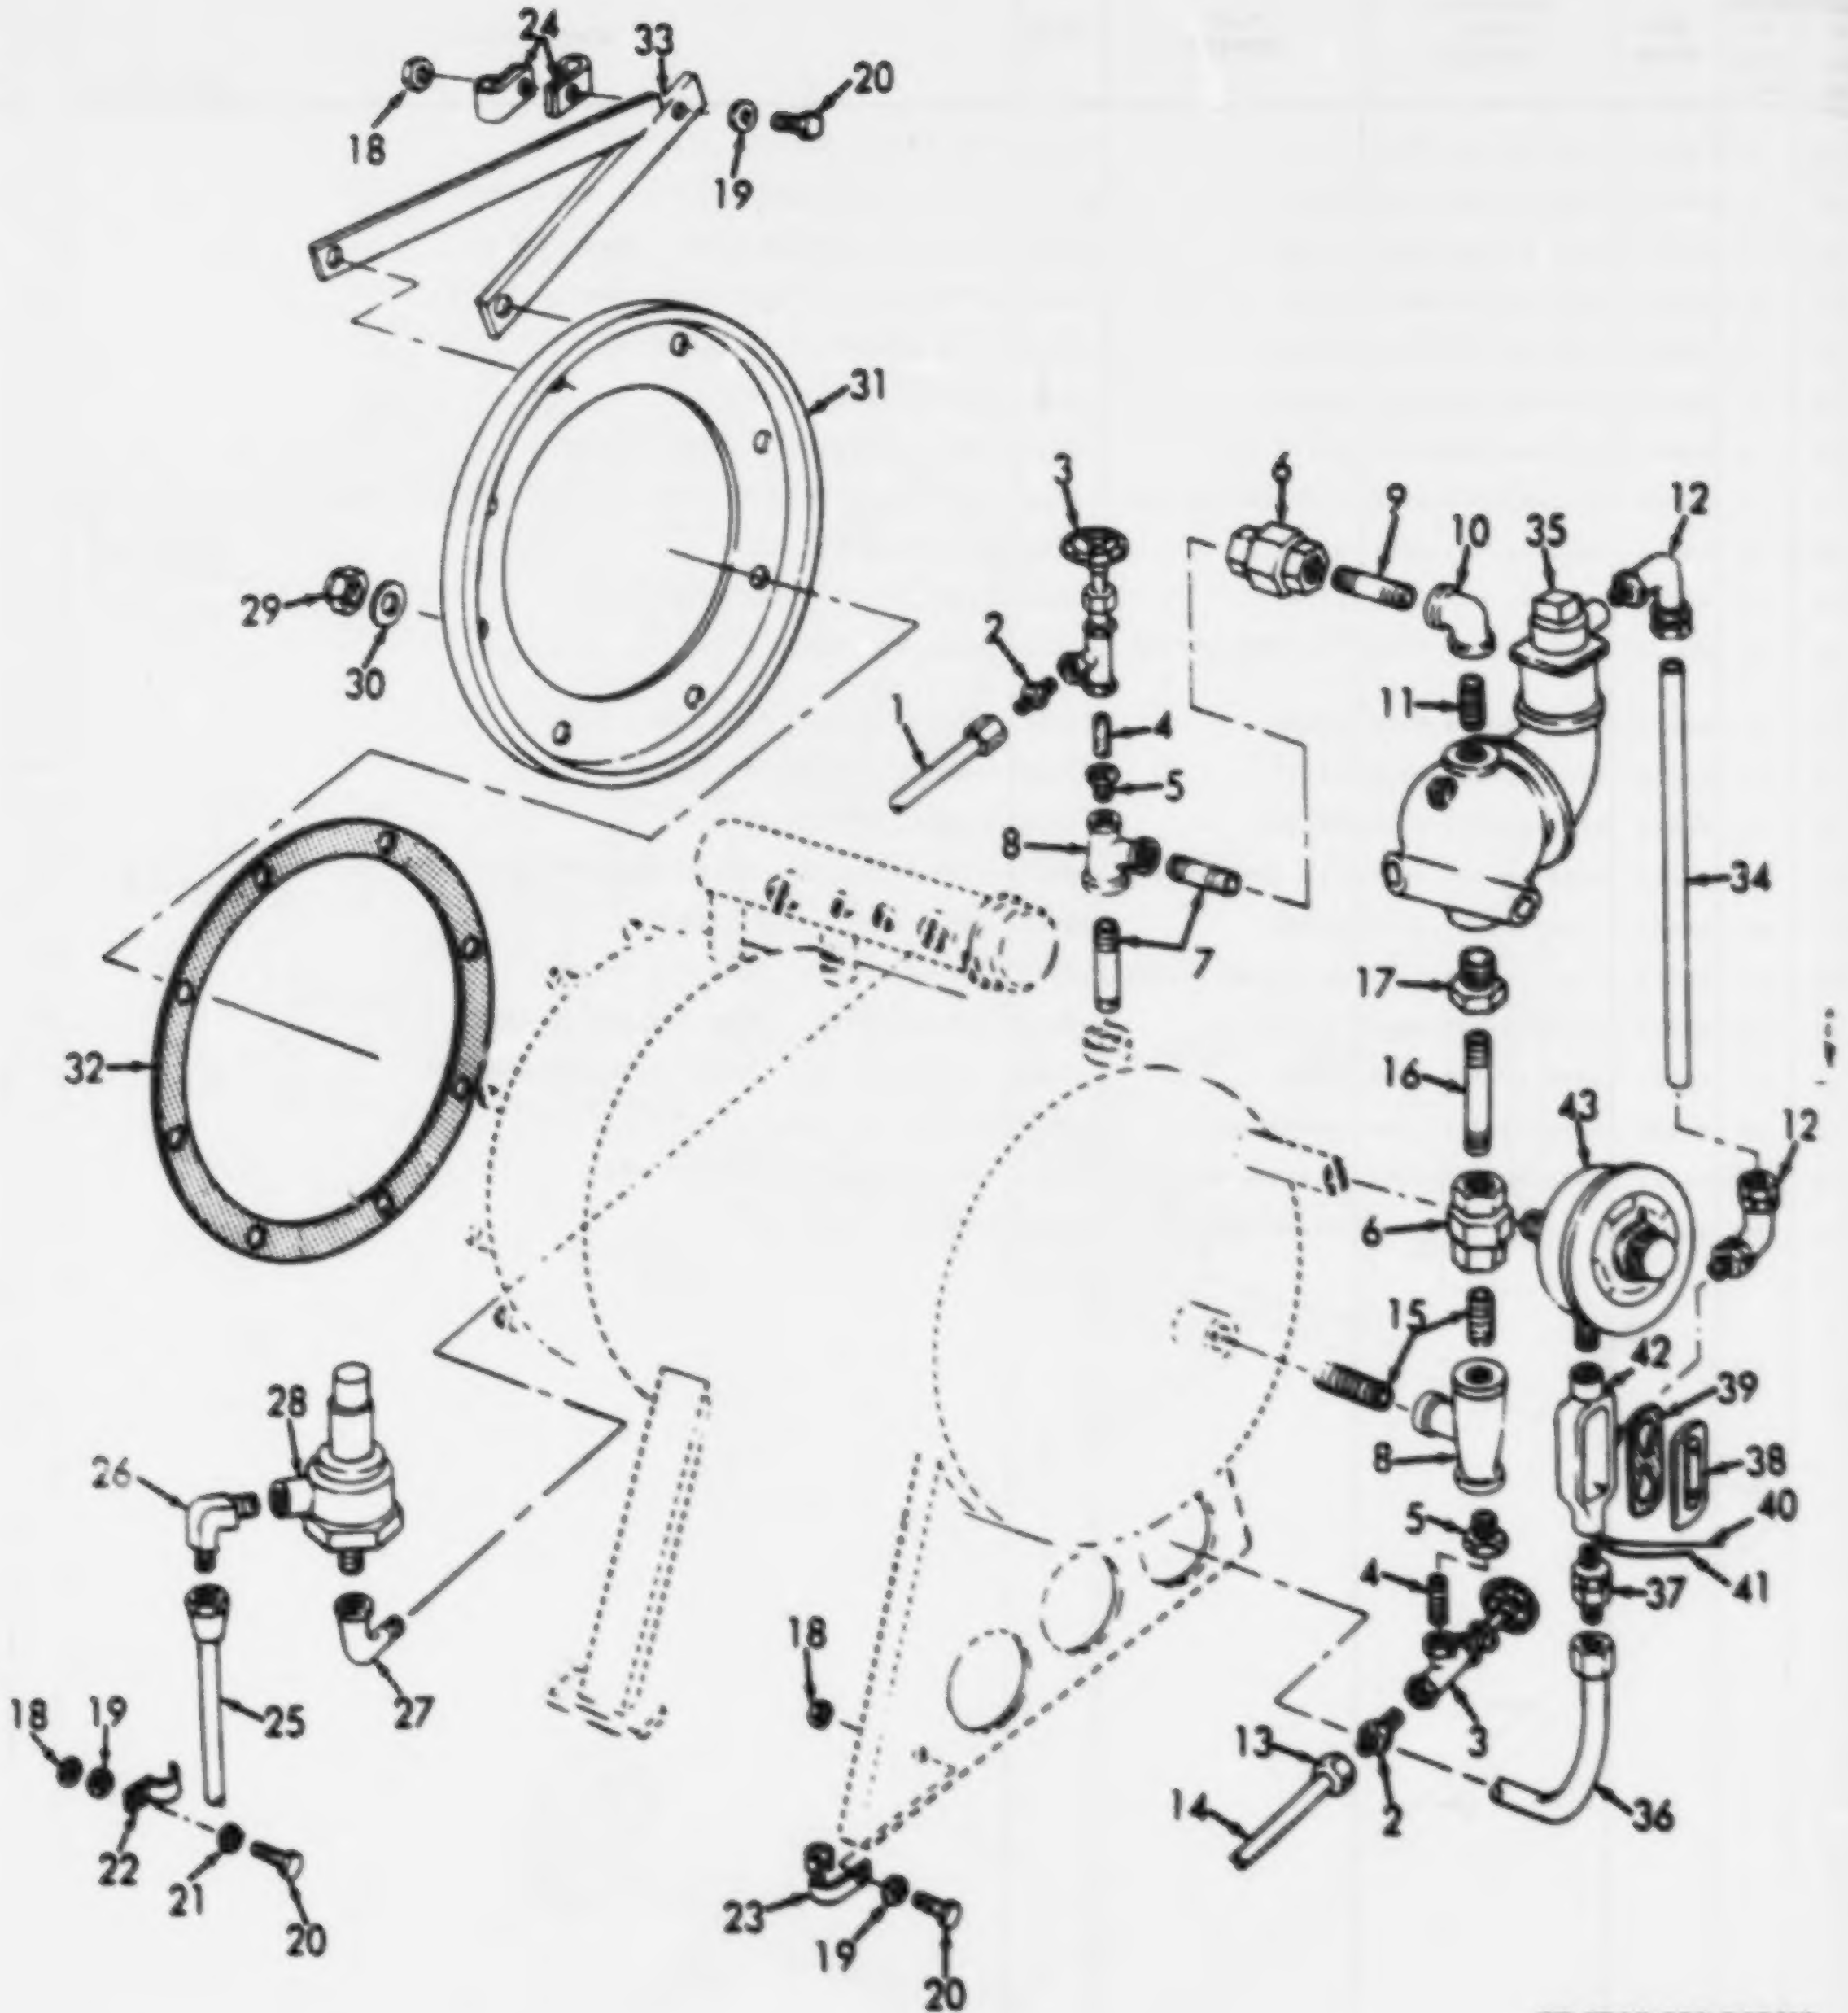

24
33
20
18
19
31
3
6
9
10
35
12
29
30
2
1
4
5
11
8
7
34
17
32
16
43
12
6
15
42
39
28
26
8
38
40
5
41
4
37
27
18
3
25
18
19
13
2
36
14
22
21
20
23
19
20
TS 3510-208-34P/43

Figure 43. Water Heater Valves, Lines and Fittings

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
43	1	MOOOO		6-1-1907-19-71A	72869	TUBING, COPPER, WALL MANUFACTURE FROM:	EA	1
43		PAOZZ	4730-00-933-7953	100376	79466	NUT, UNION	EA	2
43		PAOZZ	4710-00-277-4508	WWT799CLASSII TYPEL	81348	TUBING, COPPER, 5/8 IN. OD, 4 FT. REQUIRED	FT	V
43	2	PAOZZ	4730-00-618-2952	681X4	79470	CONNECTOR, MALE: NEEDLE VALVE TO TUBE	EA	2
43	3	PAOZZ	4820-00-203-0054	907-1-8	37239	VALVE, NEEDLE	EA	2
43	4	PAOZZ	4730-00-019-2032	67302	79466	NIPPLE, PIPE: NEEDLE VALVE TO TANK	EA	2
43	5	PAOZZ	4730-00-640-0536	6-1-1907-19-20A	72869	BUSHING, HEXAGON: NEEDLE VALVE	EA	2
43	6	PAOZZ	4730-00-189-2617	6-1-1907-19-4A	72869	UNION, FEMALE: NEEDLE VALVE CUT-OFF VALVE, 3/4 IN. NPT	EA	2
43	7	PAOZZ	4730-00-019-2084	6-1-1907-19-12A	72869	NIPPLE, PIPE: NEEDLE VALVE, 3/4 NPT X 4-1/2 IN. LG	EA	2
43	8	PAOZZ	4730-00-263-3700	6-1-1907-19-6A	72869	TEE, REDUCING: NEEDLE VALVE TO TANK, 3/4 X 1/2 X 3/4 NPT	EA	2
43	9	XBOZZ		103369	79466	NIPPLE, PIPE: NEEDLE VALVE, 3/4 IN. NPT, 2-3/4 IN. LG	EA	1
43	10	PAOZZ	4730-00-289-8051	6-1-1907-19-69A	72869	ELBOW, REDUCING: FUEL CUT-OFF VALVE TO NEEDLE VALVE, 1 X 3/4 IN. NPT	EA	1
43	11	PAOZZ	4730-00-012-7878	6-1-1907-19-16A	72869	NIPPLE, CLOSE: FUEL CUT-OFF VALVE, 1 IN. NPT	EA	2
43	12	PAOZZ	5975-00-179-0098	5121	59730	BOX CONNECTOR, ELECTRICAL: TEMPERATURE CONTROL	EA	2
43	13	PAOZZ	4730-00-933-7953	100376	79466	NUT, UNION	EA	2
43	14	PAOZZ	4710-00-277-4508	WWT799ATYPEN	81348	TUBE, COPPER: 5/8 IN. OD, 36 IN. REQUIRED	FT	V
43	15	PAOZZ	4730-00-019-2470	6-1-1907-19-15A	72869	NIPPLE, CLOSE: WATER HEATER TO TANK, 3/4 IN. NPT	EA	2
43	16	XBOZZ		100372	79466	NIPPLE, PIPE: FUEL CUT-OFF VALVE, 3/4 NPT X 5-1/2 IN. LG	EA	1
43	17	PAOZZ	4730-00-277-2141	6-1-1907-19-11A	72869	BUSHING, HEXAGON: FUEL CUT-OFF VALVE, 1 X 3/4 IN. NPT	EA	1
43	18	PAOZZ	5310-00-616-3777	6-1-1907-19-86A	72869	NUT, PLAIN, HEXAGON: CLIP MTG	EA	3
43	19	PAOZZ	5310-00-527-3288	6-1-1907-19-87A	72869	WASHER, LOCK: CLIP MTG	EA	3
43	20	PAOZZ	5305-00-043-1942	MS55305-21	08288	SCREW, CAP, HEXAGON HEAD: CLIP MTG	EA	3
43	21	PAOZZ	5310-00-167-0662	69957	79466	WASHER, LOCK: CLIP MTG, RELIEF VALVE, NO. 10	EA	1
43	22	XBOZZ		3121-10	45681	CLIP, TUBE: DRAIN TUBE	EA	1
43	23	XBOZZ		91559	79466	BRACKET, DRAIN LINE	EA	1
43	24	XBOZZ		91555	79466	CLIP, AIR LINES	EA	2
43	25	MOOOO		6-1-733-1-55A	72869	TUBE: RELIEF VALVE MANUFACTURE FROM:	EA	1
43		PAOZZ	4730-00-958-9985	5115X100	79470	NUT, TUBE COUPLING	EA	1
43		PAOZZ	4710-00-277-4508	WWT799ATYPEN	81348	TUBING, 40 IN. REQUIRED	FT	V
43	26	PAOZZ	4730-00-951-6790	5405X10	79470	ELBOW, PIPE TO TUBE: RELIEF VALVE	EA	1
43	27	PAOZZ	4730-00-249-3917	6-1-733-1-72A	72869	ELBOW, STREET: RELIEF VALVE, 1/2 IN. NPT	EA	1
43	28	PAOZZ	4820-00-933-5988	FIG20	34494	VALVE, RELIEF	EA	1
43	29	PAOZZ	5310-00-515-8773	67250	88044	NUT, SELF-LOCKING: COVER MTG	EA	8
43	30	PAOZZ	5310-00-880-5977	6-1-733-1-35A	72869	WASHER, FLAT: COVER MTG	EA	8
43	31	XBOZZ		90326	79466	COVER, SMOKEBOX	EA	1
43	32	PAOZZ	4510-00-955-9457	90325	79466	GASKET, COVER	EA	1
43	33	XBOZZ		91558	79466	BRACKET, FUEL LINE	EA	1
43	34	MOOOO		6-1-1907-19-19A	72869	CONDUIT, RIGID: TEMPERATURE CONTROL TO CUT-OFF VALVE, MANUFACTURE FROM:	EA	1
43		PAOZZ	5975-00-178-1216	WWC563	81348	CONDUIT, RIGID, 14-3/4 IN. REQUIRED	FT	V
43	35	PAOZZ	5310-00-359-5355	635	39305	VALVE, CUT-OFF: WATER HEATER	EA	1

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(8)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
43	36	MOOOO		6-1-1907-19-95A	72869	CONDUIT, RIGID: TEMPERATURE CONTROL MANUFACTURE FROM:	EA	1
43		PAOZZ	5975-00-178-1216	WWC563	81348	CONDUIT, RIGID: 36 IN. REQUIRED	FT	V
43	37	PAOZZ	5975-00-179-0098	SP4550	24446	BOX CONNECTOR, CONDUIT	EA	1
43	38	XBOZZ		LB3170	15235	COVER, CONDUIT	EA	1
43	39	XBOZZ		470	15235	GASKET, CONDUIT	EA	1
43	40	PAOZZ	6145-00-310-2598	59-255AGP4	60883	WIRE, ELECTRICAL, 30 IN. REQUIRED	FT	V
43	41	PAOZZ	6145-00-310-2593	7714	70903	WIRE, ELECTRICAL, 30 IN. REQUIRED	FT	V
43	42	PAOZZ	5975-00-973-6950	T17	15235	CONDUIT, OUTLET: TEMPERATURE CONTROL	EA	1
43	43	PAOZZ	5930-00-905-9135	100382	79466	CONTROL, TEMPERATURE	EA	1

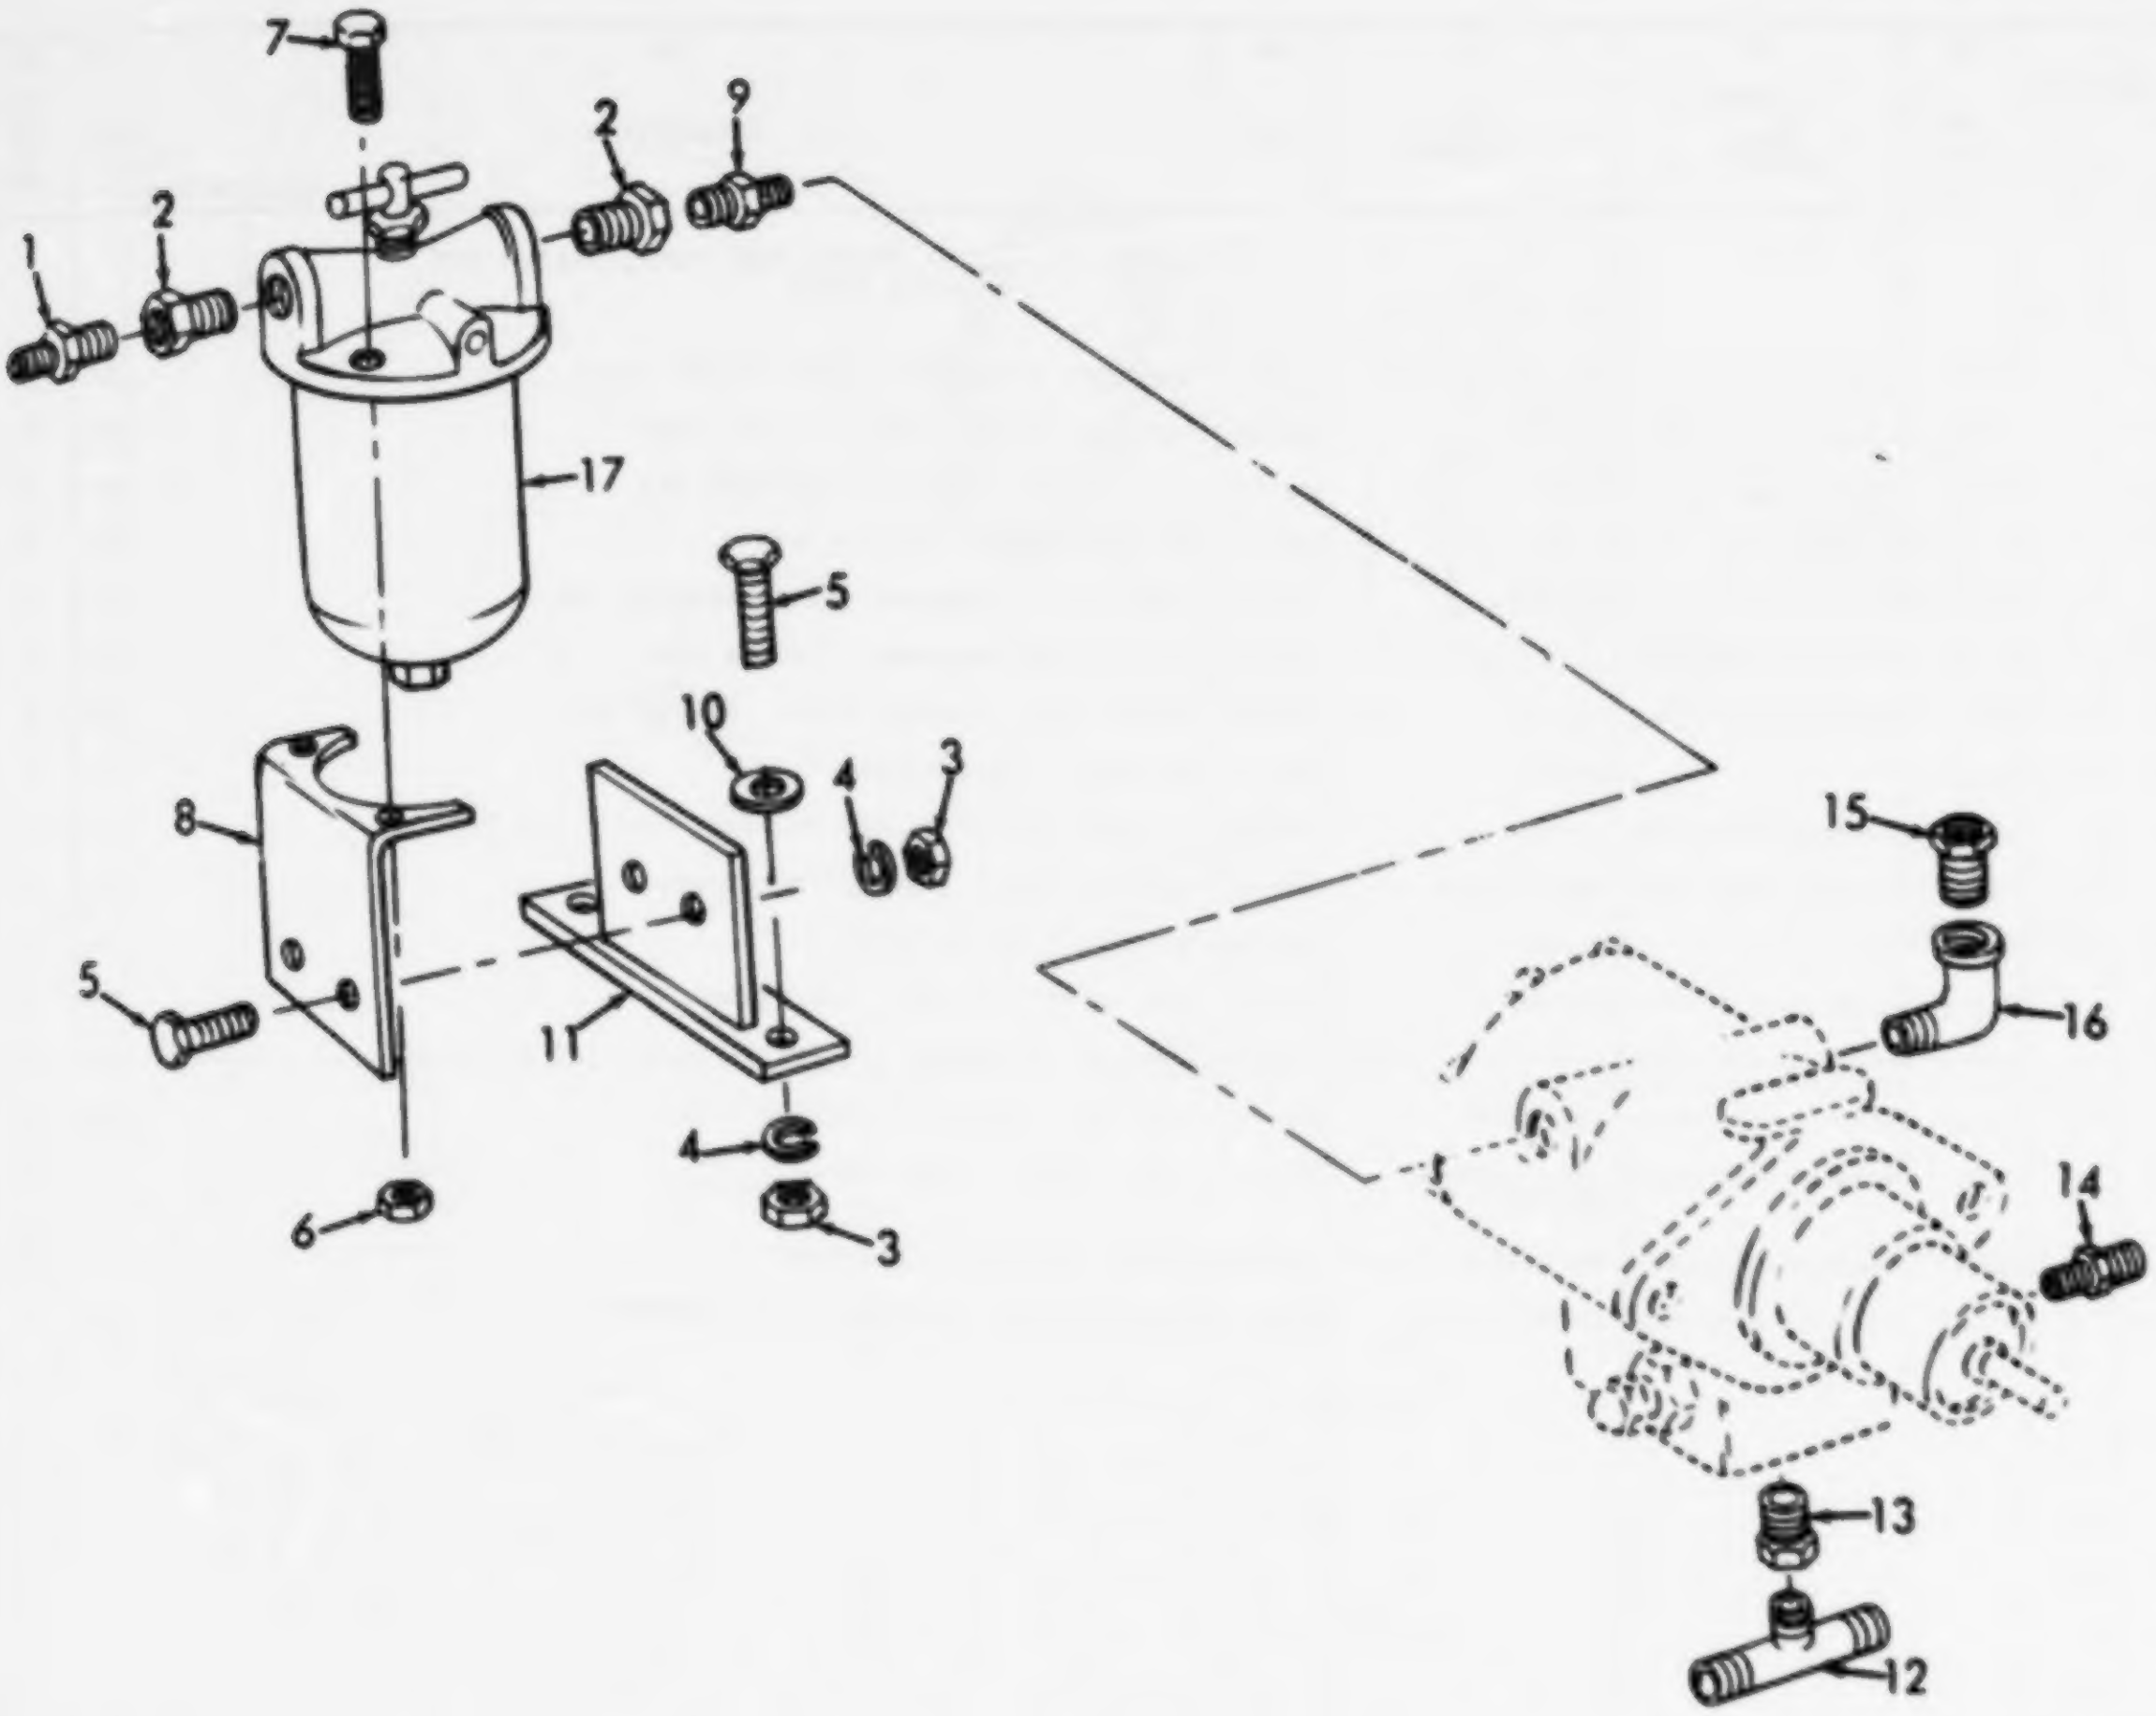
7
2
9
1
2
17
5
10
4
3
8
15
5
11
16
4
6
3
14
13
12

TS 3510-208-34P/44

Figure 44. Water Heater Fuel Filter and Related Parts.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 28 - WATER HEATER FUEL PUMP, FILTER AND RELATED PARTS		
44	1	PAOZZ	4730-00-203-3178	5816X5	79470	ADAPTER, STRAIGHT: FUEL FILTER LINES	EA	1
44	2	PAOZZ	4730-00-202-6491	119928	24617	BUSHING, PIPE: FUEL FILTER LINES	EA	2
44	3	PAOZZ	5310-00-761-6882	AN335-4	88044	NUT, PLAIN, HEXAGON: BRACKET MTG	EA	4
44	4	PAOZZ	5310-00-595-7237	67286	79466	WASHER, LOCK: BRACKET MTG	EA	4
44	5	PAOZZ	5305-00-068-0502	MS90725-6	96906	SCREW, CAP, HEXAGON HEAD: BRACKET MTG	EA	4
44	6	PAOZZ	5310-00-616-3777	6-1-733-1-30A	72869	NUT, PLAIN, HEXAGON: FILTER MTG	EA	2
44	7	PAOZZ	5305-00-018-6742	QQS633	81349	SCREW, CAP, HEXAGON HEAD: FILTER MTG	EA	2
44	8	XBOZZ		94783	79466	BRACKET: FILTER MTG	EA	1
44	9	PAOZZ	4730-00-277-8289	3325X4	79470	NIPPLE, PIPE: FILTER TO PUMP, 1/4 X 1/4 NPT	EA	1
44	10	PAOZZ	5310-00-880-5977	MS55310-31	08288	WASHER, FLAT: BRACKET MTG SCREW	EA	2
44	11	XBOZZ		94786	79466	BRACKET: FILTER MTG	EA	1
44	12	PAOZZ	4730-00-277-5105	5825X5	79470	TEE, PIPE TO TUBE: FUEL PUMP	EA	1
44	13	PAOZZ	4730-00-278-3142	6-1-737-1-2-13A	72869	BUSHING, HEXAGON: FILTER TO PUMP, 1/4 X 1/8 NPT	EA	1
44	14	PAOZZ	4730-00-620-6904	5816X5X4	79470	ADAPTER, STRAIGHT: RETURN LINE	EA	1
44	15	PAOZZ	4730-00-289-5176	WWP471TYPEC2 STYLEC	81348	PLUG, PIPE: FUEL PUMP	EA	1
44	16	PAOZZ	4730-00-253-4412	MS39230-2	96906	ELBOW, STREET: FUEL PUMP	EA	1
44	17	PAOZZ	4330-00-640-5820	DA12706-2	15472	FILTER, FUEL: WATER HEATER BURNER	EA	1

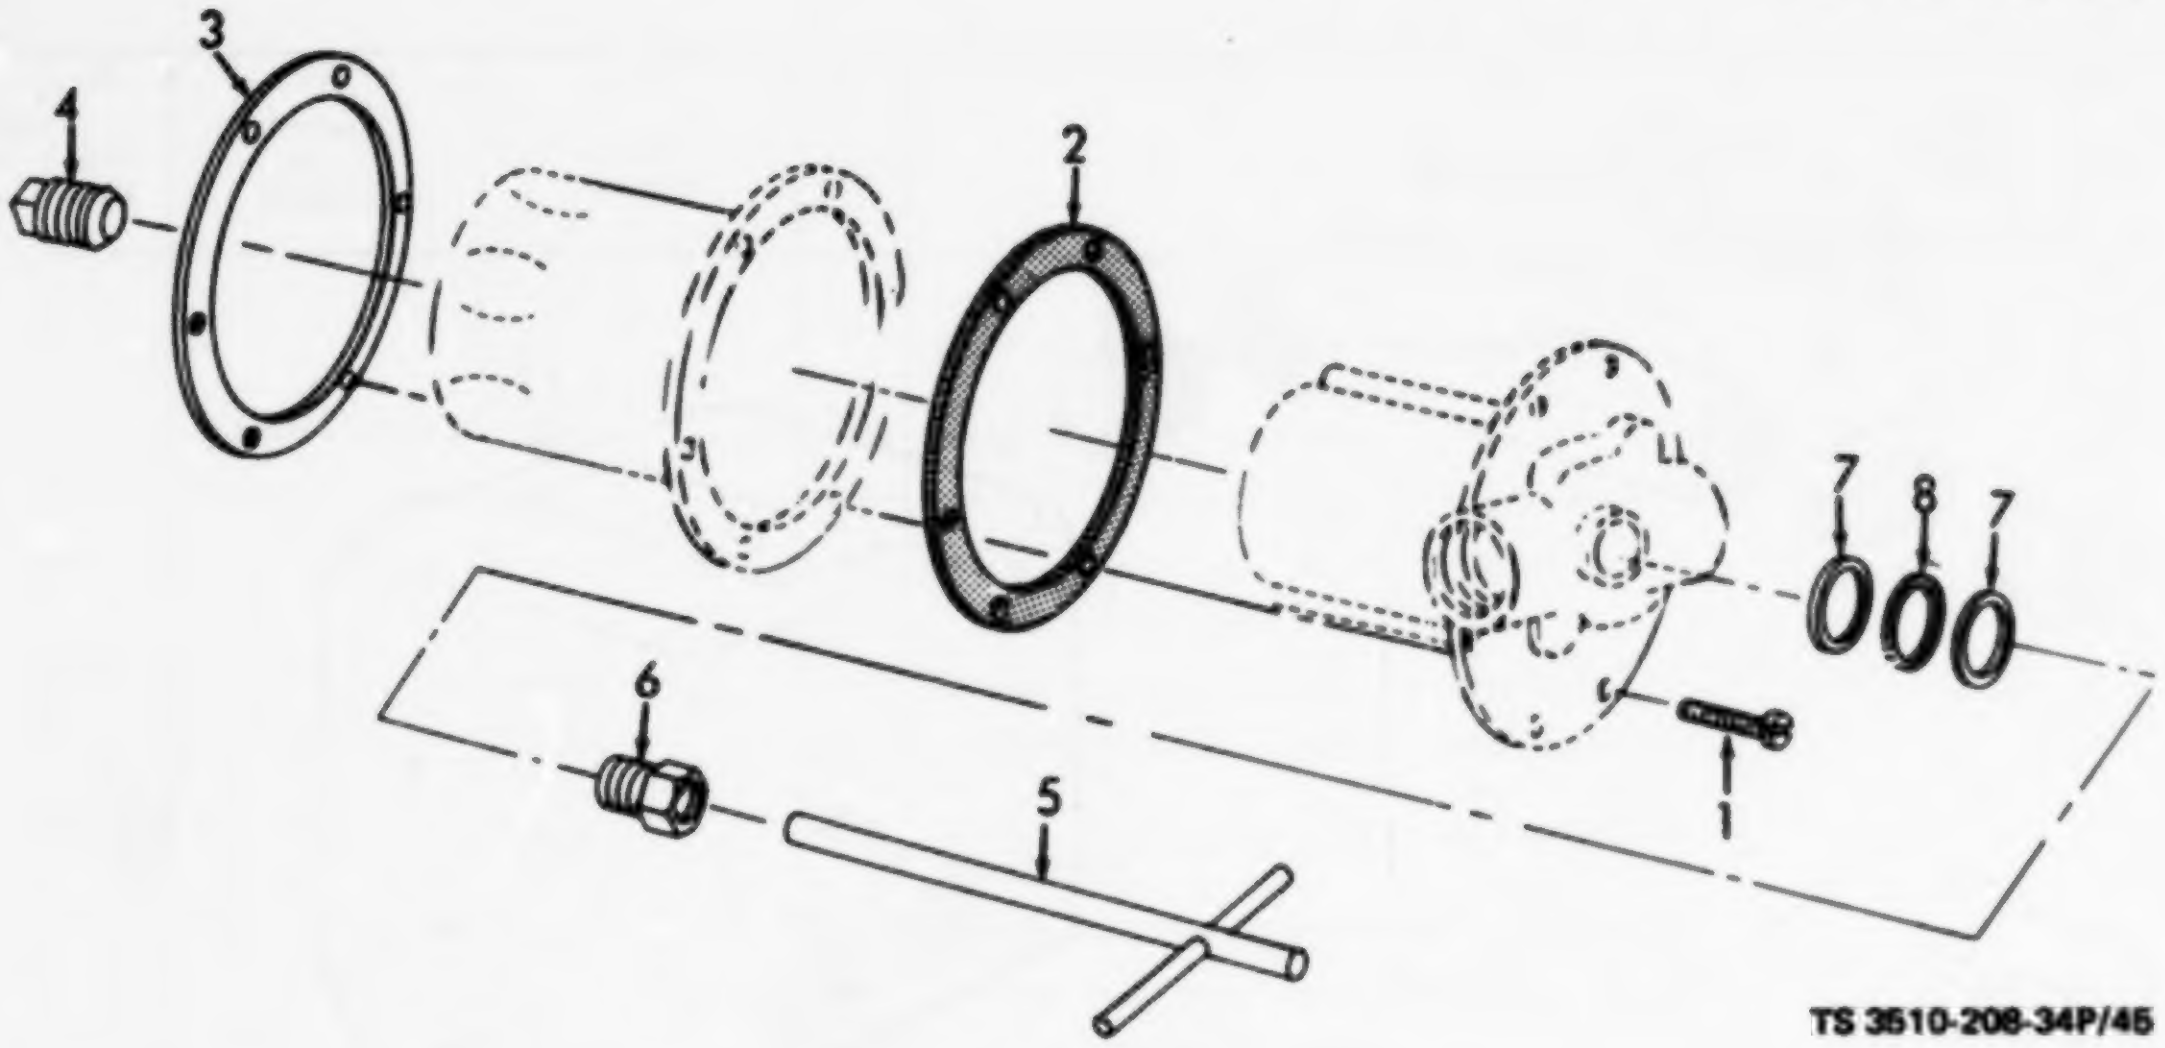

TS 3510-208-34P/45

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
45	1	PAOZZ	5305-00-016-9525	MBOES169525	81348	SCREW, SELF-TAPPING: FILTER HEAD MTG, NO. 12-24 THD SIZE, 5/8 IN. LG	EA	6
45	2	PAOZZ	5330-00-360-5303	32845	15472	GASKET, FUEL FILTER HEAD	EA	1
45	3	XBOZZ		28329-00	15472	RING, FILTER HEAD	EA	1
45	4	XBOZZ		23370-31	15472	PLUG, DRAIN, FILTER	EA	1
45	5	XBOZZ		31582-32	15472	HANDLE, FILTER	EA	1
45	6	PAOZZ	4730-00-293-3971	32158-31	15472	BUSHING, MACHINE, THROUGH	EA	1
45	7	PAOZZ	5310-00-276-2975	32059-31	15472	WASHER, RECESSED	EA	2
45	8	PAOZZ	5330-00-290-9471	1334-8	15472	PACKING, PREFORMED, FUEL GLAND FILTER	EA	1

Figure 45. Fuel Filter, Water Heater.

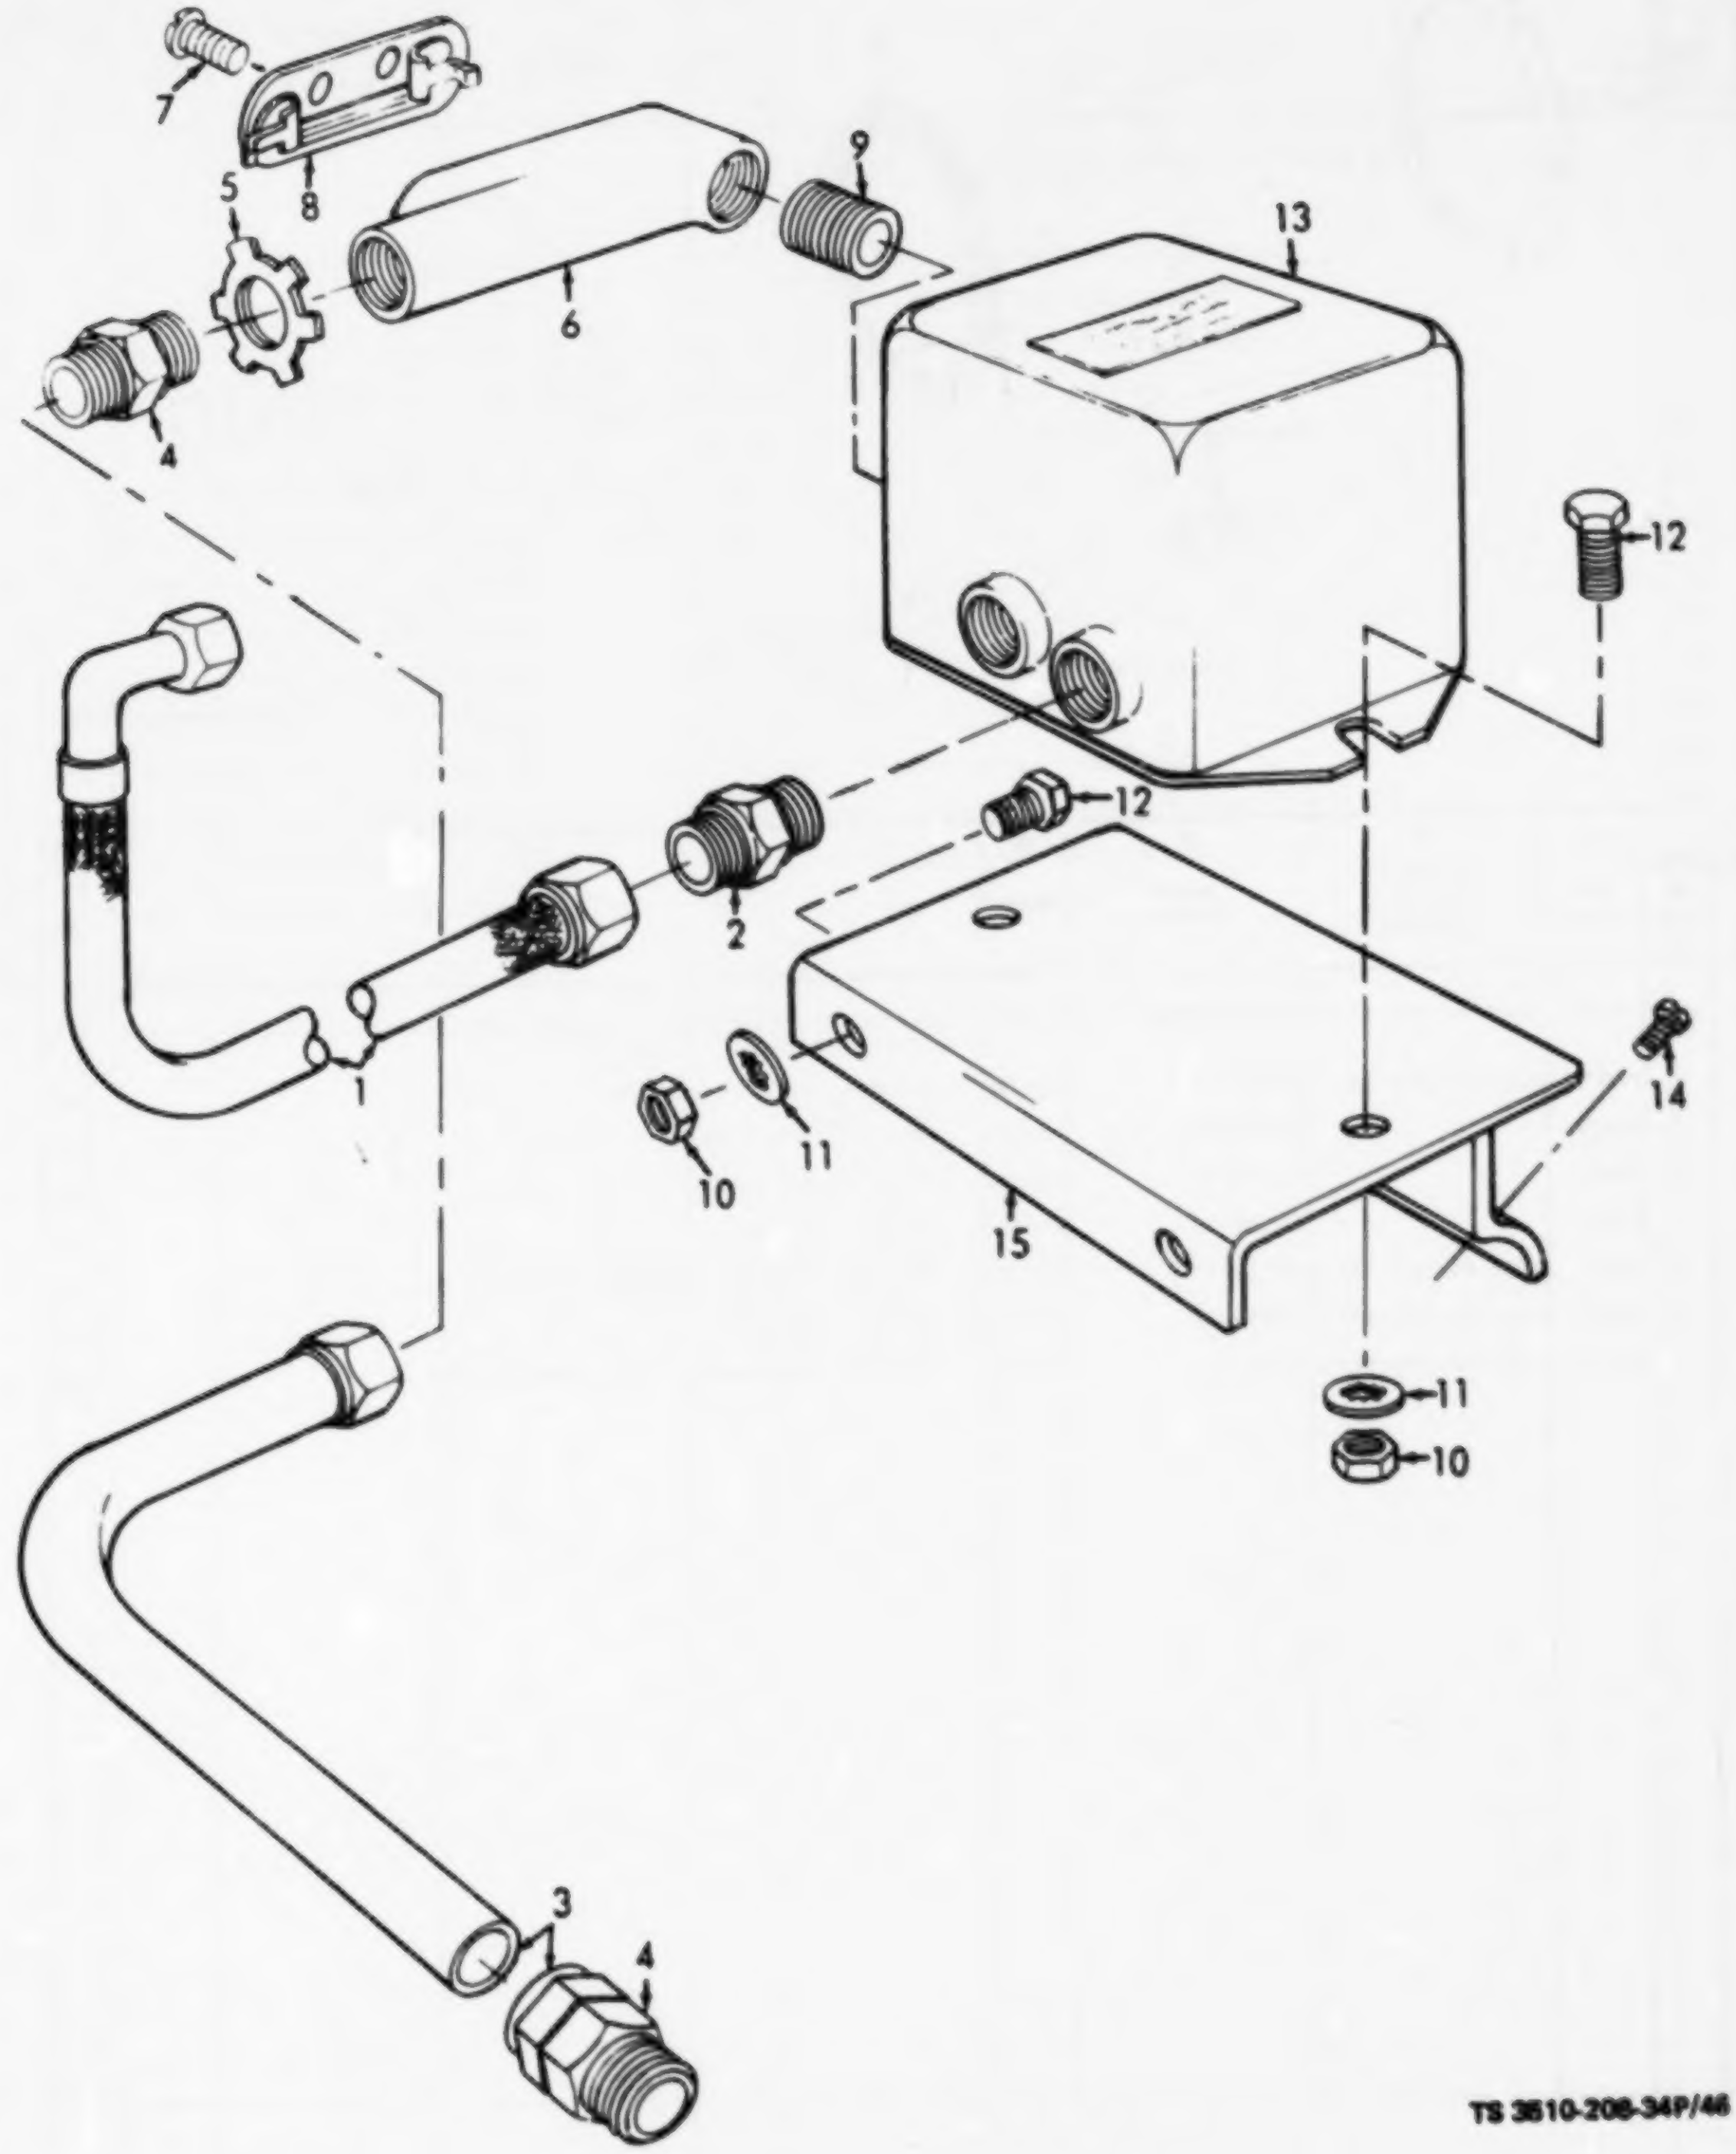
7
8
5
9
6
13
4
12
12
2
1
14
11
10
15
11
10
3
4

TS 3510-208-34P/46

Figure 46. Water Heater Transformer.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 29 - WATER HEATER TRANSFORMER		
46	1	PAOZZ	4510-00-445-9917	4158R1	26901	CABLE ASSEMBLY, IGNITION	EA	2
46	2	PAOZZ	5975-00-445-9926	1268	26901	ADAPTER: IGNITION CABLE TO TRANSFORMER	EA	2
46	3	MOOO		6-1-733-1-19A	72869	TUBING, ELECTRICAL, METAL: TRANSFORMER TO SWITCH BOX MANUFACTURE FROM:	EA	1
46		PAOZZ	5975-00-178-1216	WWC563	81349	CONDUIT, RIGID, 31-1/2 IN. REQUIRED	FT	V
46	4	PAOZZ	5975-00-179-0098	SP4550	24446	BOX CONNECTOR, ELECTRICAL: TRANSFORMER TO SWITCH BOX	EA	2
46	5	PAOZZ	5975-00-152-1075	50810	79466	LOCKNUT, ELECTRICAL: IGNITION CABLE TO TRANSFORMER	EA	2
46	6	PAOZZ	5975-00-644-3183	57141	79466	CONDUIT OUTLET: TRANSFORMER TO SWITCH BOX	EA	1
46	7	XBOZZ		6-1-1912-21-41A	72869	SCREW, MACHINE: CONNECTOR ELBOW COVER MTG	EA	2
46	8	XBOZZ		LB3170	15235	COVER: CONNECTOR ELBOW	EA	1
46	9	XBOZZ		53945	79466	NIPPLE, CONDUIT: TRANSFORMER	EA	1
46	10	PAOZZ	5310-00-761-6882	6-1-733-1-33A	72869	NUT, PLAIN, HEXAGON: TRANSFORMER AND BRACKET MTG	EA	4
46	11	PAOZZ	5310-00-550-1130	67265	79466	WASHER, LOCK: TRANSFORMER AND BRACKET MTG	EA	6
46	12	PAOZZ	5305-00-068-0502	MS90725-6	96906	SCREW, CAP, HEXAGON HEAD: TRANSFORMER AND BRACKET MTG	EA	4
46	13	PAOZZ	5950-00-627-6753	638-253-296	75138	TRANSFORMER, POWER	EA	1
46	14	PAOZZ	5305-00-044-6556	58615	79466	SCREW, TAPPING, THREADED: TRANSFORMER BRACKET MTG	EA	2
46	15	XBOZZ		80741	79466	BRACKET, TRANSFORMER	EA	1

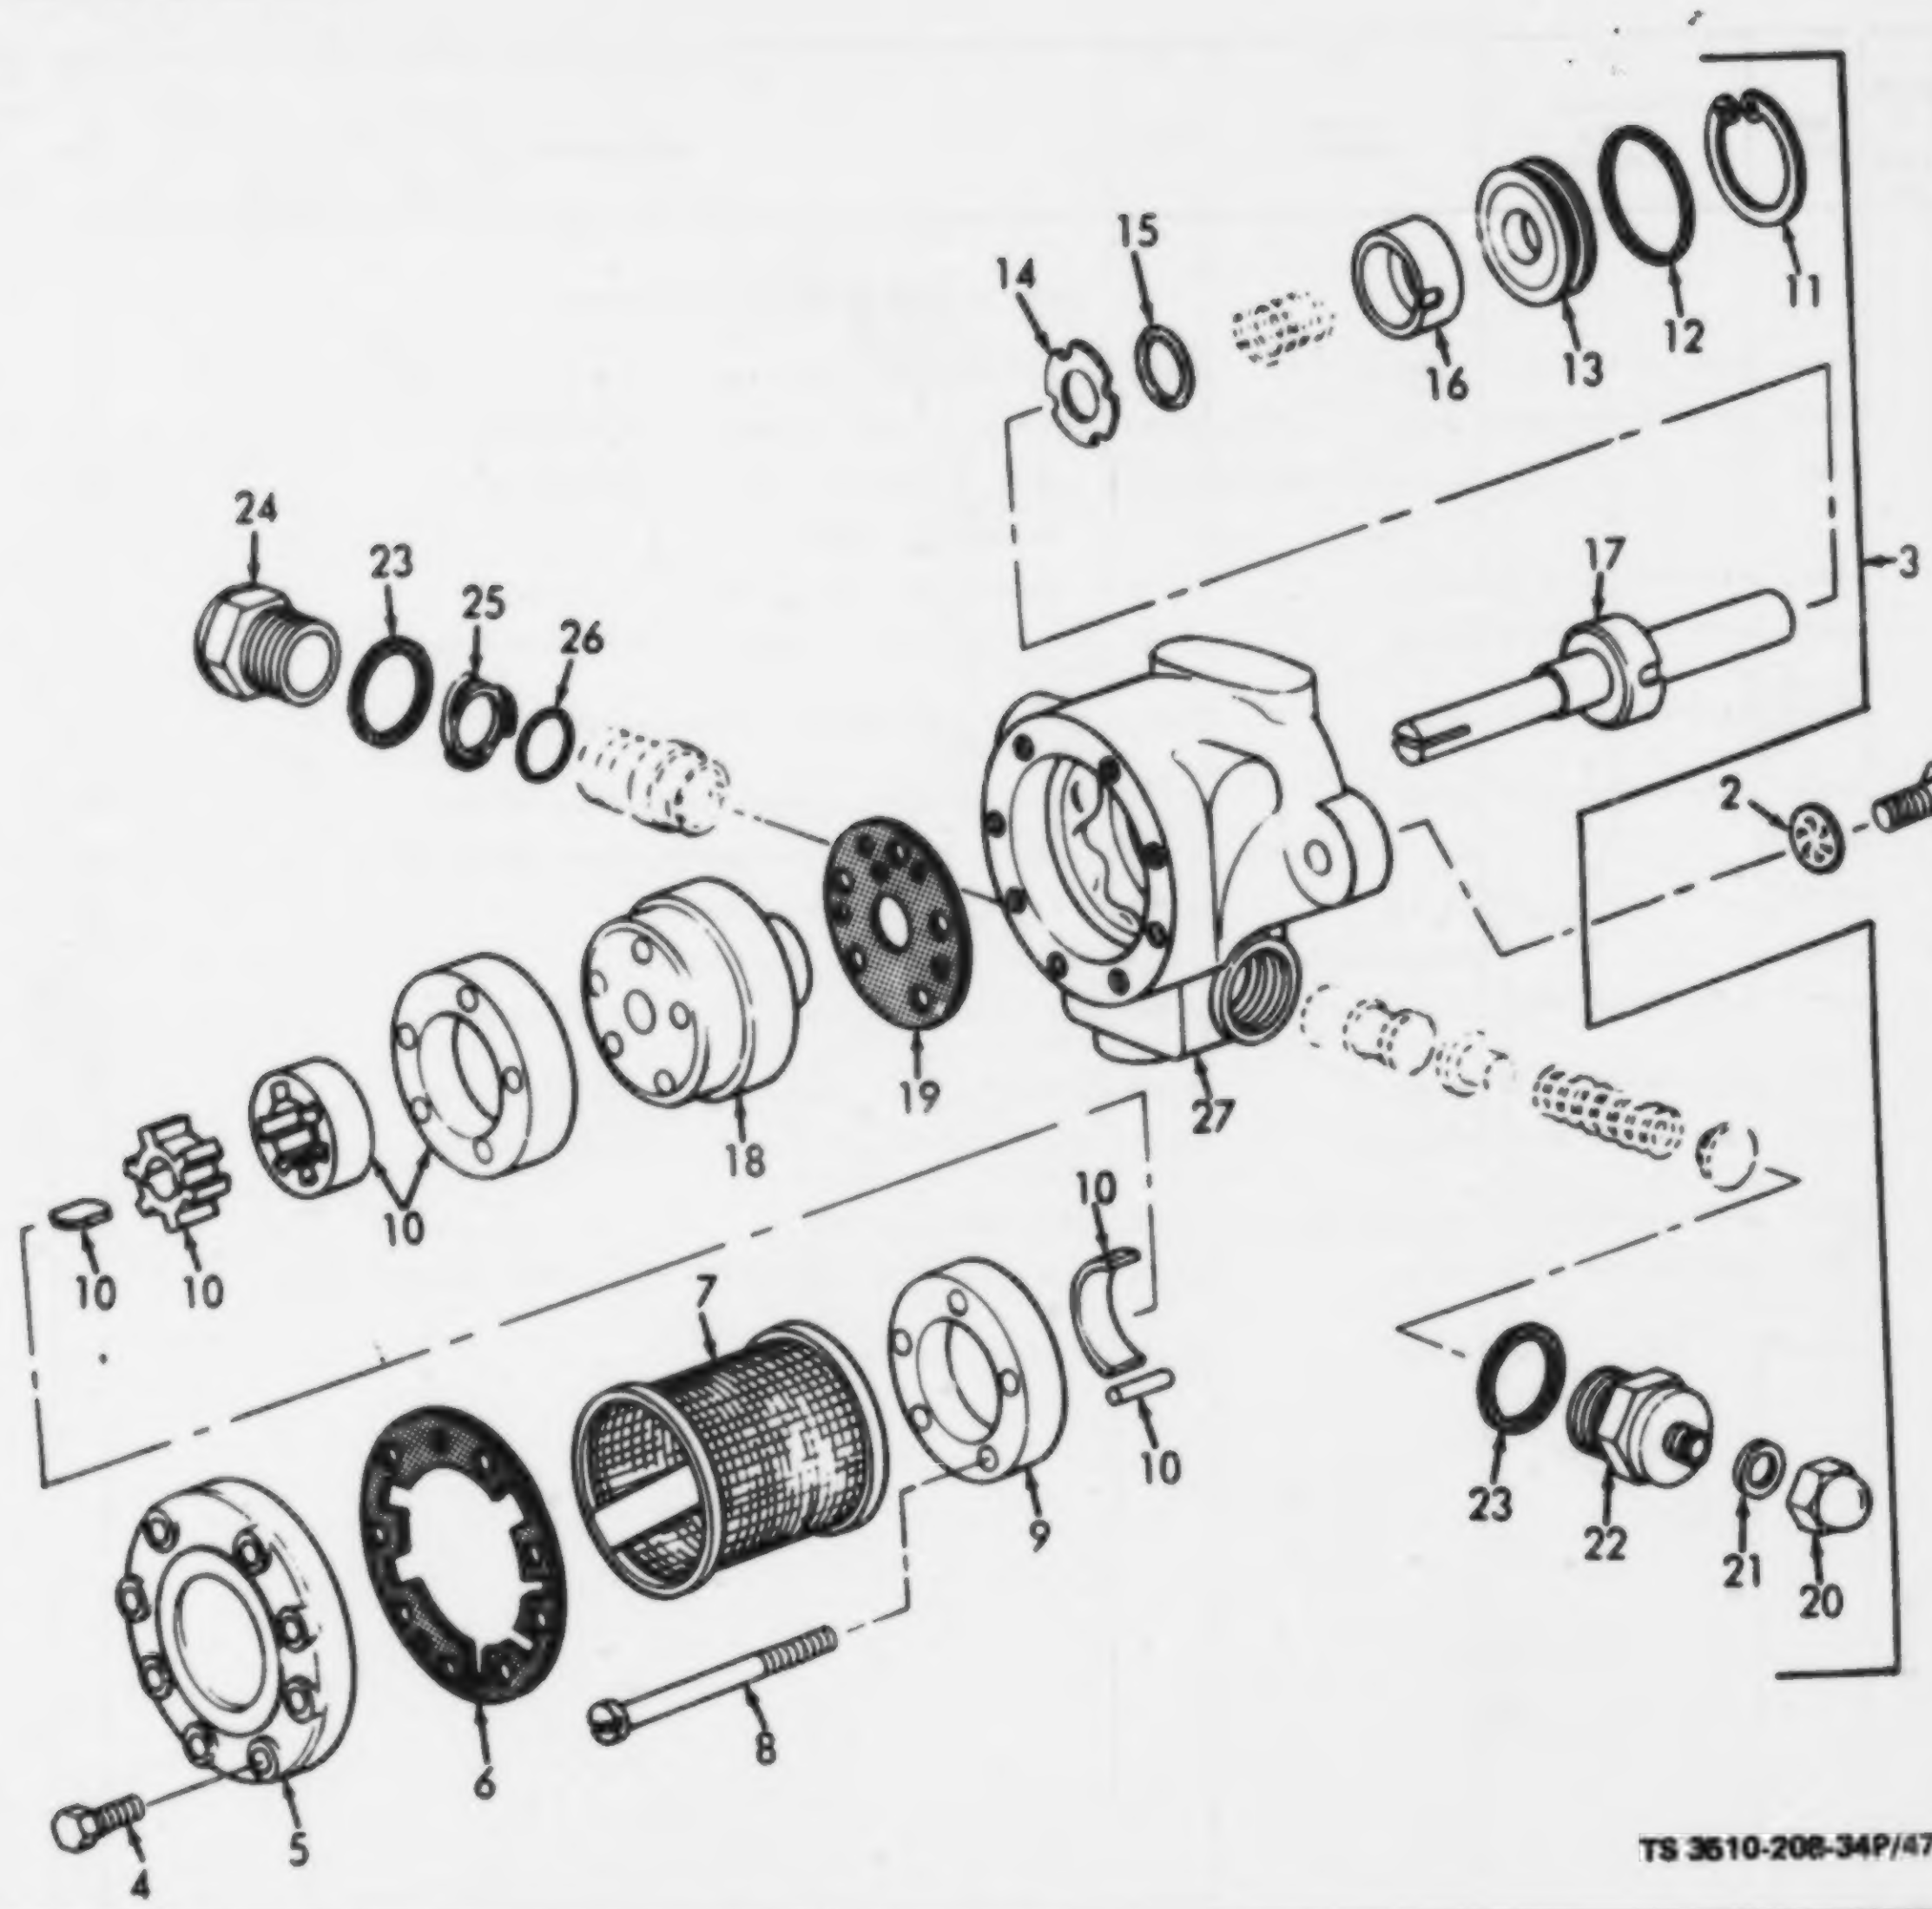

TS 3510-208-34P/47

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.							
						GROUP 30 - FUEL PUMP, WATER HEATER BURNER		
47	1	PAOZZ	5305-00-269-3211	MS55305-23	08288	SCREW, CAP, HEXAGON HEAD: FUEL PUMP MTG	EA	2
47	2	PAOZZ	5310-00-595-7237	MS35333-25	08288	WASHER, LOCK: FUEL PUMP MTG	EA	1
47	3	PAOFF	4530-00-707-4851	67285	79466	PUMP, ROTARY, POWER: WATER HEATER BURNER	EA	1
47	4	PAFZZ	5305-00-716-8186	MS35298-110	96906	SCREW, CAP, HEXAGON HEAD: FRONT COVER MTG	EA	8
47	5	XAFZZ		112077	58417	COVER, FRONT	EA	1
47	6	KBFZZ		110441	58417	GASKET, (SEE KIT P/N 80764 (79466))	EA	1
47	7	KBFZZ		121232	58417	STRAINER, (SEE KIT, P/N 80764 (79466))	EA	1

Figure 47. Fuel pump, Water Heater Burner.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
47	8	PAFZZ	5305-00-011-5298	105021	58417	SCREW, MACHINE: GEAR PLATE MTG	EA	5
47	9	KBFZZ		124027	58417	PLATE (SEE KIT, P/N 80764 (79466))	EA	1
47	10	KBFZZ		104671	58417	GEAR SET (SEE KIT, P/N 80764 (79466))	EA	1
47	11	XBFZZ		51017	58417	RING, SNAP, RETAINING	EA	1
47	12	KBFZZ		123652	58417	PACKING, PREFORMED (SEE KIT, P/N 80764 (79466))	EA	1
47	13	KBFZZ		129772	58417	SEAL (SEE KIT, P/N 80764 (79466))	EA	1
47	14	KBFZZ		129782	58417	WASHER, BACK-UP (SEE KIT, P/N 80764 (79466))	EA	1
47	15	KBFZZ		123632	58417	PACKING, (SEE KIT, P/N 80764 (79466))	EA	1
47	16	KBFZZ		129792	58417	SEAL, (SEE KIT, P/N 80764 (79466))	EA	1
47	17	XAFZZ		117667	58417	SHAFT ASSEMBLY	EA	1
47	18	KBFZZ		117531	58417	HOUSING, (SEE KIT, P/N 80764 (79466))	EA	1
47	19	KBFZZ		113331	58417	GASKET, HOUSING, (SEE KIT 80764 (79466))	EA	1
47	20	KBFZZ		100241	58417	NUT, PLAIN, CAP, (SEE KIT, P/N 80764 (79466))	EA	1
47	21	PAFZZ	2910-00-472-6189	100371	58417	GASKET: END CAP NUT	EA	1
47	22	XBFZZ		103379	58417	PLUG, END	EA	1
47	23	KBFZZ		100901	58417	WASHER, NONMETALLIC, (SEE KIT, P/N 80764 (79466))	EA	3
47	24	XBFZZ		114227	58417	PLUG, END	EA	1
47	25	PAFZZ	4520-00-976-2253	121732	58417	SLEEVE, RETAINER	EA	1
47	26	KBFZZ		28778	58417	PACKING, PREFORMED, (SEE KIT, P/N 80764 (79466))	EA	1
47	27	XAFZZ		119984	58417	BODY, FUEL PUMP	EA	1
47		PAFZZ	4530-00-707-4855	80764	79466	REPAIR KIT, FUEL PUMP: WATER HEATER BURNER	EA	1
47	6					1 EA, GASKET 110441 (58417)		
47	7					1 EA, STRAINER 121232 (58417)		
47	9					1 EA, PLATE 124027 (58417)		
47	10					1 EA, GEAR SET 104671 (58417)		
47	12					1 EA, PACKING, PREFORMED 123652 (58417)		
47	13					1 EA, SEAL 129772 (58417)		
47	14					1 EA, WASHER, BACK-UP 129782 (58417)		
47	15					1 EA, PACKING 123632 (58417)		
47	16					1 EA, SEAL 129792 (58417)		
47	18					1 EA, HOUSING 117531 (58417)		
47	19					1 EA, GASKET, HOUSING 113331 (58417)		
47	20					1 EA, NUT, PLAIN, CAP 100241 (58417)		
47	23					3 EA, WASHER, NONMETALLIC 100901 (58417)		
47	26					1 EA, PACKING, PREFORMED 28778 (58417)		

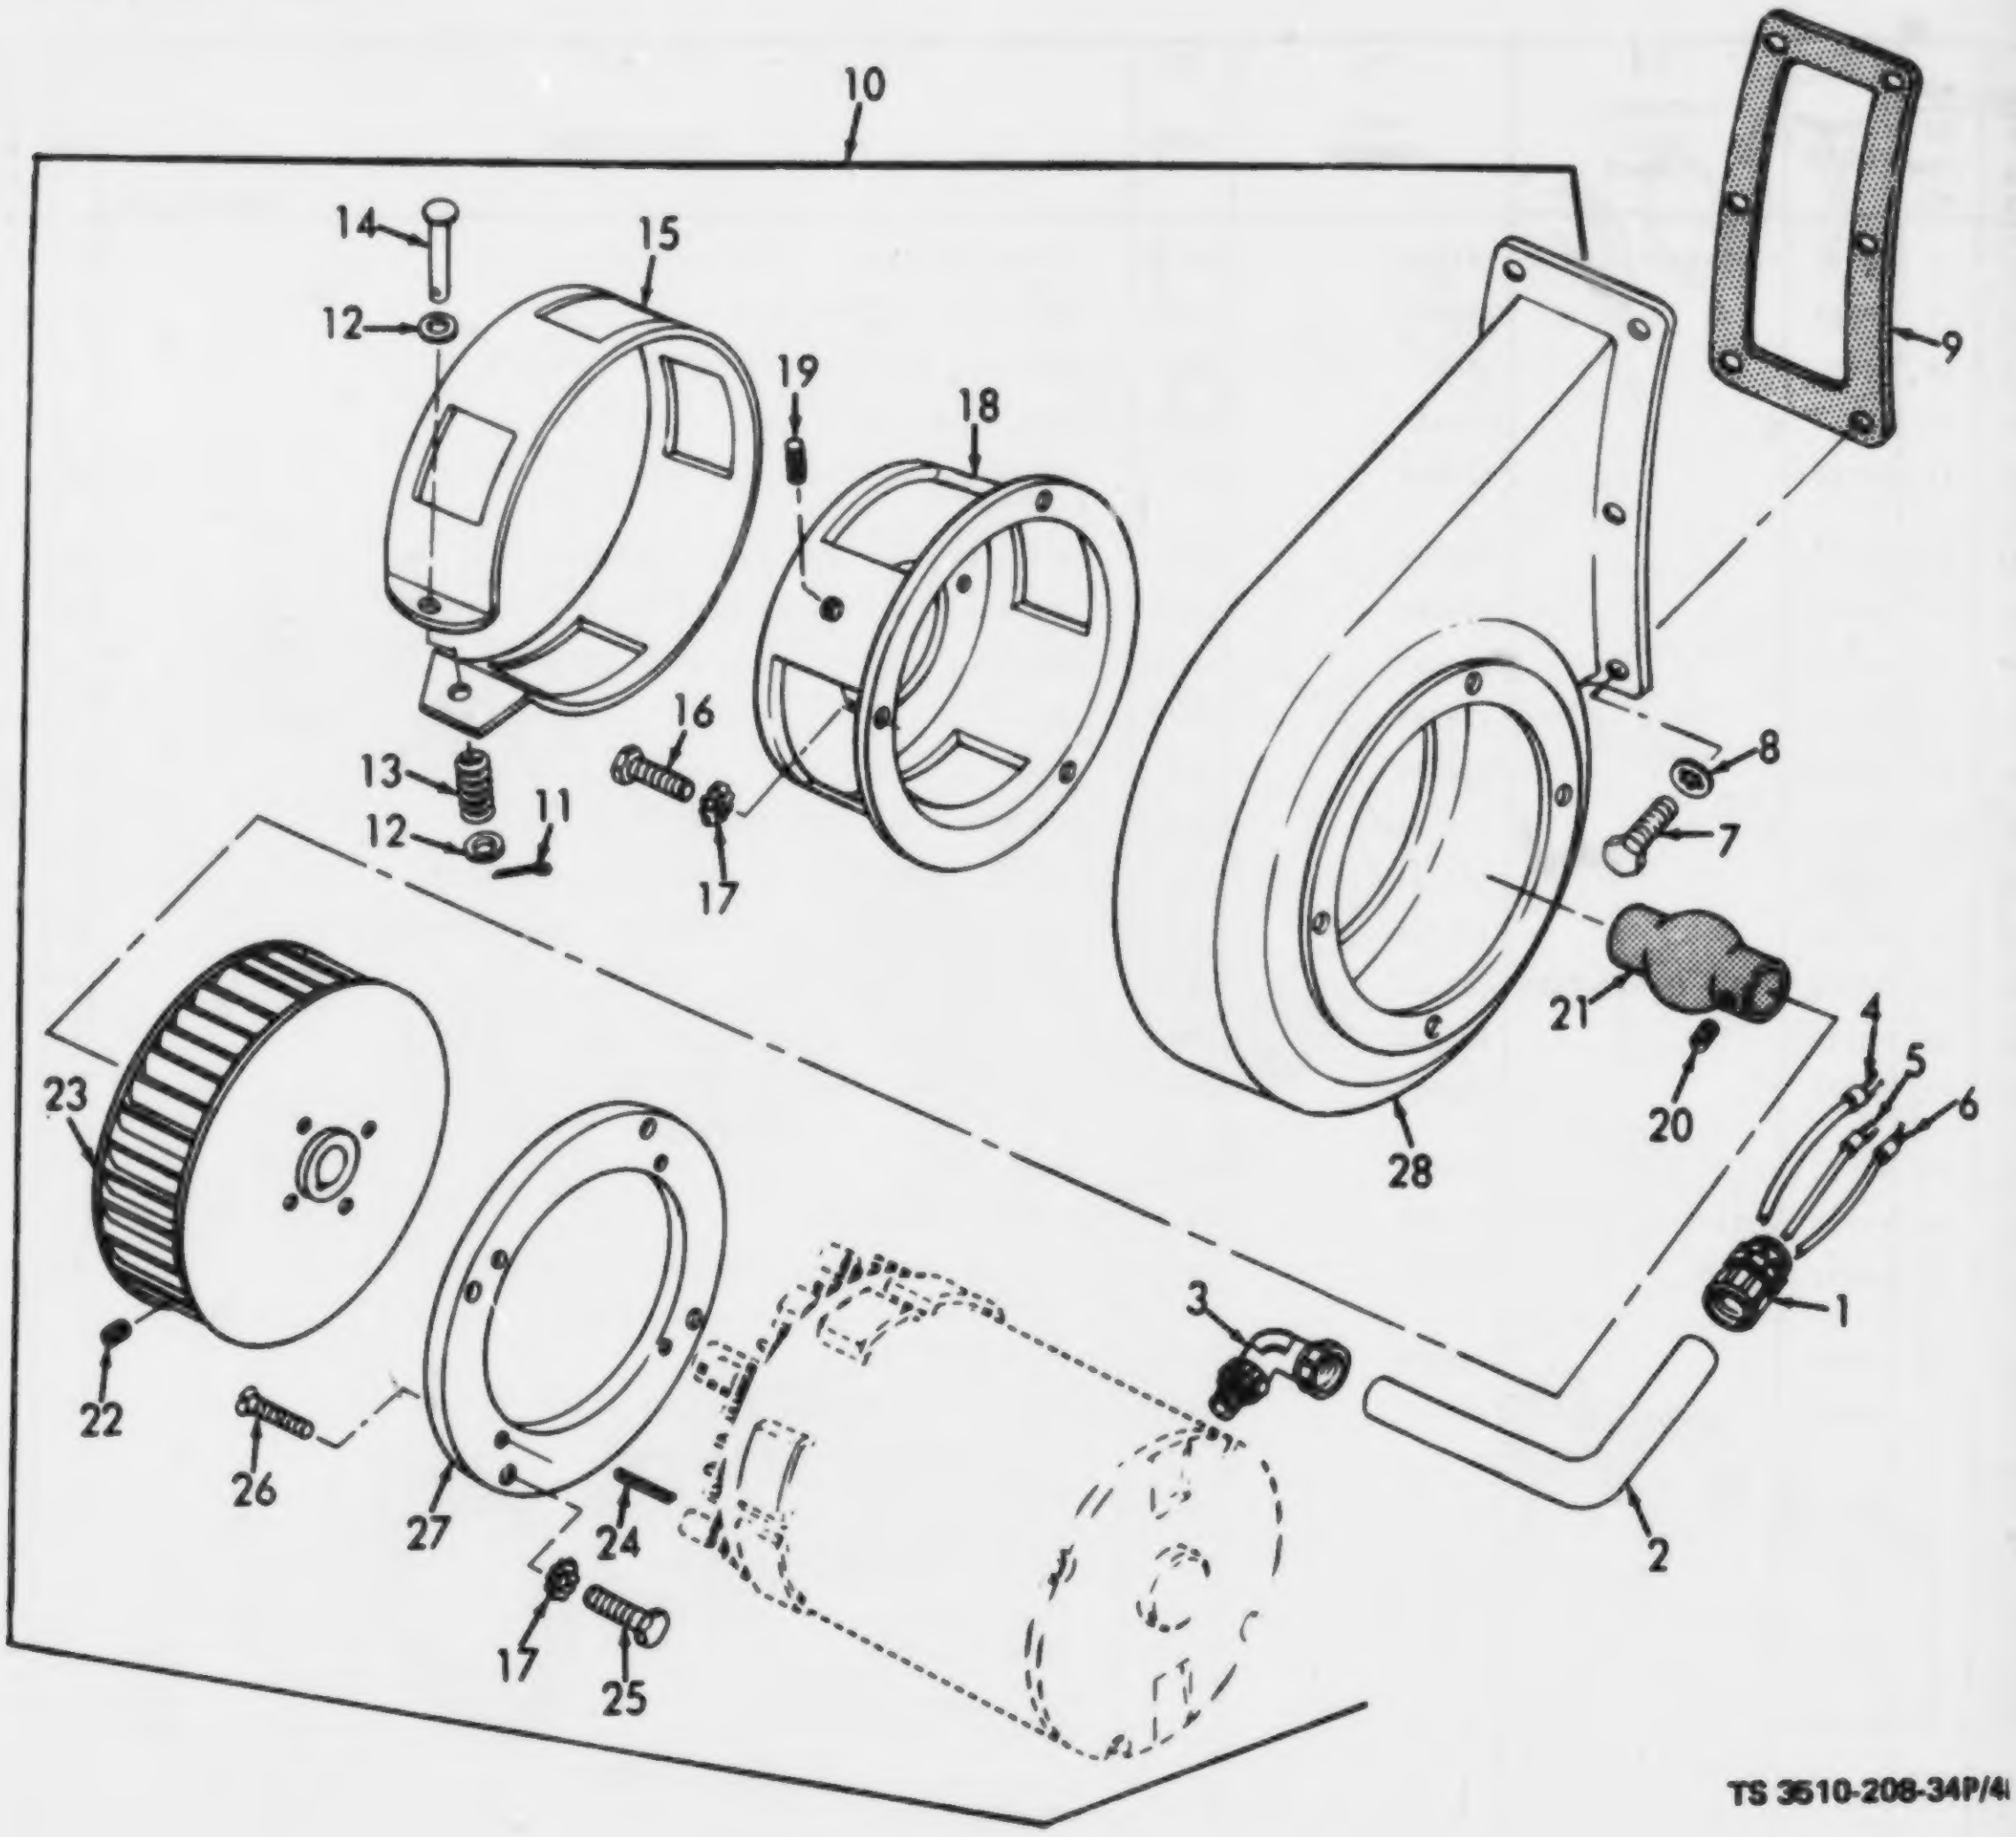
10
14
15
12
19
18
9
13
12
11
16
17
8
7
21
4
5
6
20
23
28
1
3
22
26
27
24
2
17
25

TS 3510-208-34P/4

Figure 48. Water Heater Blower and Motor.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 31 - WATER HEATER BLOWER AND MOTOR		
48	1	XBOZZ		6-1-2337-20-466A	72869	CONNECTOR, STRAIGHT: 1/2 IN.	EA	1
48	2	PAOZZ	5975-00-178-1216	WWC5635IZE1-2	81349	CONDUIT, RIGID, 11-3/8 IN. REQUIRED	FT	V
48	3	XBOZZ		67223	79466	CONNECTOR, RAIN TIGHT: MOTOR	EA	1
48	4	PAOZZ	6145-00-310-2598	59-255AGR4	60883	WIRE, ELECTRICAL, 12 IN. REQUIRED	FT	V
48	5	PAOZZ	6145-00-310-2590	59-255AGR3	60883	WIRE, STRANDED, RED, 12 IN. REQUIRED	FT	V
48	6	PAOZZ	6145-00-310-2593	7714	70903	WIRE, ELECTRICAL, 12 IN. REQUIRED	FT	V
48	7	PAOZZ	5305-00-269-3211	MS55305-23	08288	SCREW, CAP, HEXAGON HEAD: BLOWER HOUSING MTG	EA	6
48	8	PAOZZ	5310-00-550-1130	MS35333-40	96906	WASHER, LOCK: BLOWER HOUSING MTG	EA	6
48	9	PAOZZ	4510-00-709-8535	79487	79466	GASKET, ASBESTOS: BLOWER	EA	1
48	10	PAOOO	3510-00-253-0567	6-1-737-1-2-1A	79466	BLOWER ASSEMBLY	EA	1
48	11	PAOZZ	5315-00-013-7137	MS24665-814	96906	PIN, COTTER: SHUTTER MTG	EA	1
48	12	PAOZZ	5310-00-045-5210	101121	79466	WASHER, FLAT: SHUTTER	EA	2
48	13	PAOZZ	5340-00-933-5909	101128	79466	SPRING, HELICAL, COMPRESSION: SHUTTER	EA	1
48	14	XBOZZ		94778	79466	RIVET, TRUSS HEAD: SHUTTER, 1/4 IN. X 1-3/8 IN. LG	EA	1
48	15	PAOZZ	3510-00-411-2674	94779	79466	SHUTTER	EA	1
48	16	PAOZZ	5305-00-269-3213	MS90725-62	96906	SCREW, CAP, HEXAGON HEAD: SHUTTER BRACKET MTG	EA	3
48	17	PAOZZ	5310-00-550-1130	MS35333-40	96906	WASHER, LOCK: SHUTTER BRACKET AND MOTOR MTG	EA	7
48	18	XBOZZ		6-1-747-1-2-23-2A	72869	BRACKET, FUEL PUMP	EA	1
48	19	XBOZZ		101123	79466	PIN, STOP	EA	1
48	20	PAOZZ	5305-00-249-0520	MS51017-48	96906	SETSCREW: COUPLING BLOWER	EA	3
48	21	PAOZZ	4520-00-989-3380	63729	79466	COUPLING, HEATER, WATER	EA	1
48	22	PAOZZ	5305-00-724-5896	MS51963-82	96906	SETSCREW: WHEEL MTG, BLOWER	EA	1
48	23	PAOZZ	4510-00-707-5963	47857	79466	WHEEL, BLOWER	EA	1
48	24	PAOZZ	5315-00-081-6414	MS20066-166	96906	KEY, MACHINE: WHEEL MTG	EA	1
48	25	PAOZZ	5305-00-269-3211	MS55305-23	08288	SCREW, CAP, HEXAGON HEAD: MOTOR MTG	EA	4
48	26	PAOZZ	5305-00-958-5260	MS35241-120	96906	SCREW, CAP, FILLISTER HEAD: MOTOR TO PLATE	EA	4
48	27	XBOZZ	4510-00-707-5962	6-1-737-1-2-2A	72869	PLATE, MOTOR	EA	1
48	28	PAOZZ	4510-00-707-5961	6-1-737-1-2-1	79466	HOUSING, BLOWER	EA	2

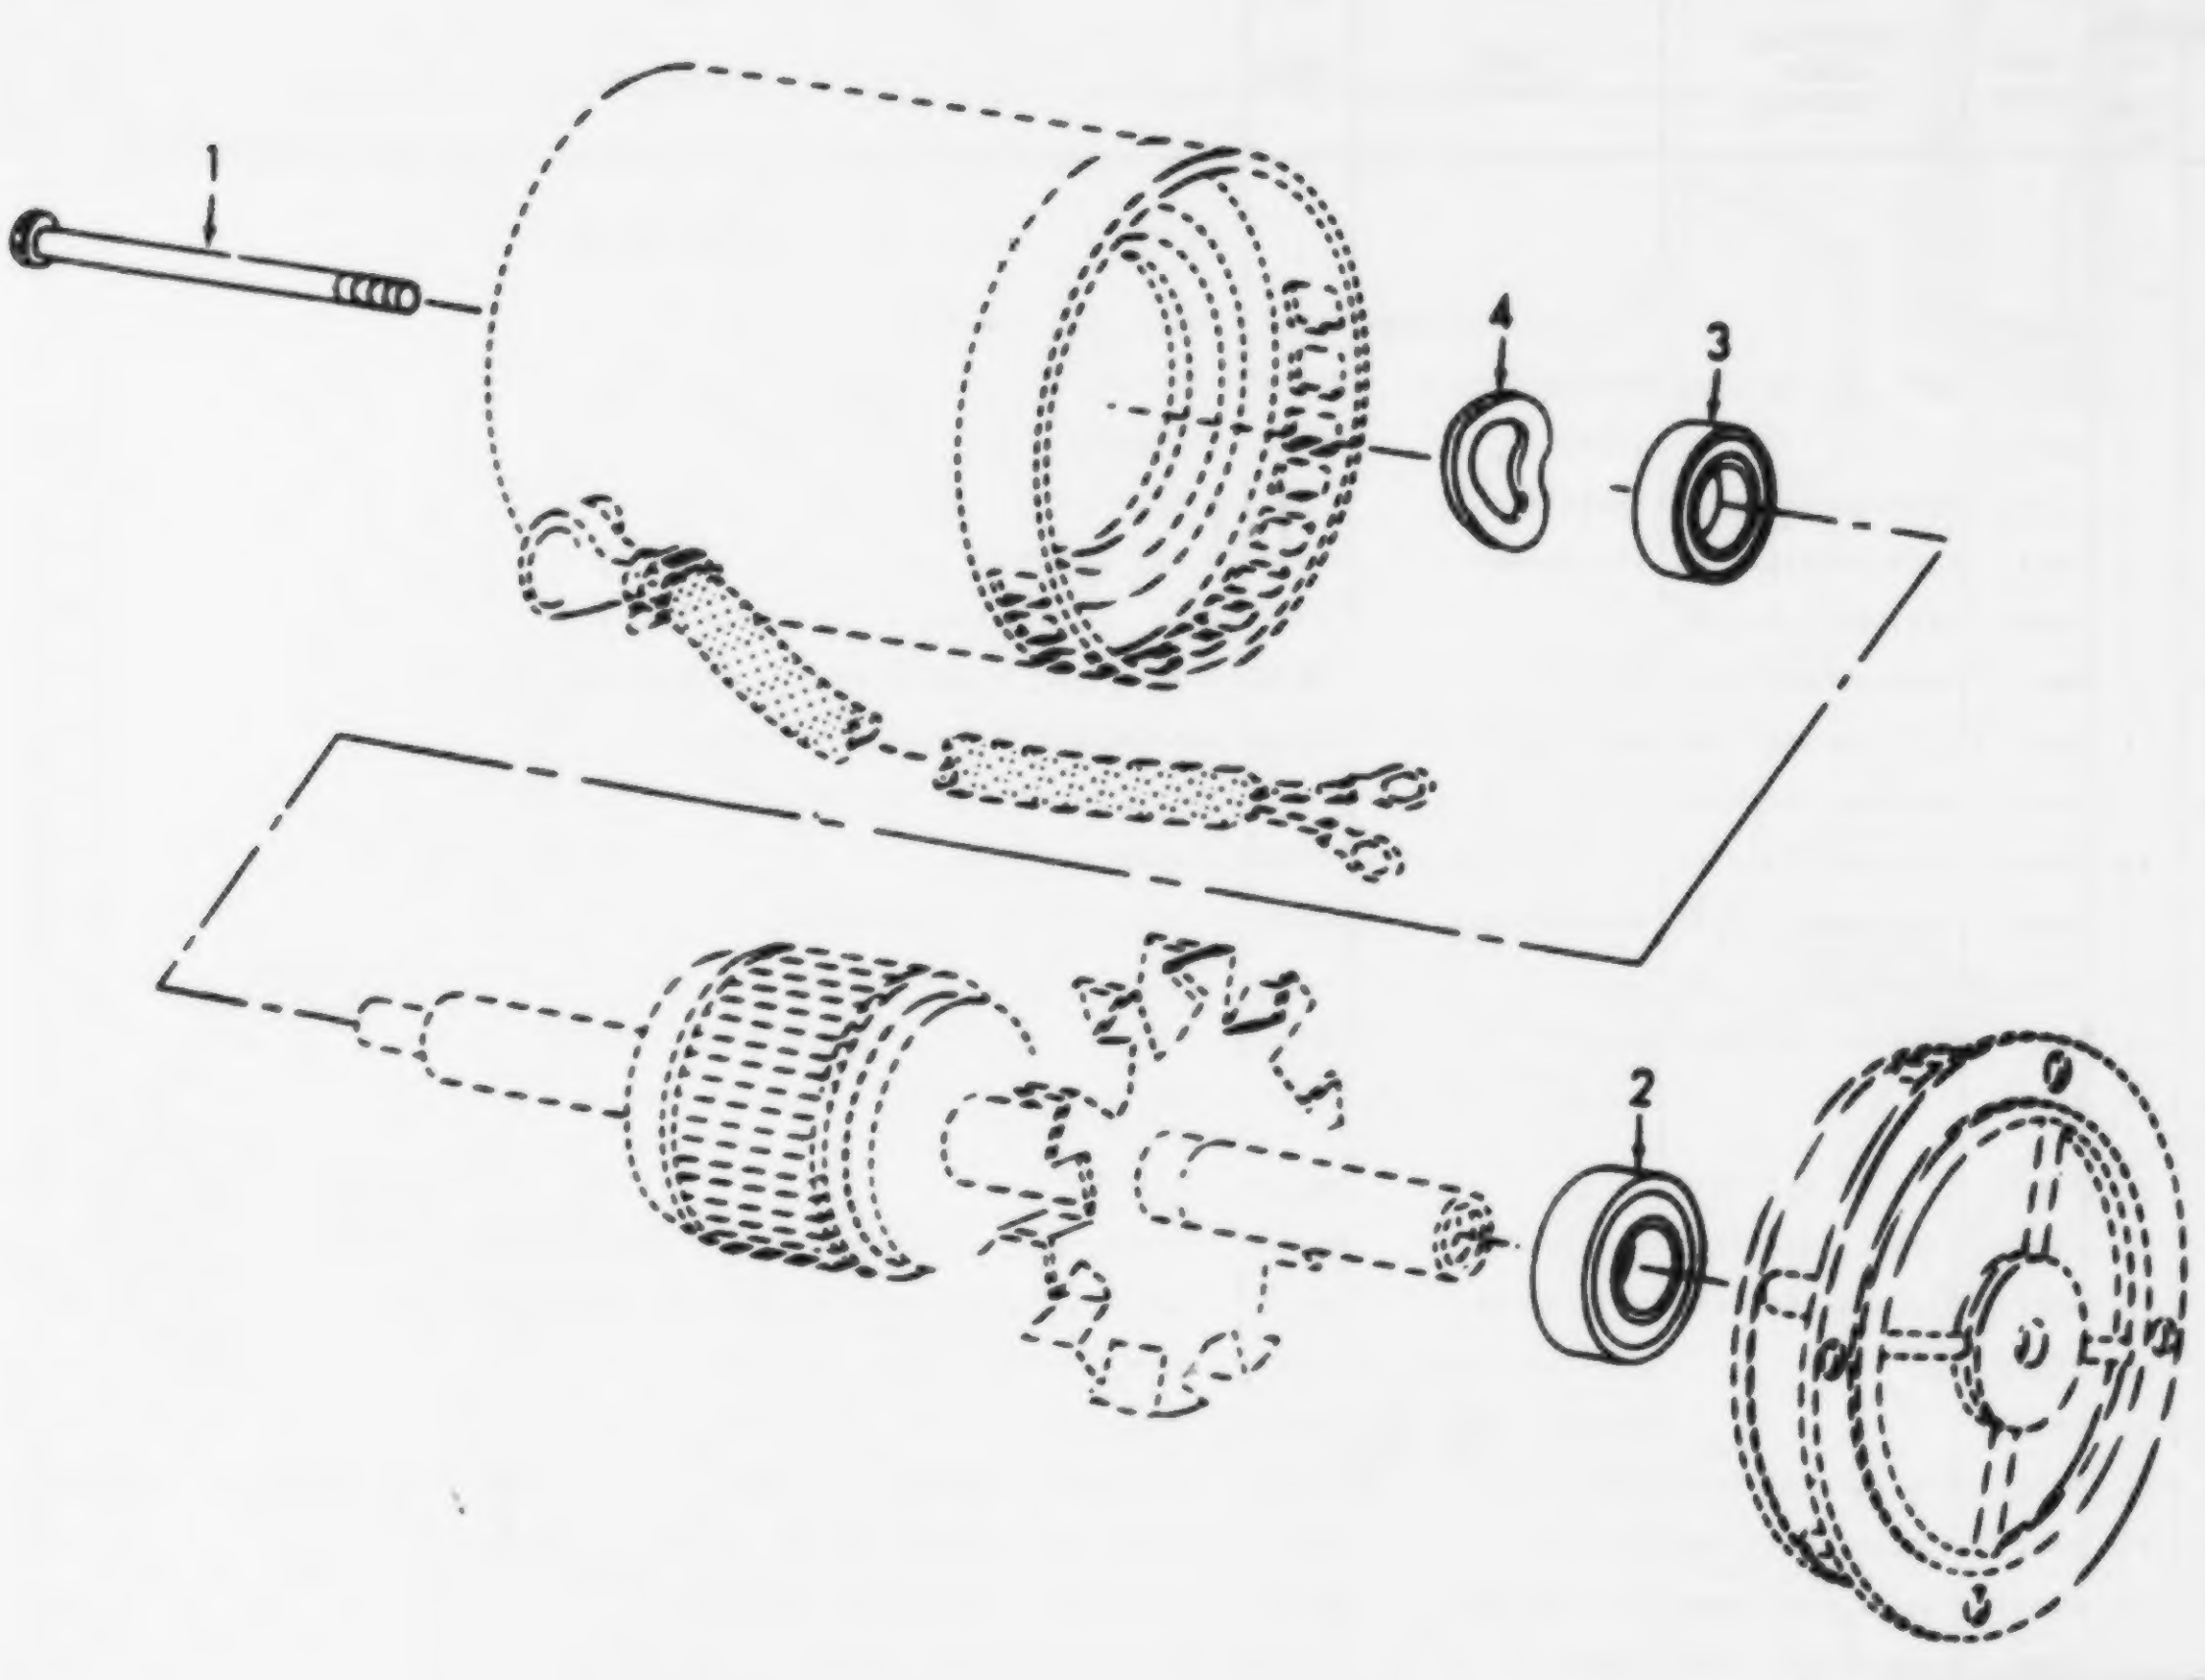

TS 3510-208-34P/49

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	QTY INC IN UNIT
						GROUP 32 — WATER HEATER BURNER BLOWER MOTOR		
49		PAOFF	6105-01-149-8829	5K36FG504U	88422	MOTOR, BLOWER: WATER HEATER BURNER BLOWER W/THERMAL PROTECTOR 112A501WDP18(88422)	EA	1
49	1	XBFZZ		30127304	11349	BOLT, THRU: END BRACKET MTG, WATER HEATER BLOWER MOTOR, 8/32 THD SIZE X 6-3/4 IN. LG	EA	4
49	2	PAFZZ		PE113A616ABP1	88422	BEARING, FRONT: WATER HEATER BURNER BLOWER MOTOR	EA	1
49	3	PAFZZ		OPE113A615ABP1	88422	BEARING, REAR: WATER HEATER BURNER BLOWER MOTOR	EA	1
49	4	PAFZZ		111A522AAP60	88422	WASHER, SPRING TENSION: WATER HEATER BURNER BLOWER MOTOR	EA	1

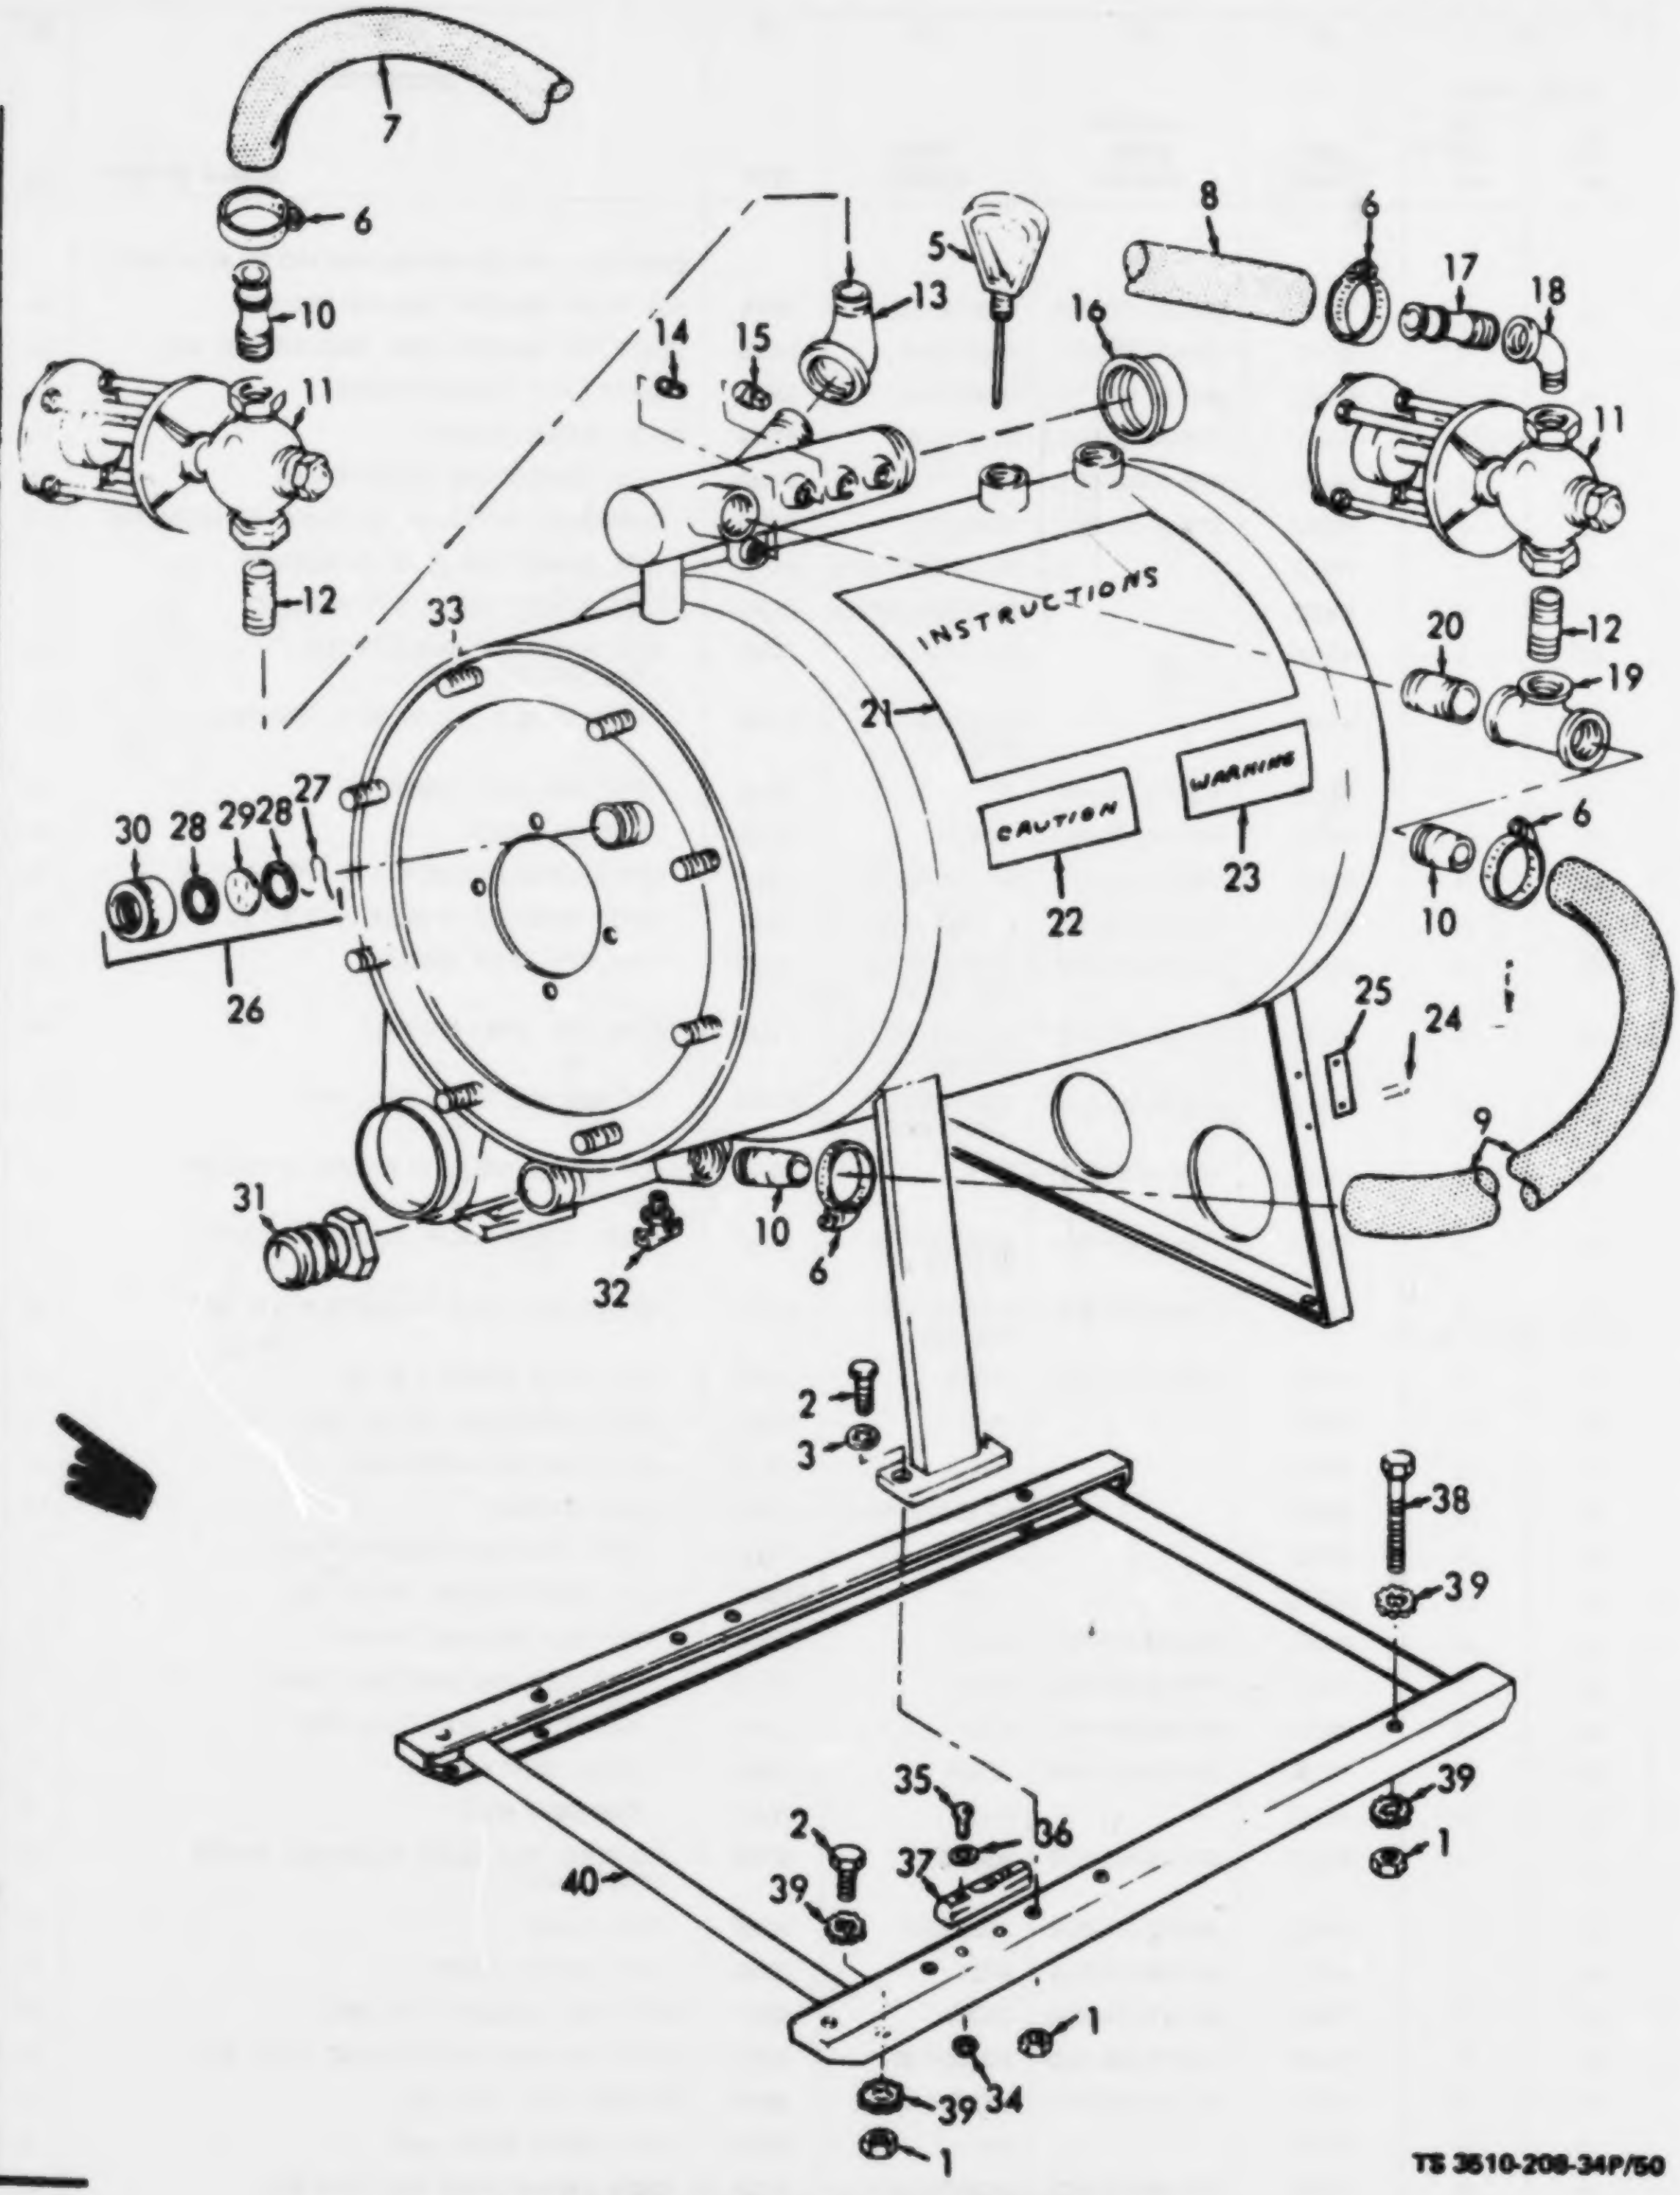
7
6
10
11
12
14
15
13
5
8
16
6
17
18
11
12
33
INSTRUCTIONS
21
20
19
CAUTION
WARNING
22
23
6
10
30
28
29
28
27
26
25
24
9
31
32
10
6
2
3
38
39
35
36
2
37
39
40
39
1
1
34
39
1
4

TS 3510-208-34P/50

Figure 50. Water Heater Tank and Related Parts.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	QTY INC IN UNIT
						GROUP 33 — WATER HEATER TANK AND RELATED PARTS		
50	1	PAFZZ	5310-00-732-0558	MS35690-606	96906	NUT, PLAIN, HEXAGON: TANK AND SKID MTG	EA	10
50	2	PAFZZ	5305-00-269-3211	MSS5305-23	08288	SCREW, CAP, HEXAGON HEAD: TANK AND SKID MTG	EA	7
50	3	PAFZZ	5310-00-595-7237	MS35333-42	96906	WASHER, LOCK: TANK MTG SCREW	EA	12
50	4	PBOFF	4520-01-162-0385	MIL-H-44086	81349	WATER HEATER ASSEMBLY	EA	1
50	5	PAOZZ	6685-00-698-6805	550	61349	GAGE, TEMPERATURE: WATER HEATER	EA	1
50	6	PAOZZ	4730-00-055-8704	MS35842-2	96906	CLAMP HOSE: WATER HEATER TO WASHER EXTRACTOR	EA	8
50	7	PAOZZ		MILZZH601GRADE1	81349	HOSE, RUBBER, 1 IN. ID, 35 IN. REQUIRED	FT	V
50	8	PAOZZ		MILZZH601GRADE1	81349	HOSE, RUBBER, 1 IN. ID, 4 FT. REQUIRED	FT	V
50	9	MOOOO		6-1-733-1-13A	72869	HOSE, WATER: WATER HEATER TANK MANUFACTURE FROM:	EA	1
50		PAOZZ		MILZZH601 GRADE 1	81349	HOSE, RUBBER, 1 IN. ID, 35 IN. REQUIRED	FT	V
50	10	PAOZZ	4730-00-710-4332	22	77860	NIPPLE, PIPE: HOSE CONNECTING	EA	1
50	11	PAFZZ	4820-00-903-4921	DA597-4	49200	VALVE, DIAPHRAGM	EA	2
50	12	PAOZZ	4730-00-265-6907	6-1-1907-19-63A	72869	NIPPLE: VALVE TO ELBOW, 1 IN. NPT X 2-1/2 IN. LG	EA	2
50	13	PAOZZ	4730-00-249-1517	6-1-1907-19-9A	72869	ELBOW: MANIFOLD TO VALVE, 1-1/2 X 1 IN. NPT	EA	1
50	14	PAOZZ	4730-00-371-5337	WWP471TYPE1 SIZE1-8NPTF	81349	PLUG, PIPE: UPPER MANIFOLD	EA	1
50	15	PAOZZ	4730-00-263-3123	WWP471TYPE1 SIZE3-8NPTF	81349	PLUG, PIPE: UPPER MANIFOLD	EA	1
50	16	PAOZZ	4730-00-231-2428	WWP521TYPE2 SIZE1-1-2NPT	81349	CAP, PIPE: MANIFOLD 1-1/2 IN. NPT	EA	1
50	17	PAOZZ	4730-00-393-6798	1010	70846	NIPPLE, HOSE: VALVE TO WASHER, EXTRACTOR HOSE	EA	2
50	18	PAOZZ	4730-00-278-2934	WWP521TYPE1 SIZE1NPT	81349	ELBOW, STREET: VALVE TO HOSE, 1 IN. NPT	EA	1
50	19	PAOZZ	4730-00-249-2033	WWP521TYPE1 SIZE1.500	81349	TEE: VALVE TO HOSE TO MANIFOLD, 1 IN. NPT	EA	1
50	20	PAOZZ	4730-00-933-7950	116656	79466	PLUG, SOLID: MANIFOLD TO TEE	EA	1
50	21	XBOZZ		48021	79466	PLATE, INSTRUCTION: WATER TANK	EA	1
50	22	XBOZZ		118714	79466	PLATE, CAUTION: WATER TANK	EA	1
50	23	XBOZZ		6-2-1910-20-634A	72869	DECAL, WARNING	EA	1
50	24	XBOZZ		118377	79466	SCREW, DRIVE: IDENTIFICATION PLATE	EA	4
50	25	XBOZZ		79486	79466	PLATE, IDENTIFICATION: WATER TANK	EA	1
50	26	PAOZZ	4510-00-477-8273	91793	79466	SIGHT HOLE ASSEMBLY: BURNER	EA	1
50	27	PAOZZ	5340-00-916-6296	91792	79466	CLIP, RETAINING: SIGHT HOLE GLASS	EA	1
50	28	PAOZZ	5330-00-905-4411	91791	79466	GASKET: SIGHT HOLE GLASS MTG	EA	2
50	29	PAOZZ	9340-00-903-6160	100450	79466	GLASS: SIGHT HOLE	EA	1
50	30	XAOZZ		91605	79466	CAP: SIGHT HOLE	EA	1
50	31	PAOZZ	4730-00-948-1719	MS27020-9	96906	COUPLING, HALF, QUICK DISCONNECT: WATER HEATER INPUT	EA	1
50	32	PAOZZ	4820-00-174-0339	MS35782-3	96906	COCK, DRAIN	EA	1
50	33	PAFFZ	4510-00-758-0059	90324	79466	TANK, WATER HEATER	EA	1
50	34	PAOZZ	5310-00-474-3639	C62504	80501	NUT, PLAIN, HEXAGON: LEVEL MTG	EA	2
50	35	PAOZZ	5305-00-206-2220	MS35214-32	96906	SCREW, MACHINE: FILLISTER HEAD, LEVEL MTG	EA	2
50	36	PAOZZ	5310-00-839-3770	MS35340-41	96906	WASHER, LOCK: LEVEL MTG	EA	2
50	37	XBOZZ		444	82084	LEVEL: WATER HEATER SKID	EA	1
50	38	PAFZZ	5305-00-269-3223	MS90725-73	96906	SCREW, CAP, HEXAGON HEAD: SKID MTG	EA	3
50	39	PAFZZ	5310-00-061-1258	MS45904-76	96906	WASHER, LOCK: INTERNAL TOOTH, SKID MTG	EA	8
50	40	XBFZZ		47310	79466	SKID ASSEMBLY: WATER TANK MTG	EA	1
50	41	XBOZZ	4520-00-950-6357	90329	79466	DUCT, EXHAUST, WATER HEATER BLOWER	EA	1

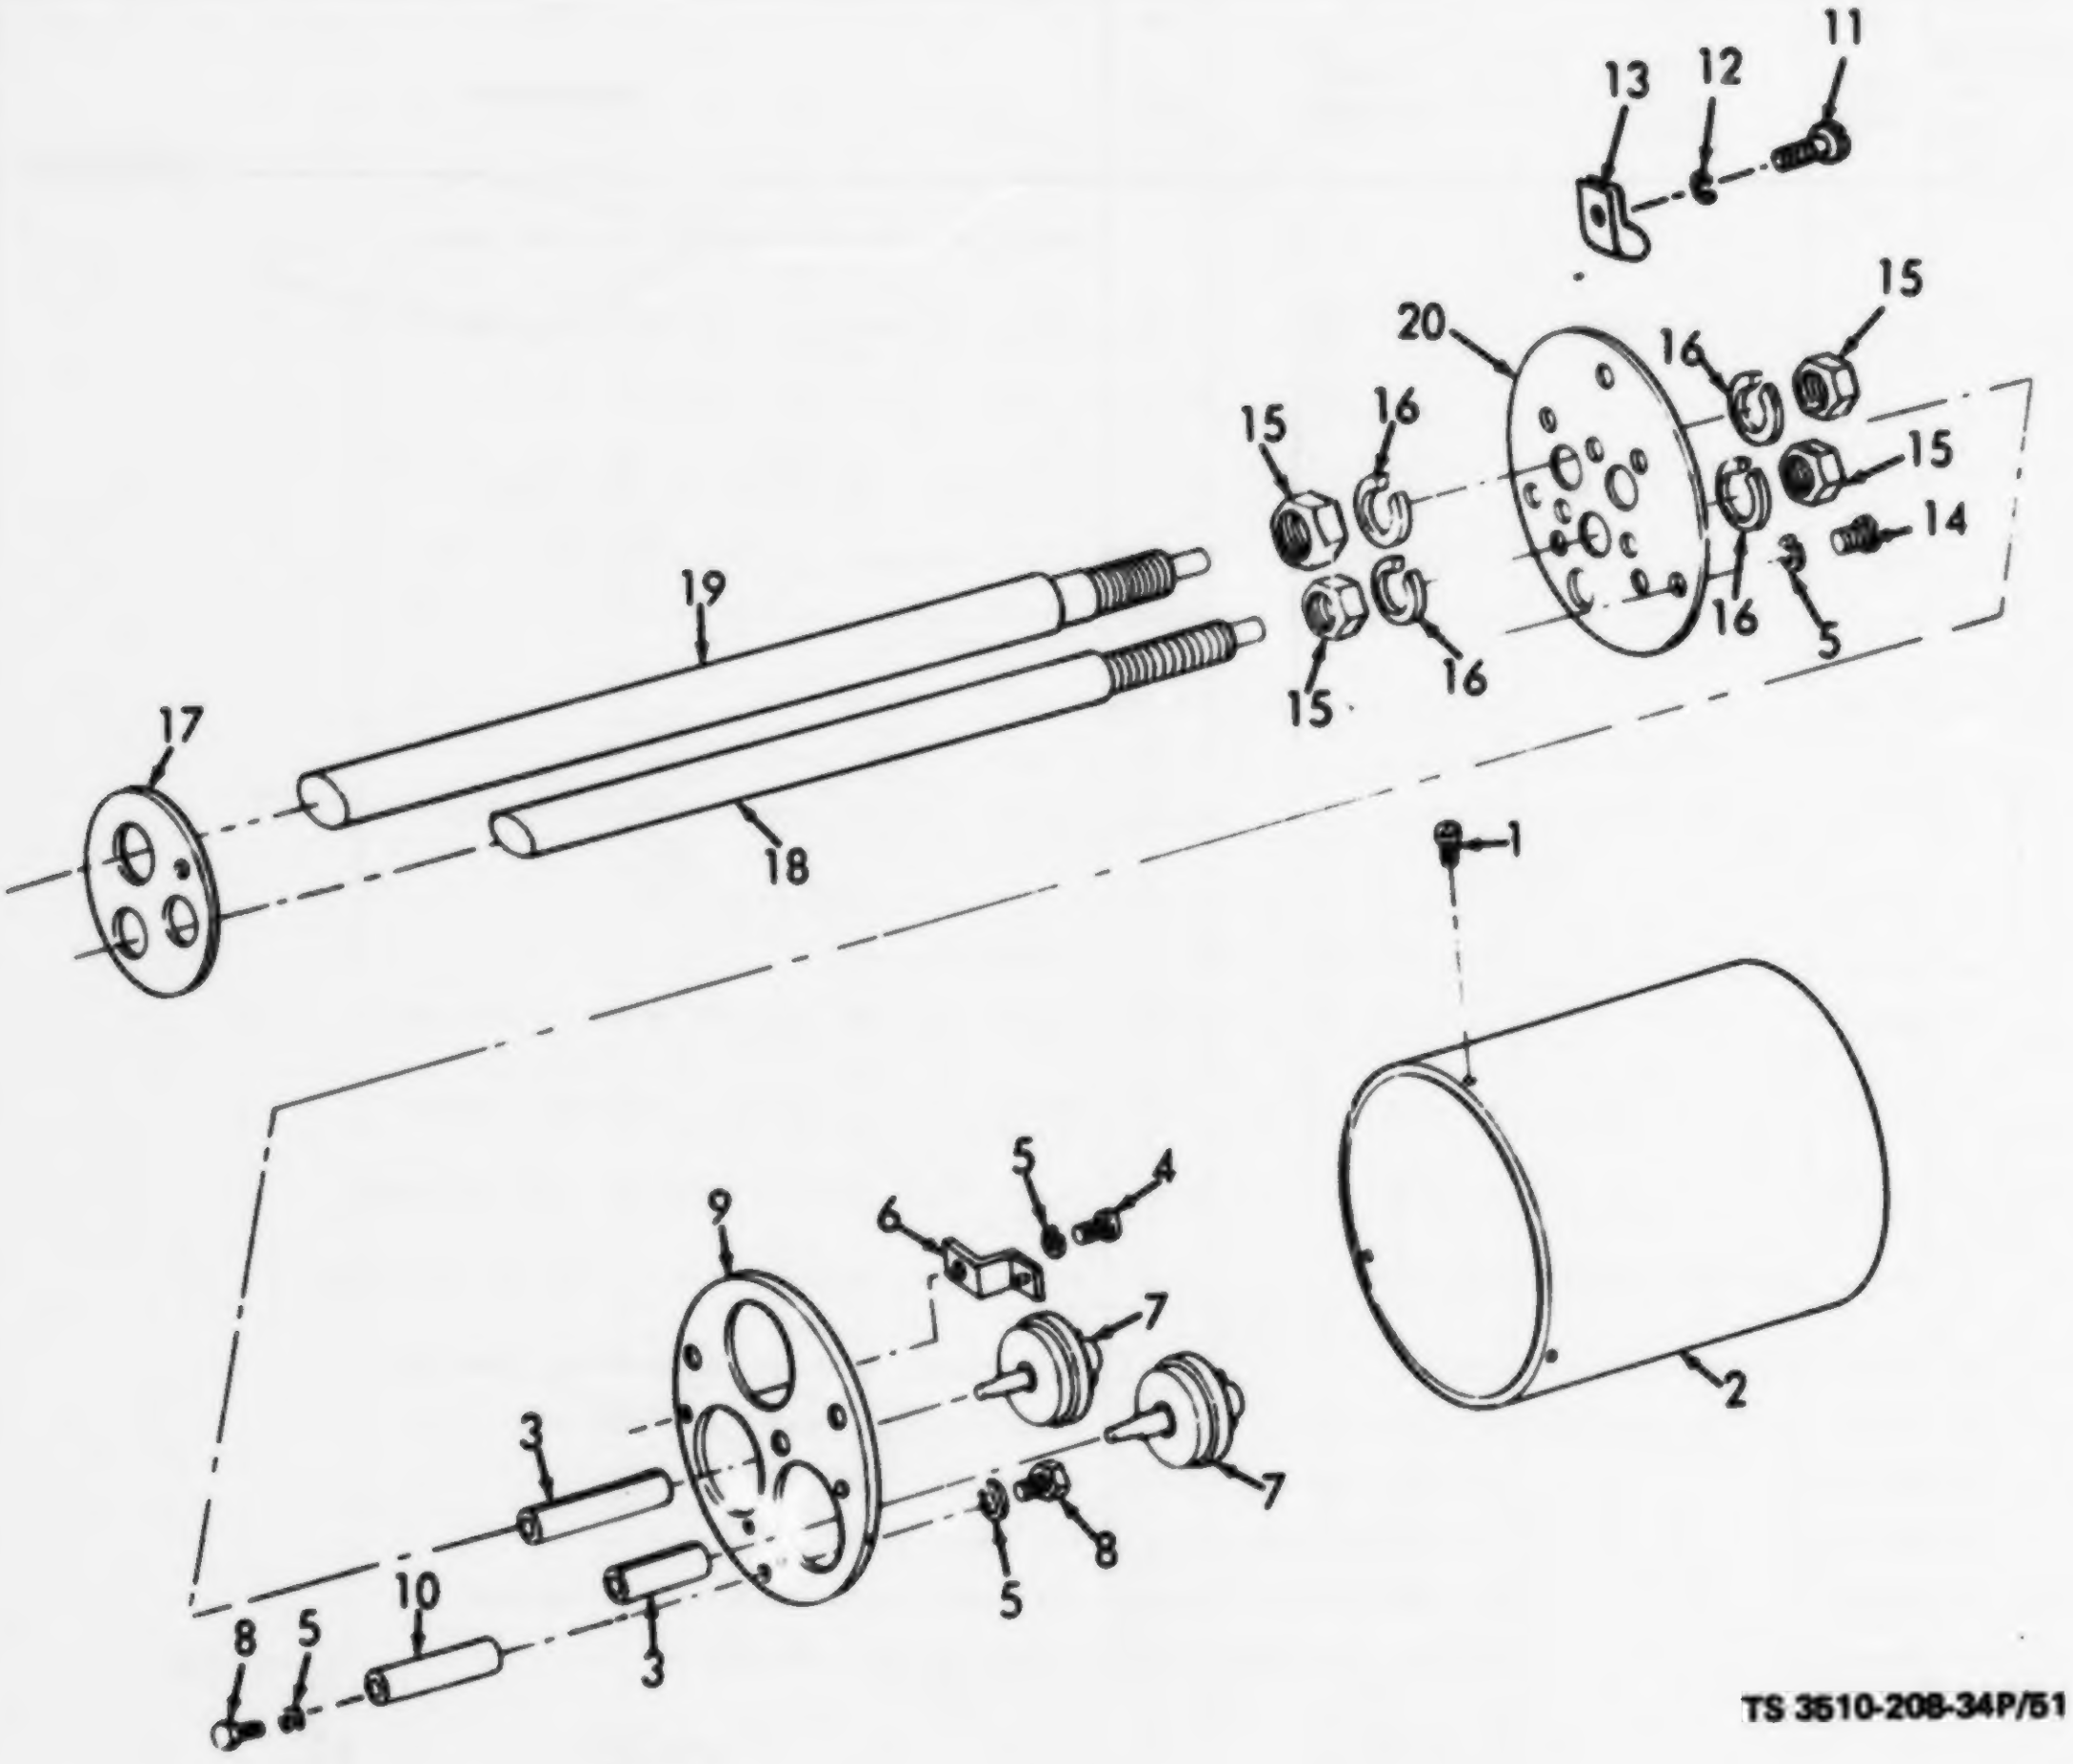
13
12
11
20
15
16
15
16
15
15
16
14
19
16
5
15
16
17
18
1
2
9
5
4
6
7
7
3
5
8
8
5
10
3
TS 3510-208-34P/51

Figure 51. Water Level Plates and Tubes.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 34 - WATER LEVEL PLATES AND TUBES		
51	1	PAOZZ	5305-00-054-6668	MS51957-43	96906	SCREW, PAN HEAD: COVER MTG, 8-32 UNC2A, 3/8 IN. LG, CRES.	EA	3
51	2	XBOZZ		6-1-1961-38-23A	72869	COVER: WATER LEVEL CONTROL	EA	1
51	3	PAOZZ	4720-00-142-1369	6-1-1961-38-41A	72869	HOSE, AIR: NEOPRENE, 3/8 IN. OD, 3/16 IN. ID, X 1 FT. REQUIRED FOR EACH HOSE	EA	2
51	4	PAOZZ	5305-00-050-9227	MS51957-61	96906	SCREW, MACHINE: WATER LEVEL SWITCH MTG	EA	4
51	5	PAOZZ	5310-00-042-6758	MS35338-82	96906	WASHER, LOCK: SWITCH PLATE AND PLATE TO CONTAINER MTG	EA	14
51	6	XBOZZ		6-1-1961-38-28A	72869	FINGER, SWITCH	EA	4
51	7	PAOZZ	6680-00-930-8384	18355	92298	SWITCH, WATER LEVEL	EA	2
51	8	PAOZZ	5305-00-068-0501	MS90725-5	96906	SCREW, CAP, HEXAGON HEAD: SWITCH PLATE MTG, 1/4-20 X 5/8 LG	EA	6
51	9	XBOZZ		6-1-1961-38-29A	72869	PLATE, SWITCH MOUNTING	EA	1
51	10	XBOZZ		6-1-1961-38-31A	72869	SEPARATOR, PLATE	EA	3
51	11	XBOZZ		6-1-1961-38-46A	72869	SCREW, MACHINE, SLOTTED HEAD: CLAMP MTG, 1/8 IN. DIA X 3/4 IN. LG	EA	1
51	12	XBOZZ		6-1-1961-38-50A	72869	WASHER, LOCK, INTERNAL, EXTERNAL TOOTH: CLAMP MTG, 1/4 IN. ID	EA	1
51	13	XBOZZ		6-1-1961-38-61A	72869	CLAMP, LOOP, TEFLON CUSHION: SWITCH WIRES TO PLATE	EA	1
51	14	PAOZZ	5305-00-225-3839	MS55305-21	08288	SCREW, CAP, HEXAGON HEAD: PLATE TO CONTAINER MTG	EA	4
51	15	PAOZZ	5310-00-889-2623	QQS763	81348	NUT, PLAIN, HEXAGON: SHORT AIR TUBE MTG	EA	4
51	16	PAOZZ	5310-00-854-8011	MS35334-25	96906	WASHER, LOCK: SHORT AIR TUBE MTG	EA	4
51	17	XBOZZ		6-1-1961-38-33A	72869	SEPARATOR, TUBE, RUBBER	EA	1
51	18	XBOZZ		6-1-1961-38-20A	72869	AIR TUBE, SHORT	EA	1
51	19	XBOZZ		6-1-1961-38-17A	72869	AIR TUBE, LONG: WATER LEVEL CONTROL	EA	1
51	20	XBOZZ		6-1-1961-38-30A	72869	PLATE, COVER: CONTAINER	EA	1

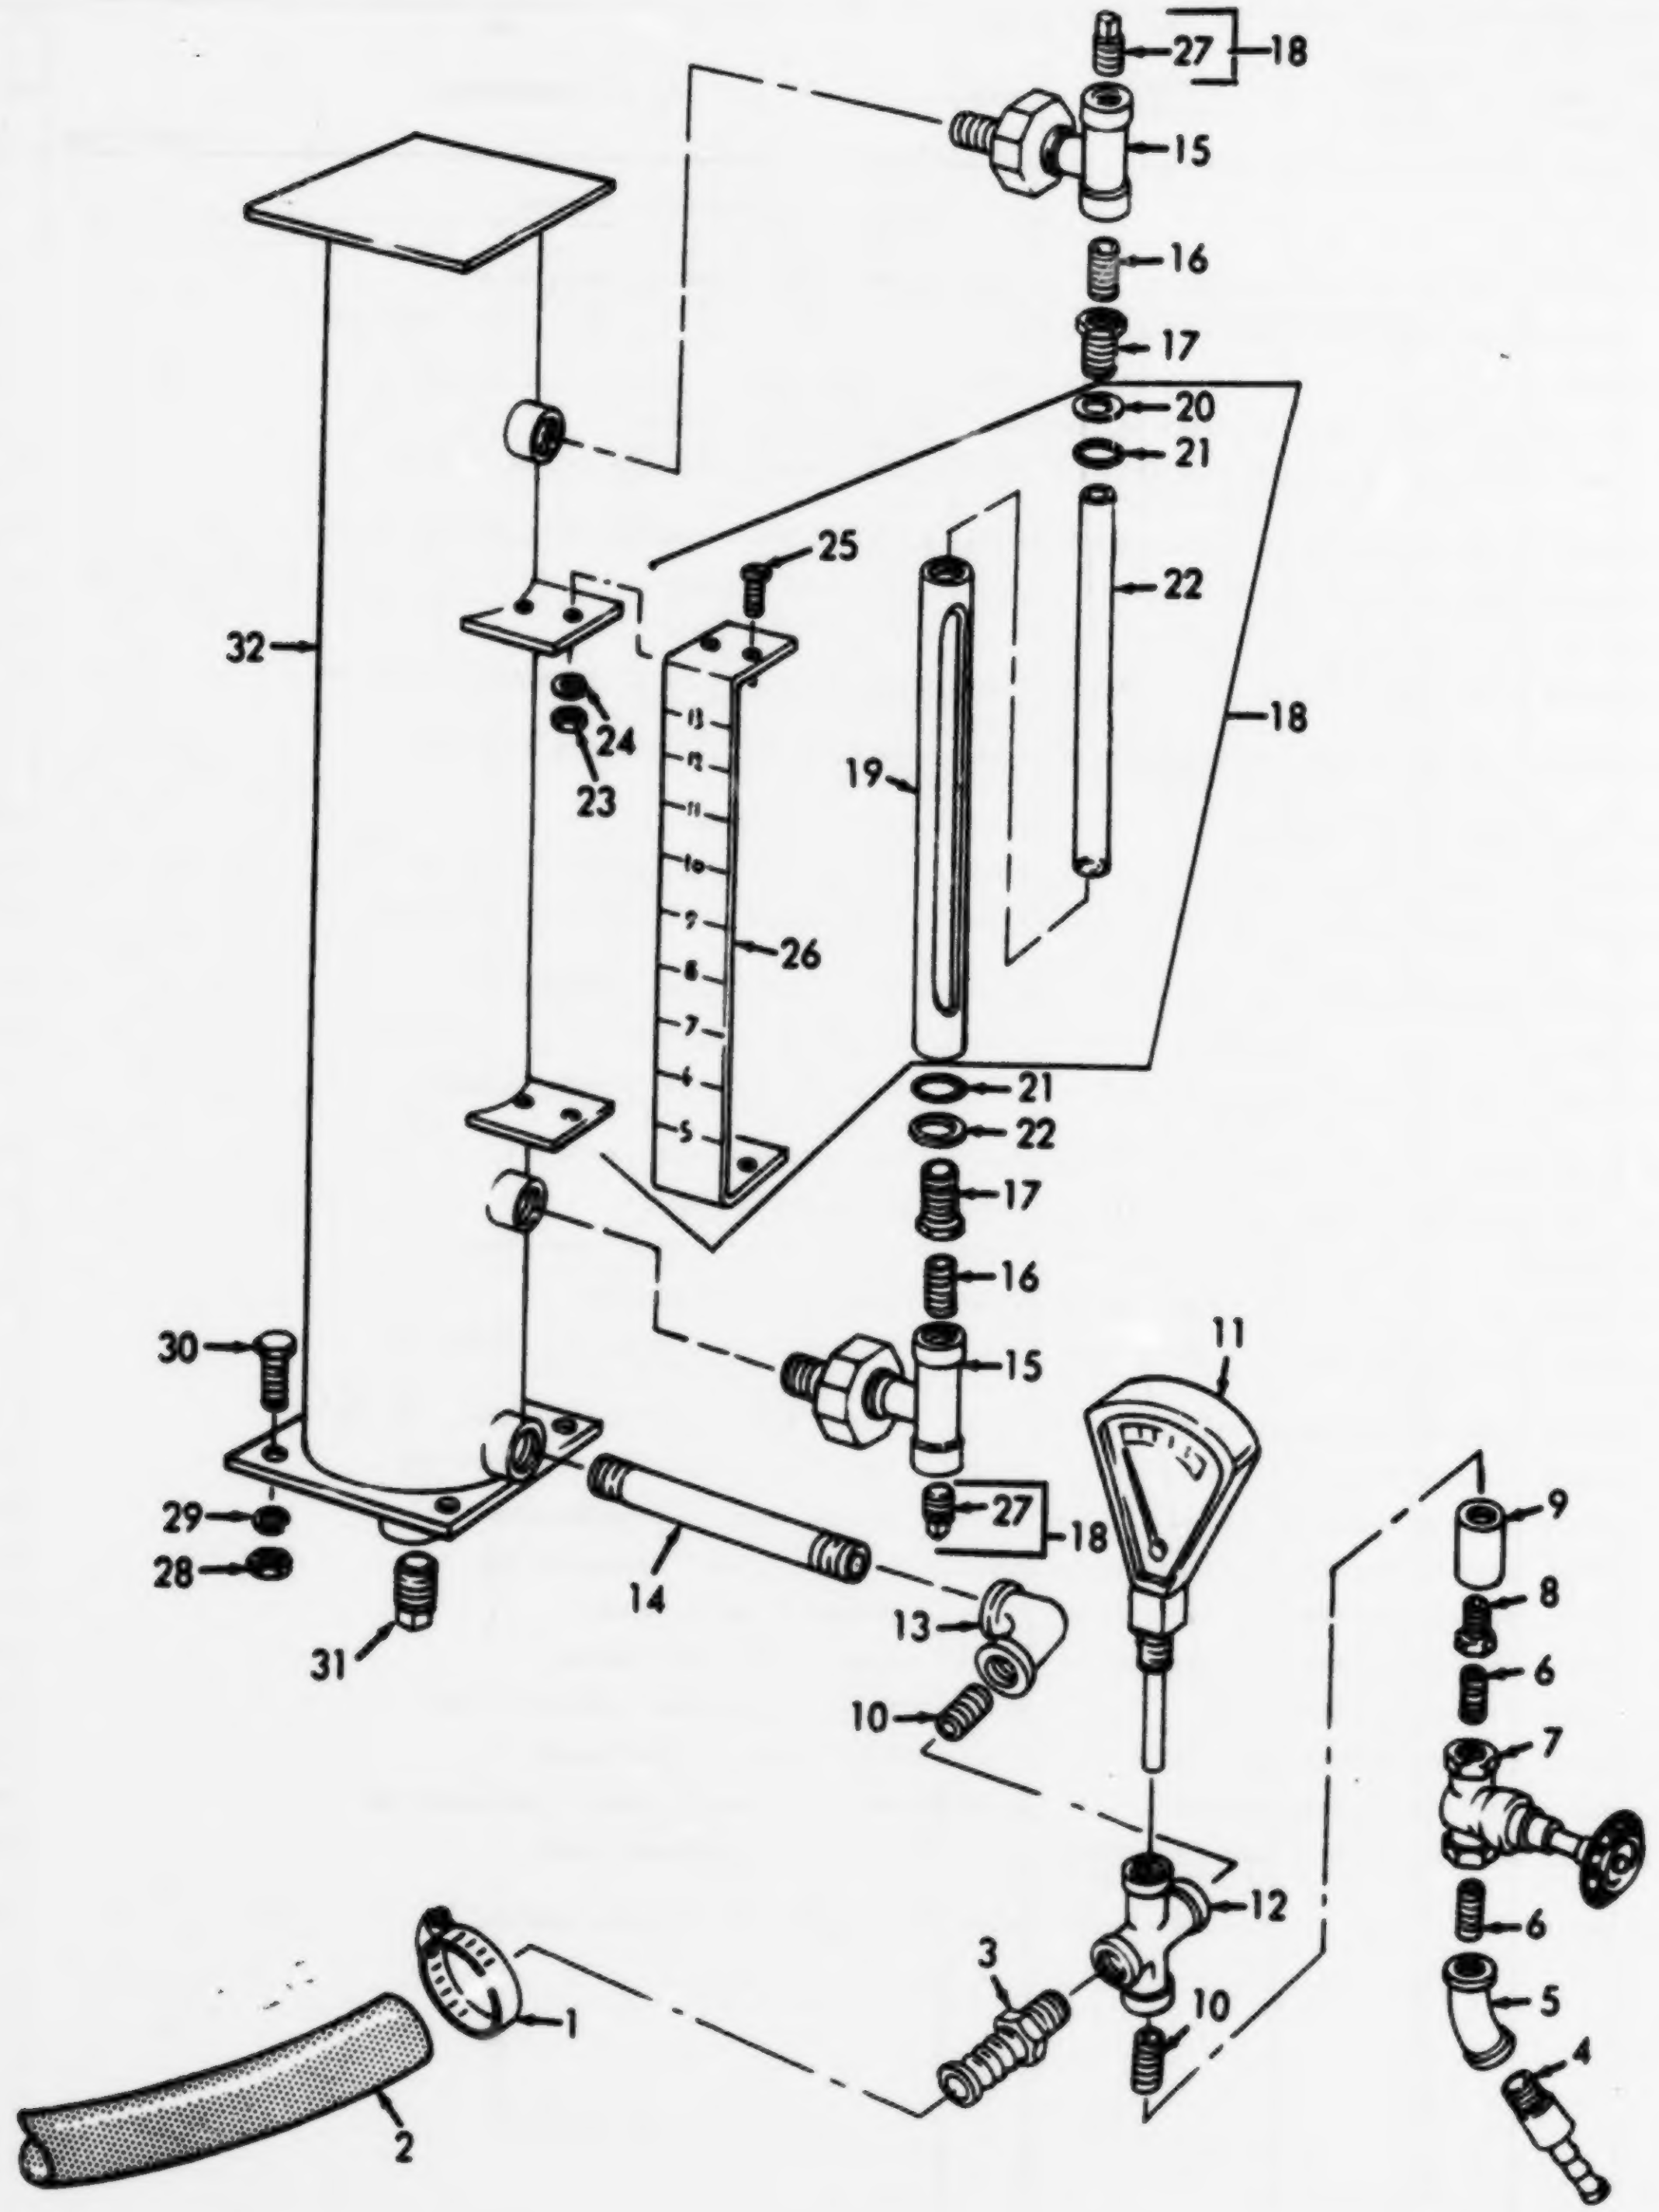
27
18
15
16
17
20
21
25
22
32
24
23
19
18
26
21
22
17
16
30
15
11
29
28
27
18
9
31
14
13
8
10
6
7
12
3
6
10
5
1
4
2

TS 3510-208-34P/52

Figure 52. Water Level Control.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 35 - WATER LEVEL CONTROL		
52	1	PAOZZ	4730-00-542-5938	MS35842-2	96906	CLAMP, HOSE: GAGE TO DRAIN VALVE	EA	2
52	2	PAOZZ	4720-00-200-0366	MILZZH601GRADE1	81349	HOSE, RUBBER: 3/4 IN. DIA, 32 IN. REQUIRED	FT	V
52	3	XBOZZ		6-1-1961-38-36A	72869	ADAPTER, HOSE	EA	1
52	4	PAOZZ	4730-00-492-5042	6-1-1961-38-53A	72869	ADAPTER, HOSE: DRAIN	EA	1
52	5	PAOZZ	4730-00-249-3945	MILP18174TYPE1 SIZE1-4IN.NPT	81349	ELBOW: ADAPTER MTG, 45 DEGREE, 1/4 NPT	EA	1
52	6	PAOZZ	4730-00-170-1538	6-1-1961-38-43A	72869	NIPPLE, CLOSE: ADAPTER TO VALVE MTG, 1/4 NPT	EA	2
52	7	PAOZZ	4820-00-962-5834	410SIZE1-4IN	14959	VALVE, GATE: DRAIN	EA	1
52	8	XBOZZ		6-1-1961-38-39A	72869	BUSHING: VALVE MTG	EA	1
52	9	PAOZZ	4730-00-273-6054	6-1-1961-38-57A	72869	COUPLING, PIPE: VALVE TO CROSS MTG, 1/2 NPT, FEMALE, 1-1/2 IN. LG	EA	1
52	10	PAOZZ	4730-00-188-1876	WWN351TYPE1SIZE 1-2IN.NPT	81348	NIPPLE, CLOSE: COUPLING TO CROSS MTG, 1/2 NPT	EA	2
52	11	PAOZZ	6685-00-698-6805	550	61349	GAGE, TEMPERATURE	EA	1
52	12	PAOZZ	4730-00-808-1590	6-1-1961-38-35A	72869	CROSS: WATER LEVEL ASSEMBLY, 1/2 NPT	EA	1
52	13	PAOZZ	4730-00-892-5590	6-1-1961-38-38A	72869	ELBOW: WATER LEVEL ASSEMBLY, 90 DEGREE, 1/2 NPT	EA	1
52	14	PAOZZ	4730-00-021-9650	6-1-1961-38-34A	72869	NIPPLE: WATER LEVEL ASSEMBLY	EA	2
52	15	XBOZZ		8981-2E	14959	TEE, UNION: GAGE MTG	EA	2
52	16	PAOZZ	4730-00-222-1837	WWN351TYPE1SIZE 1-4IN.NPT	81348	NIPPLE, CLOSE: TEE TO BUSHING MTG	EA	2
52	17	PAOZZ	4730-00-933-7943	6-1-1961-38-12A	72869	BUSHING, SIGHT GAGE: GAGE MTG	EA	2
52	18	PAOOO	6685-00-453-5306	6-1-1961-38-8A	72869	GAGE, SIGHT ASSEMBLY	EA	1
52	19	XBOZZ		6-1-1963-38-9A	72869	GUARD, GLASS: WATER LEVEL GAGE	EA	1
52	20	XBOZZ		6-1-1963-38-15A	72869	RING: SIGHT GLASS MTG	EA	2
52	21	PAOZZ	5330-00-844-9319	6-1-1963-38-16A	72869	PACKING: SIGHT GLASS MTG, GRAPHITE, 33/64 IN. ID, 1/16 IN. THK	EA	2
52	22	PBOZZ	5355-00-031-1465	6-2-1963-38-10	81337	GLASS, SIGHT: WATER LEVEL GAGE, 1/2 IN. OD	EA	1
52	23	PAOZZ	5310-00-934-9760	MS35649-204A	96906	NUT, PLAIN, HEXAGON: GRADUATOR MTG	EA	4
52	24	PAOZZ	5310-00-043-2226	6-1-1961-38-30A	72869	WASHER, LOCK: GRADUATOR MTG	EA	4
52	25	PAOZZ	5305-00-050-9229	6-1-1961-38-45A	72869	SCREW, MACHINE: GRADUATOR MTG	EA	4
52	26	PAOZZ	6680-00-460-3846	6-1-1961-38-32A	72869	GRADUATOR, WATER HEIGHT	EA	1
52	27	PAOZZ	3510-00-063-8152	6-1-1936-38-14A	72869	PLUG, SOLID: GAGE DRAIN	EA	2
52	28	PAOZZ	5310-00-616-1739	FFN836	81348	NUT, PLAIN, HEXAGON: CONTAINER MTG	EA	4
52	29	PAOZZ	5310-00-582-5965	MS35338-44	96906	WASHER, LOCK: CONTAINER MTG	EA	4
52	30	PAOZZ	5305-00-225-3839	MS35291-8	96906	SCREW, CAP, HEXAGON HEAD: CONTAINER MTG	EA	4
52	31	PAOZZ	4730-00-289-5176	WWP471TYPE2STYLE CSIZE1-2IN.NPTF	81348	PLUG, PIPE: CONTAINER DRAIN	EA	1
52	32	XBOZZ		6-1-1961-38-1A	72869	CONTAINER, WATER: LEVEL CONTROL	EA	1

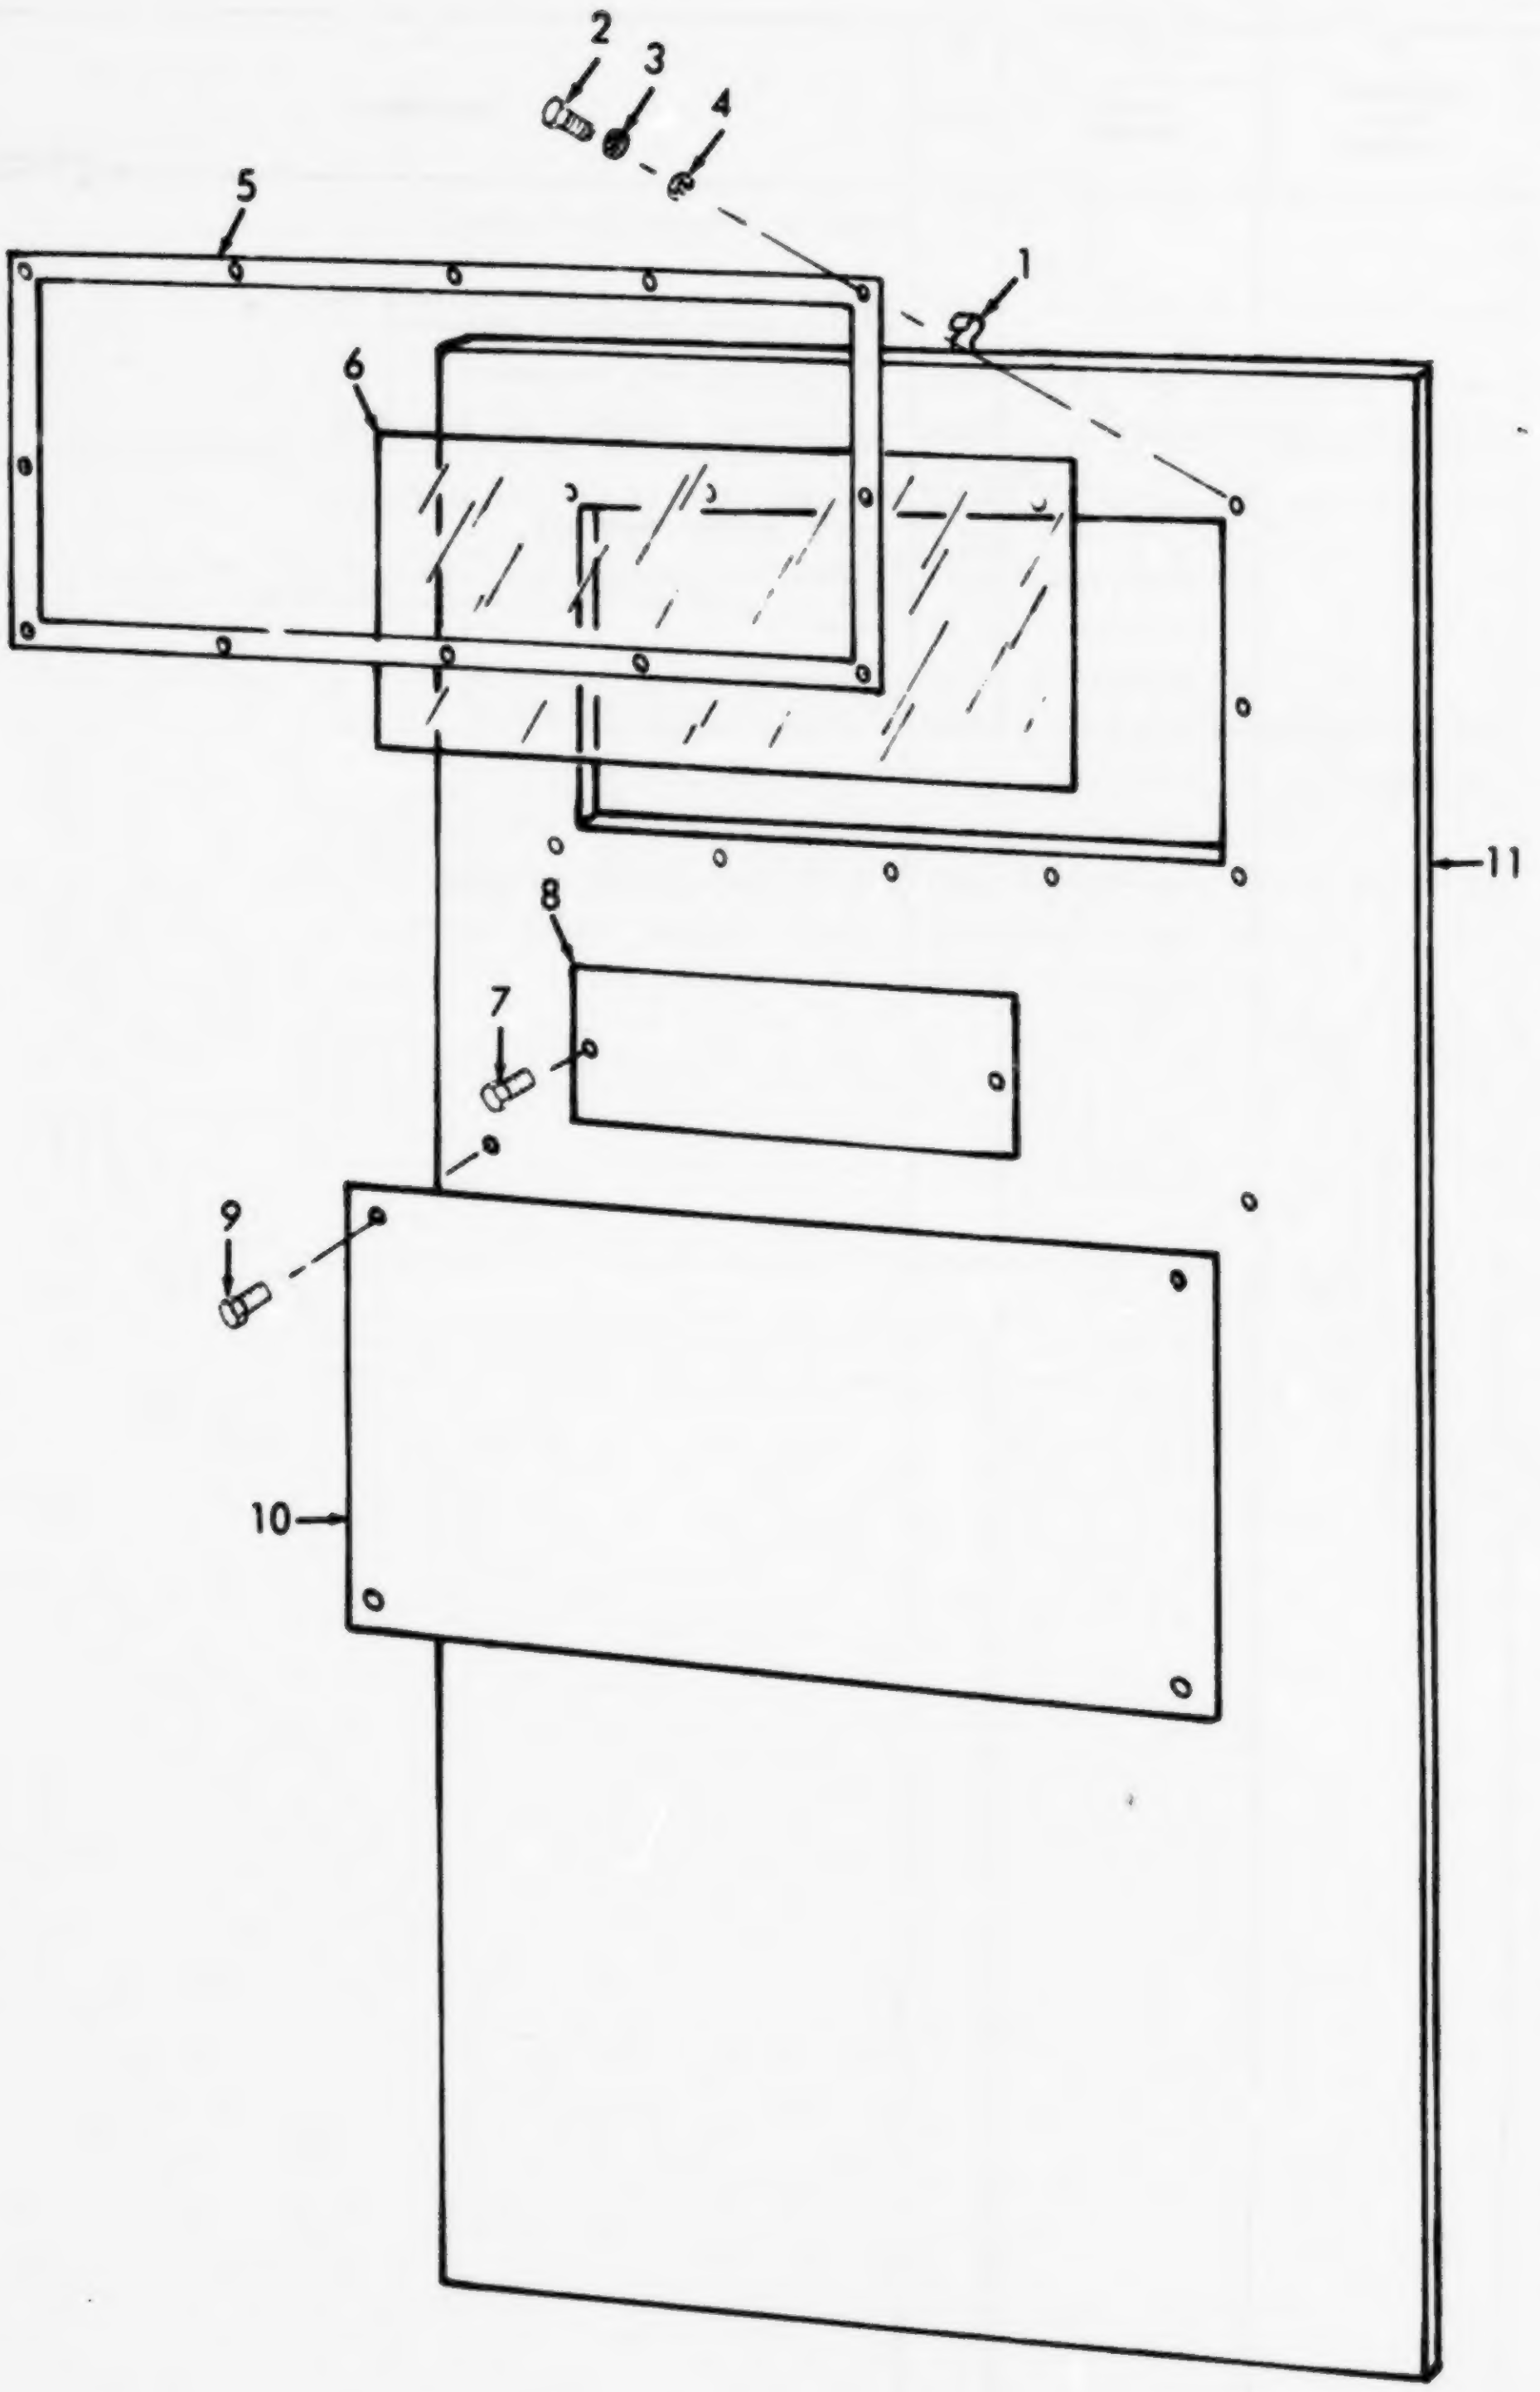
2
3
4
5
1
6
11
8
7
9
10

TS 3510-208-34P/53

Figure 53. Control Box Cover (Front View).

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 36 - CONTROL BOX ASSEMBLY		
53		XBOOO	6110-00-434-3459	6-1-1920-27-1A	72869	CONTROL BOX ASSEMBLY (BOX ASSEMBLY ONLY, NO ELECTRICAL COMPONENTS INCLUDED)		
53	1	PAOZZ	5340-00-950-8676	15797PH	14608	CATCH, DRAW PULL (WELDMENT)	EA	1
53	2	PAOZZ	5310-00-725-4712	NAS671-8	88044	NUT, PLAIN, HEXAGON: NO. 8-32 SCREW SIZE, WINDOW FRAME MTG	EA	12
53	3	PAOZZ	5310-00-901-0278	MS45904-58	96906	WASHER, LOCK, SPLIT: NO. 8-32 SCREW SIZE, WINDOW FRAME MTG	EA	12
53	4	XBOZZ		6-1-1920-27-16A	72869	SCREW, MACHINE, PAN HEAD: NO. 8-32 NC X 2A X 1/2 IN. LG, CAD PLATED, WINDOW FRAME MTG	EA	12
53	5	XBOZZ		6-1-1920-27-11A	72869	FRAME, WINDOW	EA	1
53	6	PAOZZ	9330-00-463-4954	6-1-1920-27-8A	72869	WINDOW, CONTROL BOX	EA	1
53	7	PAOZZ	5320-00-995-1875	6-1-1920-27-15A	72869	RIVET, SOLID	EA	2
53	8	XBOZZ		6-1-1920-27-10A	72869	PLATE, INSTRUCTION: CONTROL PANEL	EA	1
53	9	PAOZZ	5305-00-088-9485	6-1-1919-27-164A	72869	SCREW, SHEET METAL: CAUTION PLATE MTG	EA	4
53	10	XBOZZ		6-1-1919-27-163A	72869	PLATE, CAUTION: MASTER SWITCH	EA	1
53	11	XBOZZ		6-1-1920-27-7A	72869	COVER, CONTROL BOX	EA	1

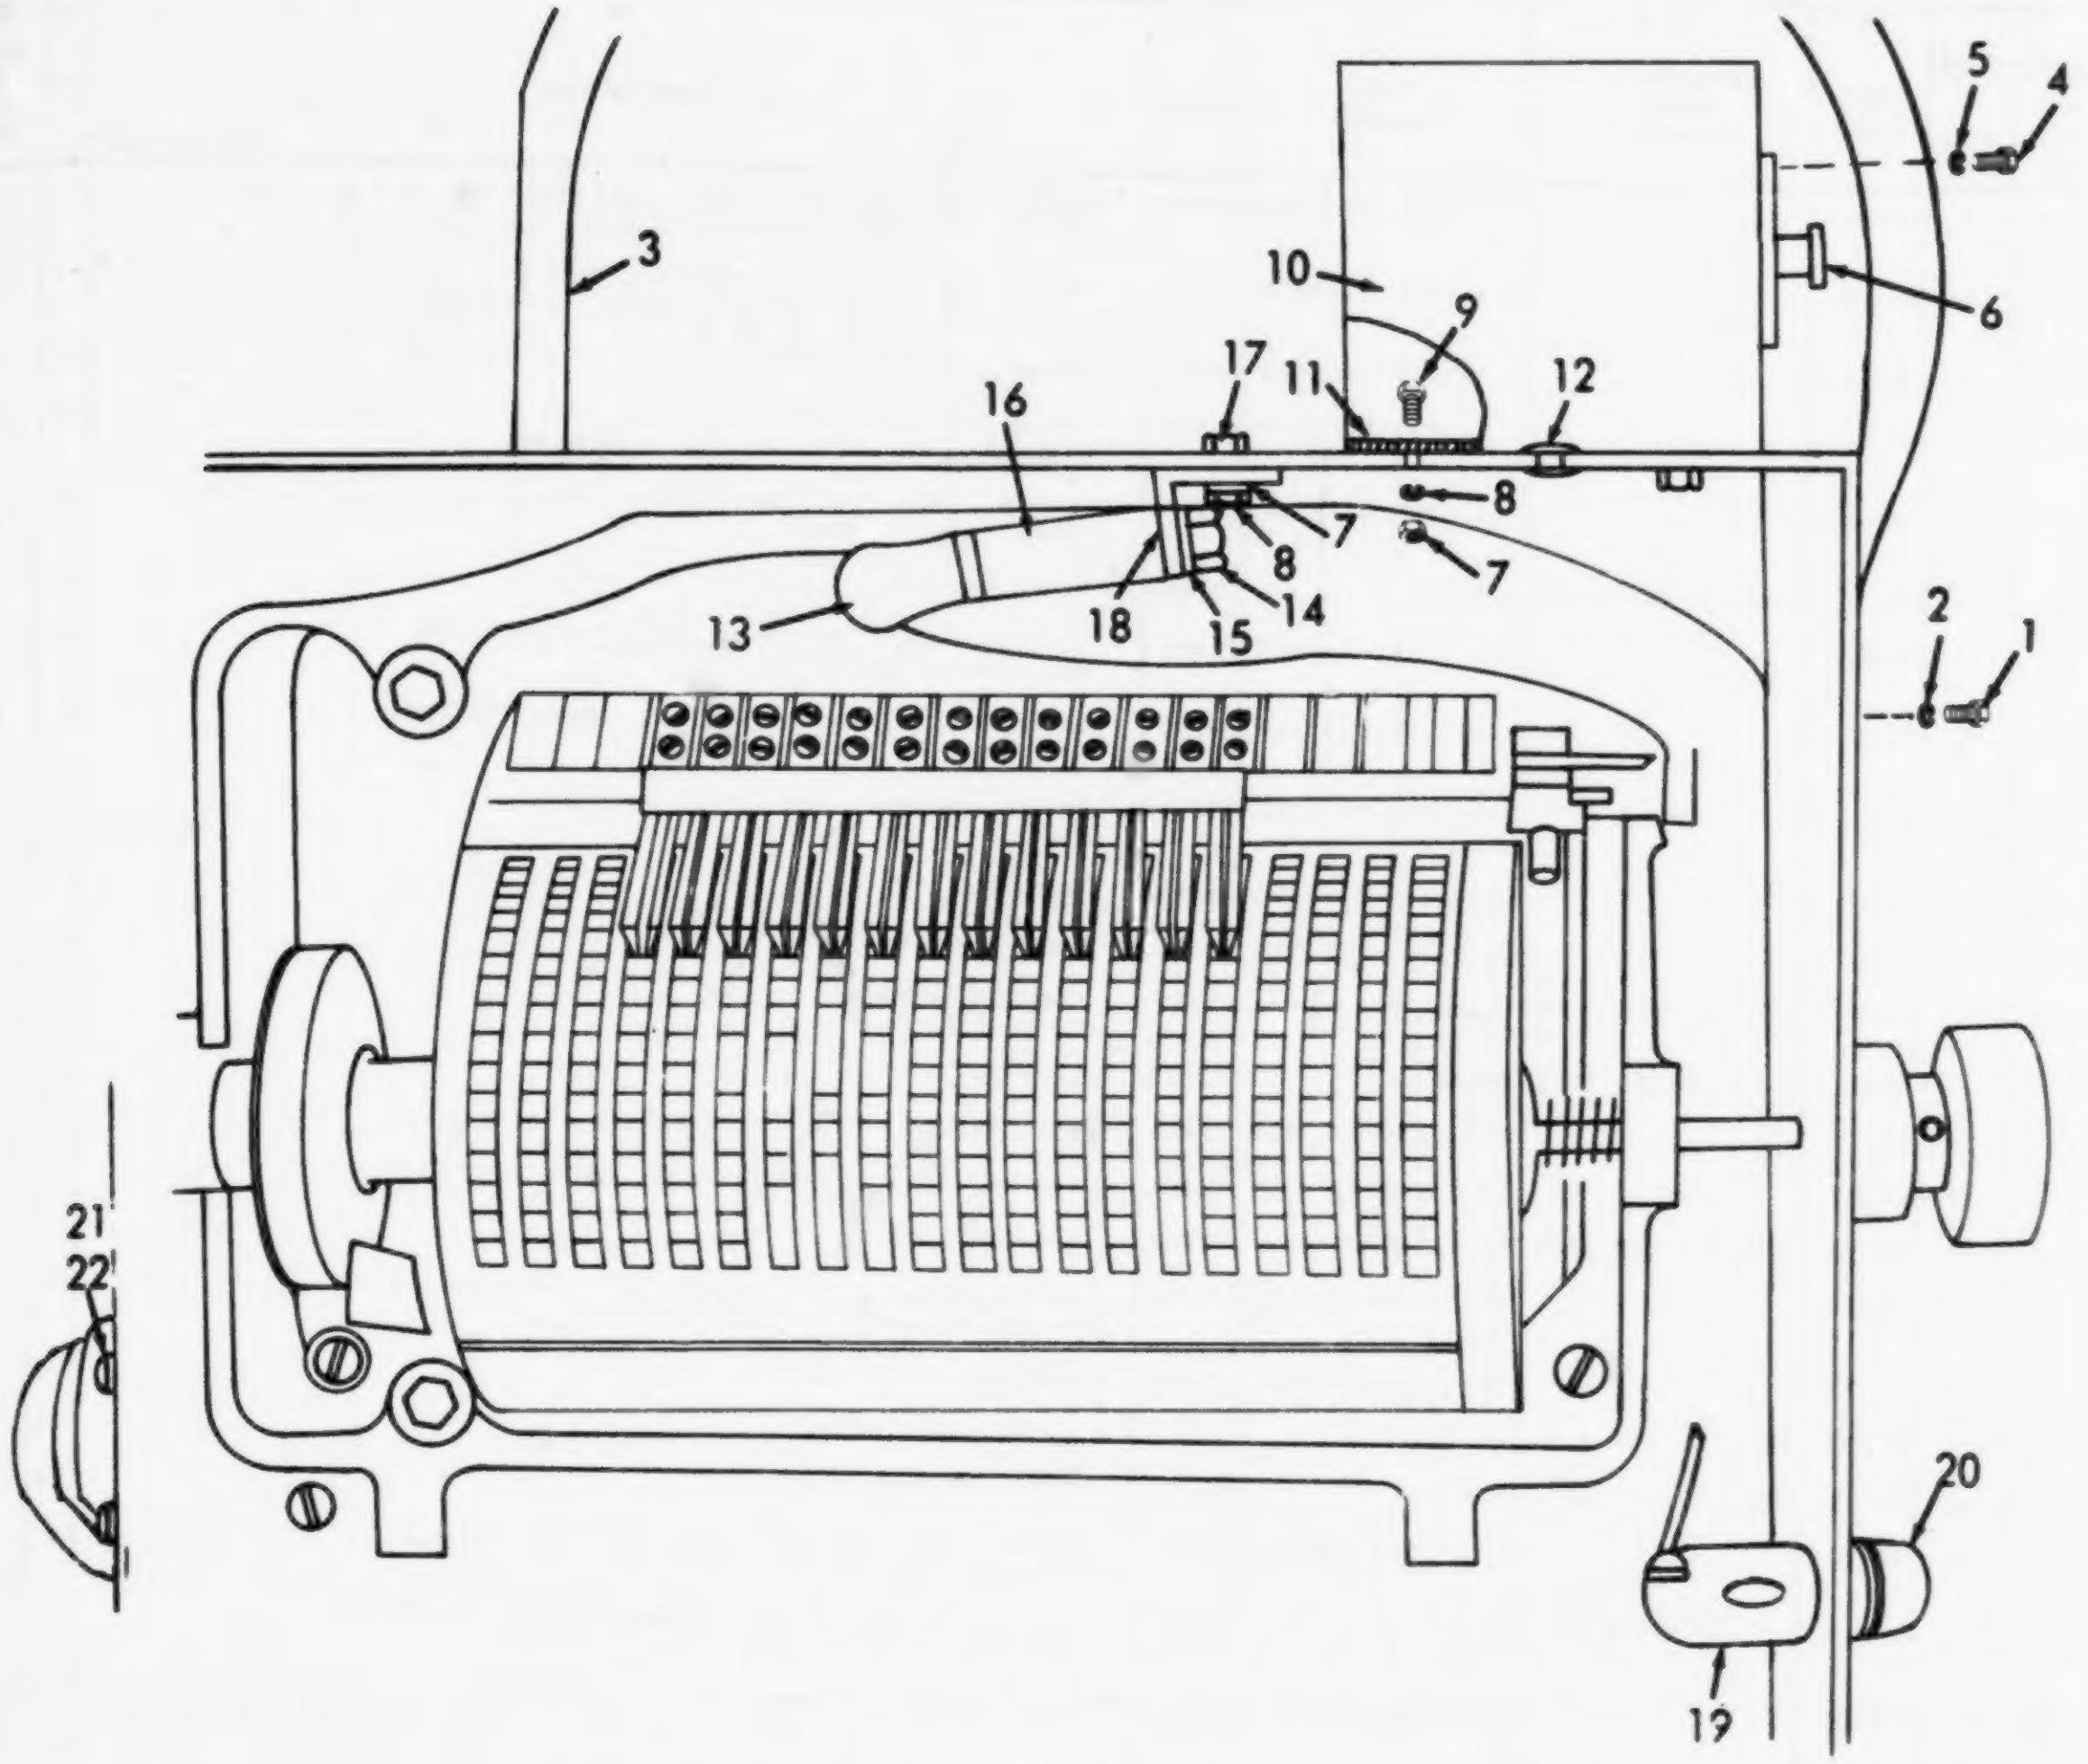
5
4
3
10
6
9
17
11
12
16
8
7
8
7
13
18
14
15
2
1
21
22
20
19

TS 3510-208-34P/54

Figure 54. Main Control Box Timer, Alarm Bell and Lights

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
54	1	XBOZZ		6-1-1919-27-140A	72869	SCREW, CAP, HEXAGON HEAD: SELF-TAPPING, 5 X 16 X 3/4 IN. LG, CONTROL PANEL GUARD MTG	EA	4
54	2	XBOZZ		6-1-1919-27-149A	72869	WASHER, LOCK, NO. 10 INTERNAL TOOTH: STEEL, CAD PLATED CONTROL PANEL GUARD MTG	EA	4
54	3	XBOZZ		6-1-1919-27-118A	72869	GUARD, CONTROL PANEL	EA	1
54	4	XDOZZ		6-1-1919-27-140A	72869	SCREW, MACHINE, SELF-TAPPING: NO. 6-32 UNC, 2A X 1/2 IN. LG, TIMER MTG	EA	3
54	5	XBOZZ		6-1-1919-27-151A	72869	WASHER, LOCK, INTERNAL TOOTH: NO. 6-32 SCREW SIZE, TIMER MTG	EA	3
54	6	PAOZZ	6645-00-917-6225	A2323A1	30703	TIMER, MINUTE	EA	1
54	7	XBOZZ		6-1-1919-27-143A	72869	NUT, HEXAGON: NO. 6-32, UNC-2B, TIMER BOX AND LAMP BRACKET MTG	EA	6
54	8	XBOZZ		6-1-1919-27-151A	72869	WASHER, LOCK, NO. 6 INTERNAL TOOTH: TIMER BOX AND LAMP BRACKET MTG	EA	6
54	9	XBOZZ		6-1-1919-27-135A	72869	SCREW, MACHINE: NO. 8-32, UNC-2A X 3/8 LG, TIMER BOX MTG	EA	4
54	10	XBOZZ		6-1-1919-27-159A	72869	BOX, TIMER	EA	1
54	11	XBOZZ		6-1-1919-27-160A	72869	PAD, TIMER BOX	EA	1
54	12	PAOZZ	5325-00-933-7940	6-1-1919-27-158A	72869	GROMMET, RUBBER: 7/8 OD X 1/2 ID, TIMER BOX	EA	1
54	13	PAOZZ	6240-00-155-7878	MS56240-1	08288	LAMP	EA	1
54	14	XBOZZ		6-1-1919-27-177A	72869	NUT, BRASS: 5/16 IN. X 27 NPT, SOCKET MTG	EA	1
54	15	XBOZZ		6-1-1919-27-178	72869	WASHER, LOCK: BRASS, 5/16, SOCKET MTG	EA	1
54	16	PAOZZ	6250-00-133-7604	6-1-1919-27-97A	72869	SOCKET, LAMP	EA	1
54	17	XBOZZ		6-1-1919-27-136A	72869	SCREW, MACHINE, PAN HEAD: NO. 6-32, UNC-2A X 3/8 LG, LAMP BRACKET MTG	EA	2
54	18	XBOZZ		6-1-1919-27-93A	72869	BRACKET, LAMP SOCKET	EA	1
54	19	PAOZZ	6220-00-548-0134	80901-511	72619	LIGHT, INDICATOR	EA	1
54	20	PAOZZ	6250-00-143-7513	656-24V	24446	LAMP, INCANDESCENT	EA	1
54	21	XBOZZ		6-1-1919-27-139A	72869	SCREW, SELF-TAPPING: NO. 8-32 UNC-2A X 1/2 LG, ALARM BELL MTG	EA	1
54	22	XBOZZ		6-1-1919-127-143A	72869	WASHER, LOCK, NO. 8 INTERNAL TOOTH: ALARM BELL MTG	EA	3
54	23	XBOZZ		340-42-24V4IN	19557	BELL, ALARM: 4 IN.	EA	1

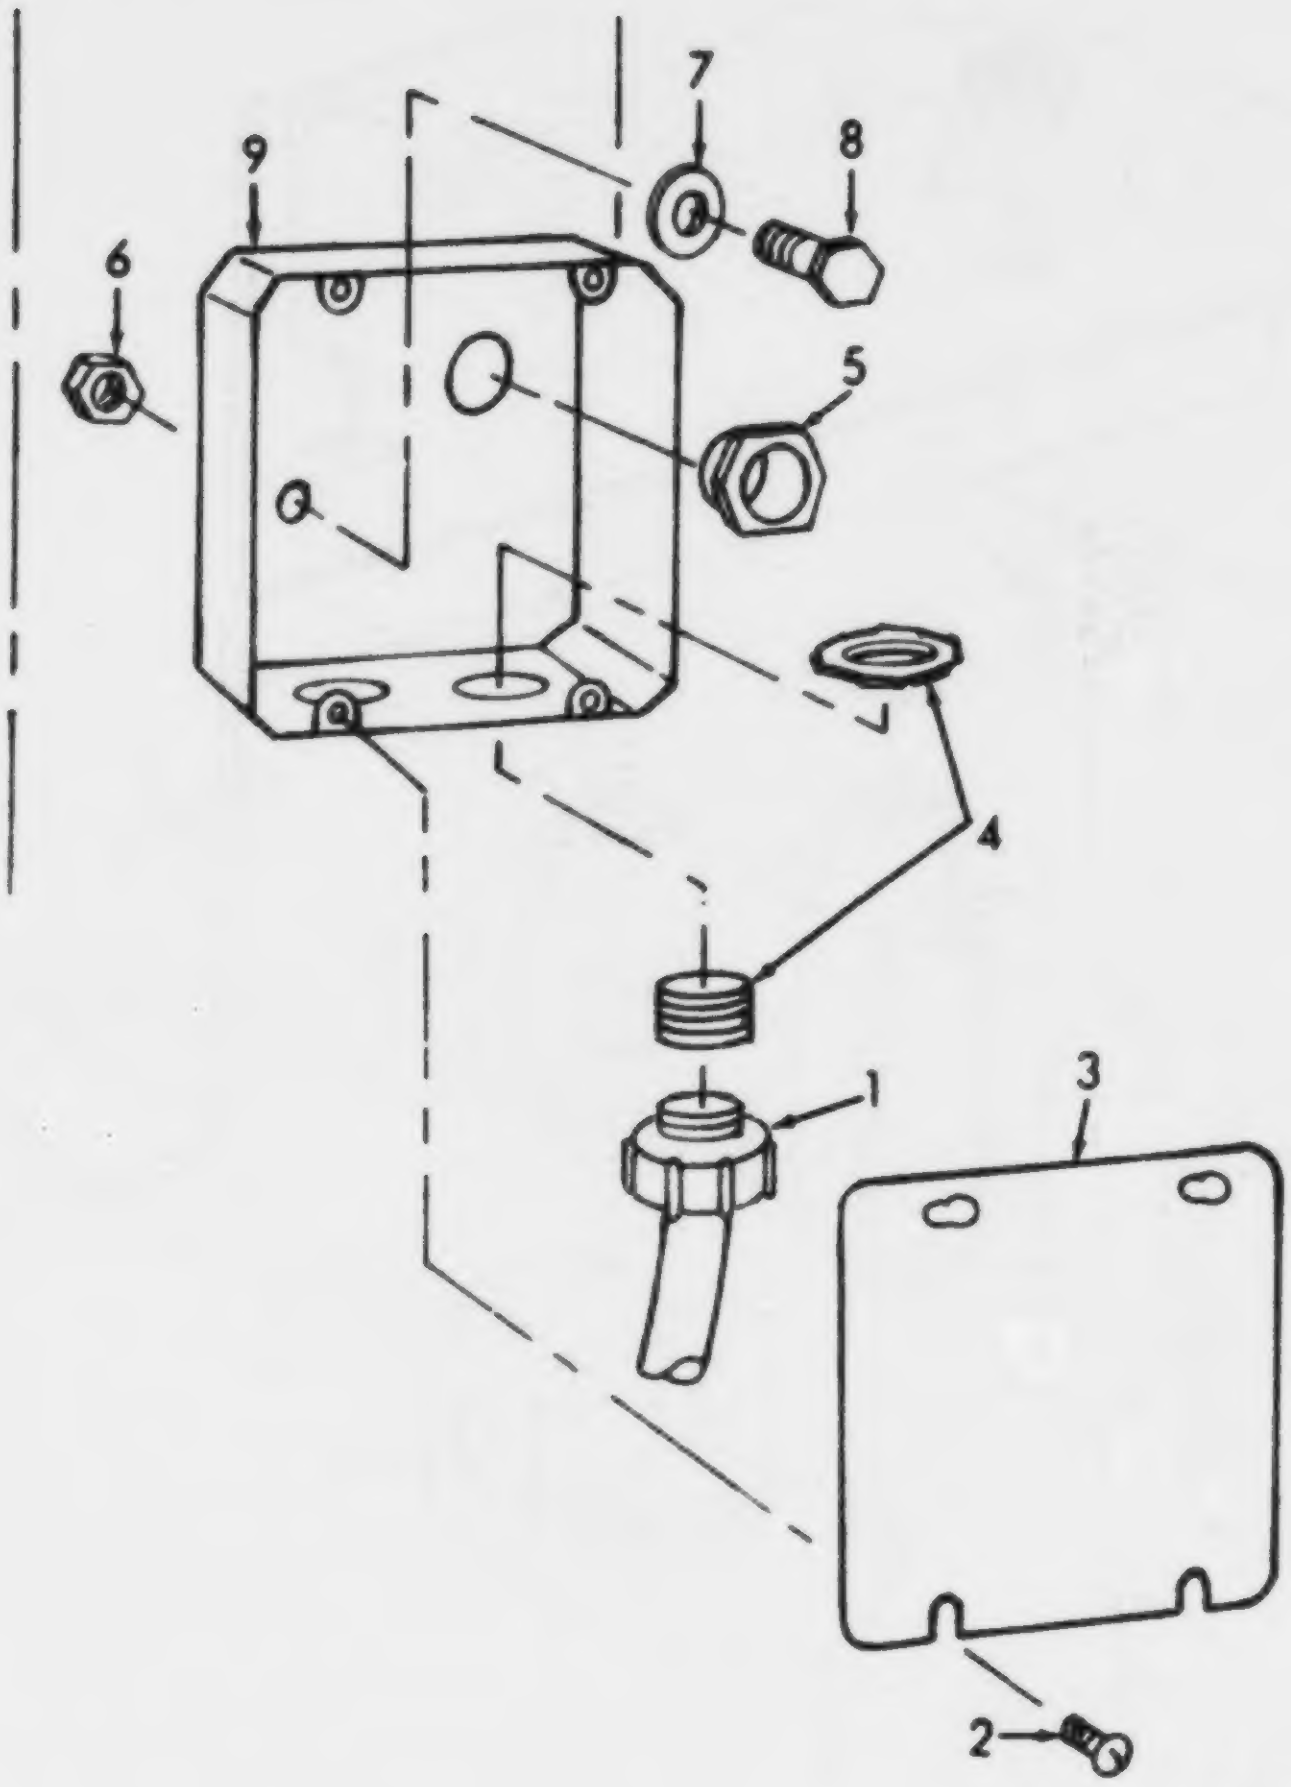

TS 3510-208-34P/55

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
55	1	PAOZZ	5935-00-317-3116	5221	59730	CONNECTOR	EA	2
55	2	PAOZZ	5305-00-052-9051	MS24630-36	96906	SCREW, MACHINE, SELF-TAPPING, SLOTTED HEAD: NO. 8-32 NC X 1/2 LG, JUNCTION BOX COVER MTG	EA	4
55	3	XBOZZ		6-1-1919-27-121A	72869	COVER, BOX, JUNCTION	EA	1
55	4	XBOZZ		6-1-1919-27-122A	72869	CONNECTOR, CABLE, W/LOCKING NUT: JUNCTION BOX	EA	2
55	5	XBOZZ		6-1-1919-27-123A	72869	BUSHING, INSULATED: 3/4, JUNCTION BOX	EA	1
55	6	XBOZZ		6-1-1919-27-172A	72869	NUT, HEXAGON: NO. 2& UNC-2B, JUNCTION BOX MTG	EA	2
55	7	XBOZZ		6-1-1919-27-173A	72869	WASHER, LOCK: NO. 10, JUNCTION BOX MTG	EA	2
55	8	XBOZZ		6-1-1919-27-171A	72869	SCREW, MACHINE: NO. 10-24, UNC-2A X 1/2, JUNCTION BOX MTG	EA	2
55	9	XBOZZ		6-1-1919-27-120A	72869	BOX, JUNCTION: 3/4 CONDUIT, 4-11/16 SQ X 1/2 OD	EA	1

Figure 55. Control Panel Junction Box.

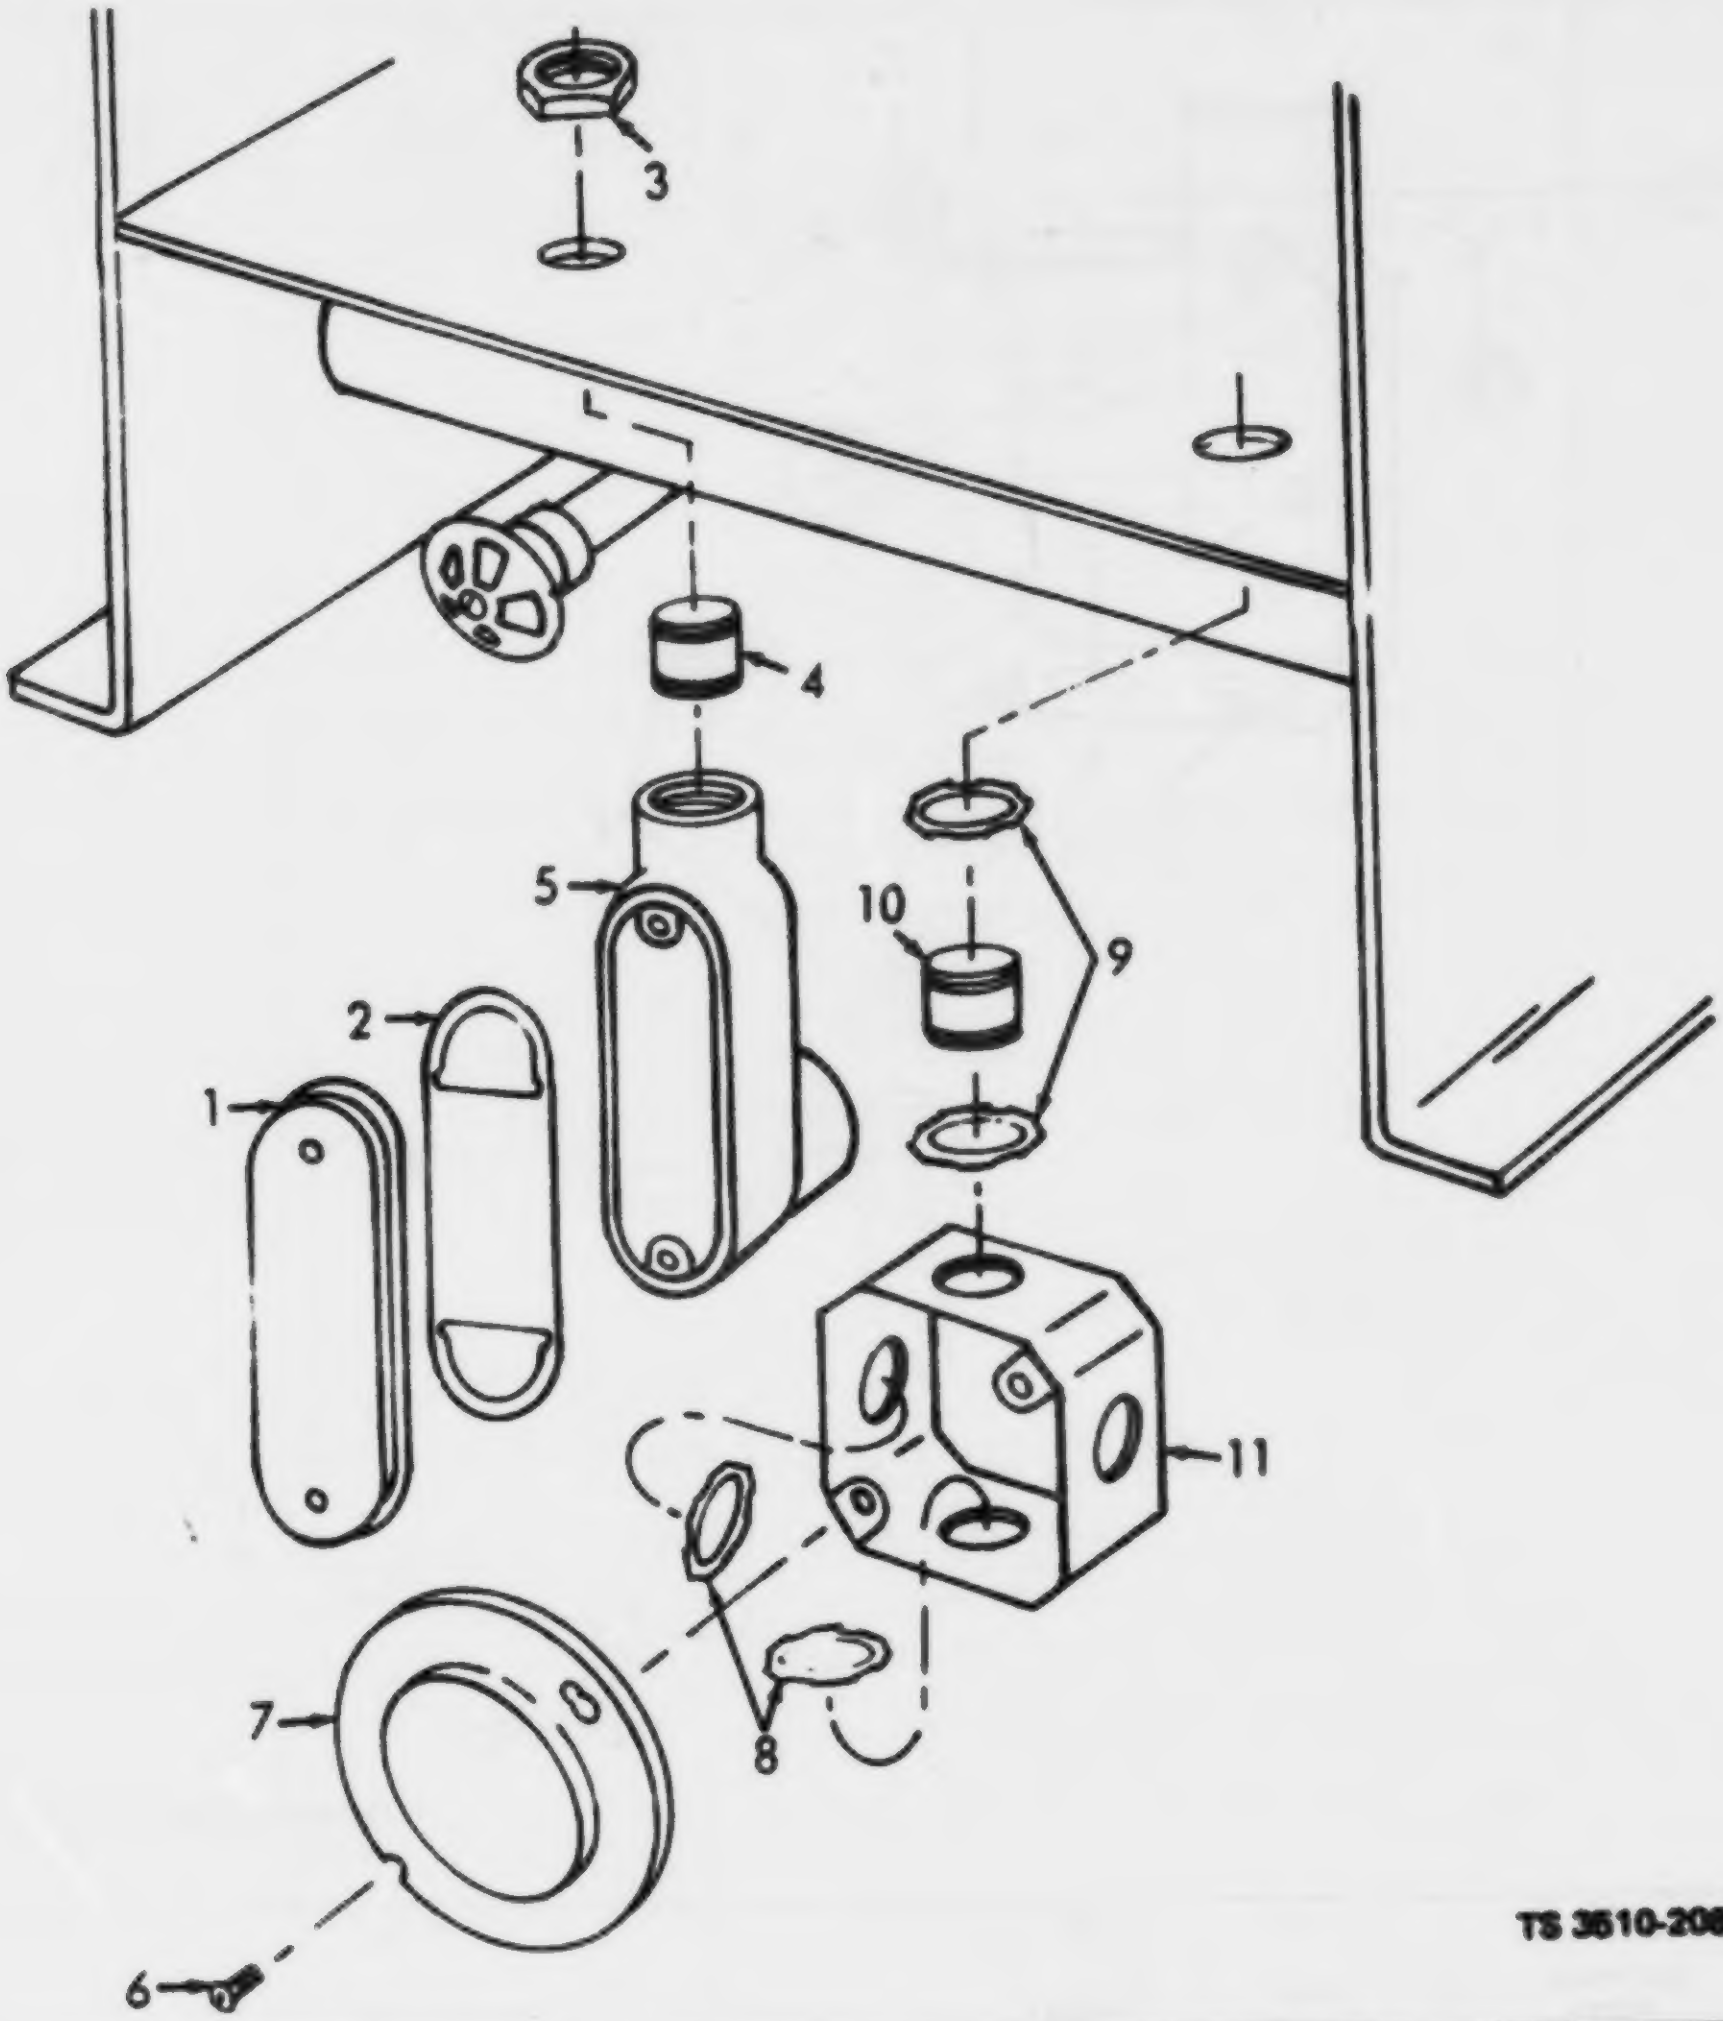

TS 3510-208-34P/56

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
56	1	XBOZZ		6-1-1919-27-154A	72869	COVER, CONDUIT, RECEPTACLE, W/SCREWS	EA	1
56	2	PAOZZ		6-1-1919-27-155A	72869	GASKET: RECEPTACLE COVER	EA	1
56	3	XBOZZ		6-1-1919-27-126A	72869	NUT, LOCK: 3/4	EA	1
56	4	XBOZZ		6-1-1919-27-124A	72869	NIPPLE:	EA	1
56	5	XBOZZ		6-1-1919-27-115A	72869	RECEPTACLE, CONDUIT	EA	1
56	6	PAOZZ	5305-00-052-9051	MS24630-36	96906	SCREW, MACHINE, SELF-TAPPING, SLOTTED HEAD: NO. 8-32 NC X 1/2 LG, JUNCTION BOX COVER MTG	EA	2
56	7	XBOZZ		6-1-1919-27-117A	72869	COVER, BOX, JUNCTION: 3 IN.	EA	1
56	8	PAOZZ	5975-00-152-1144	6-1-1919-27-130A	72869	BOX CONNECTOR, ELECTRICAL	EA	3
56	9	XBOZZ		6-1-1919-27-127A	72869	NUT, LOCK: 1/2, NIPPLE TO CONTROL BOX MTG	EA	2
56	10	XBOZZ		6-1-1919-27-125A	72869	NIPPLE: 1/2 NPT X 1-1/2, STEEL, GALV., JUNCTION BOX TO CONTROL BOX	EA	1
56	11	XBOZZ		6-1-1919-27-116A	72869	BOX, JUNCTION: 3 IN.	EA	1

Figure 56. Control Panel Junction Connections.

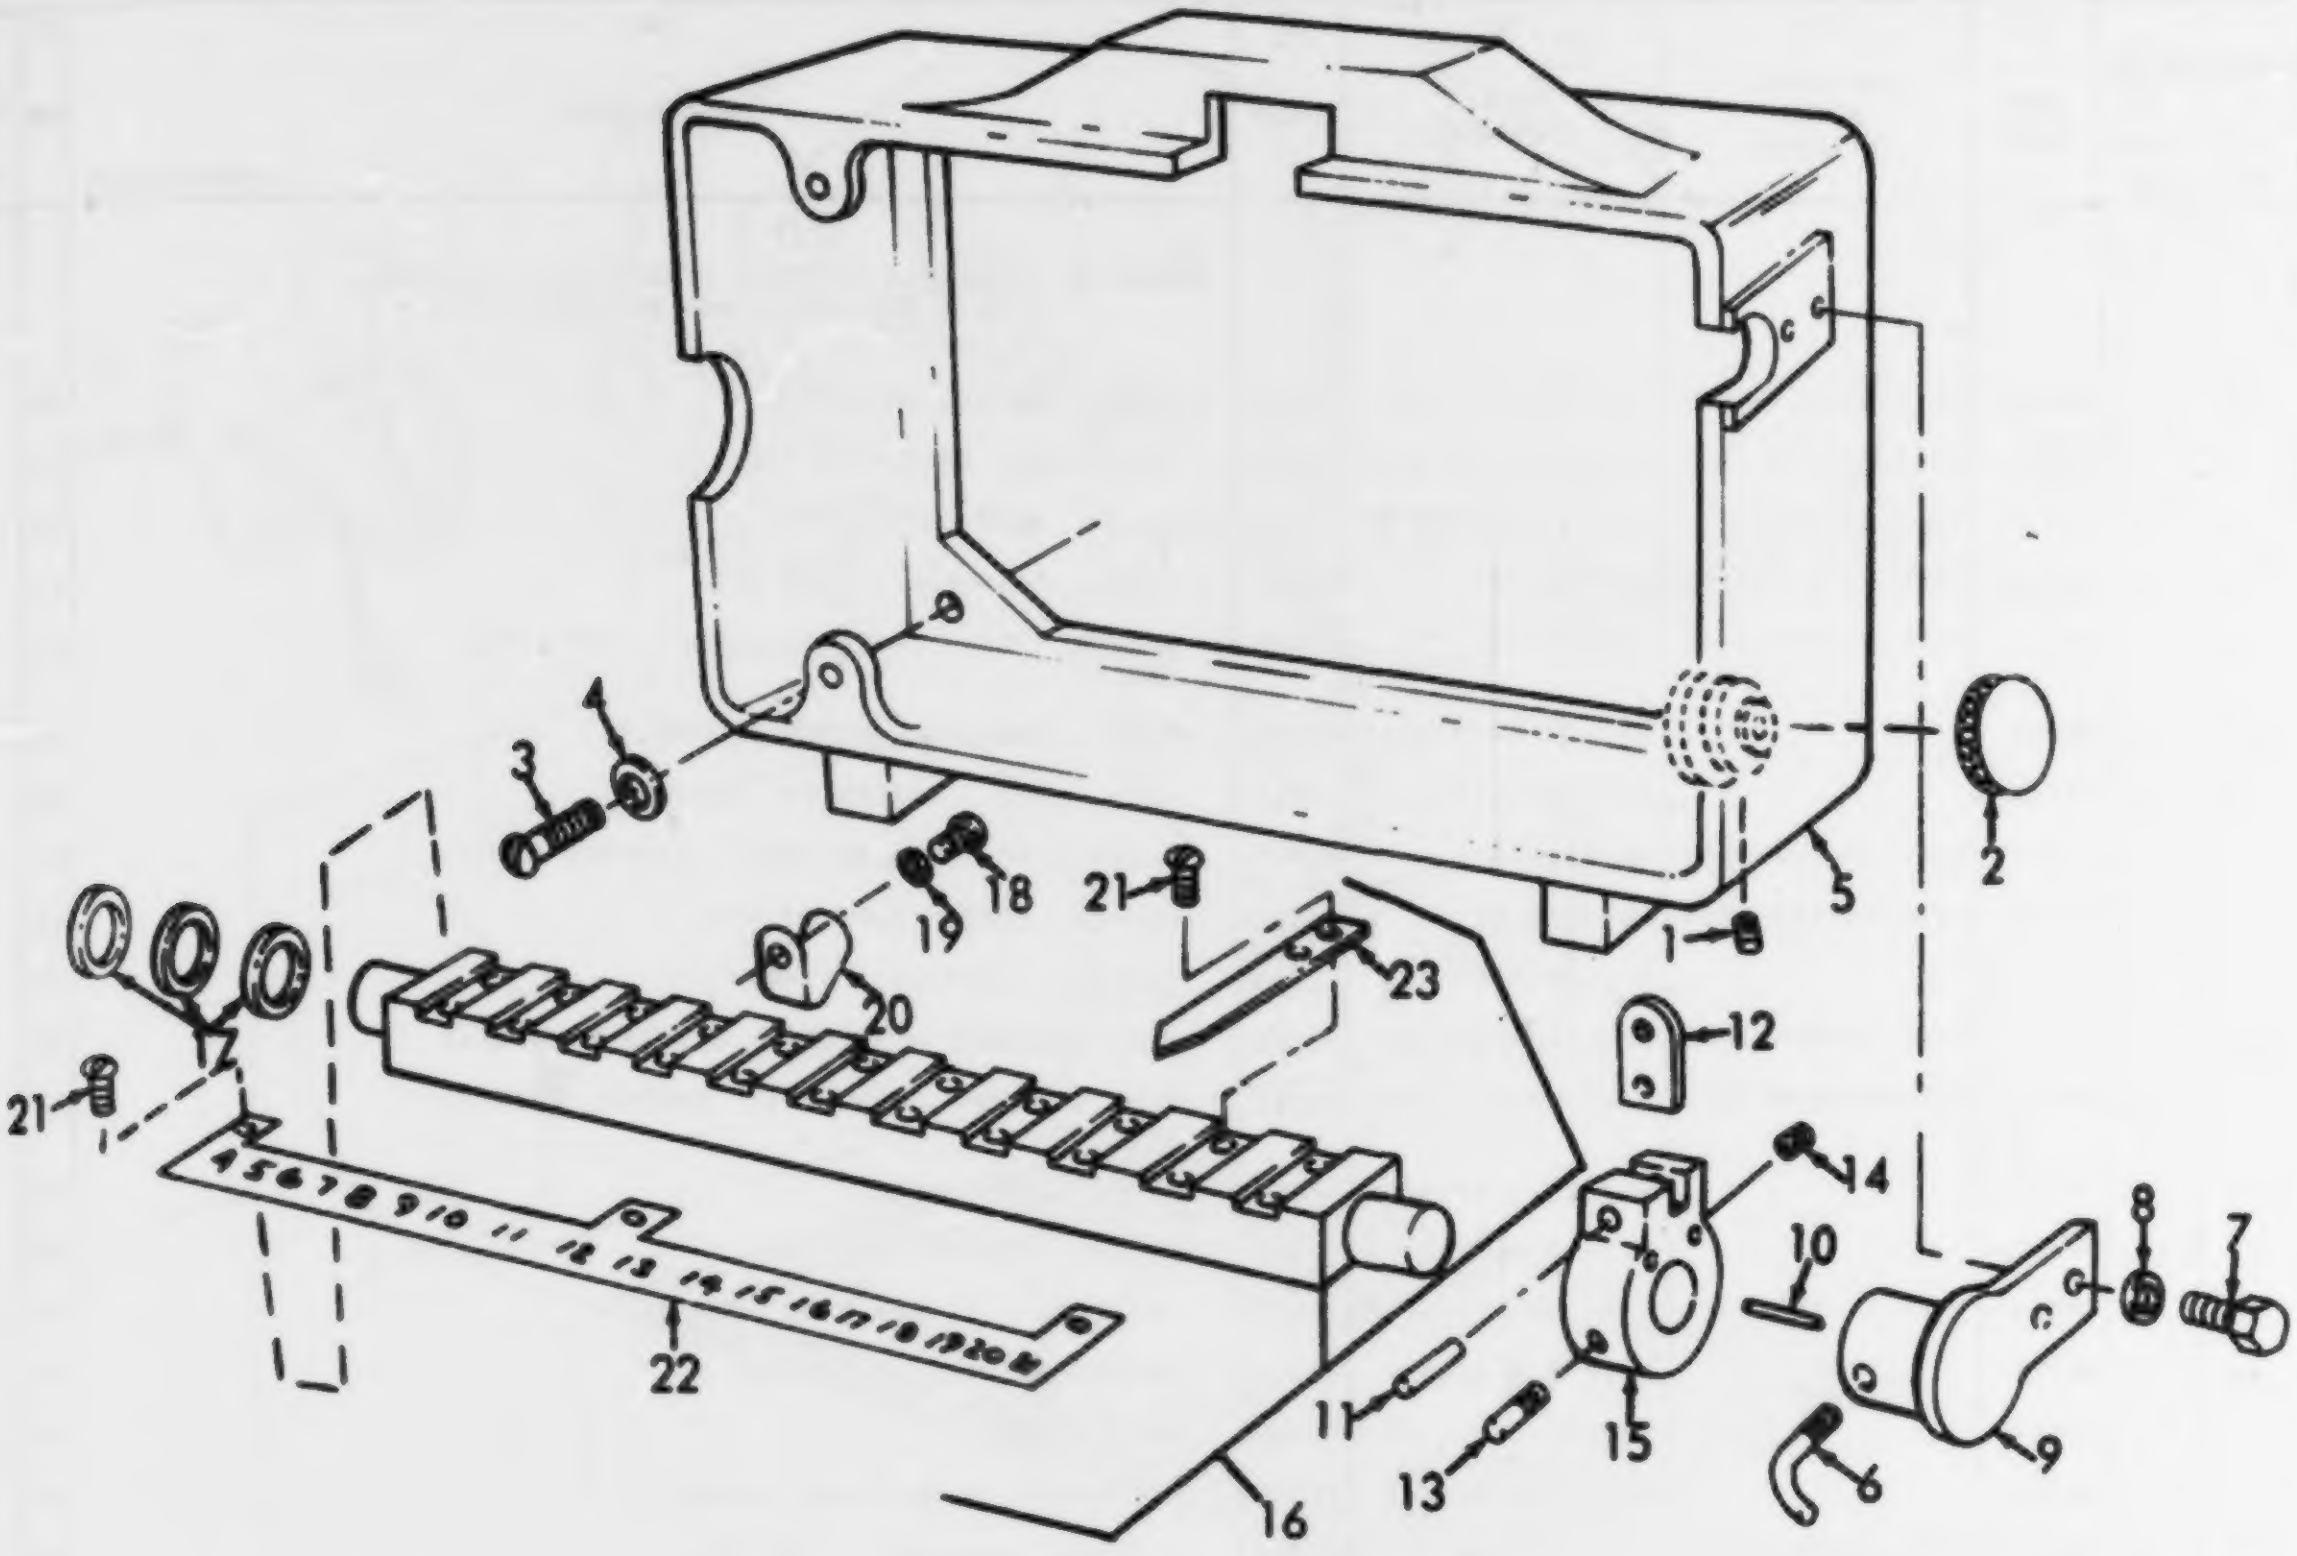
3
4
18
19
21
23
20
17
21
4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
22
16
11
13
15
14
12
10
1
5
2
8
7
9
6

TS 3510-208-34P/57

Figure 57. Formula Control Finger Box and Related Parts.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 37 - FORMULA CONTROL FINGER BOX, CONTROL DRUM AND MOTOR AND RELATED PARTS		
57		PBFFF	3510-00-253-0568	6-1-1919-27-33A	72869	FORMULA CONTROL ASSEMBLY	EA	1
57	1	PAFZZ	5305-00-042-6459	6-1-1924-27-82A	72869	SETSCREW: DRUM HEAD HUB	EA	1
57	2	PAFZZ	5335-00-181-1133	6-1-1924-27-67A	72869	KNOB: DRUM HEAD SHAFT	EA	1
57	3	PAFZZ	5305-00-071-1318	MS51957-83	96906	SCREW, PAN HEAD: CASE MTG	EA	4
57	4	PAFZZ	5310-00-550-1130	MS35333-40	96906	WASHER, LOCK, INTERNAL TOOTH: CASE MTG SCREW	EA	4
57	5	XBFZZ		6-1-1924-27-42A	72869	CASE: FORMULA CONTROL ASSEMBLY	EA	1
57	6	PAFZZ		6-1-1924-27-55A	72869	LOCK, LIFT: FINGER BOX BRACKET	EA	1
57	7	PAFZZ	5305-00-068-0502	MS90725-6	96906	SCREW, CAP, HEXAGON HEAD: SUPPORT MTG	EA	2
57	8	PAFZZ	5310-00-042-6758	MS35338-82	96906	WASHER, LOCK: SUPPORT MTG	EA	2
57	9	XBFZZ		6-1-1924-27-58A	72869	SUPPORT, CONTACT: FINGER BOX	EA	1
57	10	PAFZZ	5315-00-849-3971	6-1-1924-27-59A	72869	PIN, GROOVED, HEADLESS: FINGER LIFT LOCK	EA	2
57	11	PAFZZ	5315-00-933-7242	6-1-1924-27-57A	72869	PIN, STRAIGHT, HEADLESS: HANDLE, FINGER LIFT	EA	1
57	12	XBFZZ		6-1-1924-27-54A	72869	STUD, LIFT HANDLE	EA	1
57	13	XBFZZ		6-1-1924-27-56A	72869	HANDLE, FINGER LIFT	EA	1
57	14	PAFZZ	5305-00-723-9386	6-1-1924-27-40A	72869	SETSCREW: FINGER LIFT LOCK	EA	1
57	15	XBFZZ		6-1-1924-27-53A	72869	HANDLE, FINGER, LIFT LOCK	EA	1
57	16	XBFFF		100281-1	24446	BOX, FINGER	EA	1
57	17	XBFZZ		6-1-1924-27-70A	72869	WASHER: FINGER BOX, BRASS	EA	2
57	18	PAFZZ	5305-00-984-6206	MS35206-259	96906	SCREW, MACHINE: CLIP MTG	EA	1
57	19	PAFZZ	5310-00-198-3733	6-1-1924-27-85A	72869	WASHER, LOCK, INTERNAL TOOTH: NO. 10, CLIP MTG SCREW	EA	1
57	20	PAFZZ	5340-00-933-7252	6-1-1924-27-86A	72869	CLIP, WIRE	EA	1
57	21	PAFZZ	5305-00-889-3117	MS35206-213	96906	SCREW, MACHINE: TAPE BLOCK NUMBER, LEAD AND FINGER MTG	EA	25
57	22	XBFZZ		6-1-1924-27-72A	72869	TAPE, BLOCK NUMBER	EA	1
57	23	PAFZZ	3510-00-411-2672	6-1-1924-27-71A	72869	FINGER CONTACT	EA	12

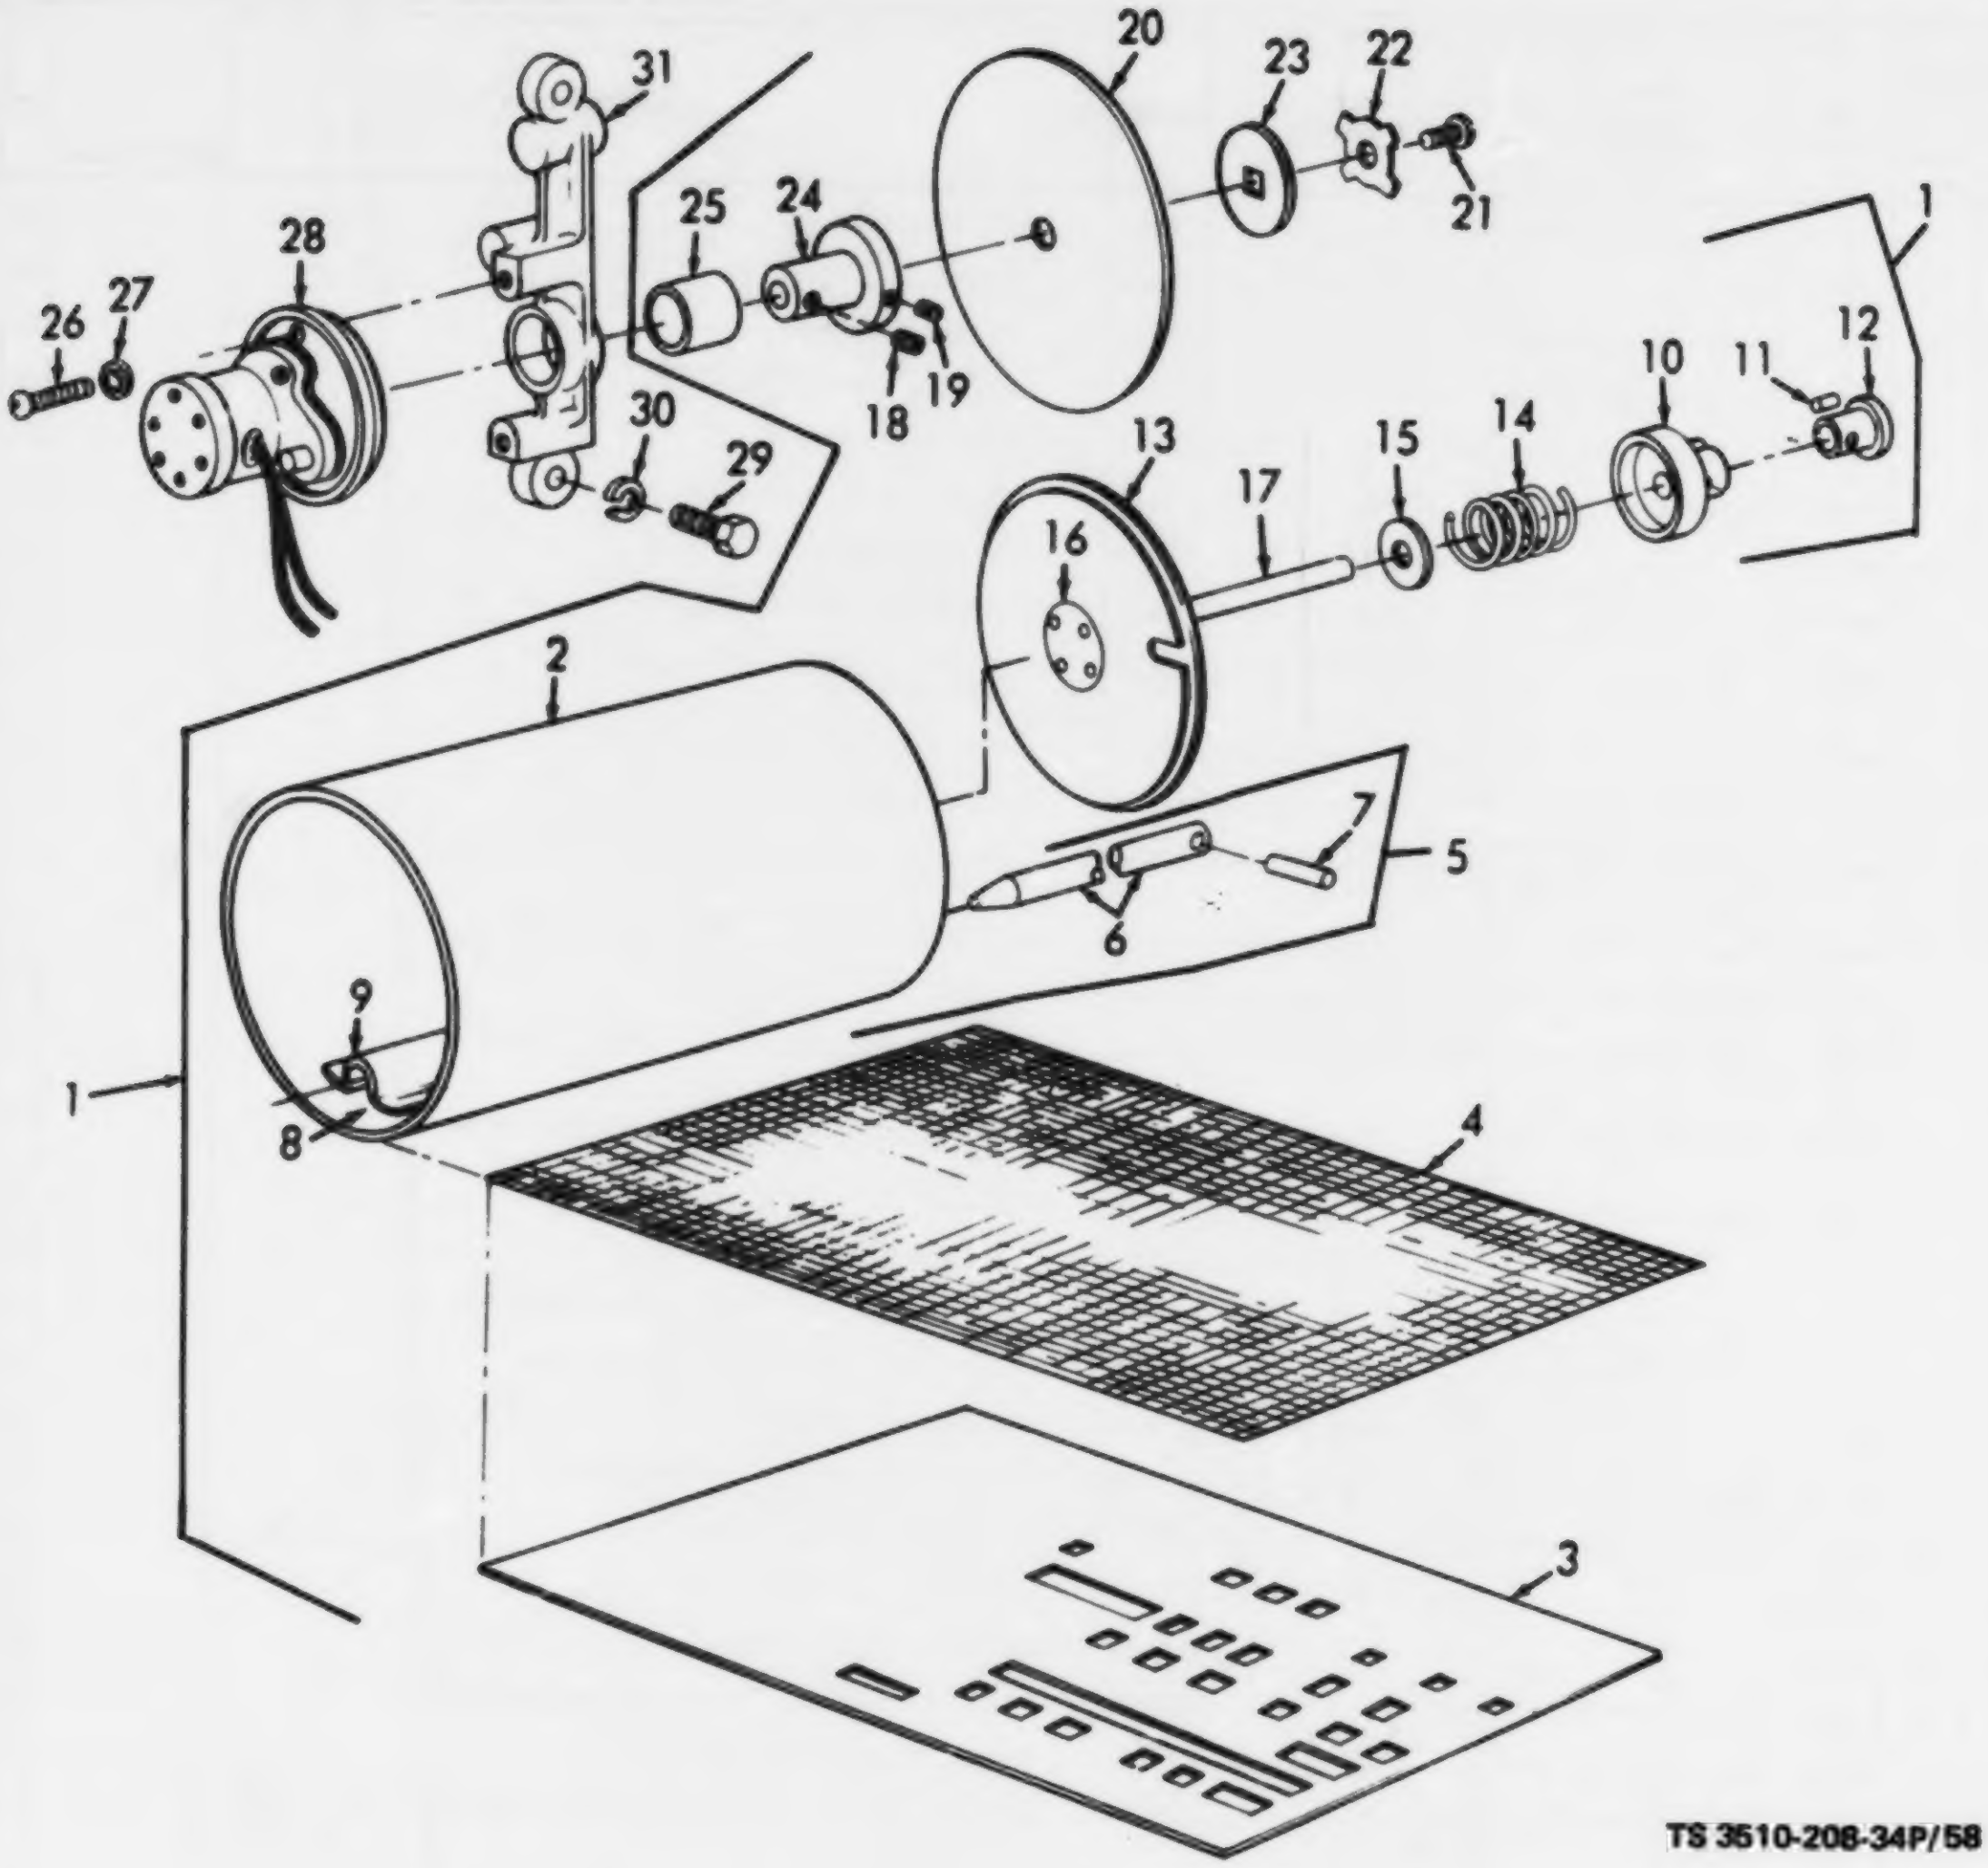
31
20
23
22
21
28
25
24
1
26
27
12
10
11
19
18
30
29
13
15
14
17
16
2
7
5
6
9
1
8
4
3

TS 3510-208-34P/58

Figure 58. Formula Control Drum, Motor and Related Parts.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
58	1	PAFFF	3510-00-411-2671	6-1-1924-27-34A	72869	DRUM ASSEMBLY	EA	1
58	2	XDFZZ		6-1-1924-27-35A	72869	DRUM	EA	1
58	3	PAFZZ	3510-00-930-2356	6-1-1928-27-73A	72869	RECORD, COTTON	EA	1
58	3	PAFZZ	3510-00-930-2355	6-1-1928-27-74A	72869	RECORD, WOOL	EA	1
58	4	PAFZZ	3510-00-411-2668	6-1-1925-27-36A	72869	SCREEN: DRUM	EA	1
58	5	PBFZZ	3510-00-411-2669	6-1-1925-27-39A	72869	RECORD LOCK ASSEMBLY	EA	1
58	6	XBFZZ		6-1-1925-27-41A	72869	LOCK, RECORD	EA	1
58	7	XBFZZ		6-1-1925-27-40A	72869	HANDLE, RECORD LOCK	EA	1
58	8	XBFZZ		6-1-1925-27-37A	72869	HOLDER, RECORD: LOCK ASSEMBLY (WELDMENT)	EA	1
58	9	XBFZZ		6-1-1925-27-38A	72869	CLIP, DRIVE: (WELDMENT)	EA	2
58	10	XBFZZ		6-1-1924-27-66A	72869	HUB, KNOB: DRUM HEAD SHAFT	EA	1
58	11	XBFZZ		6-1-1924-27-69A	72869	ROLLER, KNOB: DRUM HEAD SHAFT HUB TO KNOB	EA	3
58	12	XBFZZ		6-1-1924-27-68A	72869	BUSHING, KNOB: DRUM HEAD SHAFT	EA	1
58	13	PBFZZ	3510-00-460-6073	6-1-1924-27-51A	72869	HEAD, DRUM, FREE END	EA	1
58	14	PAFZZ	5360-00-492-6031	6-1-1924-27-64A	72869	SPRING, COMPRESSION, KNOB: DRUM HEAD SHAFT	EA	1
58	15	PAFZZ	5310-00-933-7236	6-1-1924-27-65A	72869	WASHER, SPRING TENSION: DRUM HEAD SHAFT	EA	1
58	16	PAFZZ	5320-00-994-7076	MS20613-4P4	96906	RIVET	EA	4
58	17	XBFZZ		6-1-1924-27-61A	72869	HEAD, FLANGE ASSEMBLY	EA	1
58	18	PAFZZ	5305-00-011-7200	6-1-1924-27-81A	72869	SETSCREW: FRICTION CLUTCH HUB MTG	EA	3
58	19	PAFZZ	5305-00-723-9399	6-1-1924-27-80A	72869	SETSCREW: FRICTION CLUTCH HUB	EA	1
58	20	XAFZZ		6-1-1924-27-50A	72869	HEAD, DRUM DRIVE	EA	1
58	21	PAFZZ	5305-00-984-6193	6-1-1924-27-79A	72869	SCREW, MACHINE: SPRING MTG	EA	1
58	22	PAFZZ	5340-00-933-7251	6-1-1924-27-49A	72869	SPRING, FRICTION CLUTCH	EA	1
58	23	XBFZZ		6-1-1924-27-48A	72869	WASHER, FRICTION CLUTCH	EA	1
58	24	XBFZZ		6-1-1924-27-45A	72869	HUB, FRICTION CLUTCH	EA	1
58	25	PBFZZ	3120-00-493-2945	8NBD	96881	BUSHING, HUB: FRICTION CLUTCH HUB	EA	1
58	26	PAFZZ	5305-00-984-6214	6-1-1924-27-76A	72869	SCREW, MACHINE: MOTOR MTG	EA	2
58	27	PAFZZ	5305-00-550-1130	MS35333-40	96906	WASHER, LOCK, INTERNAL TOOTH: MOTOR MTG SCREW	EA	2
58	28	PAFZZ	6105-00-953-1399	TYPE162	14907	MOTOR, ELECTRIC, 24V: DRUM, DRIVE	EA	4
58	29	PAFZZ	5305-00-068-0502	MS90725-6	96906	SCREW, CAP, HEXAGON HEAD: BRACKET MTG	EA	2
58	30	PAFZZ	5310-00-042-6758	MS35338-82	96906	WASHER, LOCK: BRACKET MTG	EA	2
58	31	XBFZZ		6-1-1924-27-44A	72869	BRACKET, CROSS: MOTOR	EA	1

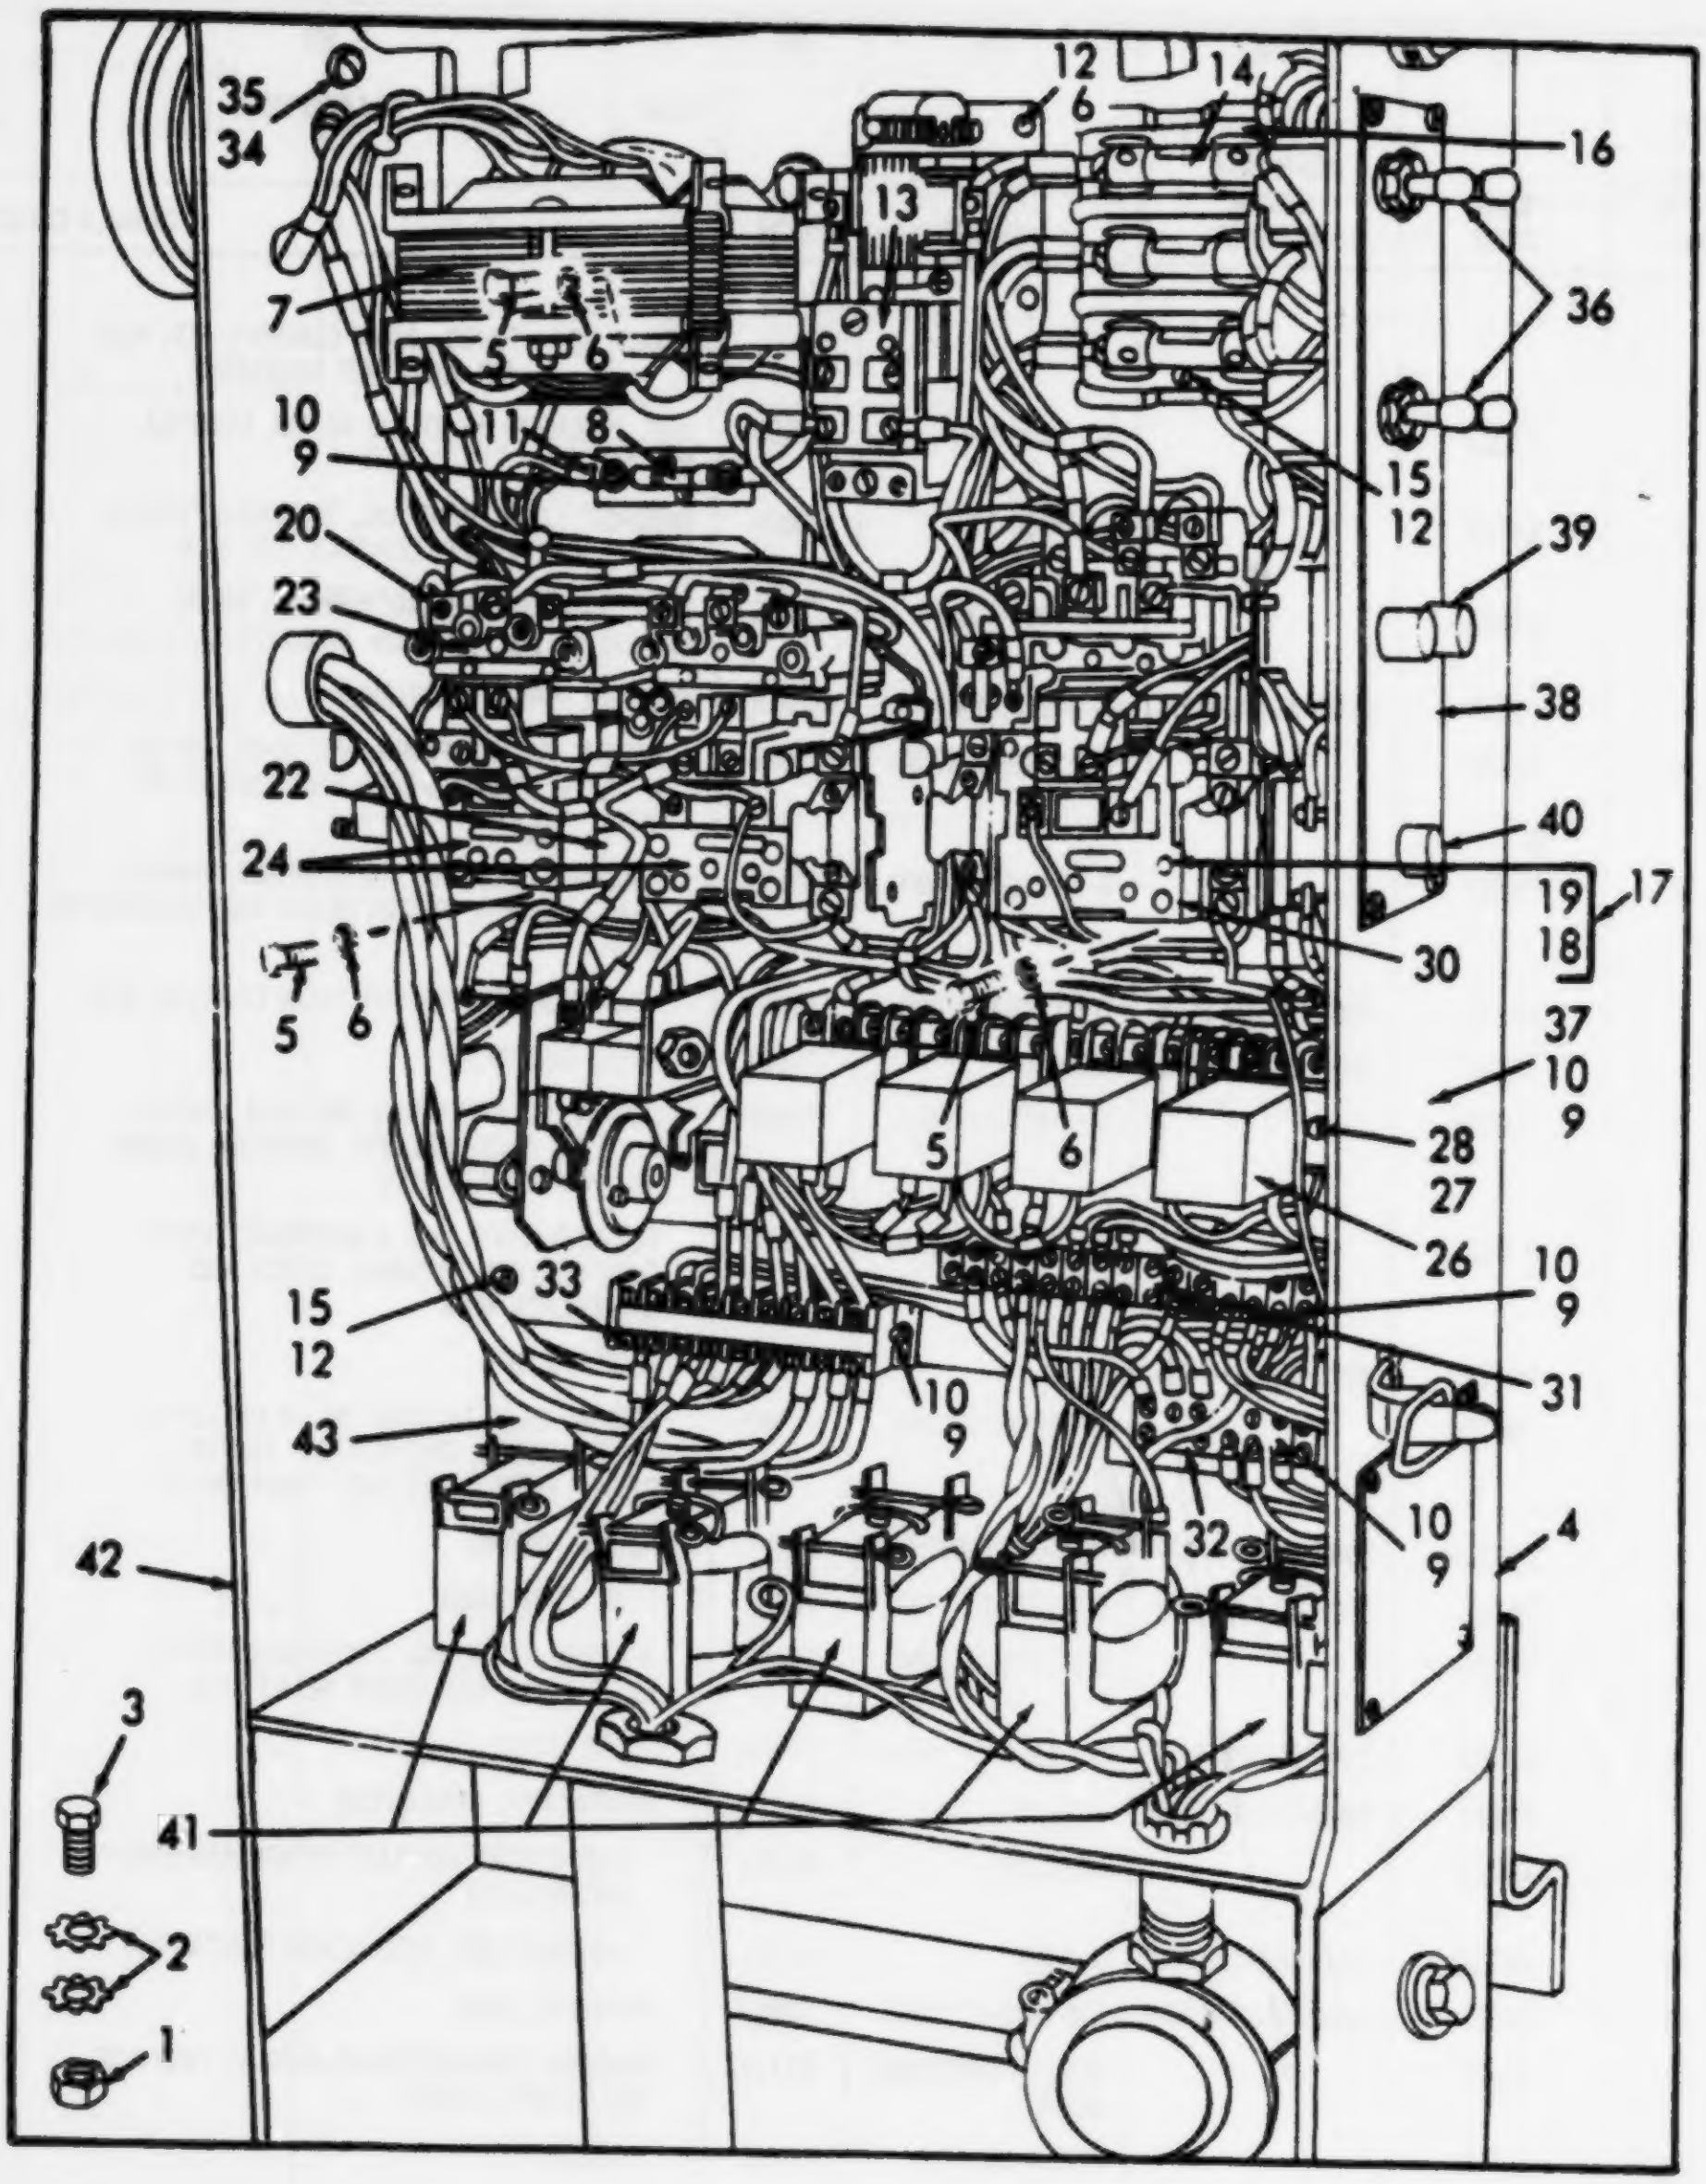
35
34
12
6
14
16
13
7
5
6
36
10
9
11
8
15
12
39
20
23
38
22
24
40
19
18
17
5
6
30
37
10
9
5
6
28
27
26
10
9
15
12
33
31
10
9
43
32
10
9
4
42
3
41
2
1

TS 3510-208-34P/59

Figure 59. Main Control Box.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6) DESCRIPTION	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	USABLE ON CODE	U/M	QTY INC IN UNIT
						GROUP 38 — PANEL, MAIN CONTROL BOX AND AIR MANIFOLD ASSEMBLY		
59	1	XBOZZ		6-1-1900-107A	72869	NUT, HEXAGON HEAD: 3/8 IN. OD, CONTROL BOX MTG	EA	4
59	2	XBOZZ		6-1-1900-110A	72869	WASHER, LOCK, INTERNAL, EXTERNAL TOOTH: 3/8 IN. SCREW SIZE, CONTROL BOX MTG	EA	8
59	3	XBOZZ		6-1-1900-108A	72869	BOLT, MACHINE, HEXAGON HEAD: 3/8 IN. X 1-1/4 IN. LG., CONTROL BOX MTG	EA	4
59	4	PBOFF	6110-00-405-4083	6-1-1919-27A	72869	CONTROL PANEL ASSEMBLY	EA	1
59	5	XBFZZ		6-1-1919-27-138A	72869	SCREW, SELF-TAPPING: NO. 10-32 UNF-24 X 5/8 LG, TRANSFORMER AND CONTACTOR MTG	EA	10
59	6	XBFZZ		6-1-1919-27-149A	72869	WASHER, LOCK, NO. 10 INTERNAL TOOTH: TRANSFORMER, TIMING RELAY AND CONTACTOR MTG	EA	14
59	7	PAFZZ	5950-00-909-9146	6-1-1919-27-109A	72869	TRANSFORMER, POWER: MAIN CONTROL BOX	EA	1
59	8	PAOFF	5920-00-142-4842	MDM10	71400	FUSE, CARTRIDGE	EA	1
59	9	XBFZZ		6-1-1919-27-140A	72869	SCREW, SELF-TAPPING: NO. 6-32 UNC-2A X 1/2 LG, FUSE HOLDER, TERMINAL BLOCK AND NAMEPLATE MTG	EA	12
59	10	XBFZZ		6-1-1919-27-151A	72869	WASHER, LOCK, NO. 6 INTERNAL TOOTH: FUSE HOLDER, TERMINAL BLOCK AND NAMEPLATE MTG	EA	12
59	11	PAFZZ	5920-00-284-7039	4512	71400	FUSE HOLDER	EA	1
59	12	XBFZZ		6-1-1919-27-139A	72869	SCREW, SELF-TAPPING: NO. 8 UNC-2A X 1/2 LG, STEEL, CAD PLATED, TIMING RELAY, FUSE PLATE AND TIMER RELAY	EA	9
59	13	PAFZZ	5945-00-933-7037	B849SBCTZ0V24VAC	01121	RELAY, TIMING	EA	1
50	14	PAOZZ	5920-00-518-3208	6-1-1919-27-113A	72869	FUSE, CARTRIDGE	EA	3
59	15	XBFZZ		6-1-1919-27-148A	72869	WASHER, LOCK, NO. 8 INTERNAL TOOTH: FUSE PLATE AND TIMER RELAY MTG	EA	5
59	16	PAFZZ	5815-00-126-4156	6-1-1919-27-114A	72869	PLATE, FUSE	EA	1
59	17	PAFFF	5945-00-833-6340	709A0WJ	01121	CONTACTOR, EXTRACTOR	EA	1
59	18	XAFZZ		X232222	01121	STATIONARY CONTACT BLOCK ASSEMBLY, W/CONTACTS	EA	1
59	19	PAFZZ	5945-00-910-5558	Z23367	01121	CONTACT SET, EXTRACTOR CONTACTOR	EA	1
59	20	PAFZZ	5940-00-933-9154	6-1-1919-27-152A	72869	TERMINAL LUG	AR	V
59	21	PAFFF		BUL705S0890598K SERIES	01121	WASHER CONTACTOR ASSEMBLY: FWD AND REV, W/MTG PLATE	EA	1
59	22	XDFZZ		705-AOWJ103	01121	RELAY	EA	2
59	23	XAFZZ		X232217	01121	STATIONARY CONTACT BLOCK ASSEMBLY, W/CONTACTS	EA	2
59	24	PAOZZ	5845-00-073-6615	Z23363	01121	CONTACT SET, STARTER KIT	EA	1
59	25	PAFZZ	6645-00-917-6140	B850Z0V40L3-24V	01121	RELAY, MOTOR DRIVEN TIMER	EA	1
59	26	PAFZZ	5945-00-900-3932	KRP11AG24VAC	77342	RELAY, ARMATURE	EA	4
59	27	XBFZZ		6-1-1919-27-168A	72869	SCREW, MACHINE, PAN HEAD: NO. 6-32 UNC-2A X 1 LG, SOCKET MTG	EA	8
59	28	XBFZZ		6-1-1919-27-169A	72869	WASHER, LOCK, NO. 6-32 SCREW SIZE: SOCKET MTG	EA	8
59	29	PAFZZ	5935-00-302-6343	6-1-1919-27-167A	72869	SOCKET, ELECTRON TUBE	EA	4
59	30	XBOZZ		100TYPESST2	92000	TIE, CABLE	EA	15
59	31	PAFZZ		6-1-1919-27-110A	72869	BLOCK, TERMINAL	EA	1
59	32	PAFZZ		6-1-1919-27-174A	72869	BLOCK, TERMINAL	EA	1
59	33	PAFZZ		6-1-1919-27-94A	72869	BLOCK, TERMINAL	EA	1

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)		(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	Usable On Code	U/M	QTY INC IN UNIT
59	34	XBOZZ		6-1-1919-27-134A	72869	SCREW, MACHINE, PAN HEAD: 1/4-20 UNC-2A X 5/8 LG, CONTROL PANEL MTG		EA	5
59	35	XBOZZ		6-1-1919-27-150A	72869	WASHER, LOCK, 1/4-20 SCREW SIZE, INTERNAL TOOTH: CONTROL PANEL MTG		EA	5
59	36	PAFZZ	5930-00-823-0962	6-1-1919-27-108A	72869	SWITCH, TOGGLE		EA	4
59	37	PAFZZ		6-1-1919-27-128A	72869	NAMEPLATE		EA	1
59	38	XBFZZ		6-1-1919-27-132A	72869	SCREW, MACHINE, FLAT HEAD: NO. 8-32 UNC-2A X 1/2 LG, PUSH SWITCH MTG		EA	6
59	39	PAFZZ	5930-00-906-0085	6-1-1919-27-165A	72869	SWITCH, PUSH		EA	2
59	40	PAFZZ	5930-00-906-0116	6-1-1919-27-100A	72869	SWITCH, PUSH		EA	1
59	41	PAFZZ	4810-00-930-2352	6-1-1919-27-181A	72869	VALVE, SOLENOID	A	EA	5
59	41	PAFZZ		XT659-24V-60HZ	81978	VALVE, SOLENOID	B	EA	5
59	42	XBOZZ		6-1-1919-27-91A	72869	PANEL, CONTROL		EA	1
59	43	PAFZZ	6110-00-484-3459	6-1-1920-27-1A	72869	CONTROL BOX ASSEMBLY		EA	1

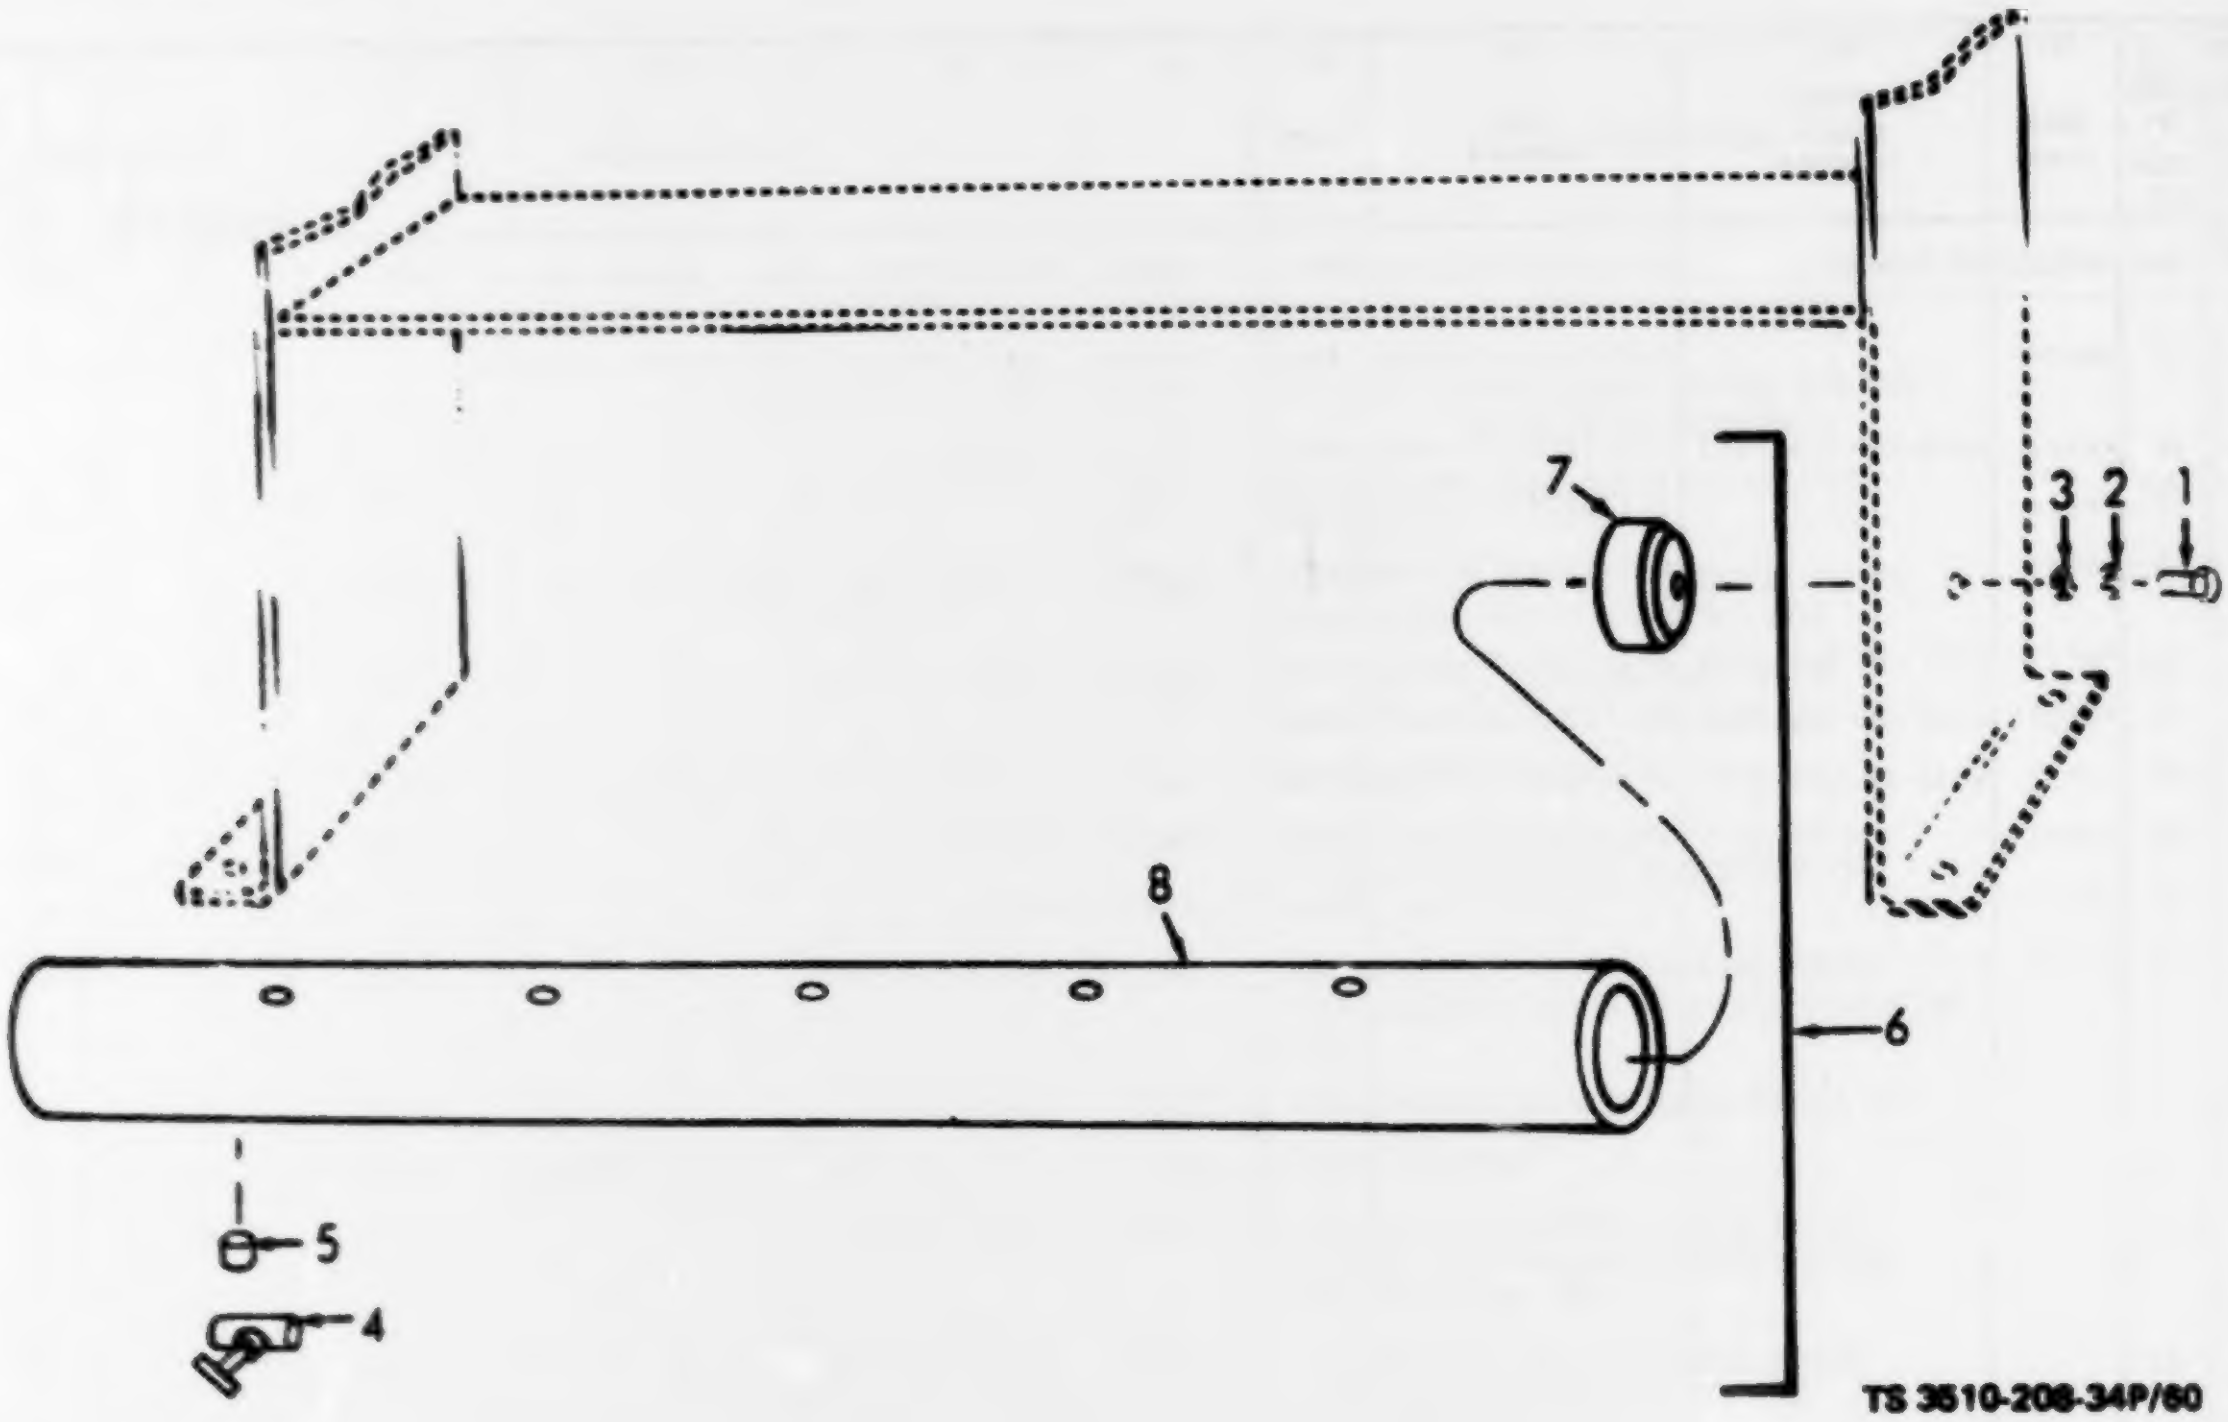

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
60	1	XBOZZ		6-1-1919-27-131A	72869	SCREW, CAP, HEXAGON HEAD: 3/8-16 UNC-2A X 1 IN. LG, AIR MANIFOLD ASSEMBLY MTG	EA	2
60	2	XBOZZ		6-1-1919-27-146A	72869	WASHER, LOCK: 3/8-16 SCREW SIZE, AIR MANIFOLD ASSEMBLY MTG	EA	2
60	3	XBOZZ		6-1-1919-27-147A	72869	WASHER, PLAIN: 3/8-16 SCREW SIZE, AIR MANIFOLD ASSEMBLY MTG	EA	2
60	4	PAOZZ		6-1-1919-27-119A	72869	VALVE, ANGLE, NEEDLE, 1/8 NPT: AIR MANIFOLD ASSEMBLY	EA	1
60	5	PAOZZ		6-1-1919-27-156A	72869	NIPPLE, CLOSE, BRASS, 1/8 NPT: ANGLE VALVE TO AIR MANIFOLD ASSEMBLY	EA	1
60	6	PAOOO		6-1-1919-27-87A	72869	AIR MANIFOLD ASSEMBLY	EA	1
60	7	PAOZZ		6-1-1919-27-88A	72869	PLUG, AIR MANIFOLD	EA	2
60	8	XBOZZ		6-1-1919-27-89A	72869	TUBE, MANIFOLD	EA	1

Figure 60. Air Manifold Assembly.

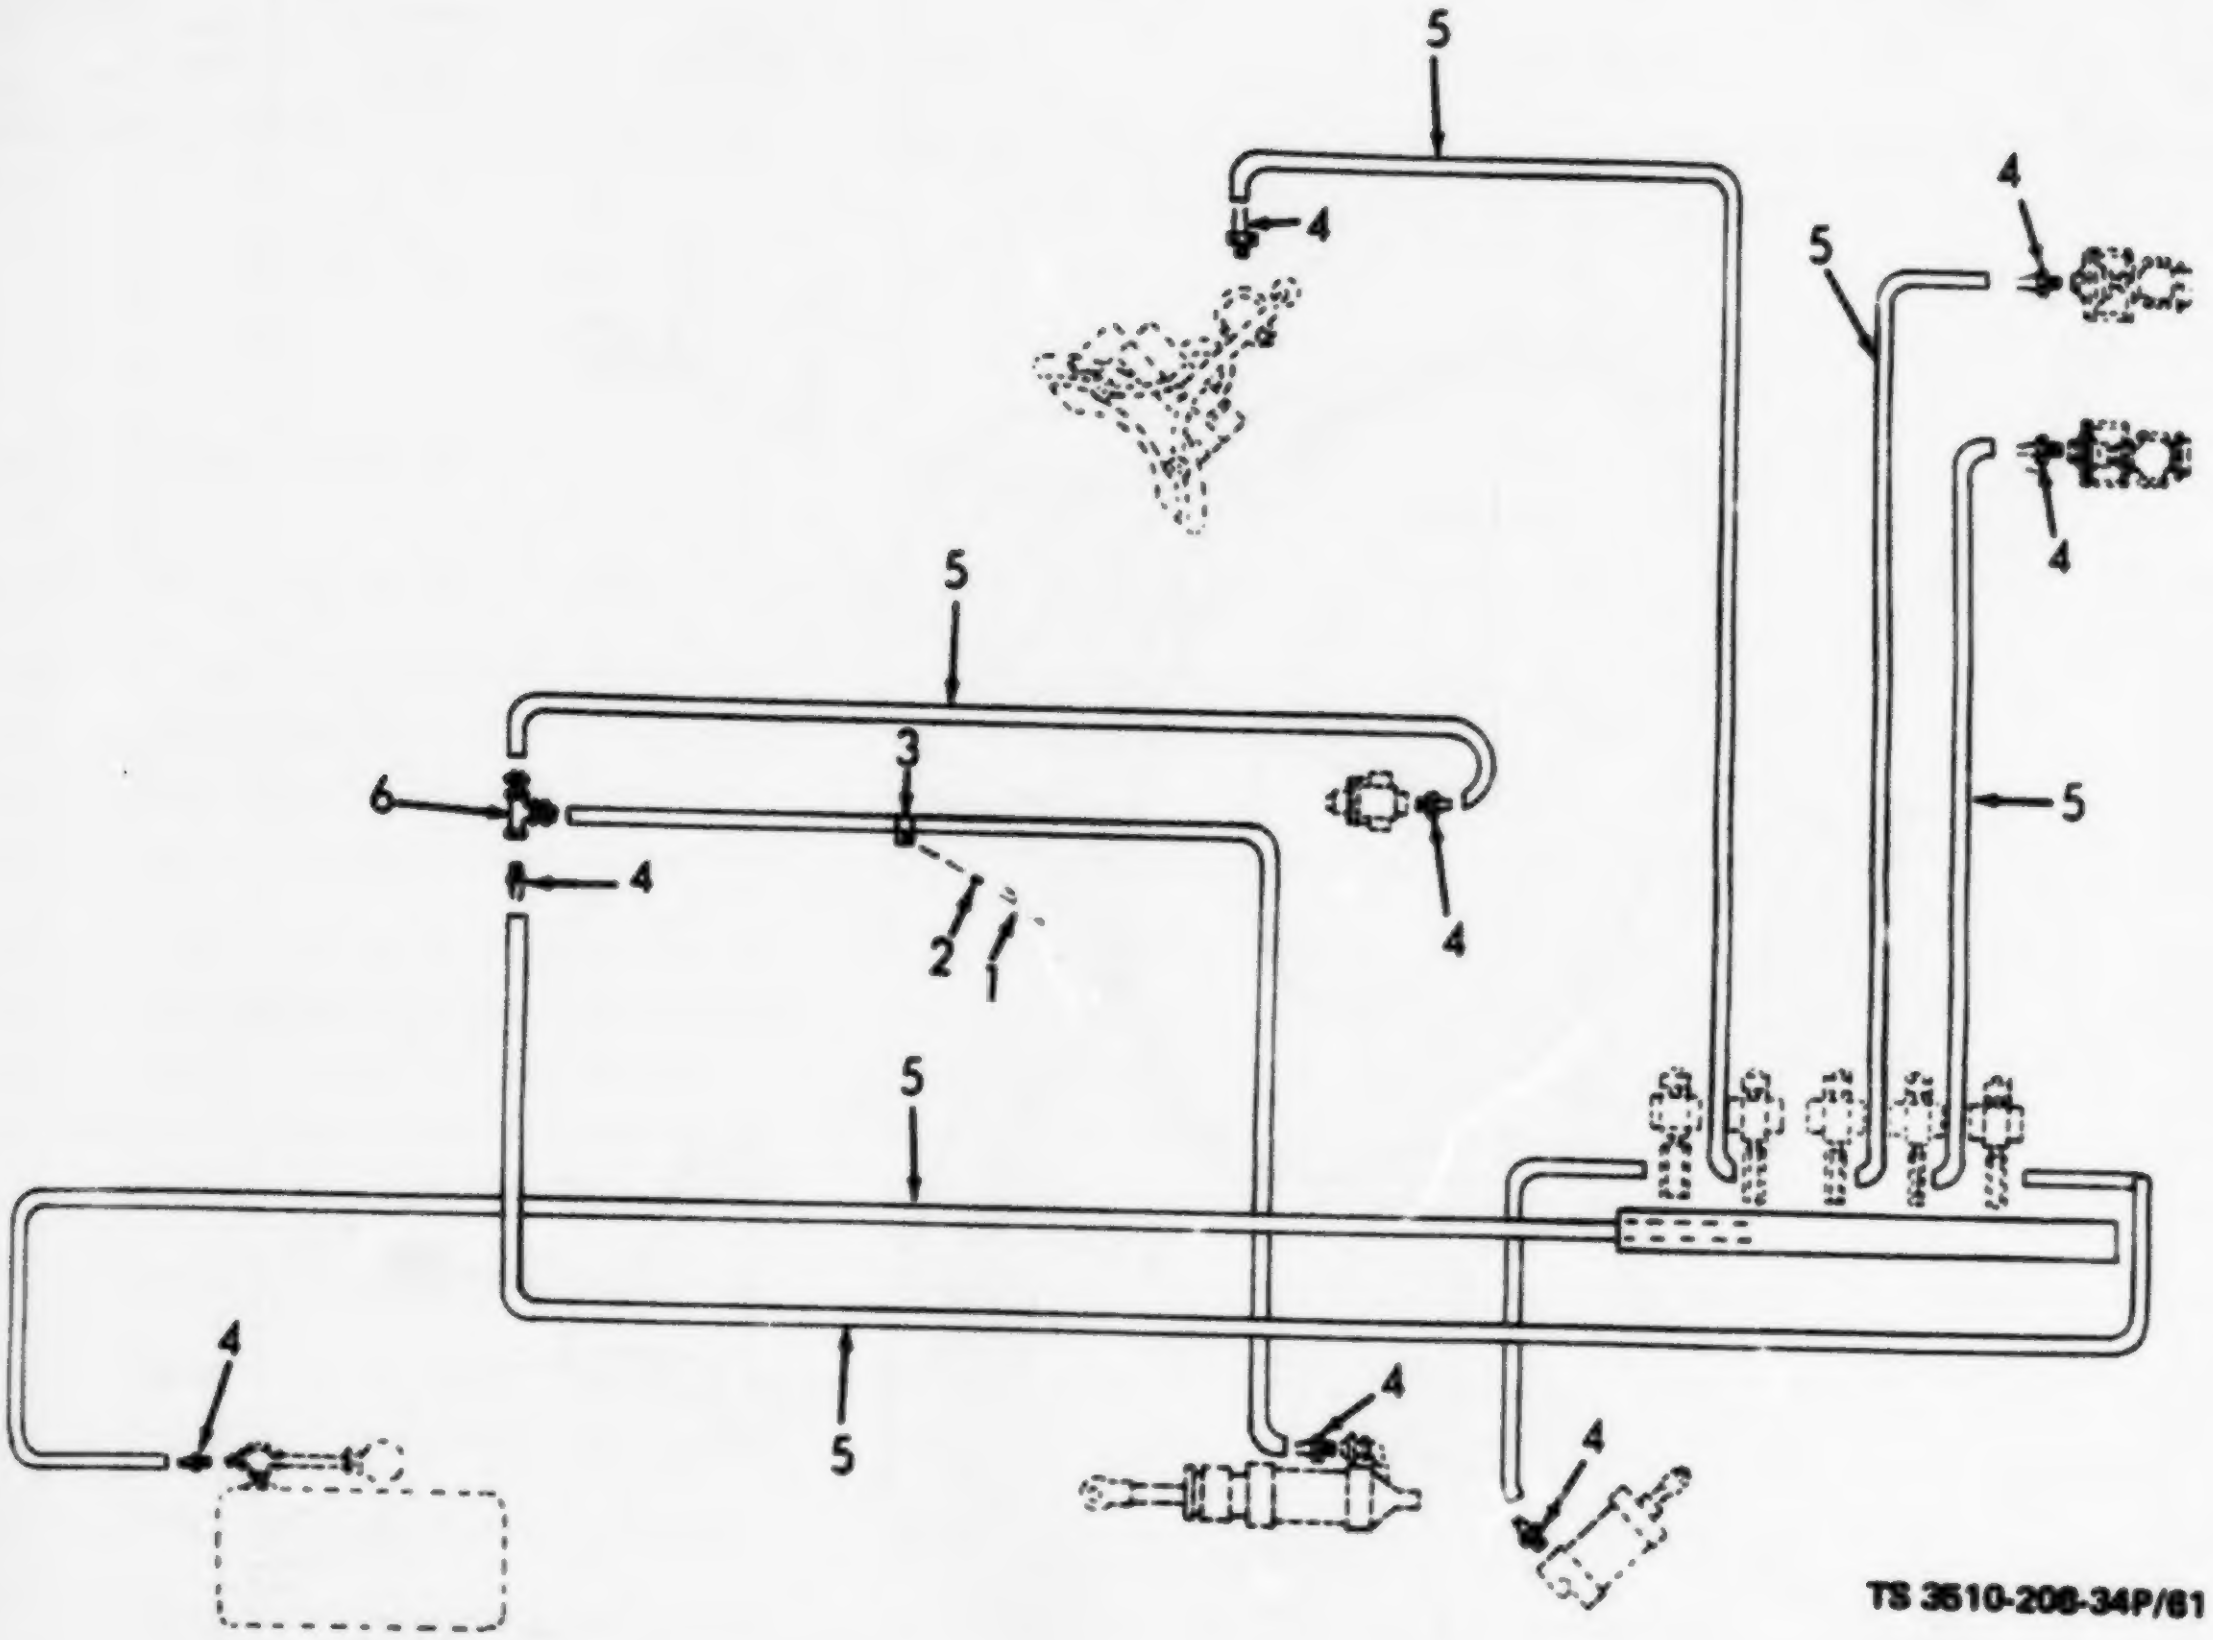

TS 3510-208-34P/61

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 39 - AIR LINES		
61	1	XBOZZ		6-1-1900-105A	72869	SCREW, MACHINE: AIR LINES CLAMP	EA	6
61	2	XBOZZ		6-1-1900-111A	72869	WASHER, LOCK: AIR LINES CLAMPS	EA	6
61	3	XBOZZ		6-1-1900-89A	72869	CLAMP, LOOP: AIR LINES	EA	6
61	4	PAOZZ	4730-00-287-1784	4738-2-4B	00624	NIPPLE, HOSE	EA	10
61	5	PAOZZ	4720-00-847-1710	2556-4	01276	HOSE, AIR LINE	FT	V
61	6	PAOZZ	4730-00-278-2740	6-1-1936-33-10A	72869	TEE: AIR LINES, 1/8 IN. NPT	EA	1

Figure 61. Air Lines.

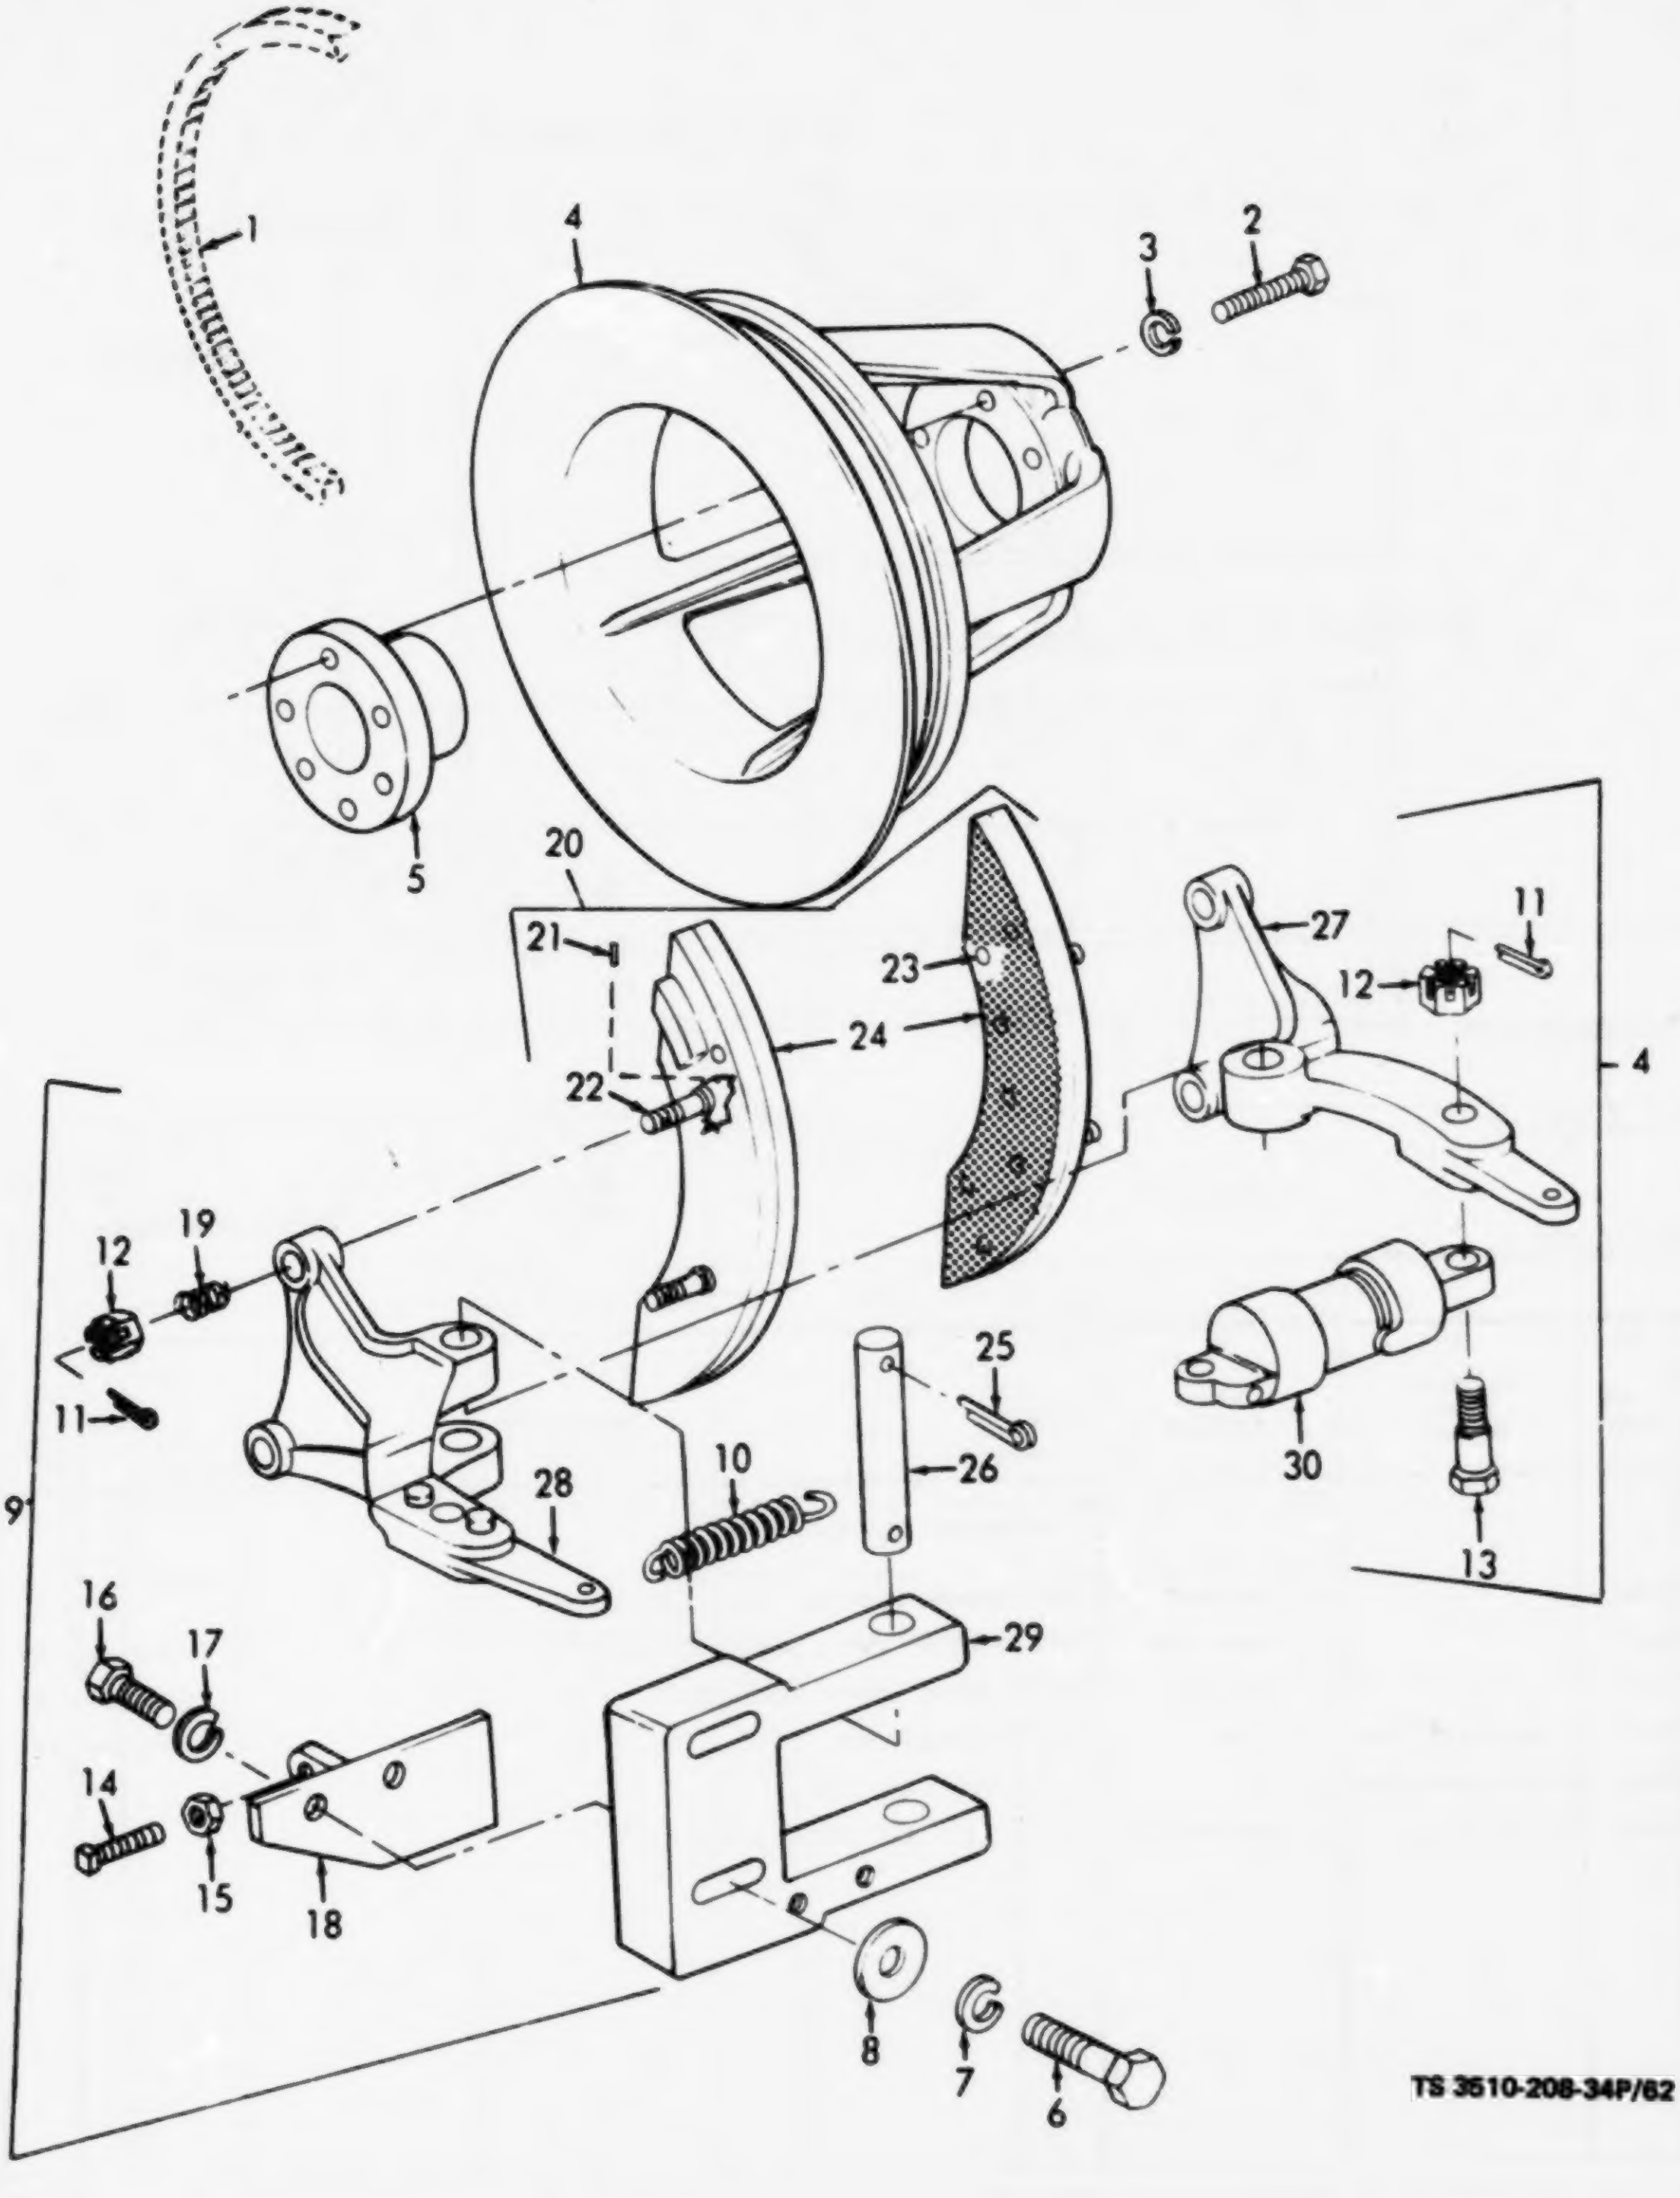
1
2
3
4
5
20
21
22
23
24
27
11
12
4
19
12
11
9
28
10
25
26
30
13
29
16
17
14
15
18
8
7
6
TS 3510-208-34P/62

Figure 62. Air Brake Cylinder, Hub Sheave and Related Parts.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 40 - MAIN DRIVE BRAKE ASSEMBLY, BRAKE AIR CYLINDER, AND MAIN BEARING ASSEMBLY		
						WASHER EXTRACTOR ASSEMBLY P/N TLMWX66(60883) NSN3510-00-933-7946 INCLUDES COMPONENTS LISTED IN FIGURES 62 THRU 72		
62	1	PAOZZ	3030-00-529-0472	BX85-3	81300	BELT, V: MATCHED SET, EXTRACTOR MOTOR TO WASHER, EXTRACTOR DRIVE PULLEY (3V BELTS TO SET)	ST	1
62	2	PAOZZ	5305-00-269-3216	MS90725-66	96906	SCREW, CAP, HEXAGON HEAD: HUB, WASHER, EXTRACTOR	EA	6
62	3	PBOZZ	5310-00-637-9541	MS35338-46	96906	WASHER, LOCK: HUB, WASHER, EXTRACTOR	EA	6
62	4	PBFZZ	3020-00-437-6974	6-1-1929-51A	93232	PULLEY, SHEAVE	EA	1
62	5	PBFZZ	3040-00-490-5470	QDTYPESF	93232	HUB	EA	1
62	6	PAOZZ	5305-00-071-1769	MS35291-115	96906	SCREW, CAP, HEXAGON HEAD: BRAKE SUPPORT MTG	EA	2
62	7	PAOZZ	5310-00-584-5272	MS35338-48	96906	WASHER, LOCK: BRAKE SUPPORT SCREW	EA	2
62	8	PAOZZ	5310-00-044-6485	MBOES446485	81348	WASHER, FLAT: BRAKE SUPPORT SCREW	EA	2
62	9	PBOFF	3510-00-253-0562	DA2339	49200	MAIN DRIVE BRAKE ASSEMBLY	EA	1
62	10	PAOZZ	5340-00-933-5906	2704	49200	SPRING, HELICAL, EXTENSION: BRAKE LEVER	EA	1
62	11	PAOZZ	5325-00-826-1794	MS24665-285	96906	PIN, COTTER: AIR BRAKE CYLINDER AND BRAKE LEVER MTG	EA	6
62	12	PAOZZ	5310-00-060-8432	MS55310-40	08288	NUT, SLOTTED: AIR BRAKE CYLINDER AND BRAKE LEVER MTG	EA	6
62	13	XBOZZ		6-1-1956-37-19A	72869	STUD: BRAKE CYLINDER MTG	EA	2
62	14	PAFZZ	5305-00-054-9261	MS51955-6	96906	SETSCREW, SQUARE HEAD: STABILIZER ADJUSTING	EA	2
62	15	PAFZZ	5310-00-761-6882	MS51967-2	96906	NUT, PLAIN, HEXAGON: STABILIZER ADJUSTING SETSCREW	EA	2
62	16	PAFZZ	5305-00-269-3211	MS90725-60	96906	SCREW, CAP, HEXAGON HEAD: STABILIZER MTG	EA	2
62	17	PAFZZ	5310-00-060-8432	6-1-1956-37-28A	72869	WASHER, SLOTTED, HEXAGON: STABILIZER MTG SCREW	EA	5
62	18	XBFZZ		DA2157	49200	STABILIZER: BRAKE	EA	1
62	19	PAFZZ	5340-00-933-5907	V0880	49200	SPRING, HELICAL, COMPRESSION: BRAKE LEVER, OUTER AND INNER	EA	4
62	20	PAOZZ	3040-00-933-5984	DA2073	49200	BRAKE, SHOE TYPE	EA	2
62	21	PAOZZ	5315-00-054-4111	544211	00000	PIN: BRAKE SHOE	EA	4
62	22	XBFZZ		6-1-1957-37-24A	72869	STUD: BRAKE SHOE	EA	4
62	23	XAFZZ		MS55320-2A	08288	RIVET, TUBULAR	EA	18
62	24	XAFZZ		6-1-1956-37-22A	60883	LINING, BRAKE	EA	2
62	25	PAOZZ	5315-00-054-4111	544111	00000	PIN, COTTER: BRAKE LEVER, INNER AND OUTER	EA	2
62	26	XBOZZ		10035-75SS	49200	PIN: BRAKE LEVER, OUTER AND INNER	EA	1
62	27	XBOZZ		D8547-1	49200	LEVER, BRAKE, OUTER	EA	1
62	28	XBOZZ		D8553	49200	LEVER, BRAKE, INNER	EA	1
62	29	XBOZZ		P9664-1	49200	SUPPORT: BRAKE	EA	1
62	30	PAOFF	3520-00-253-0609	DA2095	49200	CYLINDER, AIR BRAKE	EA	1

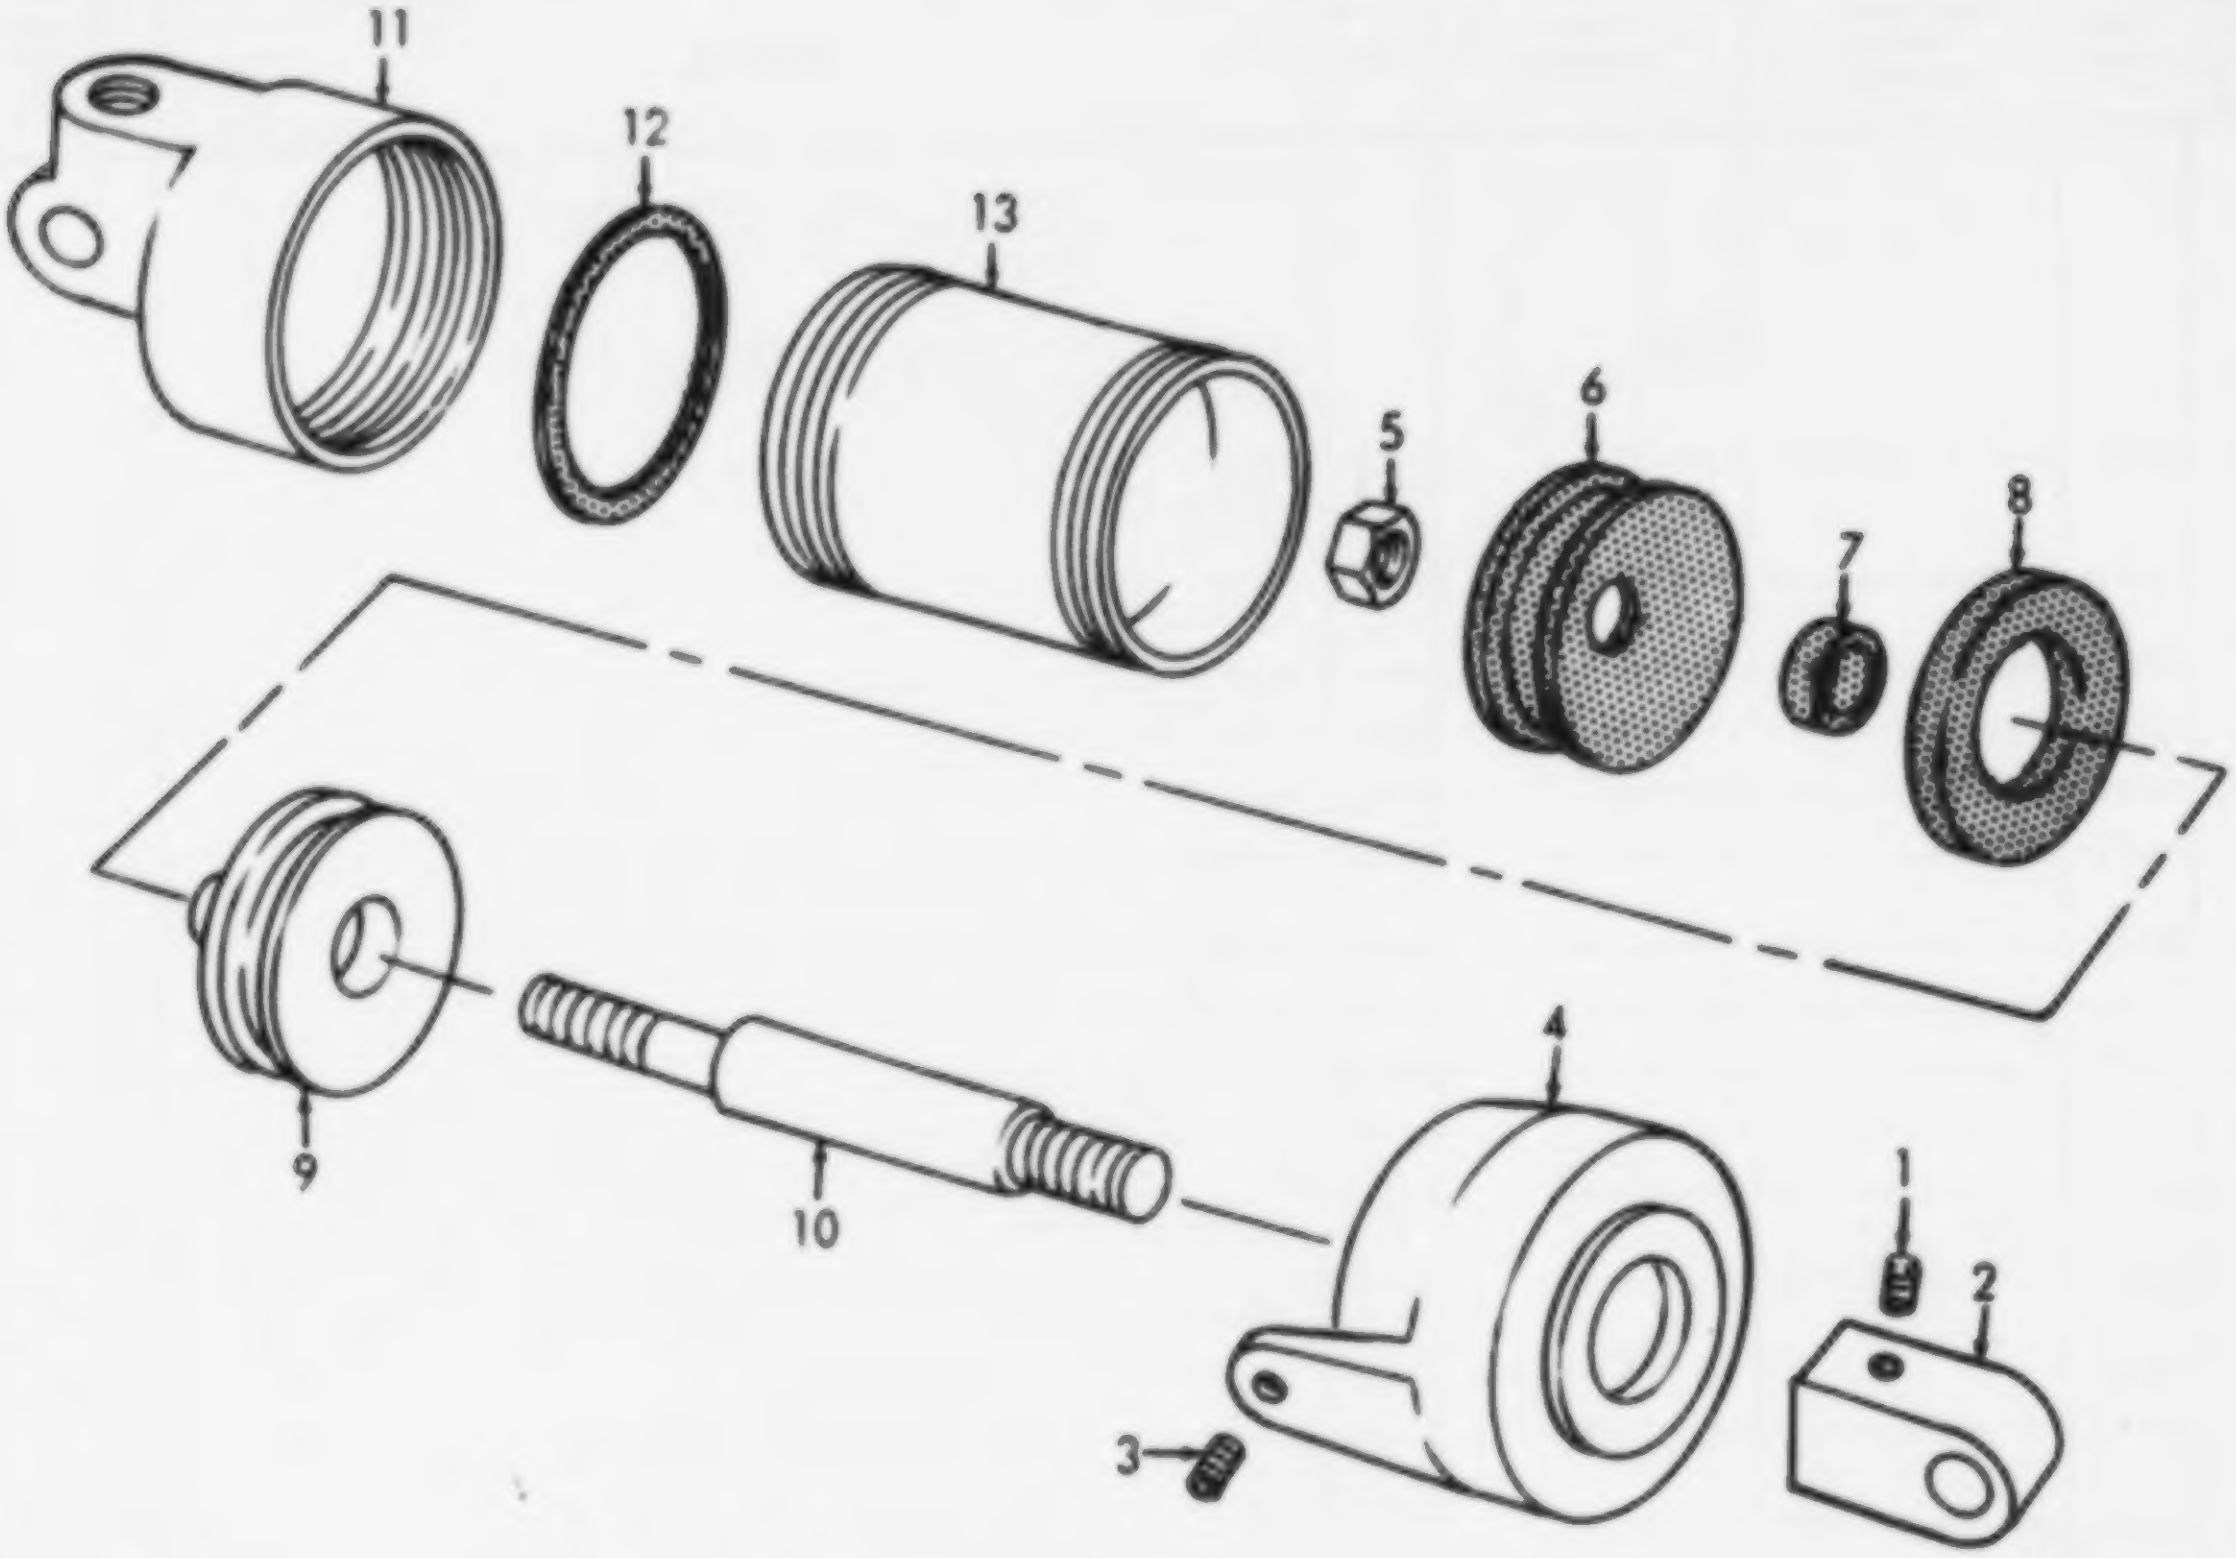

TS 3510-208-34P/63

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
63	1	PAFZZ	5305-00-719-5336	MS51963-33	96906	SETSCREW: END MTG	EA	1
63	2	PAFZZ	3510-00-869-3711	6-1-1957-37-5A	72869	PISTON ROD END	EA	1
63	3	PAFZZ	5305-00-723-9398	6-1-1957-37-14A	72869	SETSCREW, SOCKET HEAD: 10-24, 1/4 IN. LG	EA	1
63	4	PAFZZ	3510-00-411-2660	6-1-1957-37-3A	72869	HEAD, CYLINDER, LOWER	EA	1
63	5	PAFZZ	5310-00-761-6882	MS51967-2	96906	NUT, HEXAGON HEAD: PISTON ROD	EA	1
63	6	PAFZZ	3510-00-411-2664	6-1-1957-37-8A	72869	CUP, PISTON	EA	1
63	7	PAFZZ		6-1-1957-37-13A	72869	GASKET, PISTON	EA	1
63	8	PAFZZ	3510-00-411-2665	6-1-1957-37-91A	72869	LUBRICATOR, PISTON	EA	1
63	9	PAFZZ	3510-00-411-2663	6-1-1957-37-7A	72869	COLLAR, PISTON	EA	1
63	10	PAFZZ	3510-00-411-2662	6-1-1957-37-6A	72869	ROD, PISTON	EA	1
63	11	PAFZZ	3510-00-411-2659	6-1-1957-37-2A	72869	HEAD,CYLINDER, UPPER	EA	1
63	12	PAFZZ		6-1-1957-37-10A	72869	GASKET, HEAD	EA	1
63	13	PAFZZ	3510-00-411-2661	6-1-1957-37-4A	72869	TUBE, AIR CYLINDER	EA	1

Figure 63. Brake Air Cylinder.

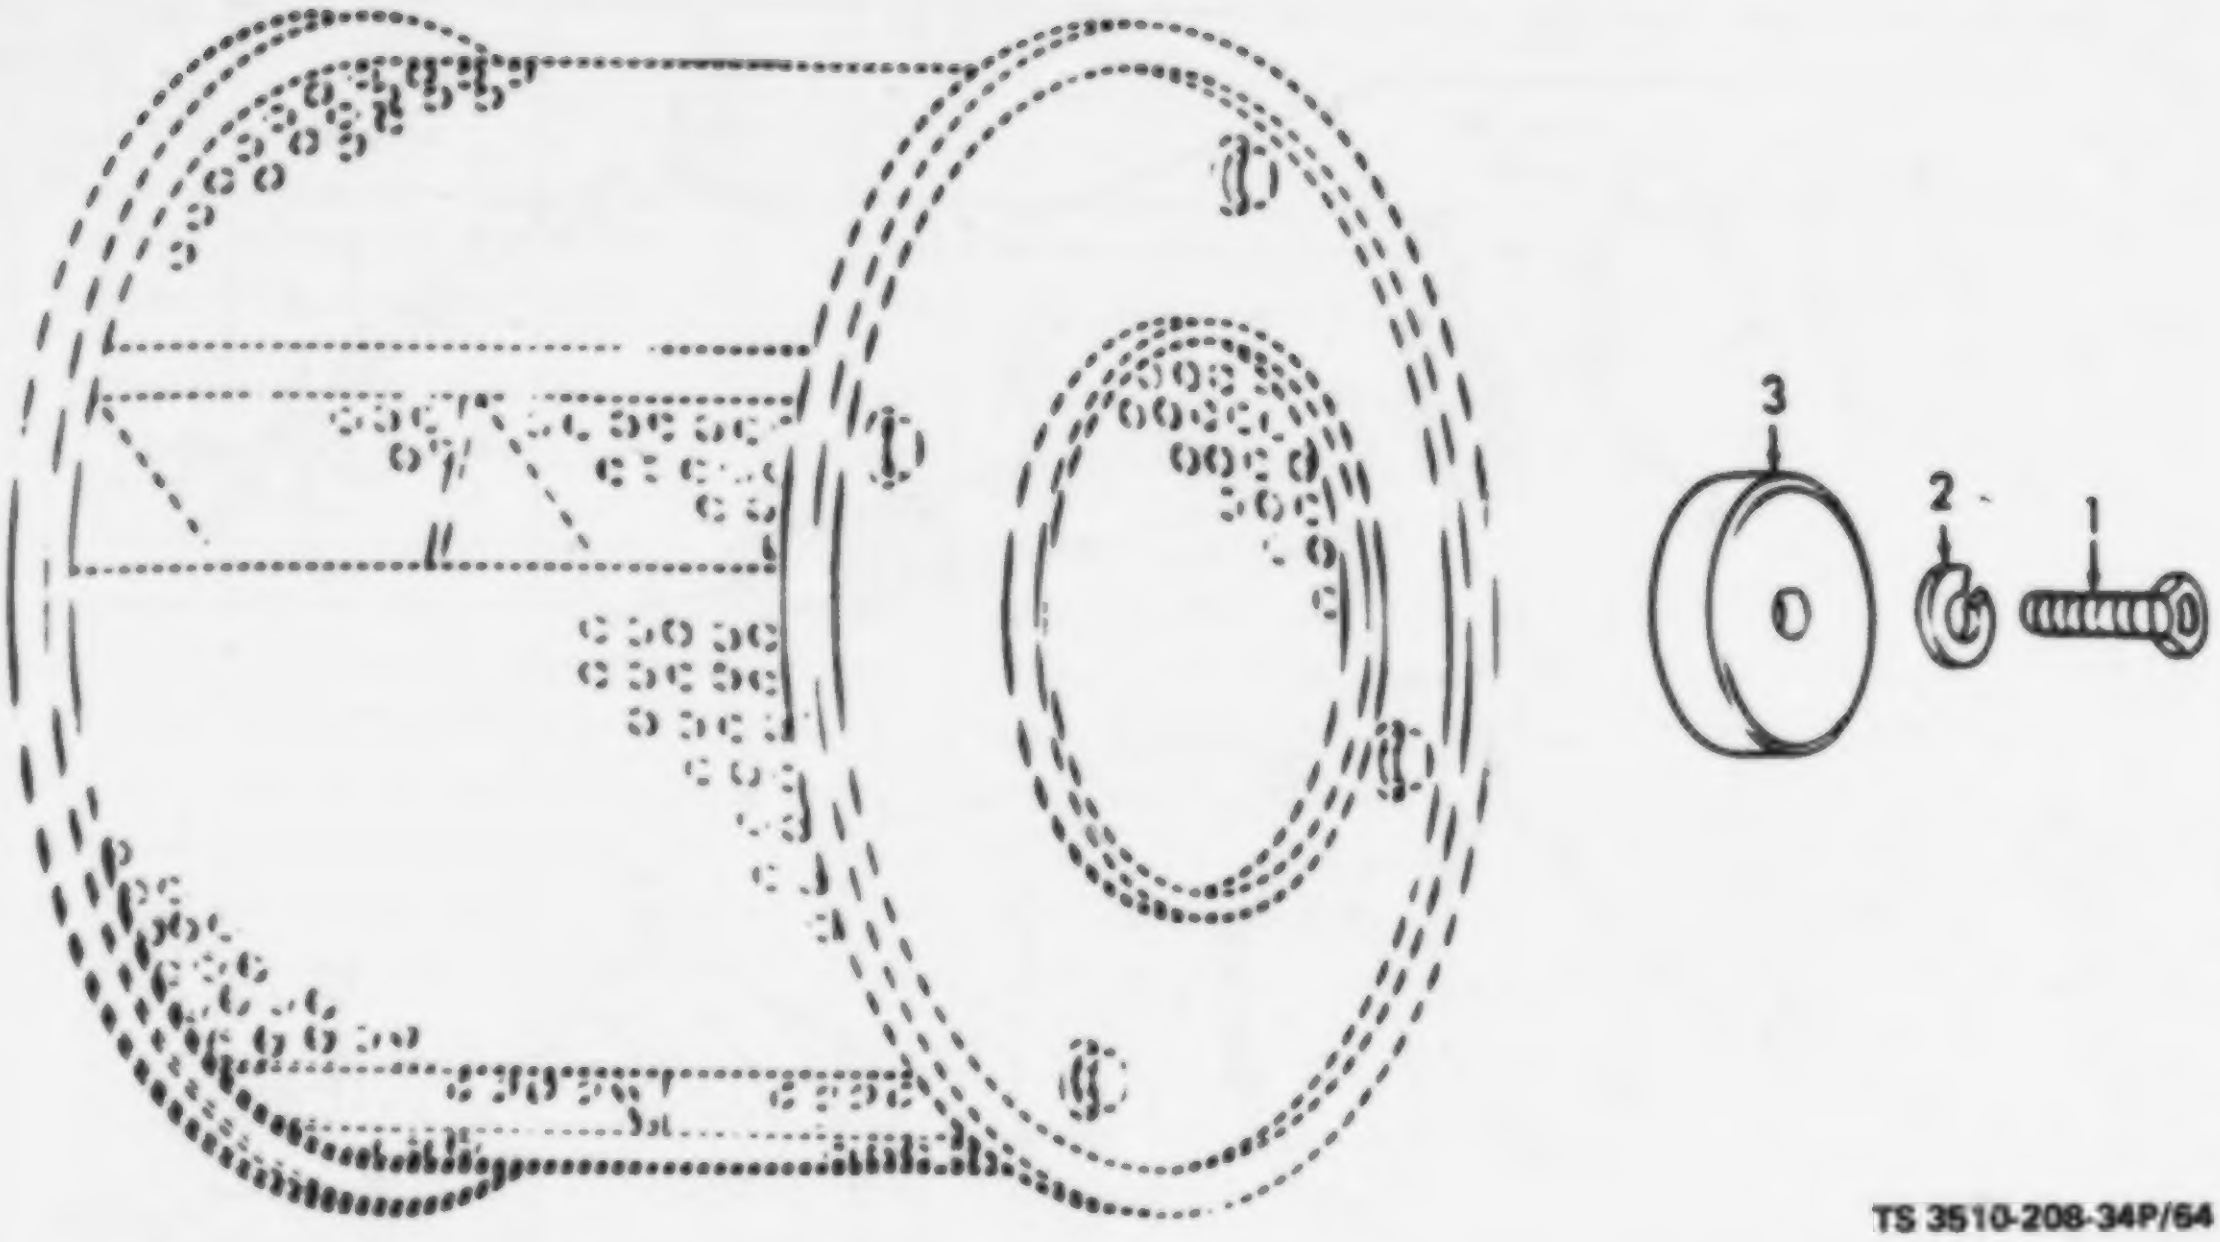

TS 3510-208-34P/64

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
64	1	PAFZZ	5305-00-983-6647	MS16995-96	96906	SCREW, LOCK, SOCKET HEAD: WASHER CYLINDER LOCKPLATE MTG, 1/2 IN.-13 UNC-2A, 1 1/2 IN. LG, CRES.	EA	1
64	2	PAFZZ	5310-00-584-5272	MS35338	96906	WASHER, LOCK: WASHER CYLINDER LOCKPLATE MTG	EA	1
64	3	XBFZZ		6-1-1929-36A	72869	PLATE, LOCK, CYLINDER	EA	1

Figure 64. Washer Cylinder Lockplate.

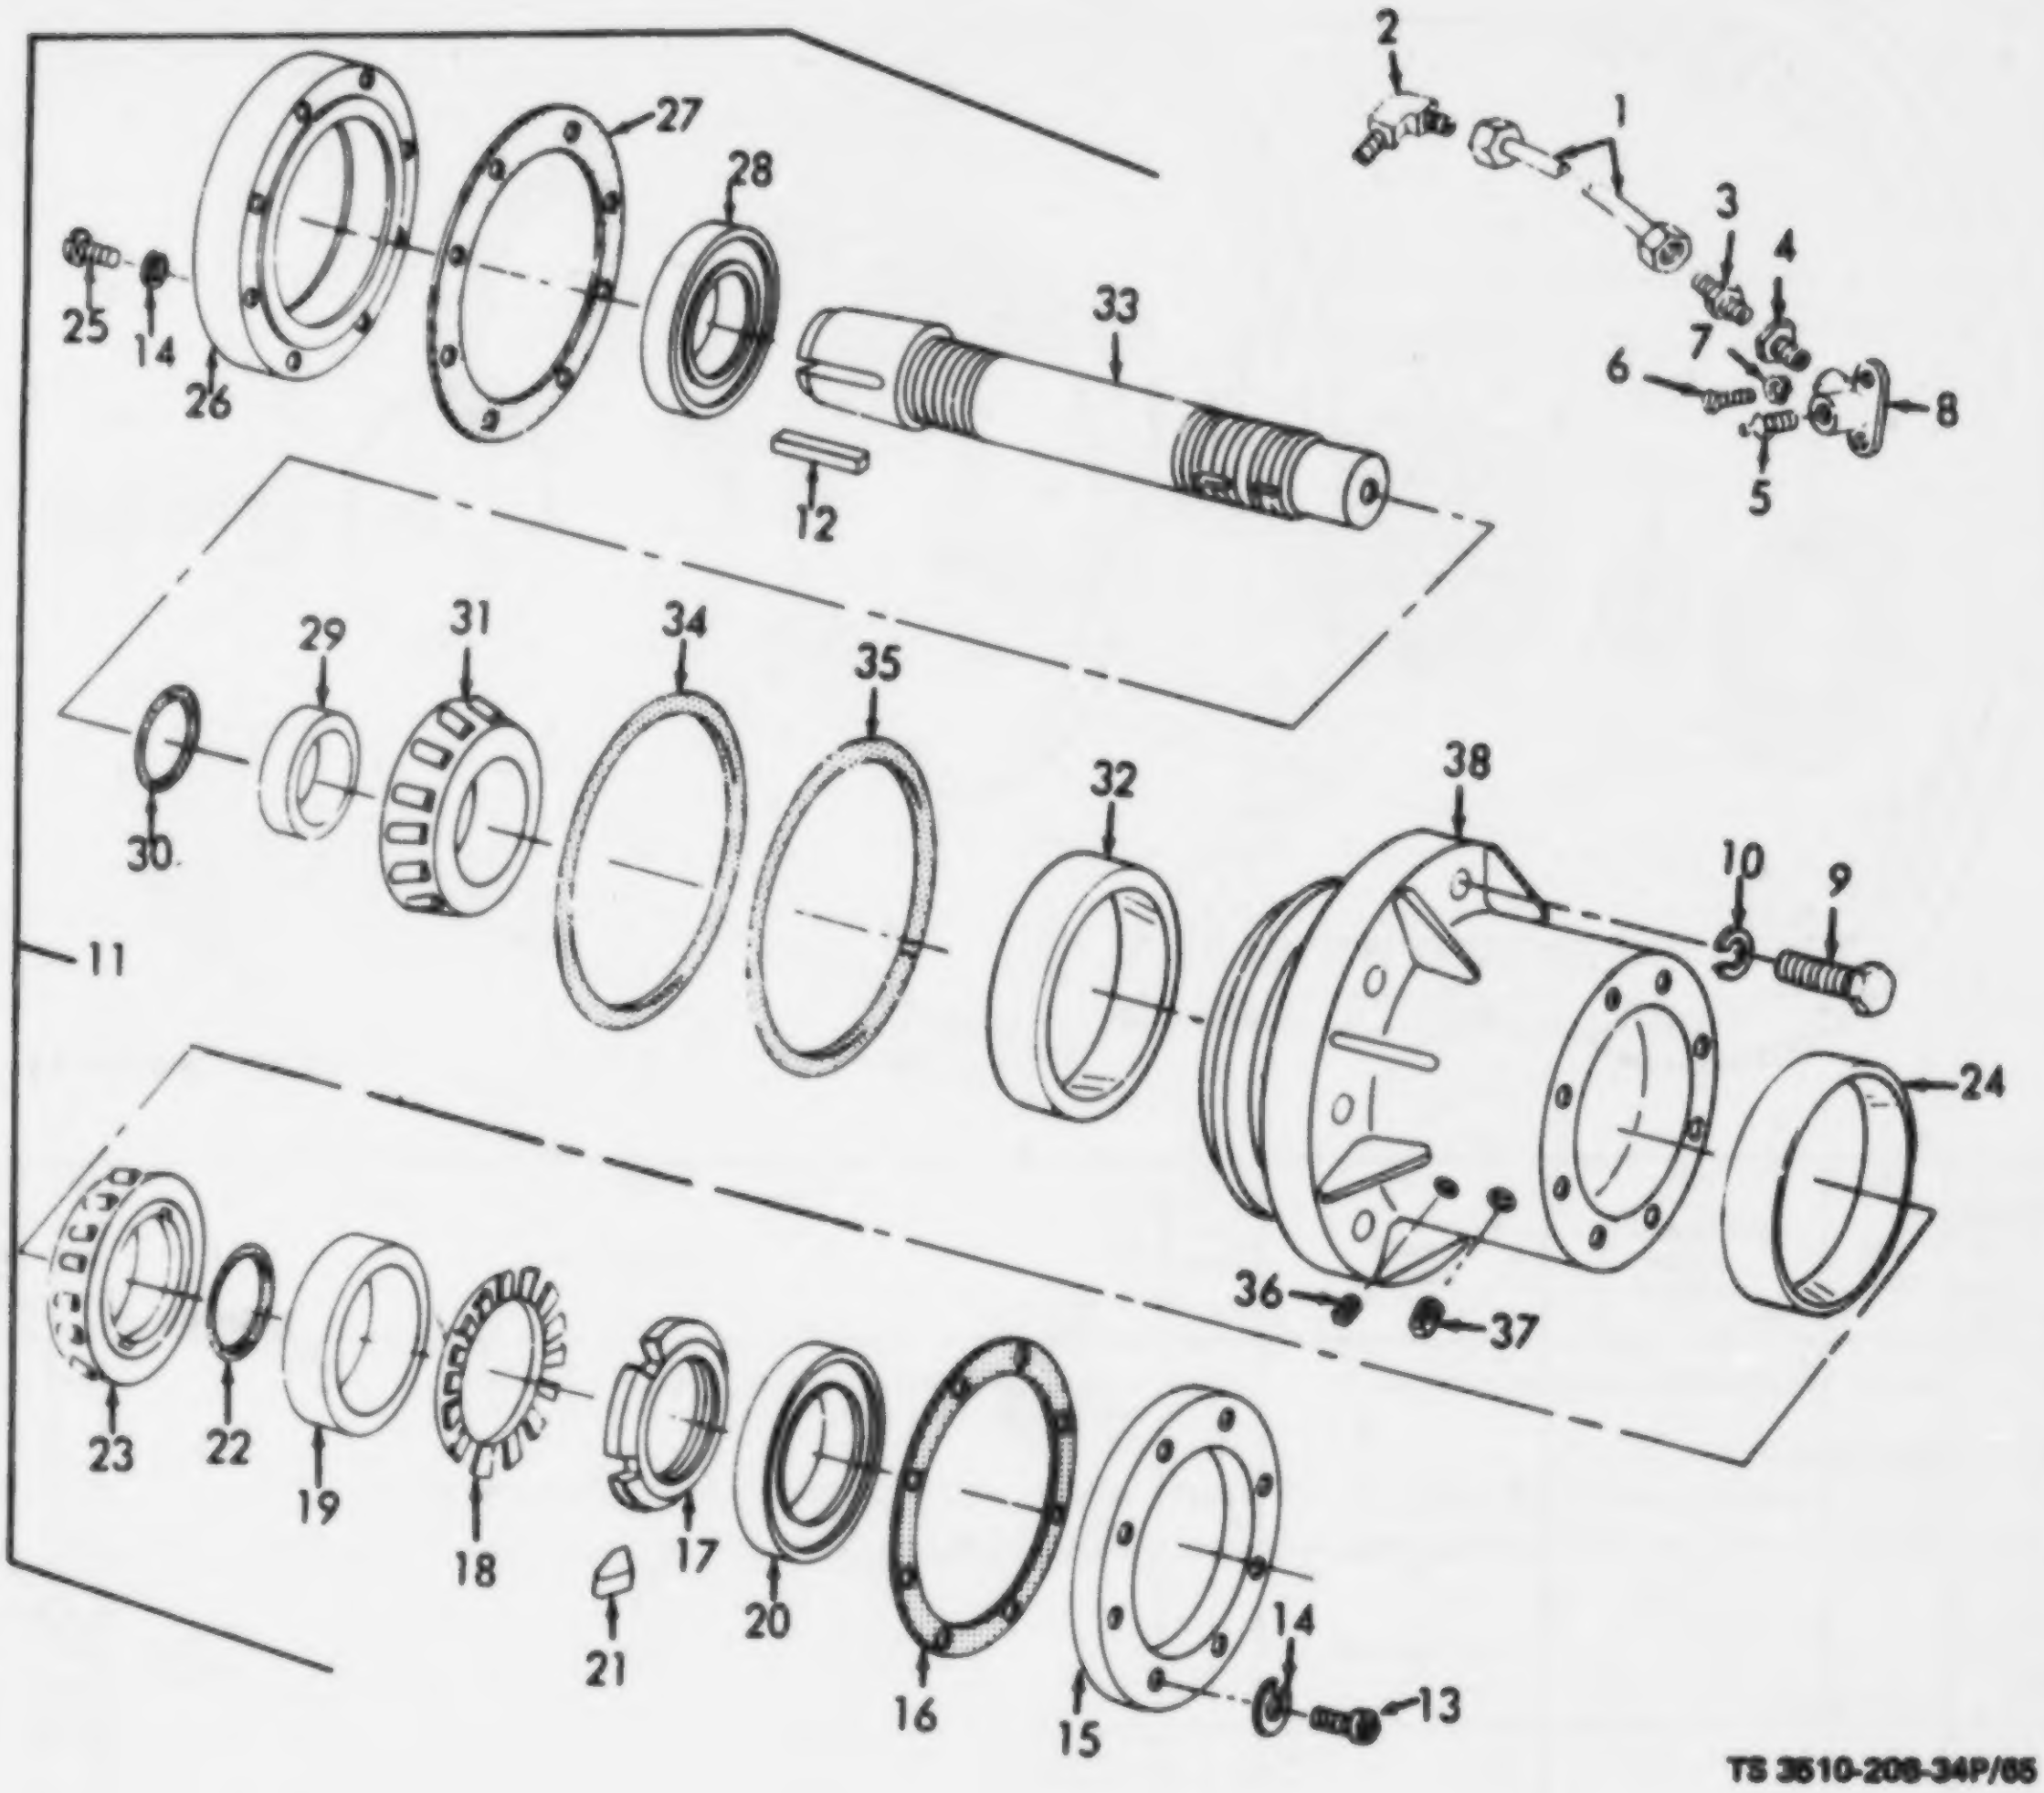
2
1
3
4
7
6
8
5
27
28
33
25
14
26
12
29
31
34
35
30
32
38
10
9
11
24
36
37
23
22
19
18
17
21
20
16
15
14
13
TS 3510-208-34P/65

Figure 65. Main Bearing

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
65	1	PAOZZ	4710-00-277-5524	WWT775	81348	TUBING: GREASE LINE, 3/16, COPPER	EA	1
65	2	PAOZZ	4730-00-278-0187	69X3	79470	ELBOW, MALE: GREASE LINE, 1/8 NPT X 3/16 TUBE	EA	1
65	3	PAOZZ	4730-00-851-1940	68X3	79470	CONNECTOR, MALE: GREASE LINE	EA	1
65	4	PAOZZ	4730-00-811-6205	2-4PRC	97576	BUSHING, REDUCER: GREASE LINE, 1/4 NPT X 1/8 NPT	EA	1
65	5	PAOZZ	4730-00-719-2634	1627B	70270	FITTING, LUBRICATION	EA	1
65	6	PAOZZ	5305-00-958-5471	MS35190-273	96906	SCREW, MACHINE: DROP ELBOW MTG	EA	2
65	7	PAOZZ	5310-00-550-1130	MS35333-40	96906	WASHER, LOCK: DROP ELBOW M"G SCREW	EA	2
65	8	PAOZZ	4730-00-933-7939	6-1-1978-32-5A	72869	ELBOW, DROP, FEMALE: GREASE LINE	EA	1
65	9	PAFZZ	5305-00-021-3806	MS35307-113	96906	SCREW, CAP, HEXAGON HEAD: HOUSING MTG	EA	8
65	10	PAFZZ	5310-00-826-8268	QQB746	81348	WASHER, LOCK,: HOUSING MTG	EA	8
65	11	PBFZF	3510-00-253-0586	6-1-1929-36A	72869	MAIN BEARING ASSEMBLY	EA	1
65	12	PAFZZ	5315-00-732-1020	MS20066-544	96906	KEY: SHAFT MTG, 1/2 X 1/2 X 3 IN. LG, CRES 304	EA	1
65	13	PAFZZ	5305-00-042-6367	426367	21450	SCREW, CAP, SOCKET HEAD: RETAINER MTG	EA	6
65	14	PAFZZ	5310-00-407-9566	MS35338-45	96906	WASHER, LOCK: SEAL RETAINER MTG	EA	12
65	15	XBFZZ		6-1-1953-36-4A	72869	RETAINER, REAR SEAL	EA	1
65	16	PAFZZ	5330-00-903-3716	6-1-1953-36-13A	72869	GASKET, REAR SEAL	EA	1
65	17	XBFZZ		TAN15	60883	LOCKNUT: REAR	EA	1
65	18	PAFZZ	5310-00-933-5940	TW115	60038	WASHER, LOCK: LOCKNUT	EA	1
65	19	PBFZZ		6-1-1953-36-5A	72869	RING, WEAR, REAR	EA	1
65	20	PAFZZ	5330-00-444-7136	6-1-1953-36-10A	72869	SEAL, PLAIN	EA	1
65	21	XBFZZ		6-1-1953-36-21A	72869	KEY, BEARING LOCK: FRONT	EA	1
65	22	PAFZZ	5330-00-930-6858	6-1-1953-36-15A	72869	WASHER, NONMETALLIC: REAR	EA	1
65	23	PAFZZ	3110-00-887-6 161	47679W47620	60883	BEARING, ROLLER, TAPERED	EA	1
65	24	PAFZZ		47620	60038	CUP: REAR BEARING	EA	1
65	25	PAFZZ	5305-00-273-4949	MS24677-48	96906	SCREW, CAP, SOCKET HEAD: FRONT SEAL RETAINER MTG	EA	6
65	26	XBFZZ		6-1-1953-36-3A	72869	RETAINER, FRONT SEAL	EA	1
65	27	PAFZZ	5330-00-903-3877	6-1-1953-36-12A	72869	GASKET, FRONT SEAL	EA	1
65	28	PAFZZ		6-1-1953-36-11A	72869	SEAL, FRONT	EA	1
65	29	PAFZZ	3510-00-411-2667	6-1-1953-36-6A	72869	RING, WEAR, FRONT	EA	1
65	30	PAFZZ	5330-00-930-2372	6-1-1953-36-14A	72869	WASHER, NONMETALLIC: FRONT	EA	1
65	31	PAFZZ	3110-00-100-0668	6038-659	60038	CONE AND ROLLER: FRONT	EA	1
65	32	PAFZZ	3110-00-100-0335	653	60038	CUP, TAPERED ROLLER: FRONT	EA	1
65	33	PBFZZ	3510-00-253-0585	6-1-1953-36-2A	72869	SHAFT, DRIVE CYLINDER	EA	1
65	34	PAFZZ	5330-00-903-6711	6-1-1953-36-22A	72869	PACKING, PREFORMED: FRONT, MAIN BEARING	EA	1
65	35	PAFZZ	5330-00-903-6706	6-1-1953-36-23A	72869	PACKING, PREFORMED: FRONT, MAIN BEARING	EA	1
65	36	PAFZZ	4730-00-787-6384	6-1-1953-36-18A	72869	PLUG, PIPE: MAIN BEARING HOUSING, 1/8 IN.	EA	1
65	37	XBFZZ		6-1-1953-36-24A	72869	PLUG, PIPE: MAIN BEARING HOUSING, 1/2 IN., MODIFIED	EA	1
65	38	XBFZZ		6-1-1953-36-1A	72869	HOUSING, MAIN BEARING	EA	1

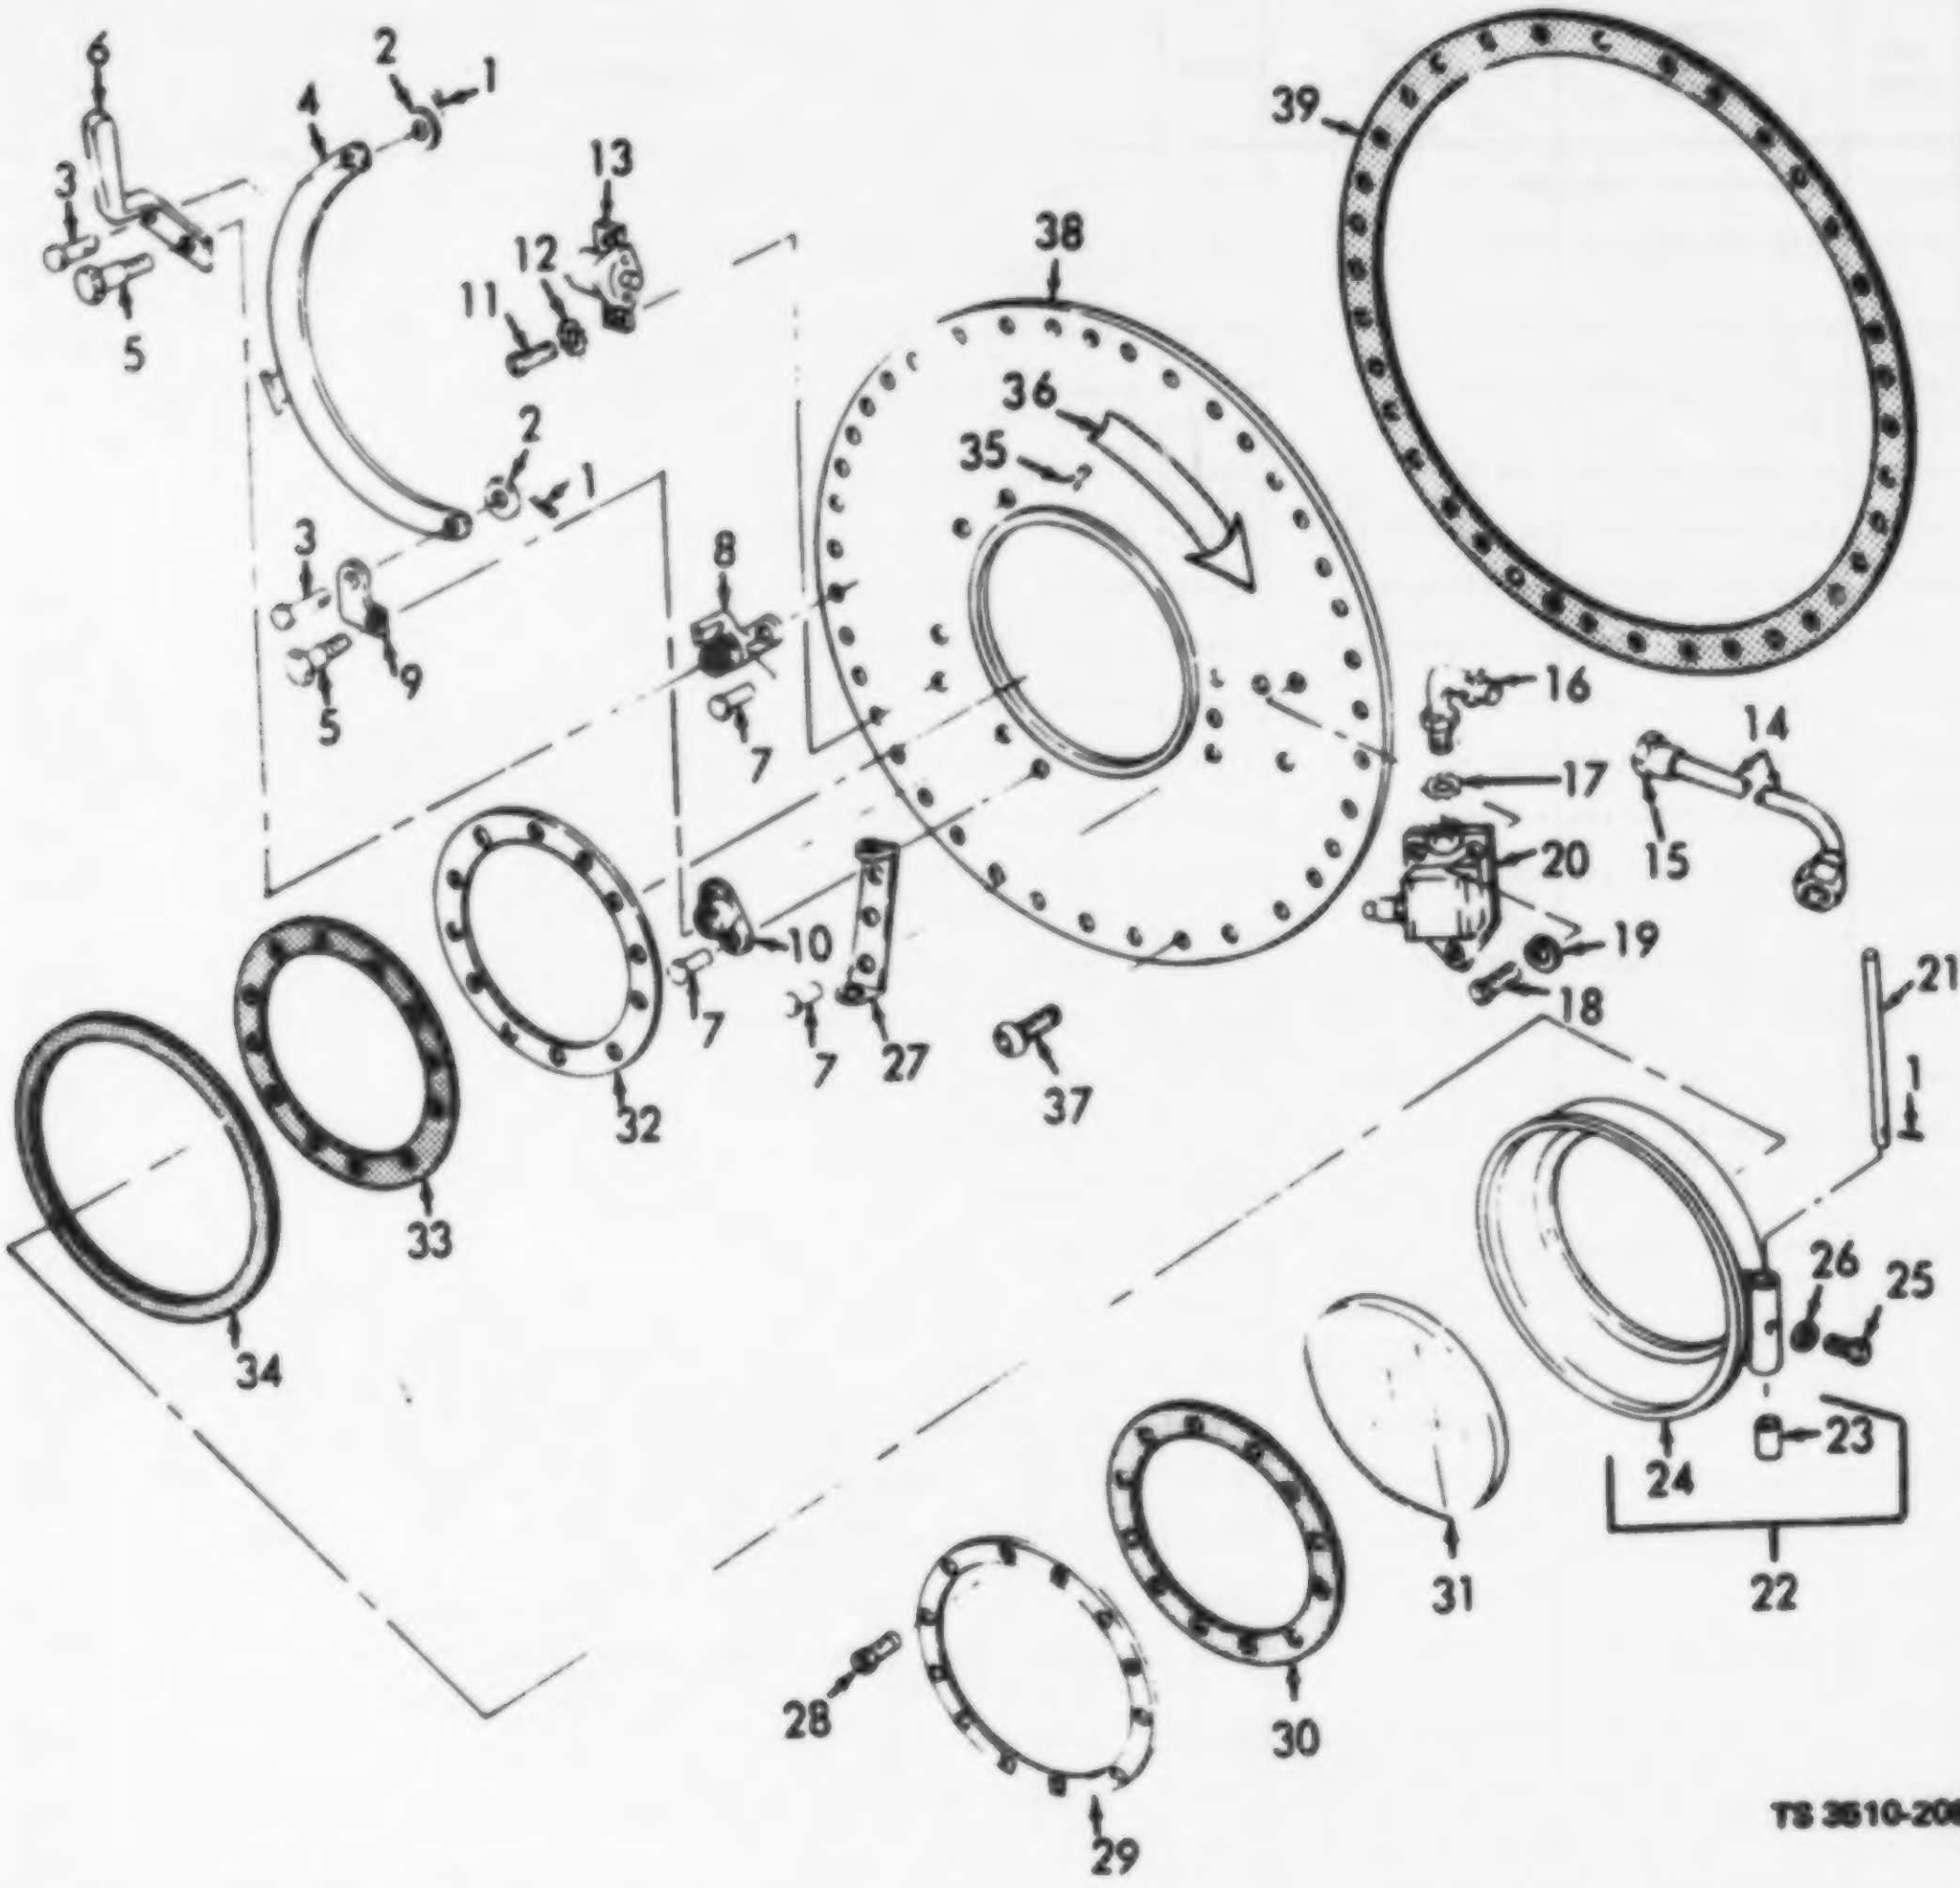
6
2
1
4
3
13
12
11
5
39
38
36
35
2
1
3
8
9
5
7
16
14
17
15
20
19
10
21
18
32
7
7
27
37
33
1
26
25
34
23
24
22
31
28
30
29

TS 3510-208-34P/66

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 41 - FRONT HEAD SHEET ASSEMBLY AND WASHER CYLINDER		
66		XBOOO		6-1-1934-32A	72869	FRONT HEAD SHEET ASSEMBLY	EA	1
66	1	PAOZZ	5315-00-842-3044	MS24665-283	96906	PIN, COTTER: HANDLE, LATCH LINK AND HINGE PIN, 3/32 IN. DIA, 5/8 IN. LG, CRES	EA	4
66	2	PAOZZ	5310-00-550-2379	6-1-1934-32-43A	72869	WASHER, FLAT: DOOR HANDLE AND LATCH LINK	EA	2
66	3	PAOZZ	5315-00-825-8840	MS35810-34	96906	PIN, STRAIGHT, HEADLESS: DOOR HANDLE AND LATCH LINK	EA	2
66	4	XBOZZ		6-1-1934-32-6A	72869	LINK, DOOR LATCH	EA	1
66	5	XBOZZ		25-3520	49200	STUD: DOOR HANDLE AND LOCK CATCH MTG	EA	2
66	6	XBOZZ		6-1-1934-32-5A	72869	HANDLE: WASHER DOOR	EA	1

Figure 66. Washer Door.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
66	7	PAOZZ	5320-00-616-5244	MS20470B8-10	96906	RIVET: HANDLE SUPPORT, LOCK SUPPORT AND HINGE BRACKET MTG, 1/4 IN. DIA, 5/8 IN. LG, CRES	EA	7
66	8	XBOZZ		6-1-1934-32-2A	72869	SUPPORT, DOOR HANDLE	EA	1
66	9	XBOZZ		6-1-1934-32-8A	72869	CATCH, DOOR LOCK	EA	1
66	10	XBOZZ		6-1-1934-32-3A	72869	SUPPORT, DOOR LOCK, HANDLE, LOWER	EA	1
66	11	PAOZZ	5305-00-206-2510	MS35215-55	96906	SCREW, PAN HEAD: DOOR LOCK MTG, 10-32 NF2A, 1/3 IN. LG, BR.	EA	2
66	12	PAOZZ	5310-00-596-7691	MS35335-32	96906	WASHER, LOCK: LOCK MTG	EA	2
66	13	PAOZZ	3460-00-901-5998	3351A	53477	CLAMPING CYLINDER, LOCK	EA	1
66	14	PAOZZ	5975-00-178-1216	6-1-1934-32-25A	72869	CONDUIT, THINWALL: WASHER, EXTRACTOR FRAME TO SWITCH, 1/2 IN. DIA, 19 IN. REQUIRED	FT	V
66	15	XBOZZ		6-1-1934-32-36A	72869	CONNECTOR, RAIN TIGHT: 1/2 IN.	EA	2
66	16	PAOZZ	5975-00-244-7807	MS55975-10	08288	ELBOW, CONNECTOR, ELECTRICAL: EXTRACTOR DOOR SWITCH	EA	1
66	17	XBOZZ		6-1-1934-32-38A	72869	NUT, LOCK: CONDUIT, 1/2 IN.	EA	1
66	18	PAOZZ	5305-00-206-2511	MS55305-33	08288	SCREW, MACHINE: EXTRACTOR DOOR SWITCH MTG	EA	3
66	19	PAOZZ	5310-00-080-9786	MS45904-60	96906	WASHER, LOCK: EXTRACTOR DOOR SWITCH MTG	EA	3
66	20	PAOZZ	5930-00-960-7650	BAF1-2RNLH	91929	SWITCH, SENSITIVE	EA	1
66	21	XBOZZ		6-1-1934-32-34A	72869	PIN, STRAIGHT, HEADLESS: DOOR HINGE	EA	1
66	22	XBOZZ		6-1-1934-32-10A	72869	DOOR ASSEMBLY	EA	1
66	23	XBOZZ		6-1-1935-32-13A	72869	BUSHING, HINGE: BRONZE, .750 OD, 1 IN. LG	EA	2
66	24	XBOZZ		6-1-1935-32-11A	72869	DOOR	EA	1
66	25	XBOZZ		6-1-1935-32-18A	72869	SCREW, PAN HEAD: SWITCH ACTUATING, 1/4-20, 1/4 IN. LG	EA	1
66	26	PAOZZ	5310-00-550-1130	MS35333-40	96906	WASHER, LOCK, INTERNAL TOOTH: SWITCH ACTUATING SCREW	EA	1
66	27	XAOZZ		6-1-1934-32-4A	72869	BRACKET, HINGE	EA	1
66	28	XBOZZ		6-1-1935-32-19A	72869	SCREW, OVAL HEAD: GLASS CLAMP MTG, 1/4-20 UNC-2A, 3/4 IN. LG	EA	12
66	29	XBOZZ		6-1-1935-32-15A	72869	RING, CLAMP: GLASS MTG, OUTSIDE	EA	1
66	30	PAOZZ	5330-00-491-1530	25-4187A	49200	GASKET, WINDOW	EA	1
66	31	PAOZZ	3510-00-411-2673	25-3697	49200	GLASS, DOOR	EA	1
66	32	XBOZZ		6-1-1935-32-21A	72869	RING, CLAMP: GLASS MTG, OUTSIDE	EA	1
66	33	PAOZZ		25-4187A	49200	GASKET, WINDOW	EA	1
66	34	PAOZZ	3510-00-930-2358	6-1-1935-32-16A	72869	SEAL, DOOR	EA	1
66	35	PAOZZ	5305-00-408-0127	6-1-1900-127A	72869	SCREW, MACHINE: INSTRUCTION PLATE, PRE-EXTRACT AND EXTRACT	EA	3
66	36	XBOZZ		6-1-1900-126A	72869	PLATE, INSTRUCTION: PRE-EXTRACT AND EXTRACT	EA	1
66	37	PAOZZ	5305-00-933-9886	100159-5NP	49200	SCREW, MACHINE: FRONT MTG, 5/16-18 THD SIZE, 3/4 IN. LG	EA	36
66	38	XBFZZ		6-1-1934-32-1A	72869	FRONT HEAD SHEET: WASHER	EA	1
66	39	PAFZZ	5330-00-437-8726	6-1-1929-41A	72869	GASKET, FRONT HEAD SHEET MOUNTING	EA	1

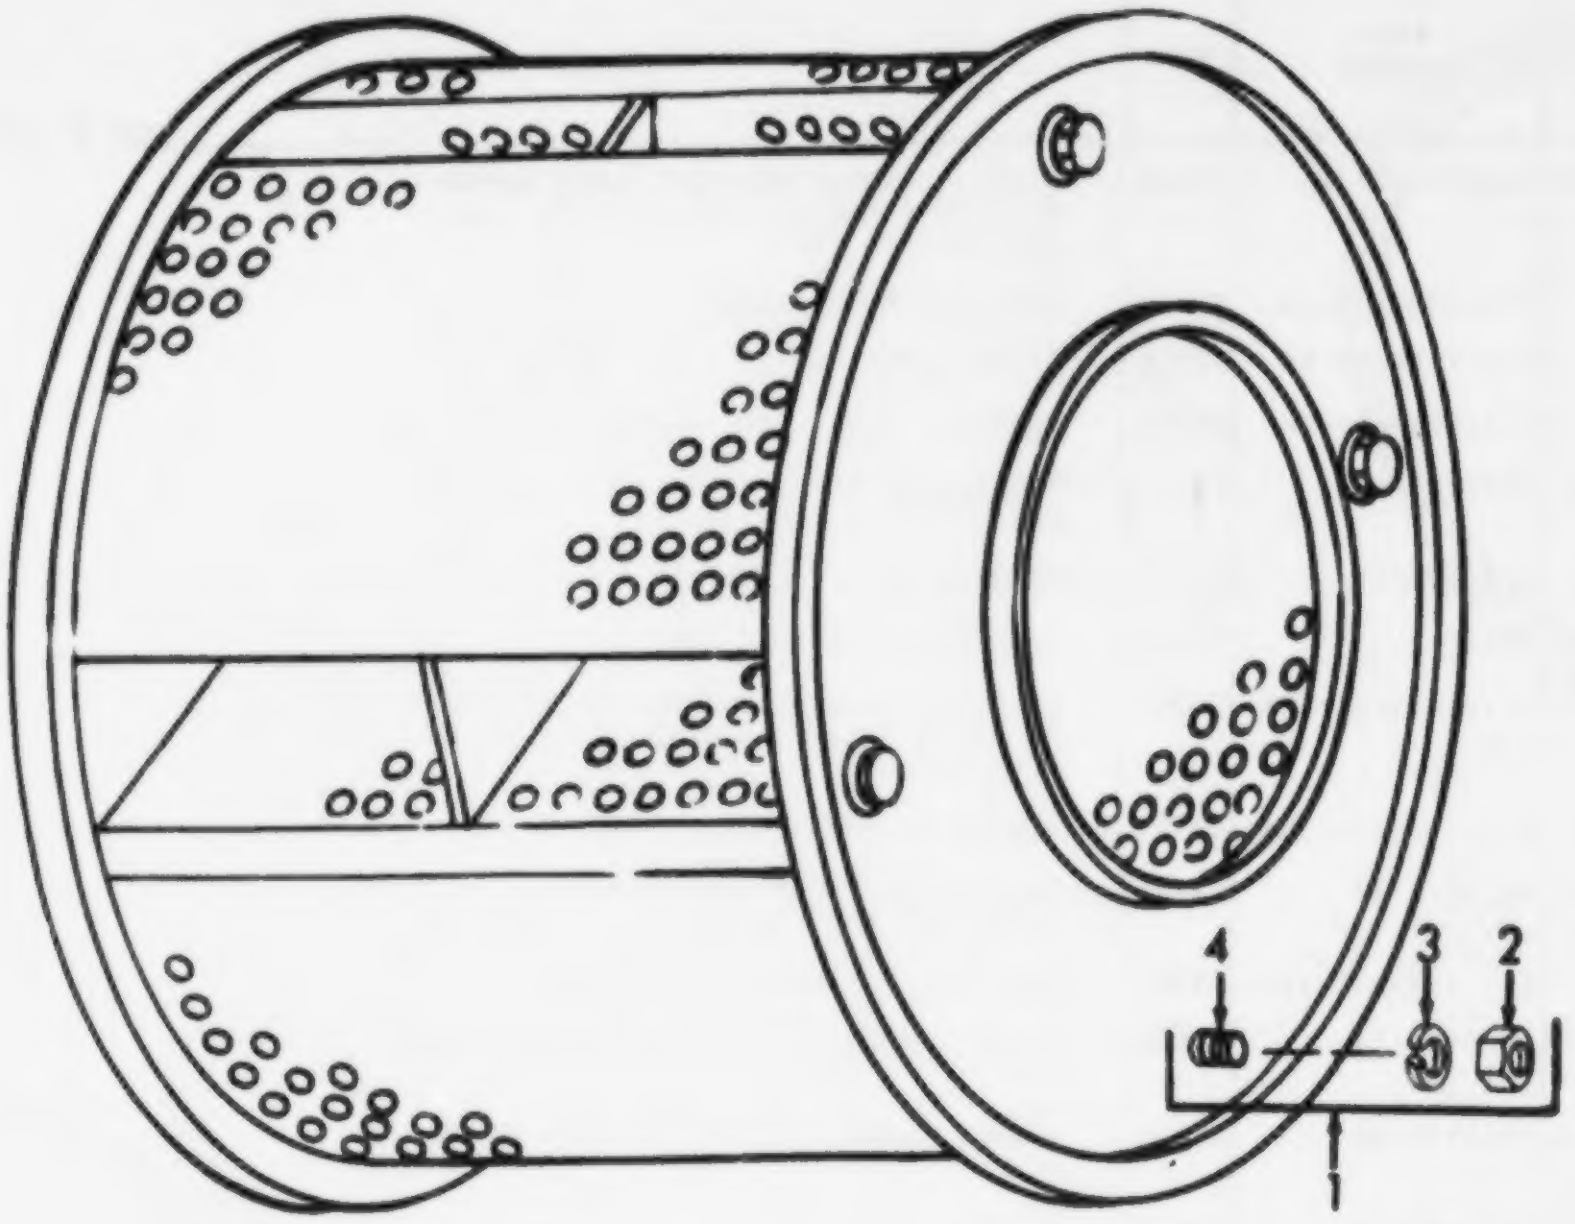

TS 3510-208-34P/67

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
67	1	PBFFZ	3510-00-253-0592	6-1-1966-40A	72369	CYLINDER ASSEMBLY	EA	1
67	2	XBFZZ		6-1-1966-40-13A	72869	NUT, PLAIN, HEXAGON	EA	8
67	3	PAFZZ	5310-00-809-5998	MS27183-18	96906	WASHER, FLAT: 1/2 IN. TIE ROD	EA	8
67	4	XBFZZ		6-1-1966-40-9A	72869	CYLINDER, TIE ROD	EA	4

Figure 67. Cylinder, Washer.

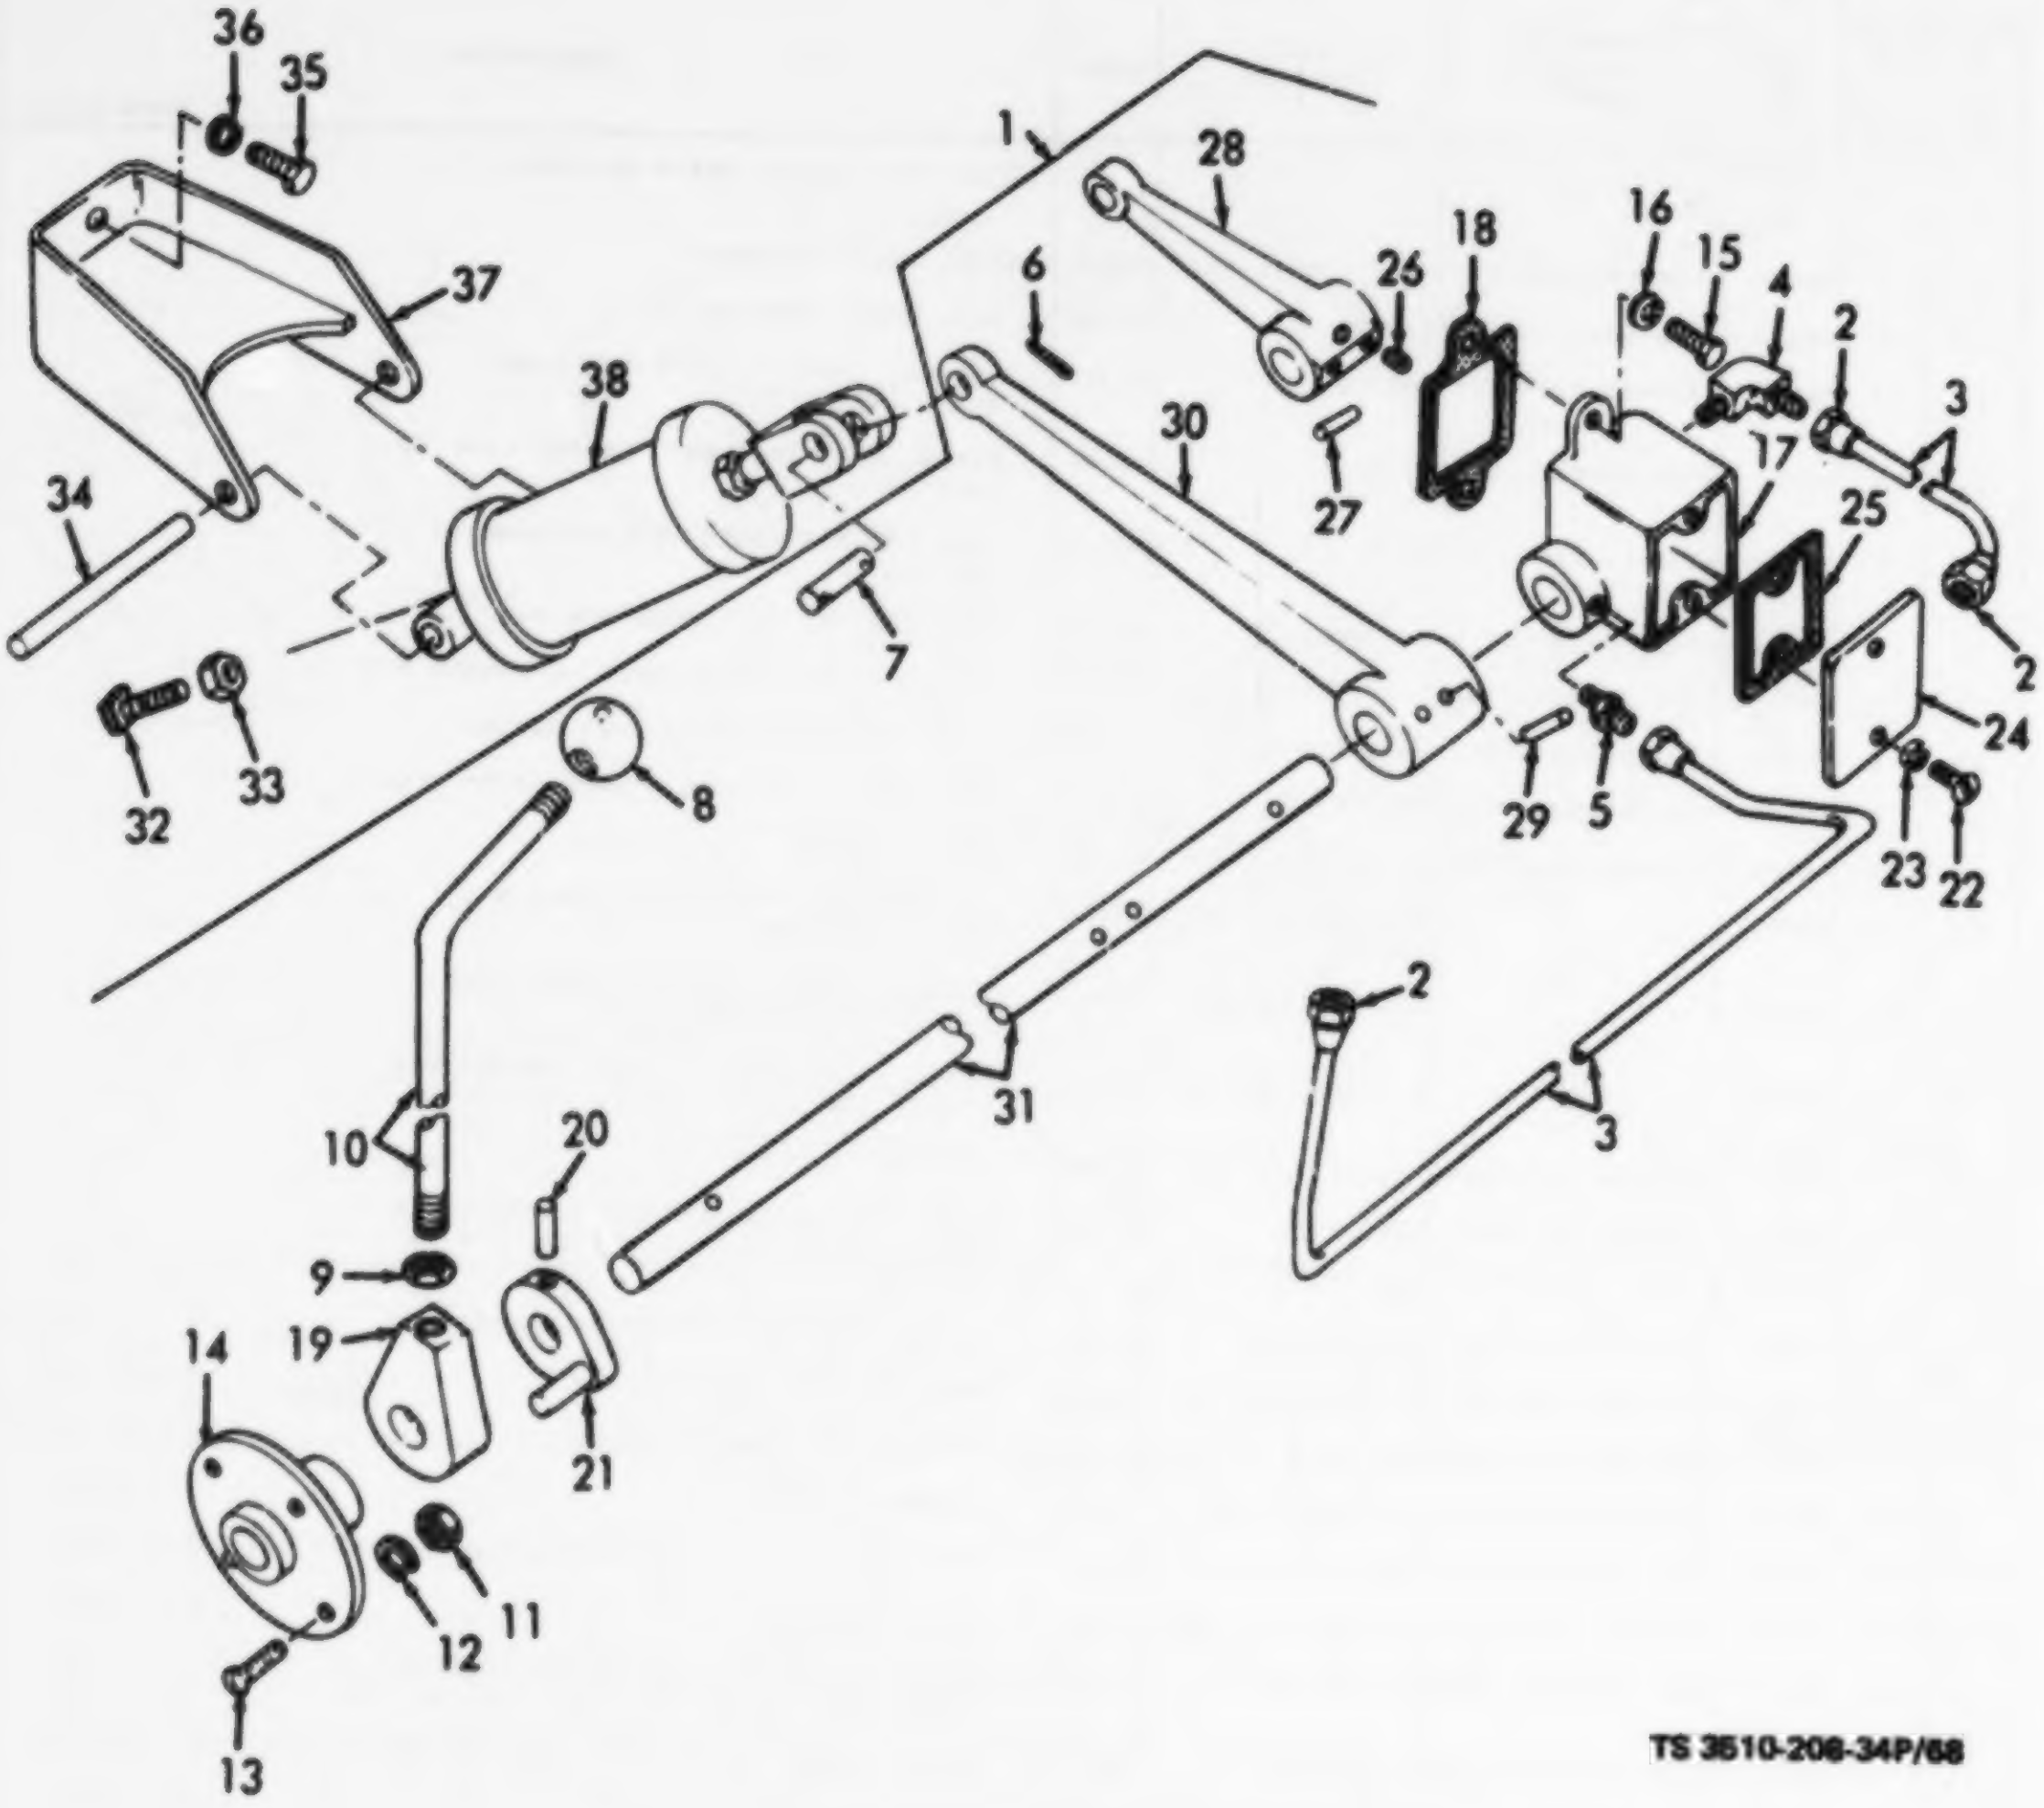
36
35
1
28
16
18
15
4
26
6
37
2
3
38
30
17
34
27
25
7
2
32
33
8
24
29
5
23
22
2
10
31
3
20
9
19
14
21
11
12
13
TS 3510-208-34P/68

Figure 68. Drain Valve Control.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(8)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 42 - VALVE, DRAIN ASSEMBLY		
68	1	PBOFF	4820-00-933-7947	6-1-1950-35-42A	72869	VALVE, DRAIN ASSEMBLY	EA	1
68	2	PAOZZ	4730-00-044-1487	1110X3	79470	NUT, TUBE COUPLING	EA	4
68	3	PAOZZ	4710-00-277-5524	WWT775	81349	TUBING, COPPER: 3/16 IN. TUBE, 84 IN. REQUIRED	FT	V
68	4	PAOZZ	4730-00-972-1631	49X3	79470	ELBOW, PIPE TO TUBE: GREASE LINE TO HOUSING	EA	1
68	5	PAOZZ	4730-00-266-0531	48X3	79470	ADAPTER, STRAIGHT: GREASE LINE TO HOUSING	EA	1
68	6	PAOZZ	5315-00-187-9370	MS24665-172	96906	PIN, COTTER: CYLINDER MTG PIN	EA	2
68	7	PAOZZ	5315-00-058-3519	6-1-1948-35-15A	72869	PIN, STRAIGHT, HEADLESS: CYLINDER MTG	EA	1
68	8	PBOZZ	5355-00-181-1135	6-1-1948-35-2A	72869	KNOB: HAND LEVER, 3/8-24 UNF2B	EA	1
68	9	PAOZZ	5310-00-732-0558	MS51967-8	96906	NUT, PLAIN, HEXAGON: HAND LEVER MTG	EA	1
68	10	PBOZZ	3510-00-460-6084	6-1-1948-35-3A	72869	LEVER, DRAIN	EA	1
68	11	XBOZZ		6-1-1947-35-7A	72869	NUT, HEXAGON: SHAFT SUPPORT MTG, 1/4 X 20 UNC2B	EA	4
68	12	XBOZZ		6-1-1947-35-9A	72869	WASHER, LOCK: SHAFT SUPPORT MTG, 1/4 IN. SCREW SIZE	EA	4
68	13	XBOZZ		6-1-1935-32-19A	72869	SCREW, OVAL HEAD: SHAFT SUPPORT MTG, 1/4-20 THD SIZE, 3/4 IN. LG	EA	4
68	14	PBOZZ	3510-00-460-6068	6-1-1947-35-6A	72869	SUPPORT, SHAFT	EA	1
68	15	PAOZZ	5305-00-465-6389	R742	60266	SCREW, CAP, HEXAGON HEAD: CAM LEVER HOUSING MTG, 5/16-18 UNC-2A, 3/4 IN. LG, CRES	EA	2
68	16	PAOZZ	5310-00-933-8122	MS35333-159	96906	WASHER, LOCK: CAM LEVER HOUSING MTG	EA	2
68	17	PBOZZ	3510-00-460-6065	6-1-1950-35-48A	72869	HOUSING, CAM LEVER	EA	1
68	18	PAOZZ	5330-00-406-3225	6-1-1950-35-53A	72869	GASKET, CAM LEVER HOUSING	EA	1
68	19	PBOZZ	3510-00-460-6101	6-1-1948-35-5A	72869	SUPPORT, LEVER	EA	1
68	20	PAOZZ	5315-00-054-5610	MS24692-210	96906	PIN, TAPER: DOG MTG, 3/4 IN. LG	EA	1
68	21	PBOZZ	3510-00-460-6064	6-1-1947-35-10A	72869	DOG, DRAIN	EA	1
68	22	PAOZZ	5305-00-071-1315	MS51957-79	96906	SCREW, PAN HEAD: CAM LEVER HOUSING COVER MTG, 1/4-20 THD SIZE, 1/2 IN. LG	EA	2
68	23	PAOZZ	5320-00-582-5965	MS35338-44	96906	WASHER, LOCK: CAM LEVER HOUSING MTG	EA	2
68	24	XBOZZ		6-1-1950-35-49A	72869	COVER, CAM LEVER HOUSING	EA	1
68	25	PAOZZ	5330-00-406-3224	6-1-1950-35-54A	72869	GASKET, CAM LEVER HOUSING COVER	EA	1
68	26	PAOZZ	5305-00-811-0798	MS51021-83	96906	SETSCREW, HOLLOW: LEVER MTG, 3/8-16 UNC-2A, 1/2 IN. LG, CRES	EA	1
68	27	PAOZZ	5315-00-188-0214	6-1-1950-35-67A	72869	PIN, TAPER: LEVER MTG, 1 1/4 IN. LG	EA	1
68	28	PBOZZ	3510-00-460-6097	6-1-1950-35-47A	72869	LEVER, CAM, DRAIN VALVE	EA	1
68	29	PAOZZ	5315-00-054-5610	MS24692-210	96906	PIN, PATER: OPERATING LEVER TO DRAIN SHAFT MTG, 3/4 IN. LG	EA	2
68	30	PBOZZ	3510-00-460-6066	6-1-1948-35-14A	72869	LEVER, OPERATING: DRAIN VALVE	EA	1
68	31	PBOZZ	3510-00-460-6067	6-1-1947-35-12A	72869	SHAFT, DRAIN VALVE	EA	1
68	32	PAOZZ	5305-00-054-9260	MS51955-4	96906	SETSCREW, SQUARE HEAD: CYLINDER MTG	EA	1
68	33	XBOZZ		6-1-1949-34A	72869	NUT, HEXAGON, JAM: CYLINDER MTG, 1/4-20 THD SIZE	EA	1
68	34	PAOZZ	5315-00-933-7243	6-1-1948-35-17A	72869	PIN, STRAIGHT, HEADLESS: CYLINDER MTG	EA	1
68	35	PAOZZ	5305-00-655-9711	MS35307-357	96906	SCREW, CAP, HEXAGON HEAD: CYLINDER BRACKET MTG	EA	2
68	36	PAOZZ	5310-00-209-4391	QQS763	81348	WASHER, LOCK: CYLINDER BRACKET MTG	EA	2
68	37	XBOZZ		6-1-1948-35-18A	72869	BRACKET, AIR CYLINDER	EA	1
68	38	PBOZF	3510-00-253-0566	6-1-1949-35-21A	72869	AIR CYLINDER ASSEMBLY: DRAIN VALVE	EA	1

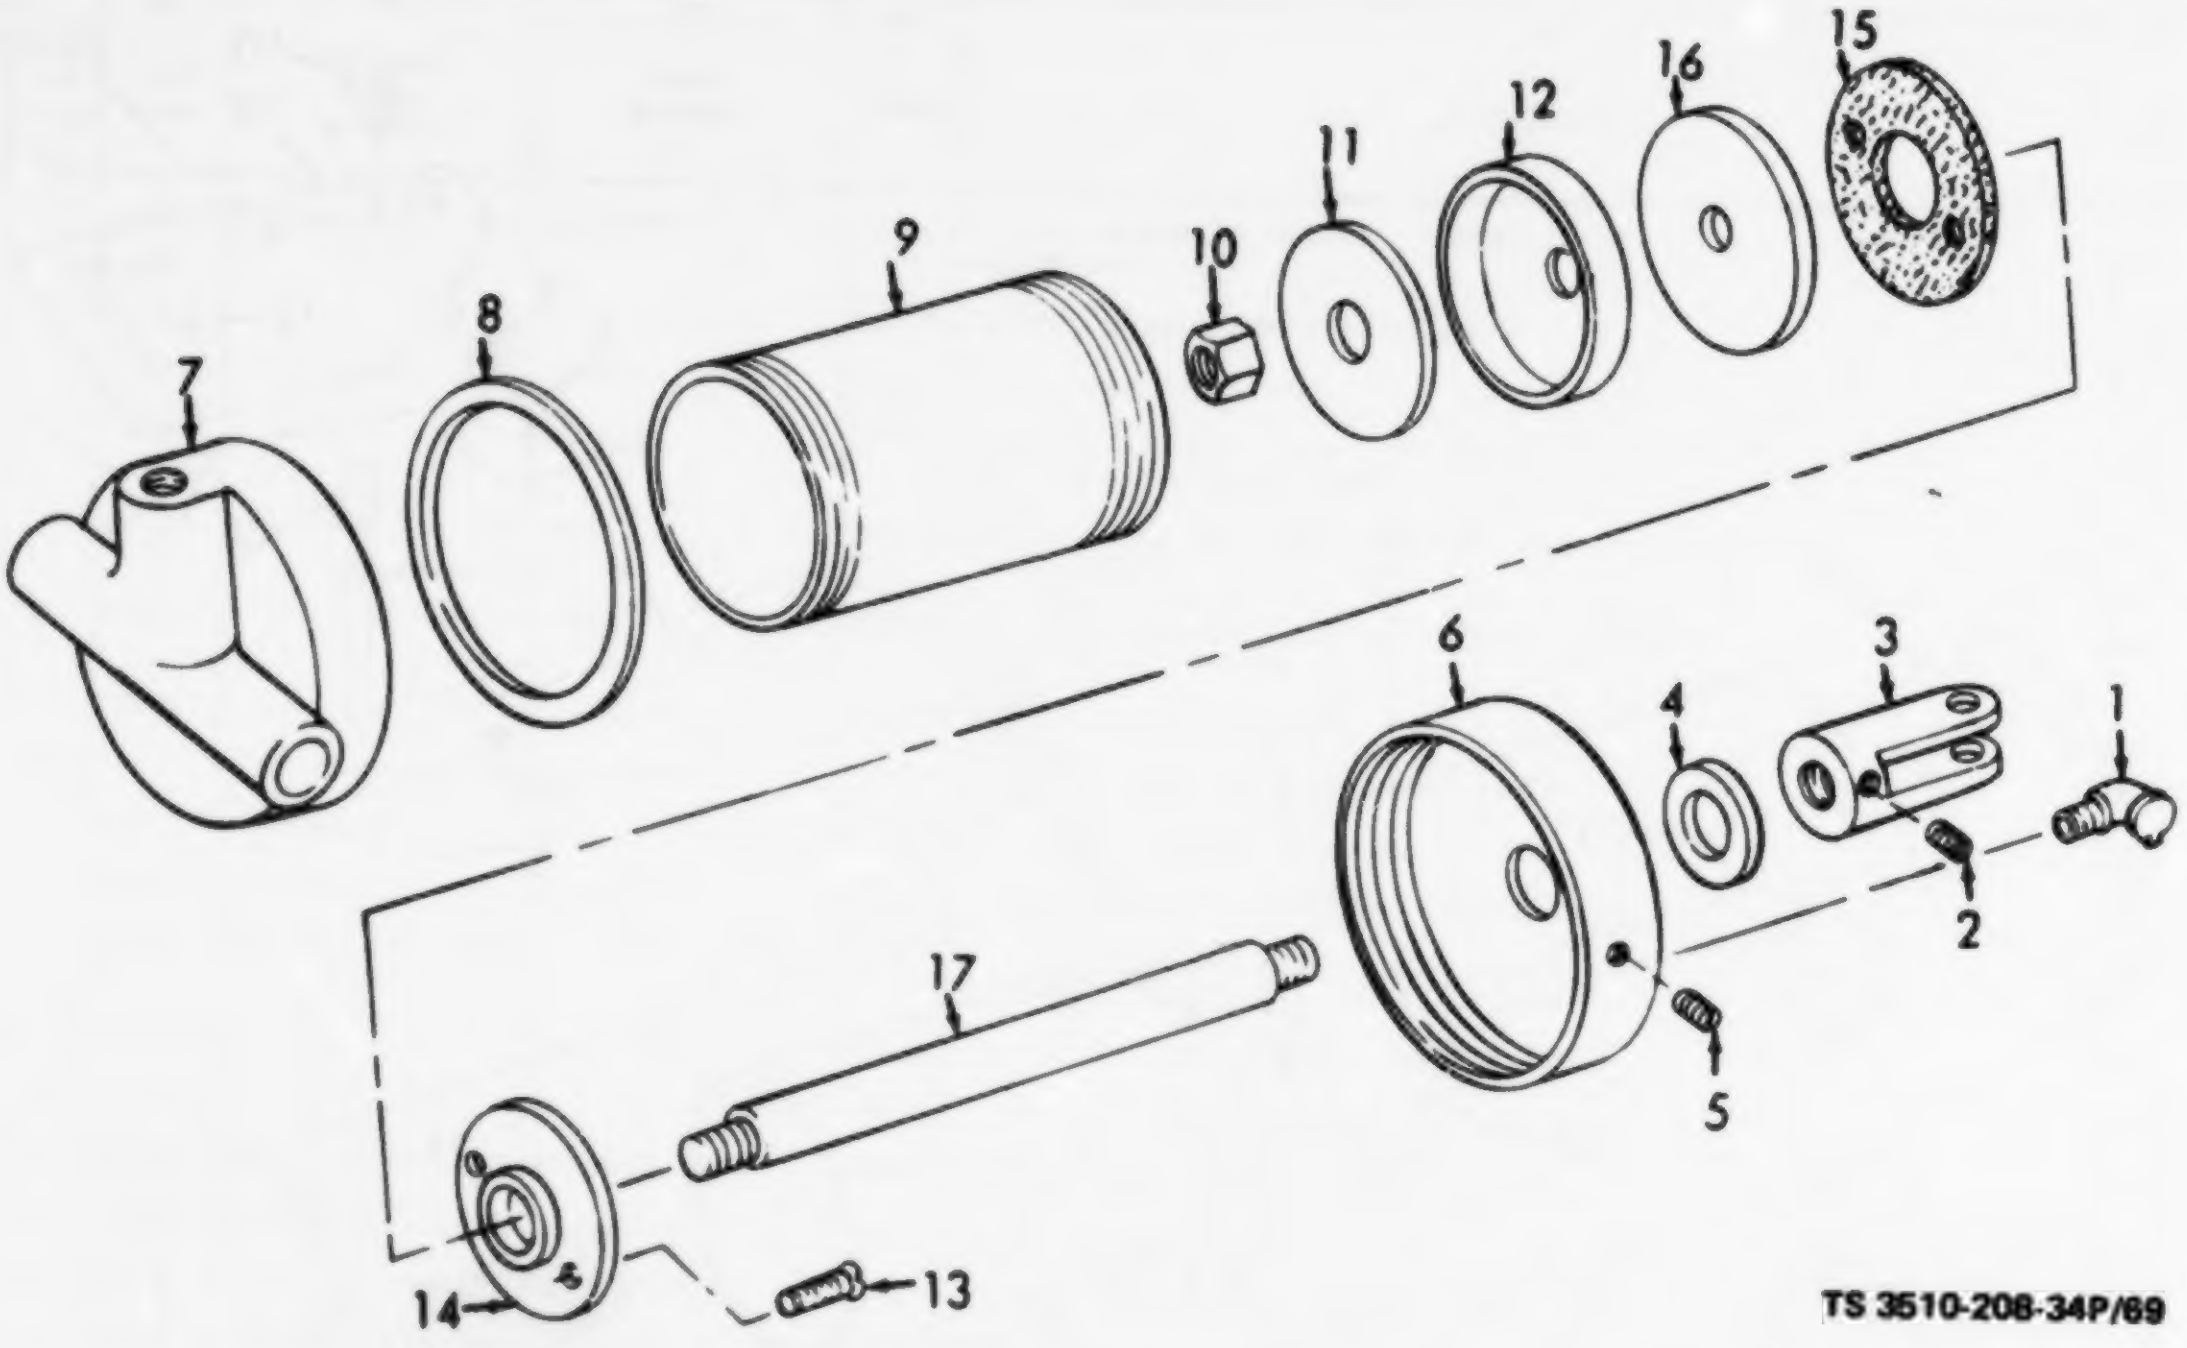

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
69	1	XBOZZ		1230	24981	OIL CUP: DRAIN VALVE CYLINDER	EA	1
69	2	PAOZZ	5305-00-817-6139	MS51021-56	96906	SCREW, SET: YOKE MTG	EA	1
69	3	XBOZZ		6-1-1949-35-22A	72869	YOKE: DRAIN VALVE CYLINDER	EA	1
69	4	XBOZZ		6-1-1949-35-23A	72869	WASHER, STOP: DRAIN VALVE CYLINDER, 7/8 IN. LG	EA	1
69	5	PAFZZ	5305-00-082-1633	6-1-1949-35-39A	72869	SETSCREW: UPPER HEAD MTG	EA	1
69	6	PAFZZ		6-1-1949-35-40A	72869	HEAD, UPPER: DRAIN VALVE CYLINDER	EA	1
69	7	PAFZZ		6-1-1949-35-35A	72869	HEAD, LOWER: DRAIN VALVE CYLINDER	EA	1
69	8	PAFZZ		6-1-1949-35-36A	72869	GASKET, HEAD: 2 IN. OD, 1 5/8 IN. ID, 1/16 IN. THK, ASBESTOS, COMPRESSED	EA	2
69	9	PAFZZ		6-1-1949-35-38A	72869	CYLINDER, DRAIN VALVE CYLINDER	EA	1
69	10	PAOZZ	5310-00-260-7324	MILB857TYPE2 STYLEA	81349	NUT, HEXAGON HEAD, JAM: CYLINDER ROD, 3/8-16 THD SIZE	EA	1
69	11	PAFZZ		6-1-1949-35-31A	72869	RETAINER, AIR SEAL: DRAIN VALVE CYLINDER	EA	1
69	12	PAFZZ	5330-00-933-5912	6-1-1949-35-30A	72869	SEAL, AIR CUP: DRAIN VALVE CYLINDER	EA	1
69	13	PAFZZ	5305-00-957-6272	MS35190-269	96906	SCREW, MACHINE: RETAINER MTG	EA	2
69	14	PAFZZ		6-1-1949-35-26A	72869	RETAINER, FELT PAD: DRAIN VALVE CYLINDER	EA	1
69	15	PAFZZ		6-1-1949-35-28A	72869	PAD, LUBRICATION: DRAIN VALVE CYLINDER	EA	1
69	16	PAFZZ		6-1-1949-35-29A	72869	COLLAR, PISTON: DRAIN VALVE CYLINDER	EA	1
69	17	PAFZZ		6-1-1949-35-25A	72869	ROD, PISTON: DRAIN VALVE CYLINDER	EA	1

Figure 69. Drain Valve Air Cylinder.

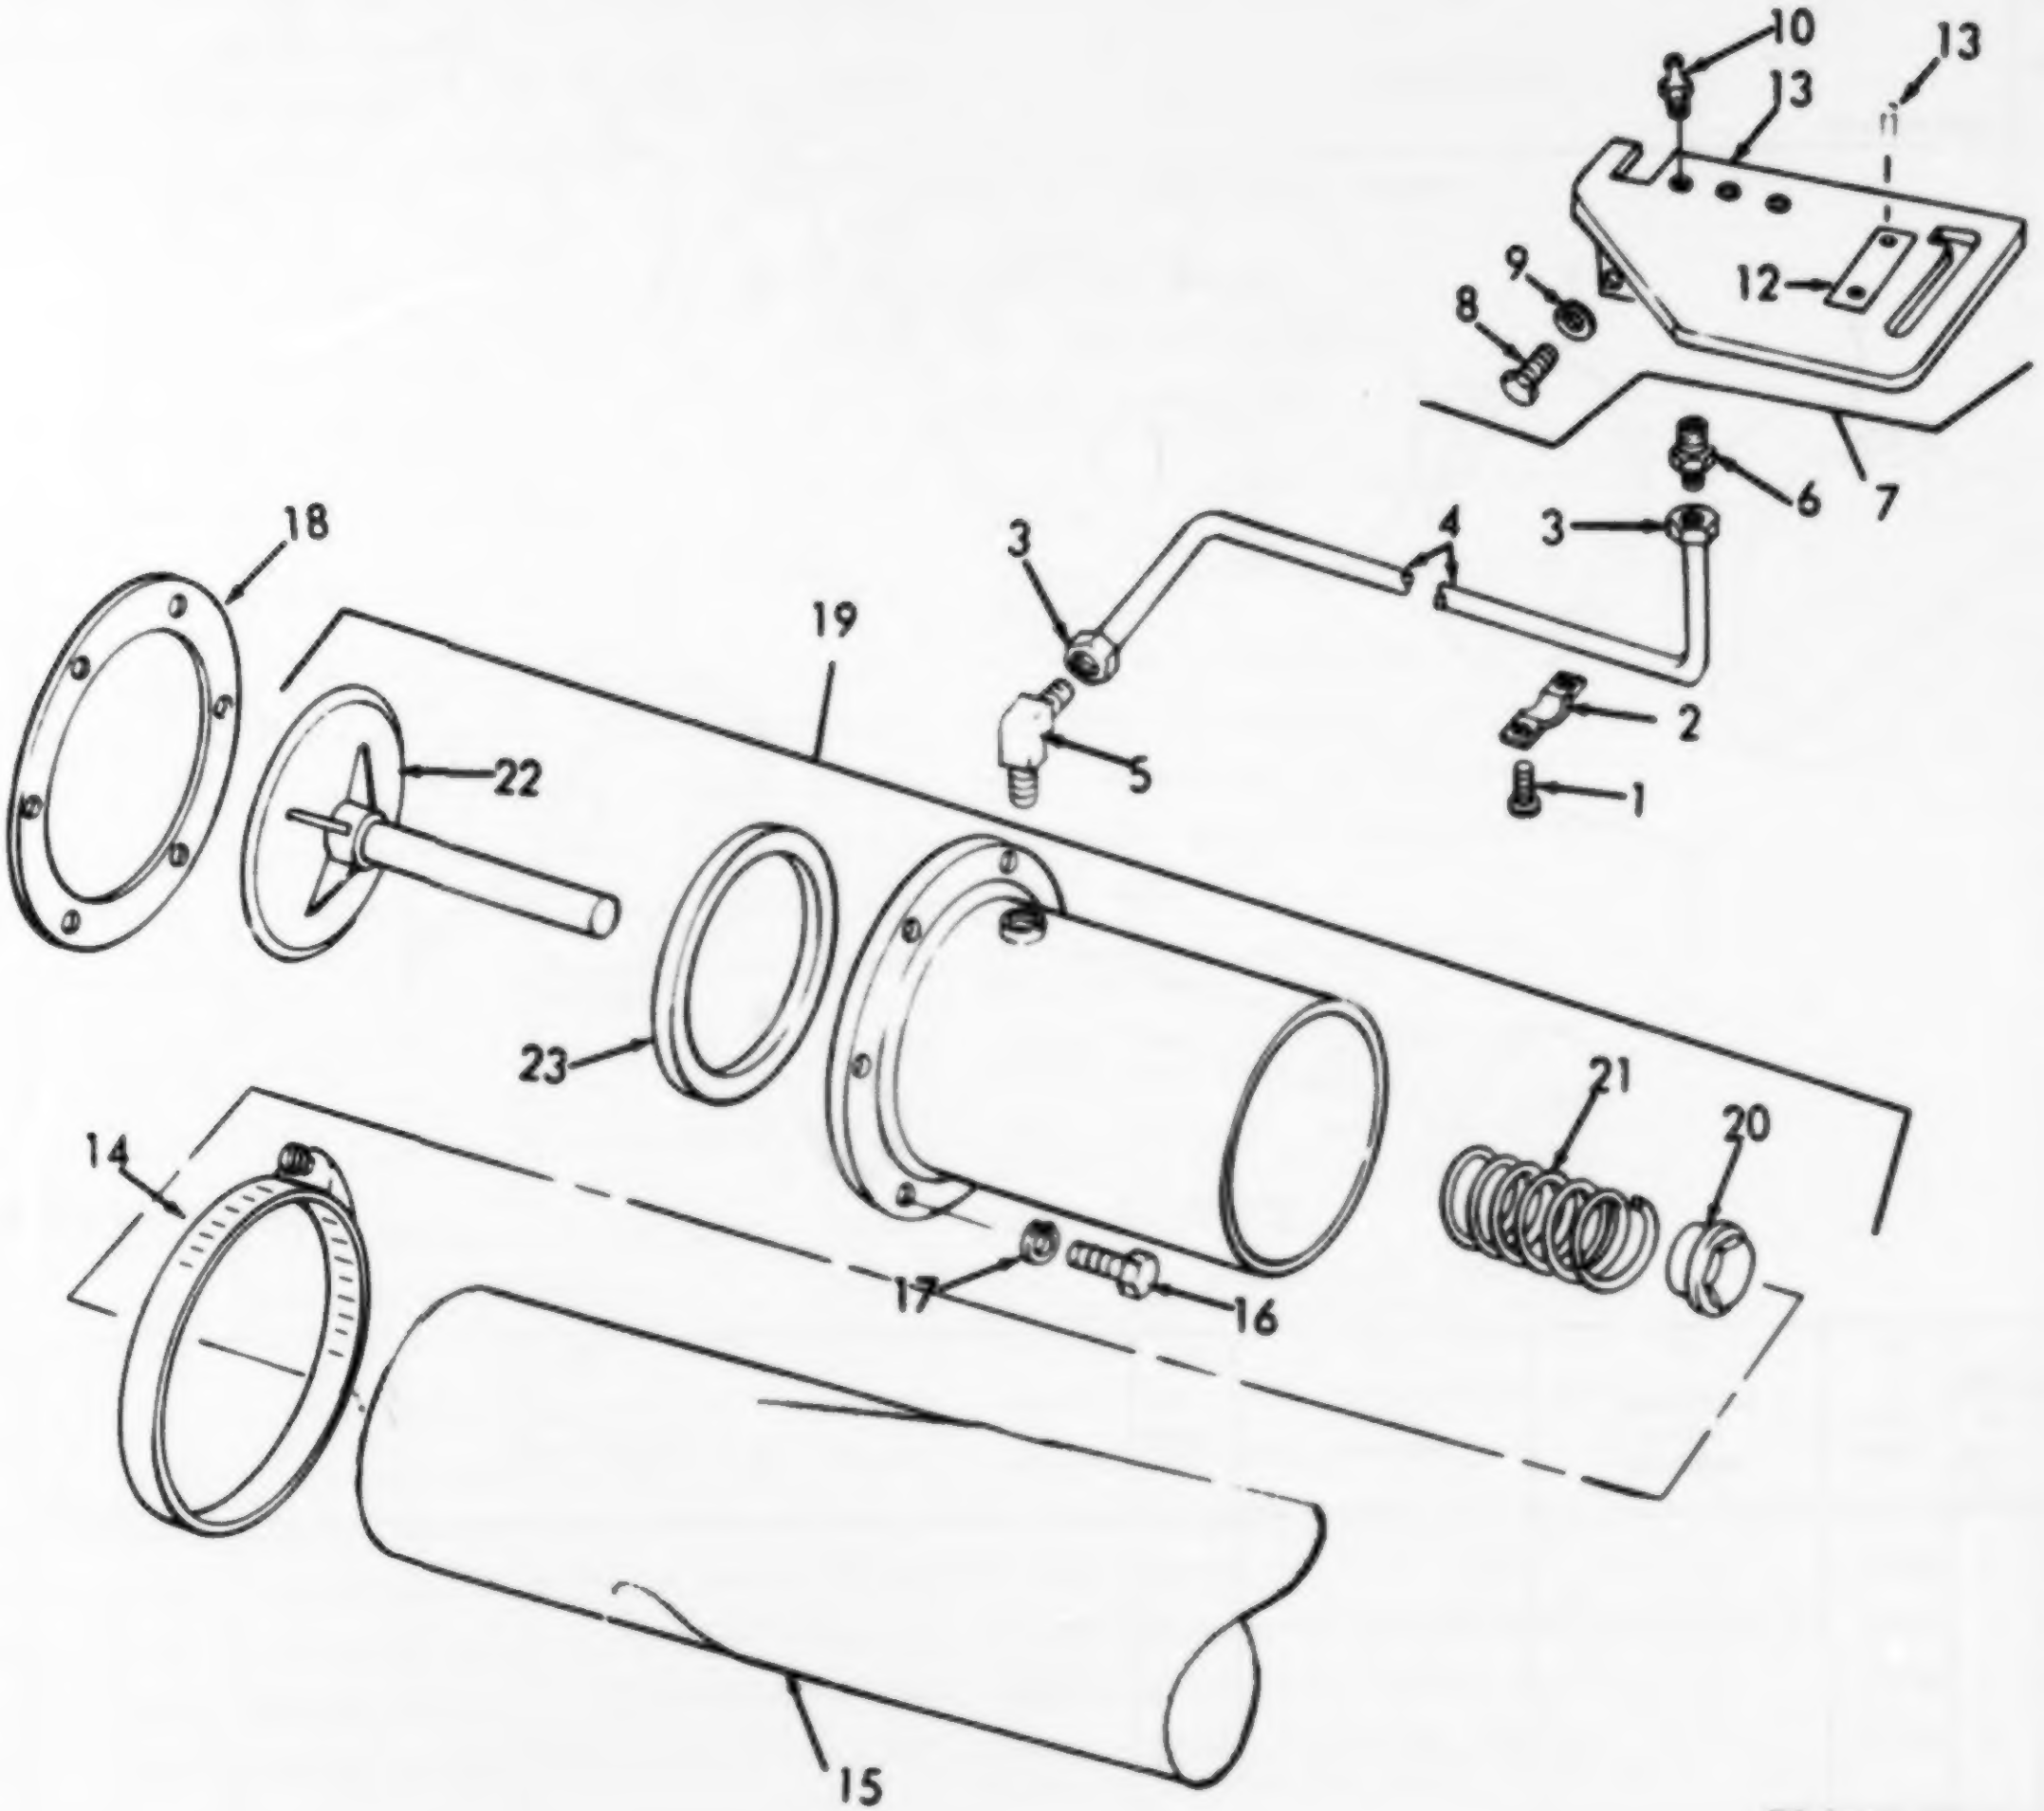
10
13
13
9
8
12
6
7
3
4
3
18
19
5
2
1
22
23
21
20
14
17
16
15

TS 3510-208-34P/70

Figure 70. Drain Valve Body and Lever Guide.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
70	1	PAOZZ	5305-00-590-7883	MBOES424504	81349	SCREW ASSEMBLED WASHER: GREASE LINE CLAMP MTG	EA	2
70	2	XBOZZ		6-1-1929-74A	72869	CLAMP, STEEL: GREASE LINE MTG	EA	2
70	3	PAOZZ	4730-00-044-1487	1110X3	79470	NUT, TUBE COUPLING	EA	4
70	4	PAOZZ	4710-00-277-5524	WWT775	81349	TUBING, COPPER: 3/16 IN. TUBE, 42 IN. REQUIRED FOR EACH TUBE	FT	V
70	5	PAOZZ	4730-00-973-1630	49X3	79470	ELBOW, PIPE TO TUBE: GREASE LINE TO VALVE BODY	EA	1
70	6	PAOZZ	4730-00-266-0531	48X3	79470	ADAPTER, STRAIGHT, PIPE TO TUBE: GREASE LINE TO FITTING	EA	3
70	7	XBOZZ		6-1-1970-47A	72869	GUIDE, LEVER ASSEMBLY	EA	1
70	8	PAOZZ	5305-00-225-3840	MS90725-7	96906	SCREW, CAP, HEXAGON HEAD: BODY MTG	EA	2
70	9	PAOZZ	5310-00-042-6758	6-1-1970-47-6A	72869	WASHER, LOCK: BODY MTG	EA	2
70	10	PAOZZ	2930-00-900-1580	MS15003-1	96906	FITTING, LUBRICATION: GREASE LINE	EA	3
70	11	PAOZZ	5305-00-285-4520	6-1-1970-47-5A	72869	SCREW, ROUND HEAD: CONTROL ROD INSTRUCTION PLATE MTG	EA	2
70	12	XBOZZ		6-1-1970-47-3A	72869	PLATE, INSTRUCTION: CONTROL ROD	EA	1
70	13	XBOZZ		6-1-1970-47-1A	72869	BODY: CONTROL ROD	EA	1
70	14	PAOZZ	4730-00-908-6294	MS35842-16	96906	CLAMP, HOSE: TUBE MTG	EA	1
70	15	PAOZZ	4720-00-136-1972	6-1-1947-35-74A	72869	TUBE, AUTO: VALVE	EA	1
70	16	PAOZZ	5305-00-269-2801	MS90726-58	96906	SCREW, CAP, HEXAGON HEAD: VALVE MTG	EA	6
70	17	PAOZZ	5310-00-261-7340	6-1-1950-35-65A	72869	WASHER, LOCK: VALVE MTG	EA	6
70	18	PAOZZ	5330-00-933-5947	6-1-1950-35-52A	72869	GASKET, FLANGE: VALVE TO FLANGE	EA	1
70	19	PAFFZ		6-1-1950-35-43A	72869	BODY, DRAIN VALVE	EA	1
70	20	PAFZZ		6-1-1950-35-50A	72869	NUT, SPRING RETAINER	EA	1
70	21	PAFZZ		6-1-1950-35-51A	72869	SPRING, DRAIN VALVE	EA	1
70	22	PAFZZ		10826-10	92798	SEAL, DISC: DRAIN VALVE	EA	1
70	23	PAFZZ		6-1-1950-35-45A	72869	SEAT, DRAIN VALVE	EA	1

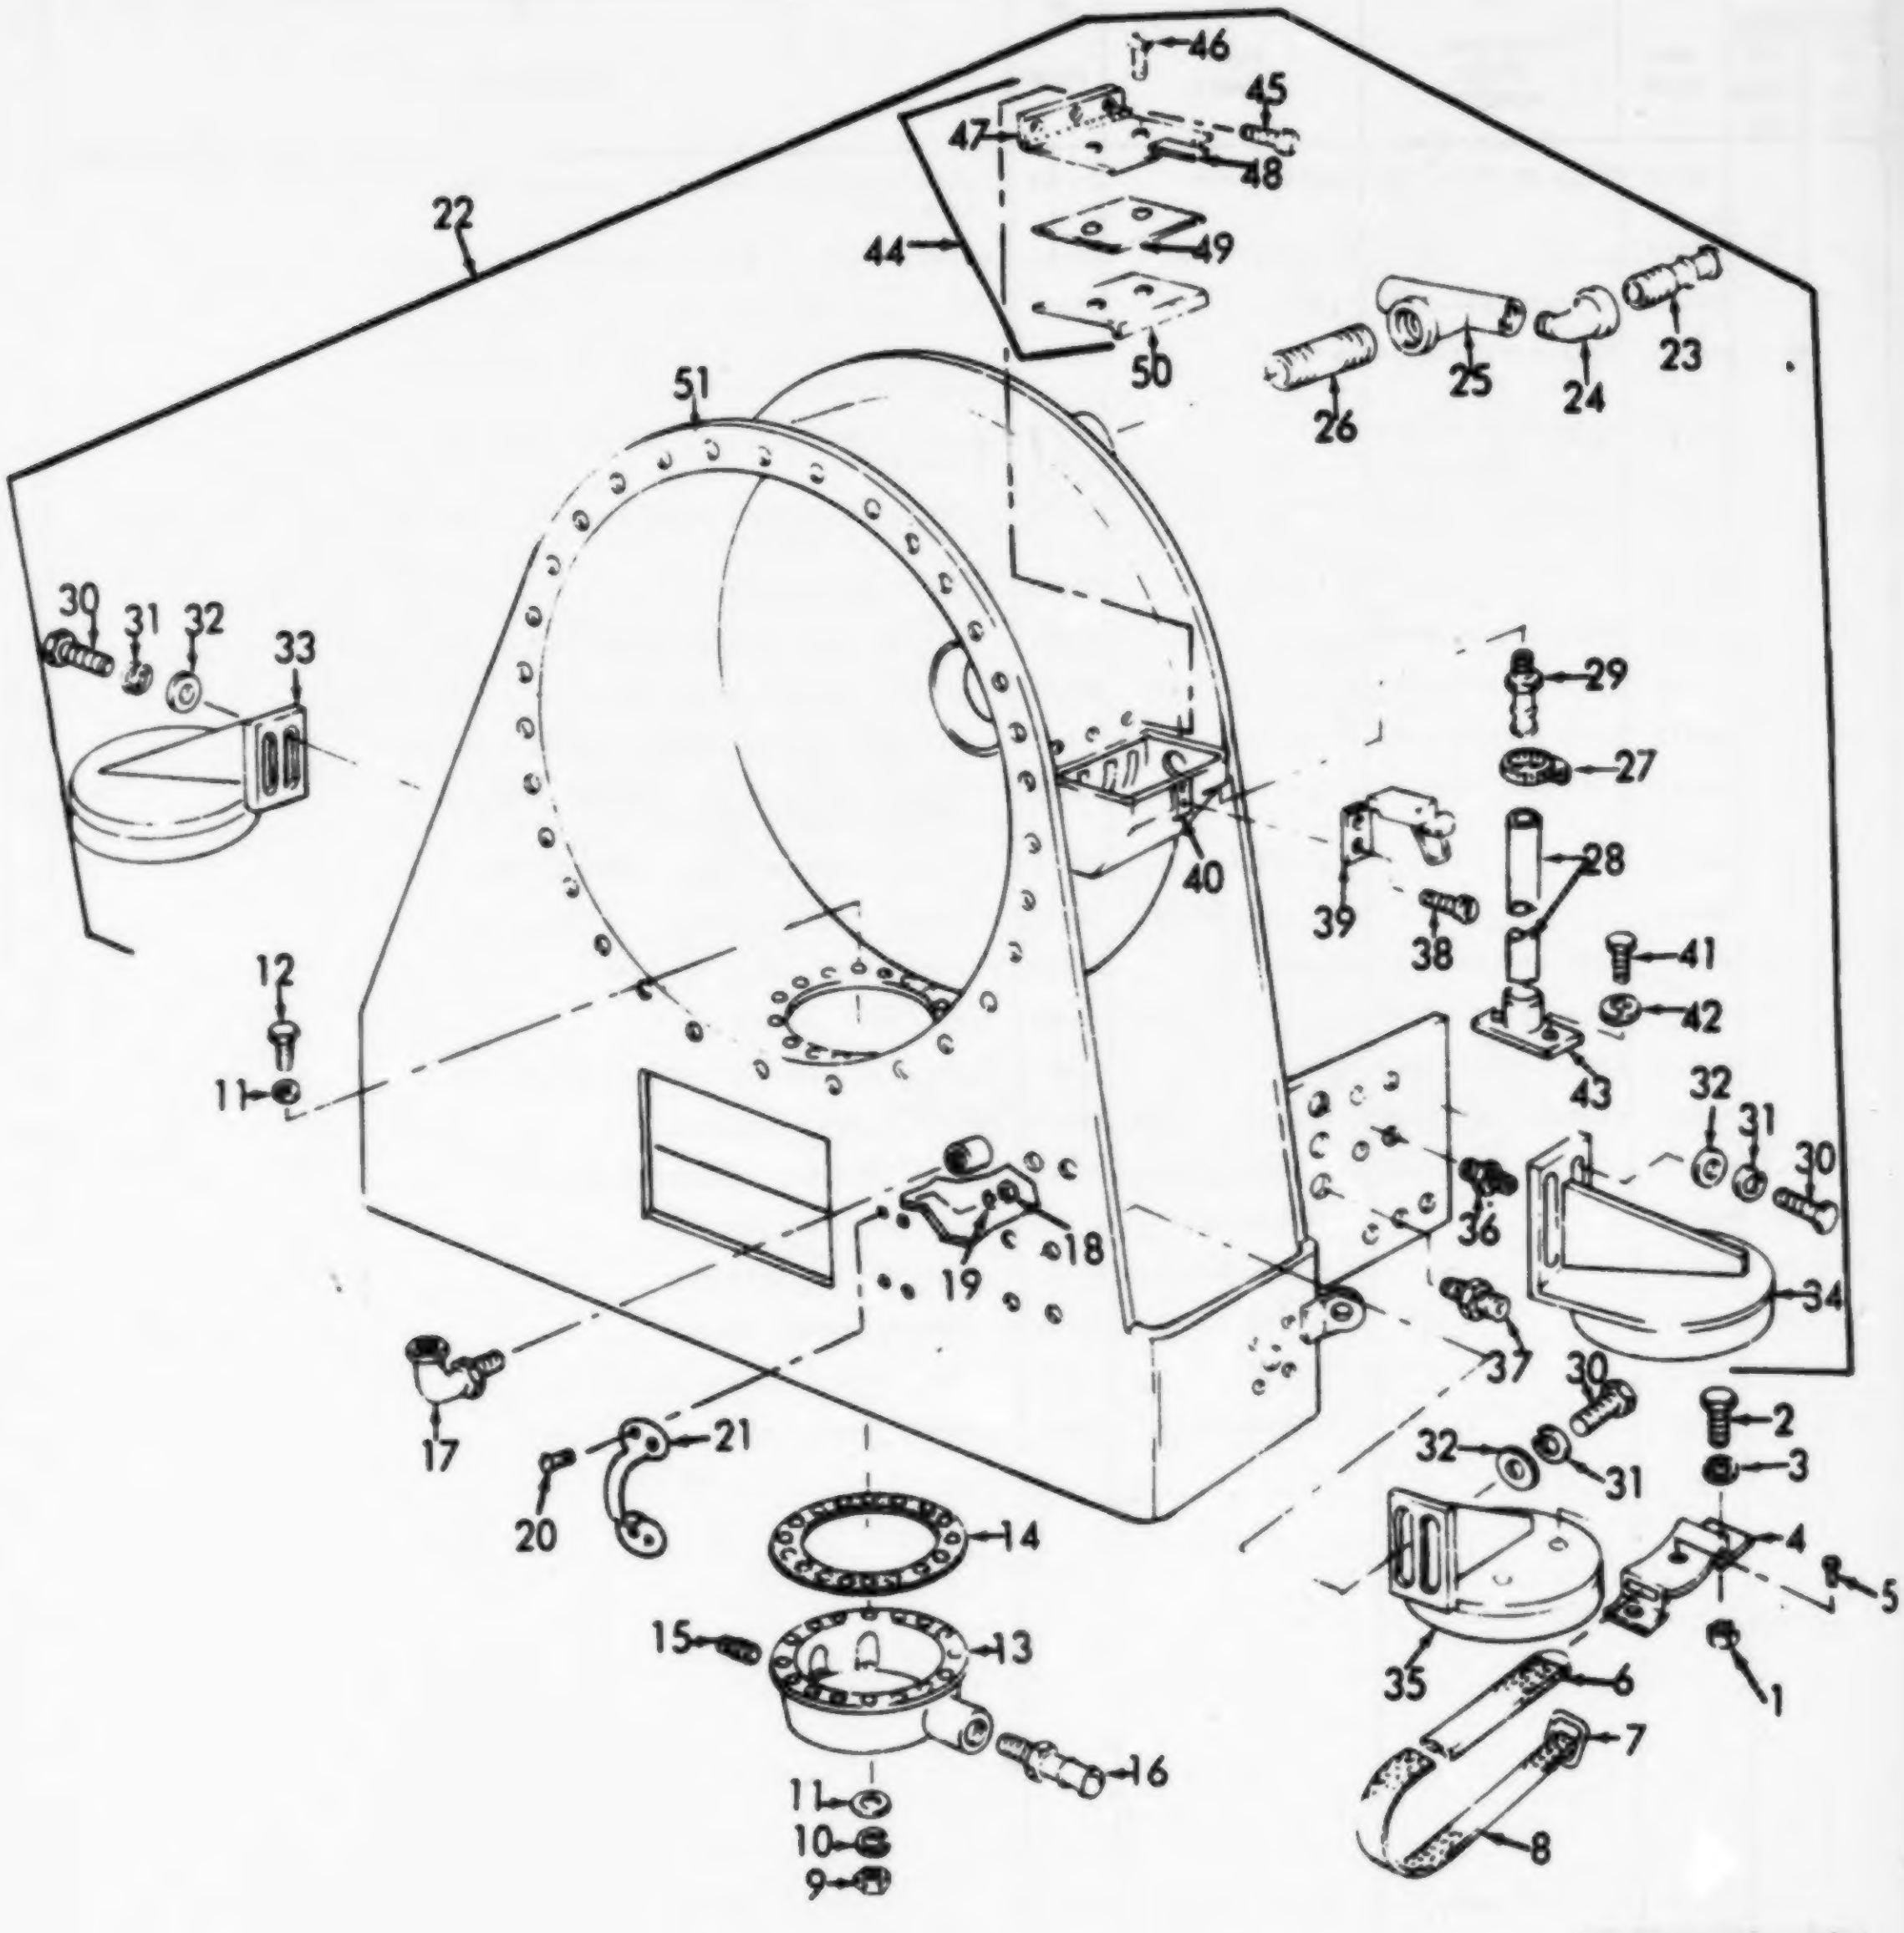

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
TS 3510-208-34P/71

Figure 71. Washer Extractor Frame and Related Parts.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)		(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	Usable On Code	U/M	QTY INC IN UNIT
						GROUP 43 - WASHER EXTRACTOR FRAME AND RELATED PARTS			
71	1	PAOZZ	5310-00-543-5626	6-1-1978-124-6A	72869	NUT, PLAIN, HEXAGON: RETAINER DUCT MTG SCREW, 1/4-20 THD SIZE		EA	2
71	2	PAOZZ	5305-00-068-0502	MS35291-6	96906	SCREW, CAP, HEXAGON HEAD: RETAINER DUCT MTG		EA	4
71	3	PAOZZ	5310-00-582-5965	MS35338-44	72869	WASHER, LOCK: RETAINER DUCT MTG, 1/4 IN.		EA	4
71	4	XBOZZ		6-1-1978-28-1A	72869	RETAINER, DUCT		EA	2
71	5	PAOZZ	5330-00-234-8572	MS20470A5-5	96906	RIVET, UNIVERSAL HEAD: 5/32 IN. DIA, 5/16 IN. LG, CRES		EA	4
71	6	PAOZZ	5340-00-297-6833	6-1-1978-124-2A	72869	CLIP, END BALL: RETAINER DUCT STRAP, 1 IN.		EA	2
71	7	PAOZZ	5340-00-297-6645	6-1-1978-124-3A	72869	BUCKLE, TONGUELESS: RETAINER DUCT STRAP		EA	2
71	8	PAOZZ		MILW530TYPE111 CLASS4	81439	WEBBING, COTTON: 1 IN., 72 IN. REQUIRED		FT	V
71	9	PAOZZ	5310-00-903-5966	MS51971-1	96906	NUT, PLAIN, HEXAGON: DRAIN VALVE MTG		EA	19
71	10	PAOZZ	5310-00-042-6758	MS35338-82	96906	WASHER, LOCK: DRAIN VALVE MTG		EA	24
71	11	PAOZZ	5310-00-880-5977	MS15795-811	96906	WASHER, FLAT: DRAIN VALVE MTG, 1/4 IN.		EA	24
71	12	PAOZZ	5305-00-817-2478	9157788-94	00000	SCREW, PAN HEAD: DRAIN VALVE MTG, 1/4-20 UNC-2A, 1 IN. LG.		EA	19
71	13	XBOZZ		6-1-1950-35-44A	72869	FLANGE, DRAIN VALVE		EA	1
71	14	PAOZZ		6-1-1950-35-46A	72869	GASKET: DRAIN VALVE FLANGE TO WASHER EXTRACTOR		EA	1
71	15	PAOZZ	4730-00-781-7040	WWP471ATYPE2 STYLEC	81349	PLUG, SQUARE HEAD: DRAIN VALVE, 1/2 NPT		EA	1
71	16	XBOZZ		6-1-1947-35-71A	72869	NIPPLE, HOSE: DRAIN VALVE, 3/4 NPT, 3/4 IN. ID, BRASS		EA	1
71	17	PAOZZ	5975-00-244-7807	MS55975-10	08288	ELBOW, CONNECTOR, ELECTRICAL: WASHER EXTRACTOR FRAME TO SWITCH		EA	1
71	18	XBOZZ		6-1-1930-31-55A	72869	NUT, HEXAGON, NO. 10-24 UNC-2B: PULL HANDLE MOUNTING	B	EA	4
71	19	XBOZZ		6-1-1930-31-54A	72869	WASHER, LOCK, SPLIT, MED, NO. 10: PULL HANDLE MOUNTING	B	EA	4
71	20	XBOZZ		6-1-1930-51-53A	72869	SCREW, MACHINE, OVAL HEAD, NO. 10-24 UNC-2AX 1-1/4 LG: PULL HANDLE MOUNTING	B	EA	4
71	21	XBOZZ		6-1-1930-51-52A	72869	HANDLE, PULL	B	EA	1
71	22	XBFFF		6-1-1930-31A	72869	FRAME, WELD ASSEMBLY: WASHER EXTRACTOR		EA	1
71	23	XBOZZ		103247	79466	NIPPLE, HOSE: WASHER EXTRACTOR TO WATER HEATER HOSE		EA	2
71	24	PAOZZ	4730-00-231-3909	AN915-8STD	88044	ELBOW, STREET: WATER HEATER HOSE TO WASHER EXTRACTOR, 1 IN. BRASS		EA	2
71	25	XBOZZ		6-1-1900-87A	72869	TEE: WASHER EXTRACTOR TO WATER HEATER HOSE, 1 X 1 X 2		EA	1
71	26	PAOZZ	4730-00-196-1472	WWN355TYPE1	81349	NIPPLE, CLOSE: WATER EXTRACTOR TO WATER HEATER HOSE		EA	1
71	27	PAOZZ	4730-00-908-3194	MS35842-11	96906	CLAMP, HOSE: SOAP CHUTE OVERFLOW		EA	2
71	28	MOOOO		6-1-1931-31-31A	72869	HOSE, RUBBER: SOAP CHUTE OVERFLOW MANUFACTURE FROM:		EA	1
71		PAOZZ		MILLZZH601GRADE1	81349	HOSE, RUBBER: 1 1/4 IN. ID, 39 IN. REQUIRED		FT	V
71	29	XBOZZ		6-1-1931-31-29A	72869	NIPPLE, HOSE, MALE: SOAP CHUTE COVER, 1 IN. NPT X 1 IN. ID. HOSE		EA	1
71	30	PAFZZ	5305-00-021-3806	MS35307-113	96906	SCREW, CAP, HEXAGON HEAD: BRACKET MTG		EA	16

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
71	31	PAFZZ	5310-00-988-7516	MS43904-87	96906	WASHER, LOCK: BRACKET MTG	EA	16
71	32	PAFZZ	5310-00-395-6521	6-1-1929-69A	72869	WASHER, FLAT: BRACKET MTG	EA	16
71	33	XBFZZ		6-1-1929-43A	72869	BRACKET, SPRING: REAR	EA	1
71	34	XBFZZ		6-1-1929-44A	72869	BRACKET, SPRING: REAR	EA	1
71	35	XBFZZ		6-1-1929-42A	72869	BRACKET, SPRING: FRONT, WASHER EXTRACTOR	EA	2
71	36	XBFZZ		6-1-1930-31-46A	72869	GRIP, CORD: WASHER EXTRACTOR, 1/2 IN.	EA	1
71	37	XBFZZ		6-1-1930-31-47A	72869	GRIP, CORD: WASHER EXTRACTOR, 3/4 IN.	EA	2
71	38	PAFZZ	5305-00-050-9226	MS51957-60	96906	SCREW, PAN HEAD: CATCH MTG, 10-24 NC2A, 5/16 IN. LG, CRES	EA	2
71	39	XBFZZ		15641	14608	STRIKE, CATCH: SOAP CHUTE	EA	1
71	40	XAFZZ		6-1-1931-31-26A	72869	BASE, LOCK (WELDMENT)	EA	1
71	41	PAFZZ	5305-00-068-0501	MS35291-5	96906	SCREW, CAP, HEXAGON HEAD: PLATE MTG, OVERFLOW	EA	2
71	42	PAFZZ	5310-00-042-6758	MS35338-82	96906	WASHER, LOCK: PLATE MTG, OVERFLOW	EA	2
71	43	XBFZZ		6-1-1931-31-33A	72869	PLATE, PIPE: OVERFLOW HOSE	EA	1
71	44	XBOFF		6-1-1930-31-38A	72869	SOAP CHUTE COVER ASSEMBLY	EA	1
71	45	PAOZZ	5305-00-933-9880	6-1-1930-31-45A	72869	SCREW, TAPPING, THREAD: HINGE MTG, 1/4 IN. LG	EA	3
71	46	PAFZZ	5305-00-824-6197	NAS388-8-8P	80205	SCREW, OVAL HEAD: SOAP CHUTE COVER, 8-32 NC2A, 1/2 IN. LG, CRES	EA	2
71	47	XAFZZ		MS35822-26	96906	HINGE, CONTINUOUS	EA	1
71	48	XBFZZ		6-1-1932-31-39A	72869	COVER: SOAP CHUTE	EA	1
71	49	PAFZZ	5330-00-406-1400	6-1-1932-31-42A	72869	GASKET: SOAP CHUTE COVER	EA	1
71	50	XBFZZ		6-1-1932-31-41A	72869	PLATE, GASKET: SOAP CHUTE	EA	1
71	51	XBFZZ		6-1-1930-31A	72869	FRAME, WELD ASSEMBLY: WASHER EXTRACTOR	EA	1

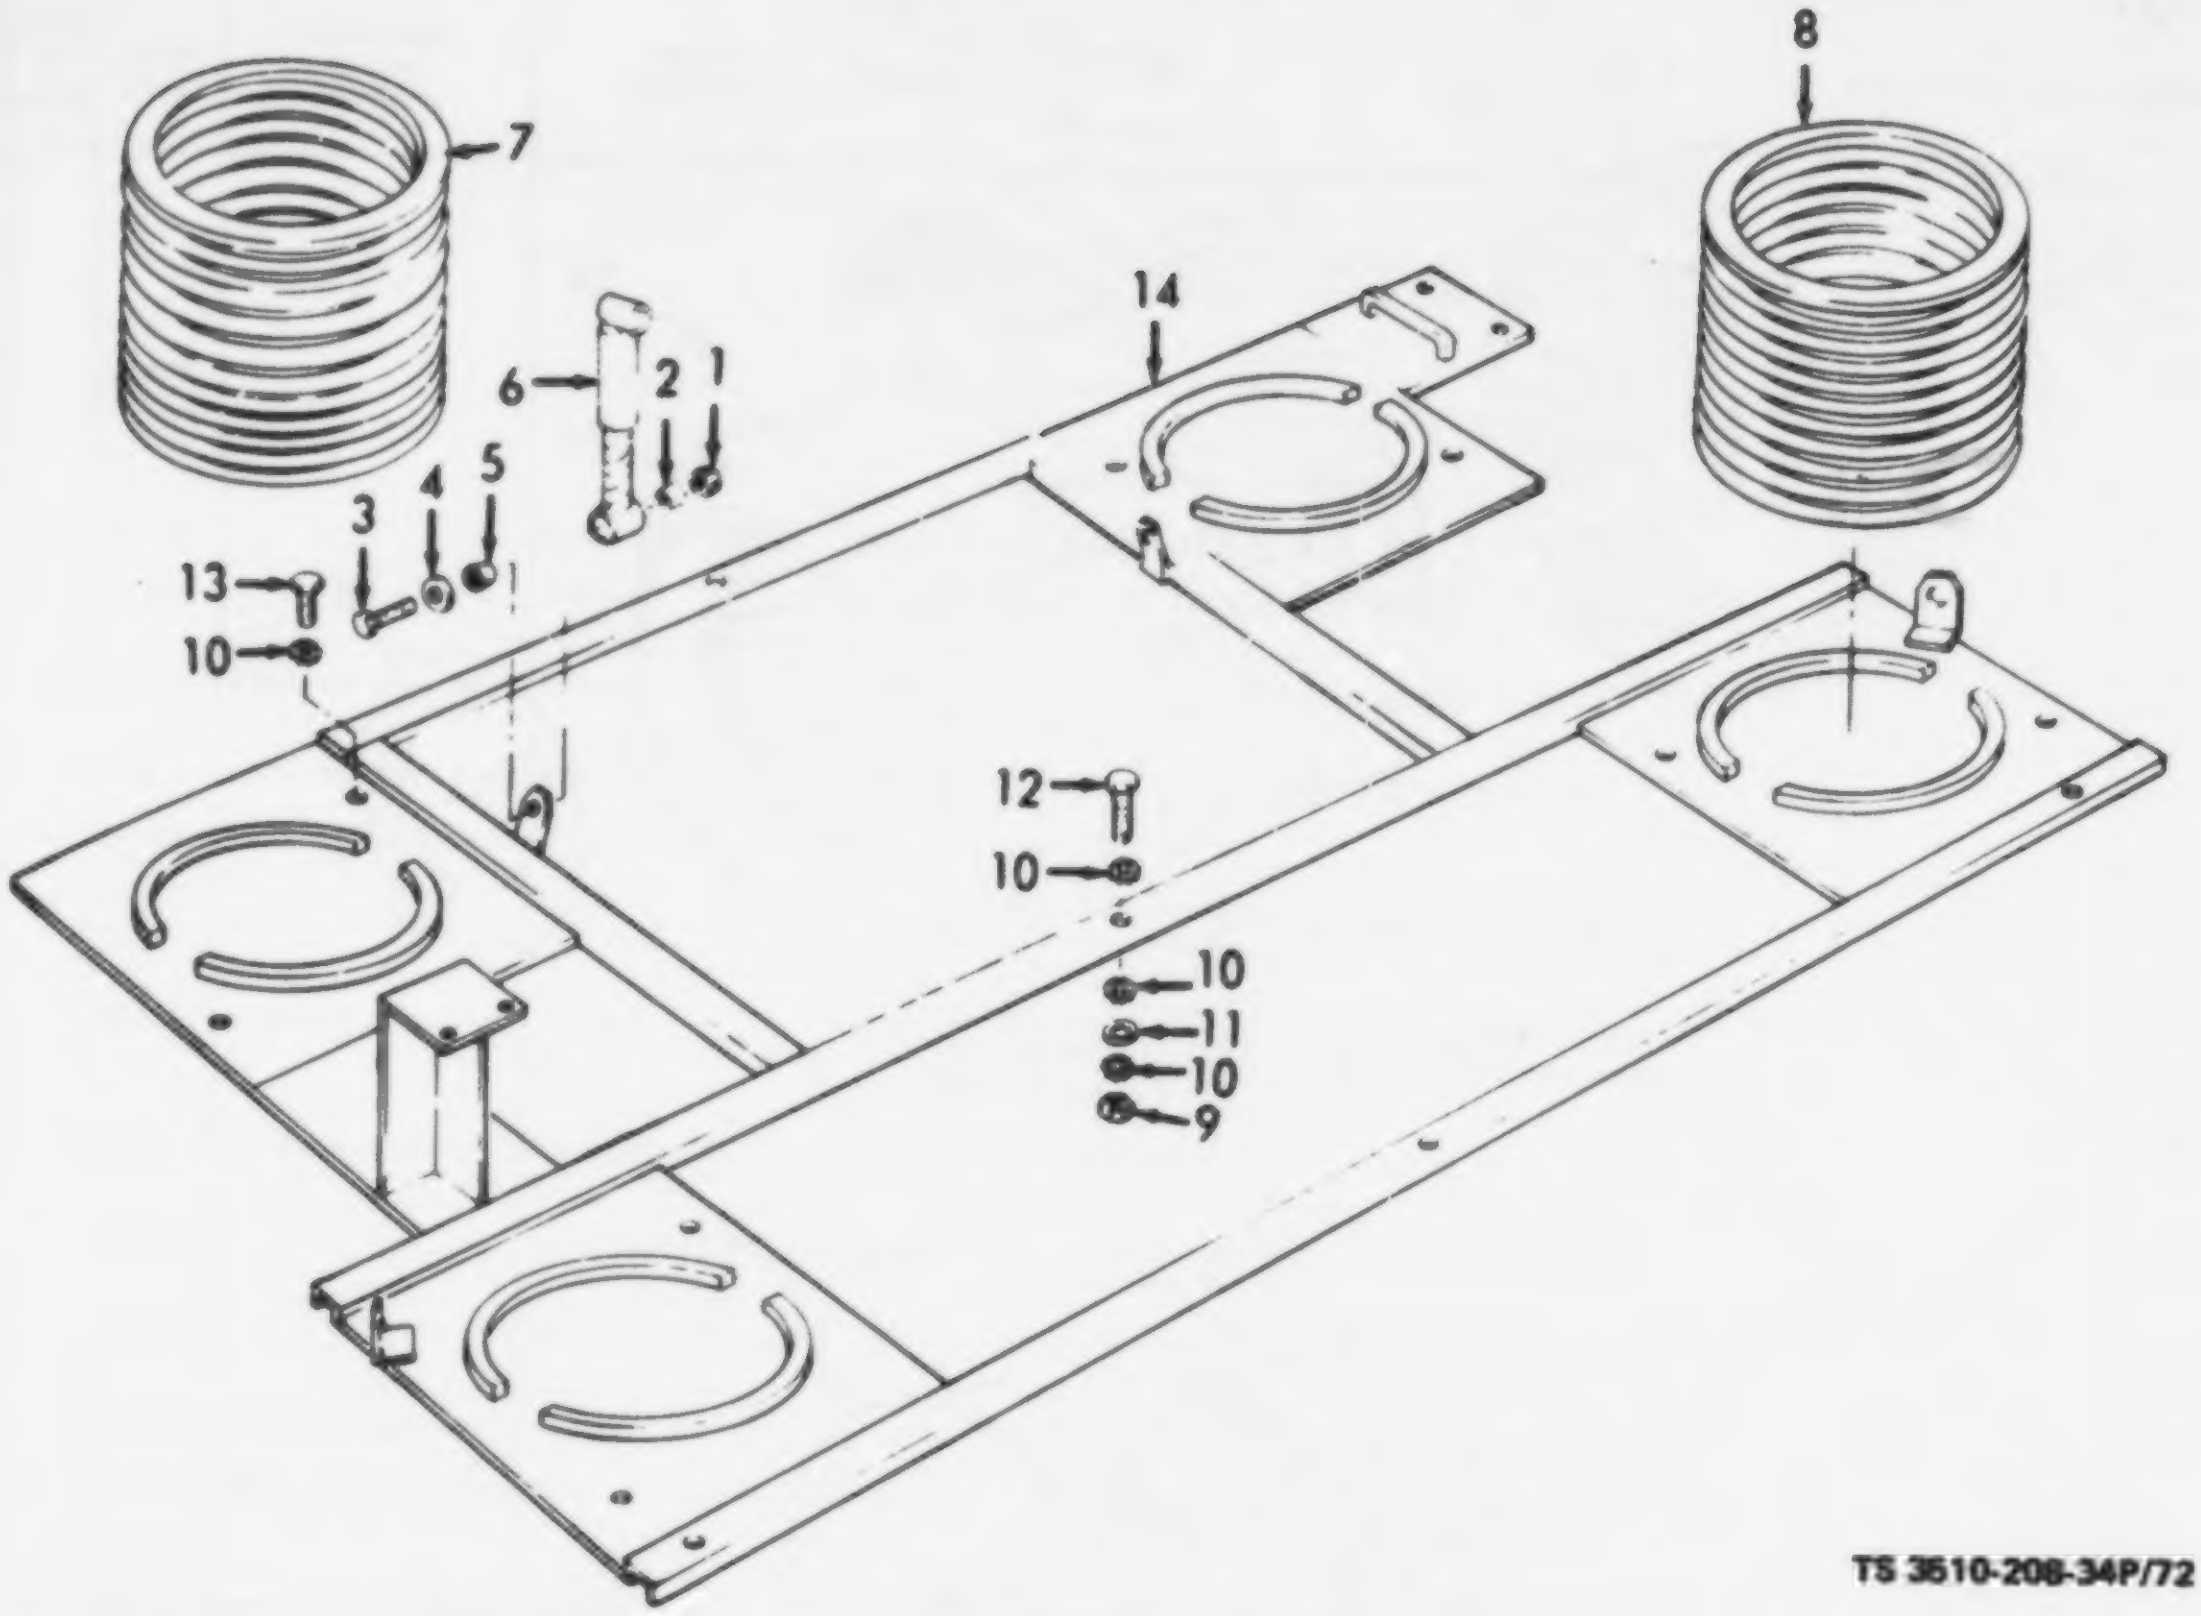

TS 3510-208-34P/72

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
72	1	PAOZZ	5305-00-584-7990	6-1-1929-71A	72869	NUT, SELF-LOCKING, HEXAGON. SHOCK ABSORBER MTG	EA	8
72	2	PAOZZ	5325-00-930-2354	535228	72560	GROMMET: SHOCK ABSORBER MTG	EA	8
72	3	XBOZZ		6-1-1929-54A	72869	BOLT: SHOCK ABSORBER MTG, 5/8-11 1/2 THD SIZE, 2-1/4 IN. LG	EA	8
72	4	PAOZZ	5310-00-285-5620	6-1-1929-70A	72869	WASHER, FLAT: SHOCK ABSORBER MTG	EA	8
72	5	PAOZZ	5325-00-930-2354	535228	72560	GROMMET: SHOCK ABSORBER	EA	8
72	6	PAOZZ	3510-00-949-6254	5552315	72560	SHOCK ABSORBER ASSEMBLY	EA	4
72	7	PBFZZ	5360-00-492-6030	6-1-1929-45A	60883	SPRING, COMPRESSION, REAR	EA	2
72	8	PBFZZ	5360-00-479-2896	6-1-1929-46A	60883	SPRING, COMPRESSION, FRONT	EA	2
72	9	PAFZZ	5310-00-763-8920	MS51967-20	96906	NUT, PLAIN, HEXAGON: BASE TO TRAILER MTG	EA	11
72	10	PAFZZ	5310-00-017-8267	6-1-1929-67A	72869	WASHER, LOCK: BASE TO TRAILER MTG, 5/8 IN.	EA	28
72	11	PAFZZ	5310-00-285-5620	6-1-1929-70A	72869	WASHER, FLAT: BASE TO TAILER MTG, 5/8 IN.	EA	15
72	12	PAFZZ	5305-00-051-0827	MS90725-164	96906	SCREW, CAP, HEXAGON HEAD: BASE TO TRAILER MTG, 5/8-11 UNC-2A, 2 IN. LG, STL CPL	EA	13
72	13	PAFZZ	5305-00-724-5910	6-1-1945-34-24A	72869	SCREW, CAP, HEXAGON HEAD: BASE TO TRAILER MTG, 5/8-11 UNC-2A, 1-1/2 IN. LG, STL CPL	EA	2
72	14	XBFZZ		6-1-1945-34A	72869	BASE, WASHER EXTRACTOR	EA	1

Figure 72. Washer Base.

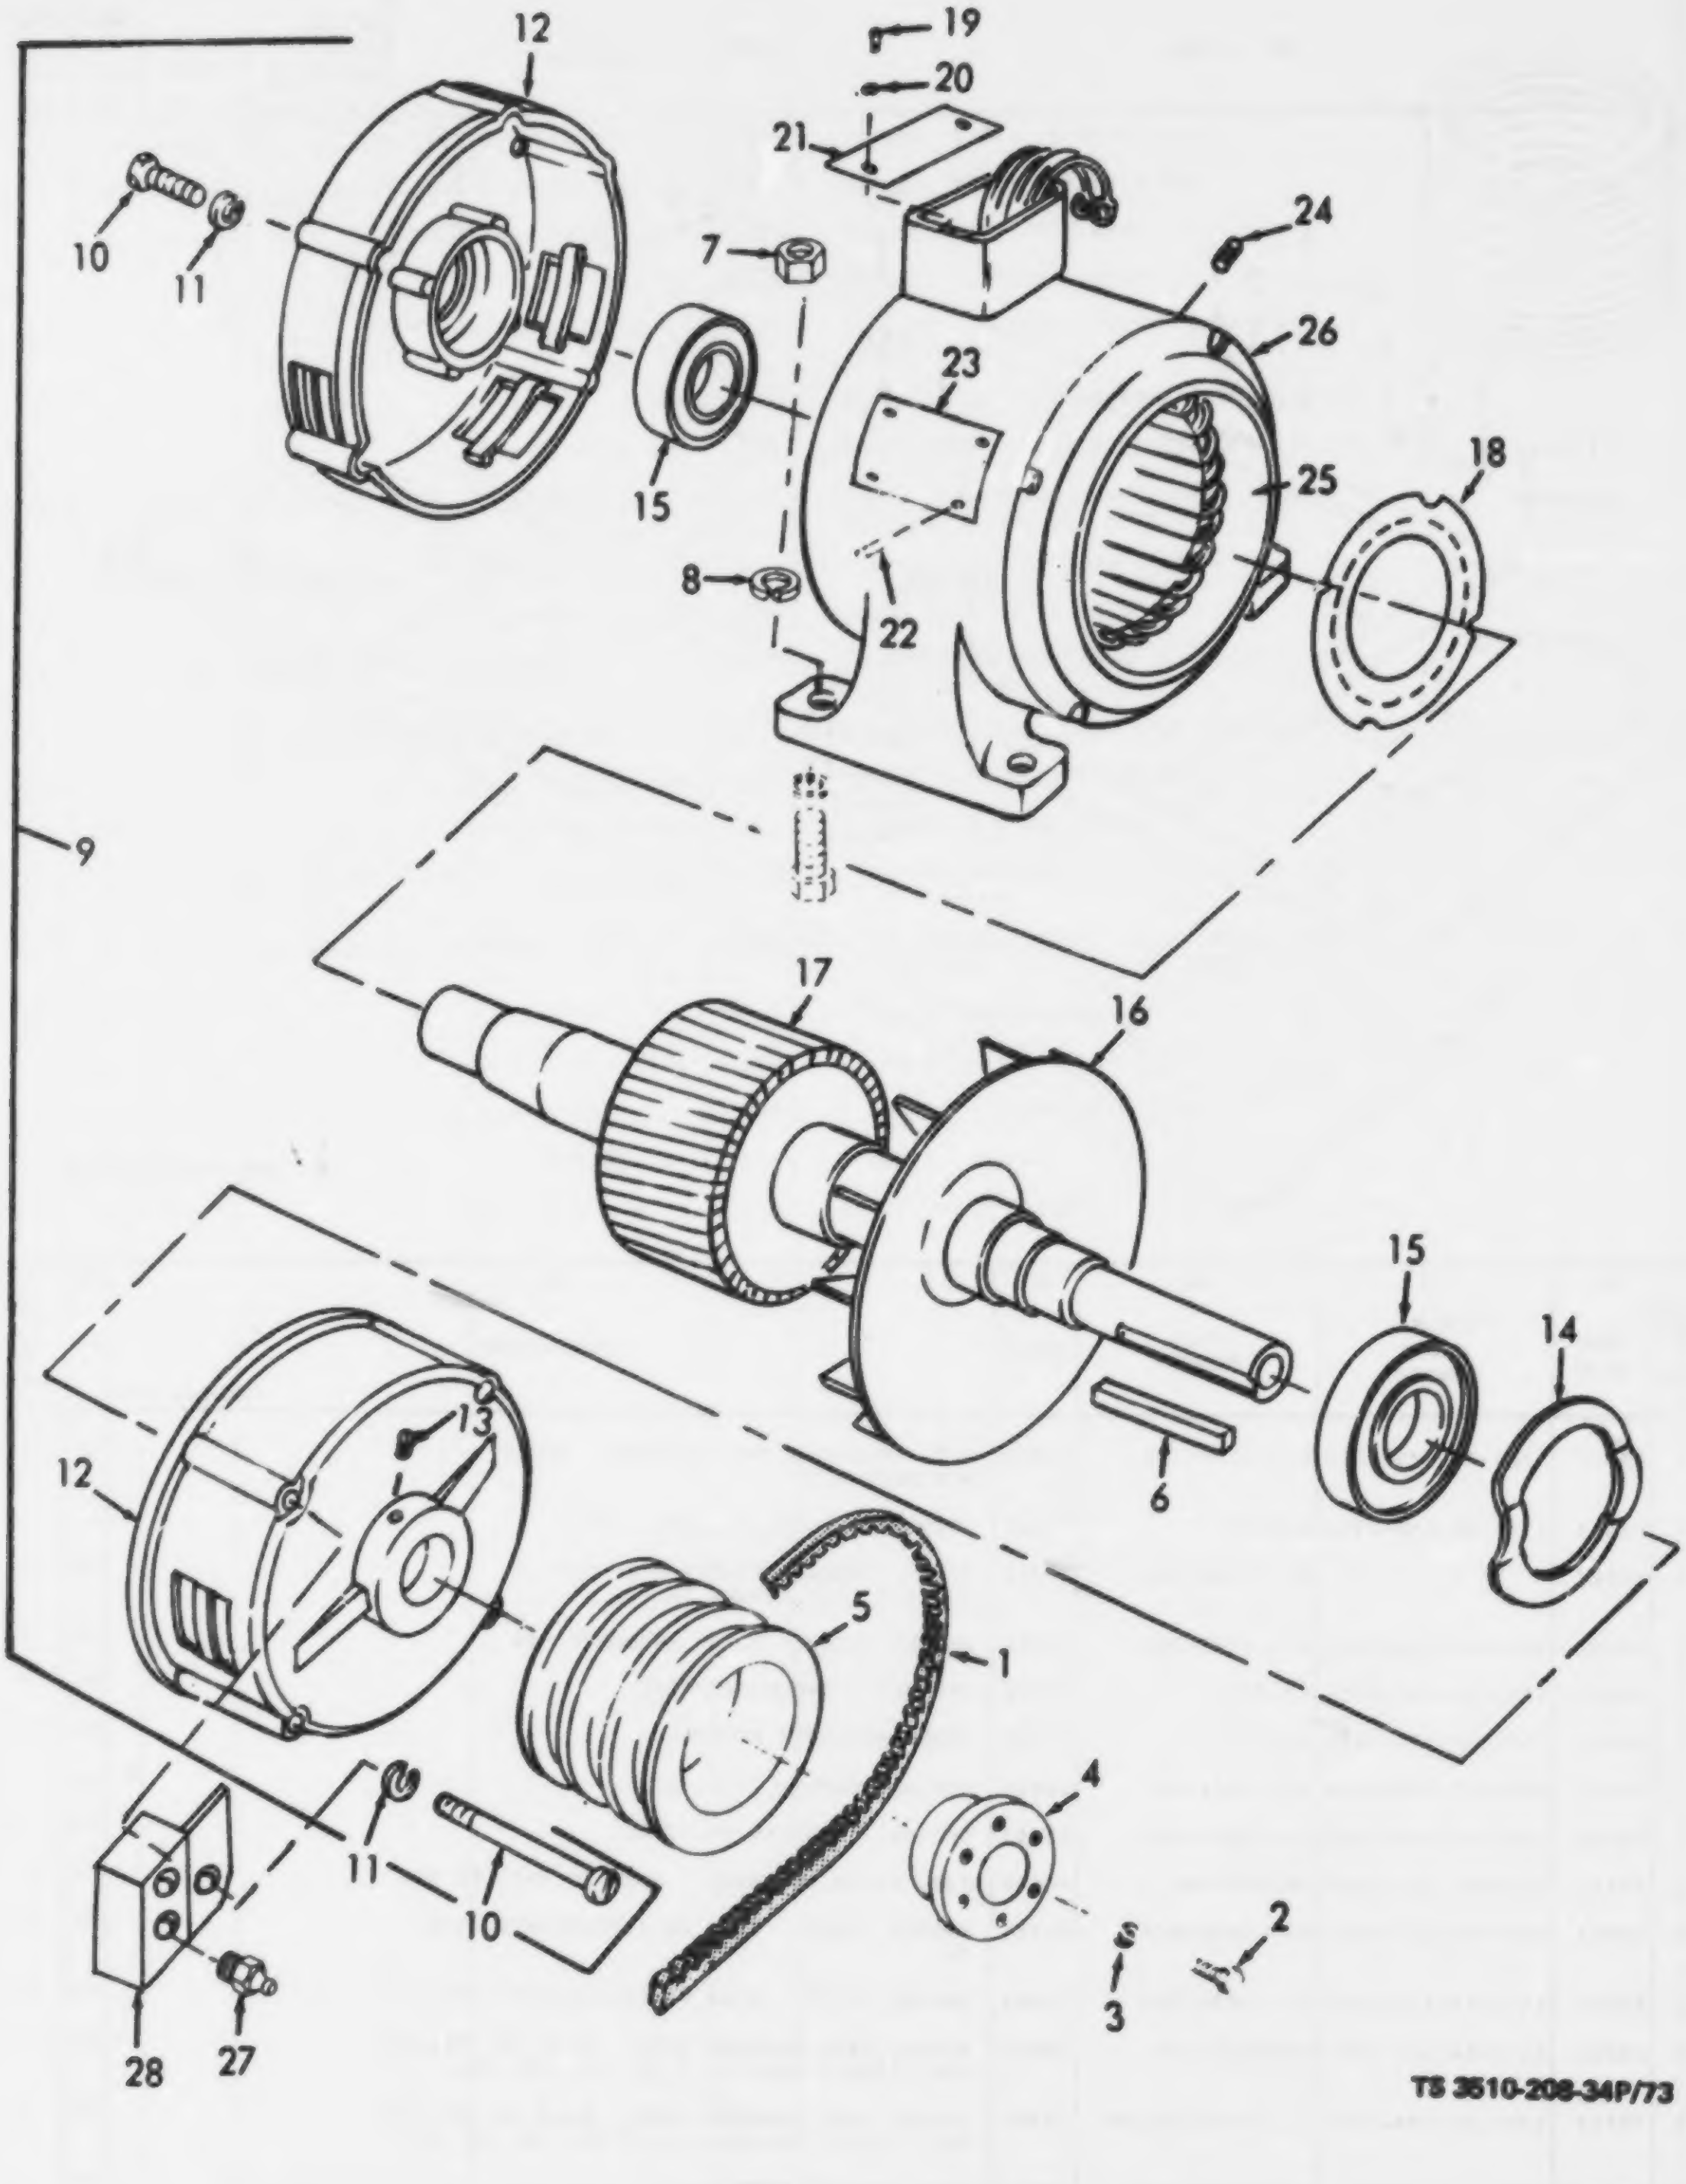
12
19
20
21
10
11
7
24
26
23
15
25
18
8
22
9
17
16
15
14
13
12
6
5
1
4
11
10
2
3
28
27

TS 3510-208-34P/73

Figure 73. Washer Motor.

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION	Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 44 - WASHER MOTORS, EXTRACTOR MOTORS, WASHER DRIVE AND RELATED PARTS			
73		XBFFZ		6-1-2981-33	01551	MAIN DRIVE ASSEMBLY (NOTE: COMPONENTS SAME AS MAIN DRIVE ASSEMBLY, PART NO. 6-1-1936-33A (72869) EXCEPT WHERE INDIVIDUAL COMPONENTS ARE ANNOTATED)	B	EA	1
73		XBFZZ		6-1-1936-33A	72869	MAIN DRIVE ASSEMBLY	A	EA	1
73	1	PAOZZ		AX48-3	81380	BELT, V: WASHER MOTOR TO JACKSHAFT (3 EA TO SET)		ST	1
73	2	PAOZZ	5305-00-225-3839	M2000R	90192	SCREW, CAP, HEXAGON HEAD: HUB TO PULLEY MTG		EA	3
73	3	PAOZZ	5310-00-582-5965	M2047G	90192	WASHER, LOCK: HUB TO PULLEY MTG		EA	3
73	4	PBOZZ	3040-00-437-0628	SH1-1-8	93232	HUB, PULLEY		EA	1
73	5	PBOZZ		3AQ30	01551	PULLEY, SHEAVE: WASHER DRIVE (USED ON DRIVE ASSEMBLY, PART NO. 6-1-2981-33 (01551) ONLY)	B	EA	1
73	5	PBOZZ	3020-00-457-1559	3A34QD	93232	PULLEY, SHEAVE: WASHER DRIVE (USED ON DRIVE ASSEMBLY, PART NO. 6-1-1936-33A (72869) ONLY)	A	EA	1
73	6	PAOZZ	5315-00-810-4761	MS20066-258	96906	KEY, MACHINE: PULLEY HUB MTG, 1/4 IN., 2 IN. LG		EA	1
73	7	XBOZZ		6-1-2981-33-102A	72869	NUT, SELF-LOCKING: WASHER MOTOR MTG, 3/8-24 UNF X 38		EA	4
73	8	XBOZZ		6-1-2981-33-103A	72869	WASHER, FLAT: WASHER MOTOR MTG, 3/8 IN. SCREW SIZE		EA	4
73	9	PAOFF	6105-00-930-8921	P11800	46175	MOTOR, ELECTRICAL: WASHER		EA	1
73	10	PAFZZ	5305-00-770-0238	5-16-18X3-1-4	46175	SCREW, MACHINE: END PLATE, FILLISTER HEAD, 5/16-18 NC THD SIZE, 3-1/4 IN. LG		EA	8
73	11	PAFZZ	5310-00-407-9566	MS35338-45	96906	WASHER, LOCK: END PLATE MTG, 5/16 SCREW SIZE		EA	8
73	12	PAFZZ		H215-33	46175	END PLATE: WASHER MOTOR		EA	2
73	13	PAFZZ	4730-00-787-6384	1-8NPT	46175	PLUG, PIPE: END PLATES, WASHER MOTOR		EA	4
73	14	PAFZZ	5310-00-655-9969	R225-250	46175	SPRING, END		EA	1
73	15	PAFZZ	3110-00-917-6435	K3002A7	46175	BEARING, BALL: WASHER MOTOR		EA	2
73	16	XBFZZ		R4255-768	46175	FAN		EA	1
73	17	XBFZZ		H11213-13	46175	ROTOR: WASHER MOTOR		EA	1
73	18	XBFZZ		H215-47	46175	PLATE, BAFFLE: WASHER MOTOR		EA	1
73	19	XBFZZ		1-4-20X3-8	46175	SCREW, MACHINE, FILLISTER HEAD: TERMINAL BOX MTG, 1/4-20 X 3/8		EA	2
73	20	XBFZZ		1-4	46175	WASHER, LOCK: TERMINAL BOX MTG, 1/4 IN. SCREW SIZE		EA	2
73	21	XBFZZ		R28-546	46175	TERMINAL BOX: W/COVER AND SCREWS		EA	1
73	22	PAFZZ	5305-00-253-4618	MS21318-27	96906	SCREW, DRIVE: NAMEPLATE, WASHER MOTOR		EA	4
73	23	XBFZZ		125V	46175	NAMEPLATE, WASHER MOTOR		EA	1
73	24	XBFZZ		1-4-20X5-8	46175	SETSCREW, CONE TYPE: SHELL, WASHER MOTOR, 1/4-20 X 5/8		EA	2
73	25	XBFZZ		H9215-115-5	46175	STATOR, WASHER MOTOR		EA	1
73	26	XBFZZ		H213-81	46175	SHELL, FIELD: WASHER MOTOR		EA	1
73	27	PAOZZ		6-1-2981-33-112A	72869	FITTING, LUBRICATION	B	EA	2
73	28	XBOZZ		6-1-2981-33-132A	72869	BLOCK GREASE	B	EA	1

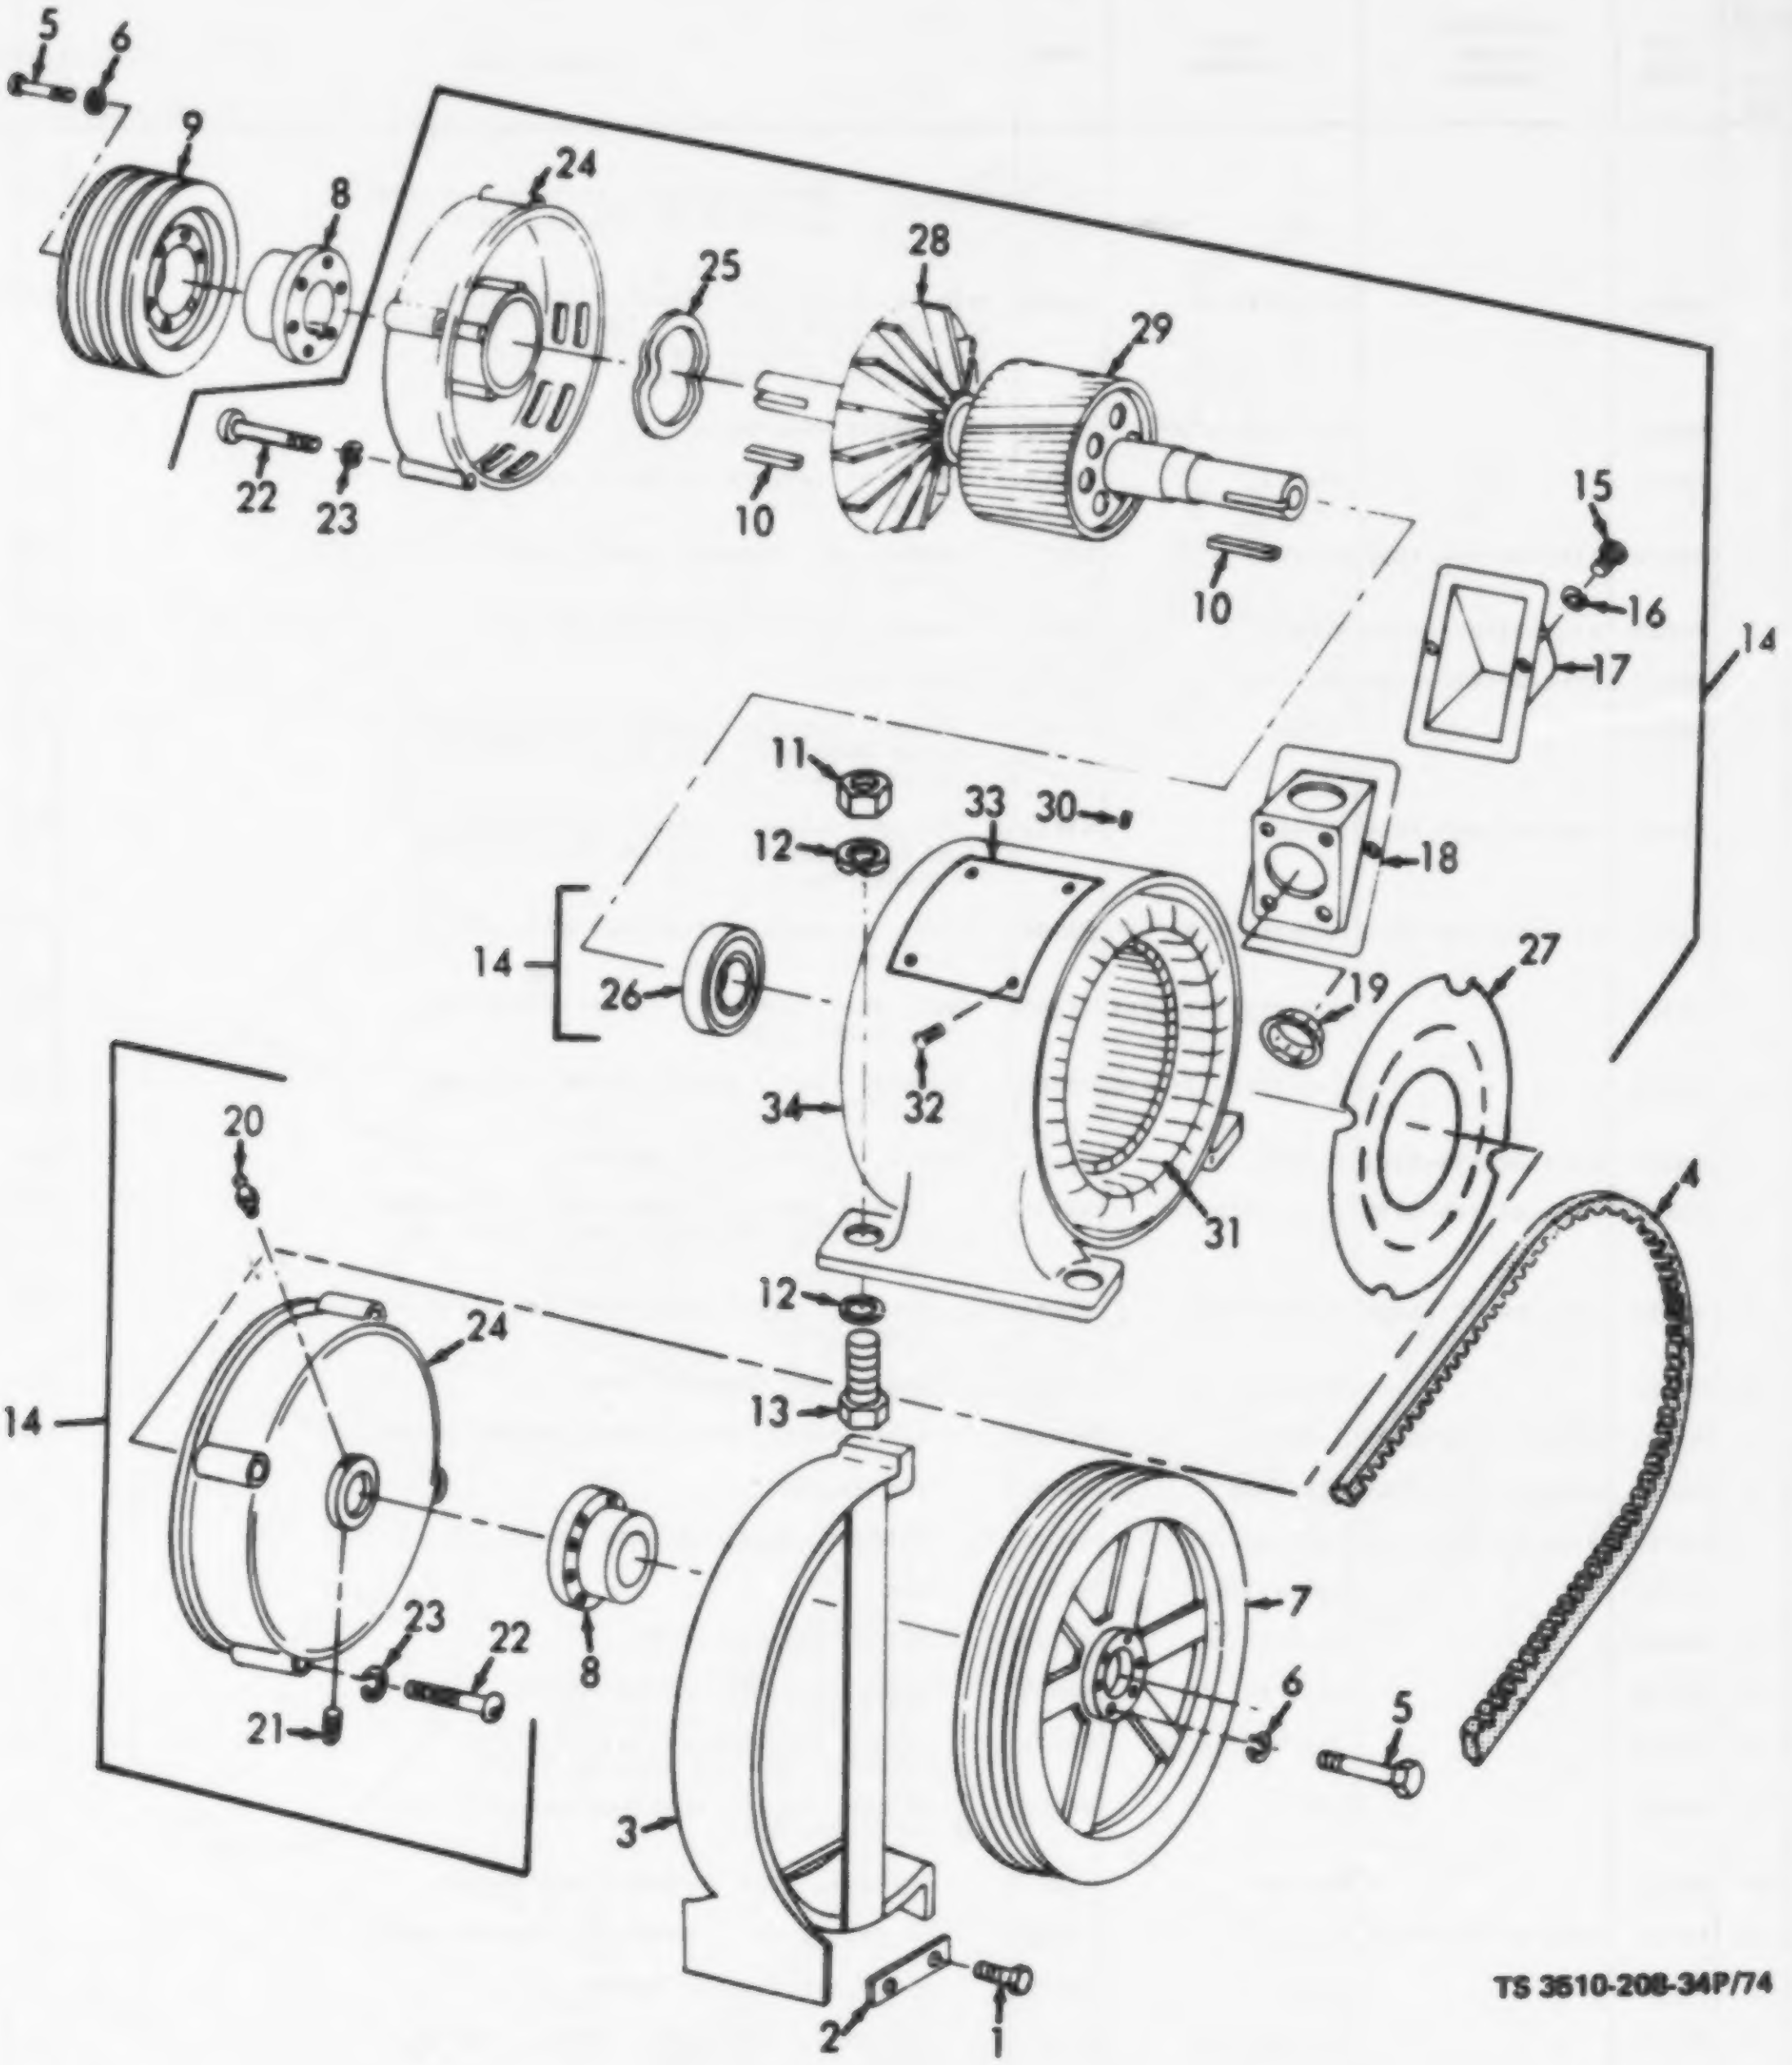
5
6
9
8
24
25
28
29
22
23
10
10
15
16
17
14
11
12
33
30
18
14
26
34
32
19
27
31
4
20
12
24
14
13
7
8
23
22
21
6
5
3
2
1

TS 3610-208-34P/74

Figure 74. EIDAL Extractor Motor and Motor Mountings.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)		(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	Usable On Code	U/M	QTY INC IN UNIT
74	1	PAOZZ	5305-00-269-3211	MS90725-60	96906	SCREW, CAP, HEXAGON HEAD: BELT GUARD MTG, EXTRACTOR	A	EA	2
74	2	XBOZZ		6-1-1936-33-56A	72869	PLATE, LOCK: BELT GUARD MTG, EXTRACTOR	A	EA	1
74	3	PBOZZ	3510-00-460-6071	6-1-1936-33-37A	72869	GUARD, BELT, EXTRACTOR	A	EA	1
74	4	PAOZZ	3030-00-451-2777	A53-4	81300	BELT, V, MATCHED SET: JACKSHAFT TO EXTRACTOR MOTOR (4 EA BELTS REQUIRED)	A	ST	1
74	5	PAOZZ	5306-00-225-8504	MS90725-40	96906	BOLT, MACHINE: GROOVE PULLEY MTG, EXTRACTOR DRIVE END	A	EA	6
74	6	PAOZZ	5310-00-407-9566	MS35338-45	96906	WASHER, LOCK: GROOVE PULLEY MTG, EXTRACTOR DRIVE END	A	EA	6
74	7	PBOZZ	3020-00-933-7929	4A12-00D	93232	PULLEY, GROOVE: EXTRACTOR DRIVE END	A	EA	1
74	8	PBOZZ	3040-00-437-0632	SK1-1-8	93232	HUB, PULLEY: EXTRACTOR MOTOR	A	EA	2
74	9	PBOZZ	3020-00-933-7930	3870QD	93232	SHEAVE PULLEY: EXTRACTOR DRIVE END	A	EA	1
74	10	PAOZZ	5315-00-956-5683	MS20066-229	96906	KEY: EXTRACTOR MOTOR SHAFT, 1/4 IN. X 1/4 IN. X 1 IN. LG	A	EA	2
74	11	PAOZZ	5310-00-050-3383	5293200	19207	NUT, SELF-LOCKING: EXTRACTOR MOTOR MTG	A	EA	4
74	12	PAOZZ	5310-00-595-6057	MS15795-315	96906	WASHER, PLAIN: EXTRACTOR MOTOR MTG SCREW, 3/8 IN.	A	EA	8
74	13	PAOZZ	5305-00-269-2803	MS90726-65	96906	SCREW, CAP, HEXAGON HEAD: EXTRACTOR MTG	A	EA	4
74	14	PAOFF	6105-00-930-8920	P11801	46175	MOTOR, ELECTRICAL		EA	1
74	15	PAFZZ	5305-00-988-1721	1-4-20X3-8	46175	SCREW, MACHINE: TERMINAL BOX MTG		EA	4
74	16	PAFZZ	5310-00-582-5965	1-4IN.	46175	WASHER, LOCK: TERMINAL BOX MTG SCREW		EA	4
74	17	XBFZZ		R225-426C	46175	COVER, TERMINAL BOX: EXTRACTOR MOTOR		EA	1
74	18	XBFZZ		R225-426B	46175	TERMINAL BOX: EXTRACTOR MOTOR		EA	1
74	19	PAFZZ	3120-00-933-5920	SB1500-21	46175	BUSHING, SLEEVE: TERMINAL BOX		EA	1
74	20	PAFZZ	4730-00-050-4208	MS15003-1	96906	FITTING, LUBRICATION: EXTRACTOR MOTOR END PLATES, 1/8 NPT		EA	2
74	21	PAFZZ	4730-00-018-9566	X120	14351	PLUG, PIPE: EXTRACTOR MOTOR END PLATES		EA	2
74	22	PAFZZ	5305-00-984-3022	MS16997-89	96906	SCREW, FILLISTER HEAD: EXTRACTOR MOTOR END PLATE MTG, 5/16-18 THD SIZE, 3-1/4 IN. LG		EA	8
74	23	PAFZZ	5310-00-407-9566	MS35338-45	96906	WASHER, LOCK: EXTRACTOR MOTOR END PLATE MTG SCREW, 5/16 IN.		EA	8
74	24	XBFZZ		H215-33	46175	END PLATE: EXTRACTOR MOTOR		EA	2
74	25	PAFZZ	5310-00-655-9969	R225-250	46175	SPRING, END: EXTRACTOR MOTOR SHAFT		EA	1
74	26	PAFZZ	3110-00-917-6435	MRC207SFF	76062	BEARING, BALL: EXTRACTOR MOTOR		EA	2
74	27	XBFZZ		H215-47	46175	PLATE, BAFFLE: EXTRACTOR MOTOR		EA	1
74	28	XBFZZ		R4225-768	46175	FAN: EXTRACTOR MOTOR		EA	1
74	29	XBFZZ		H6213-84	46175	ROTOR: EXTRACTOR MOTOR		EA	1
74	30	XBFZZ		1-4-20X5-8	46175	SETSCREW, CONE POINT, SLOTTED. HEADLESS: SHELL		EA	2
74	31	XBFZZ		H17215-115-5	46175	STATOR: EXTRACTOR MOTOR		EA	1
74	32	PAFZZ	5305-00-253-5618	MS21318-27	96906	SCREW, DRIVE: NAMEPLATE MTG, EXTRACTOR MOTOR, NO. 6 X 1/4 IN.		EA	4
74	33	XBFZZ		12SV	46175	NAMEPLATE, EXTRACTOR MOTOR		EA	1
74	34	XBFZZ		H213-21	46175	FIELD SHELL: EXTRACTOR MOTOR		EA	1

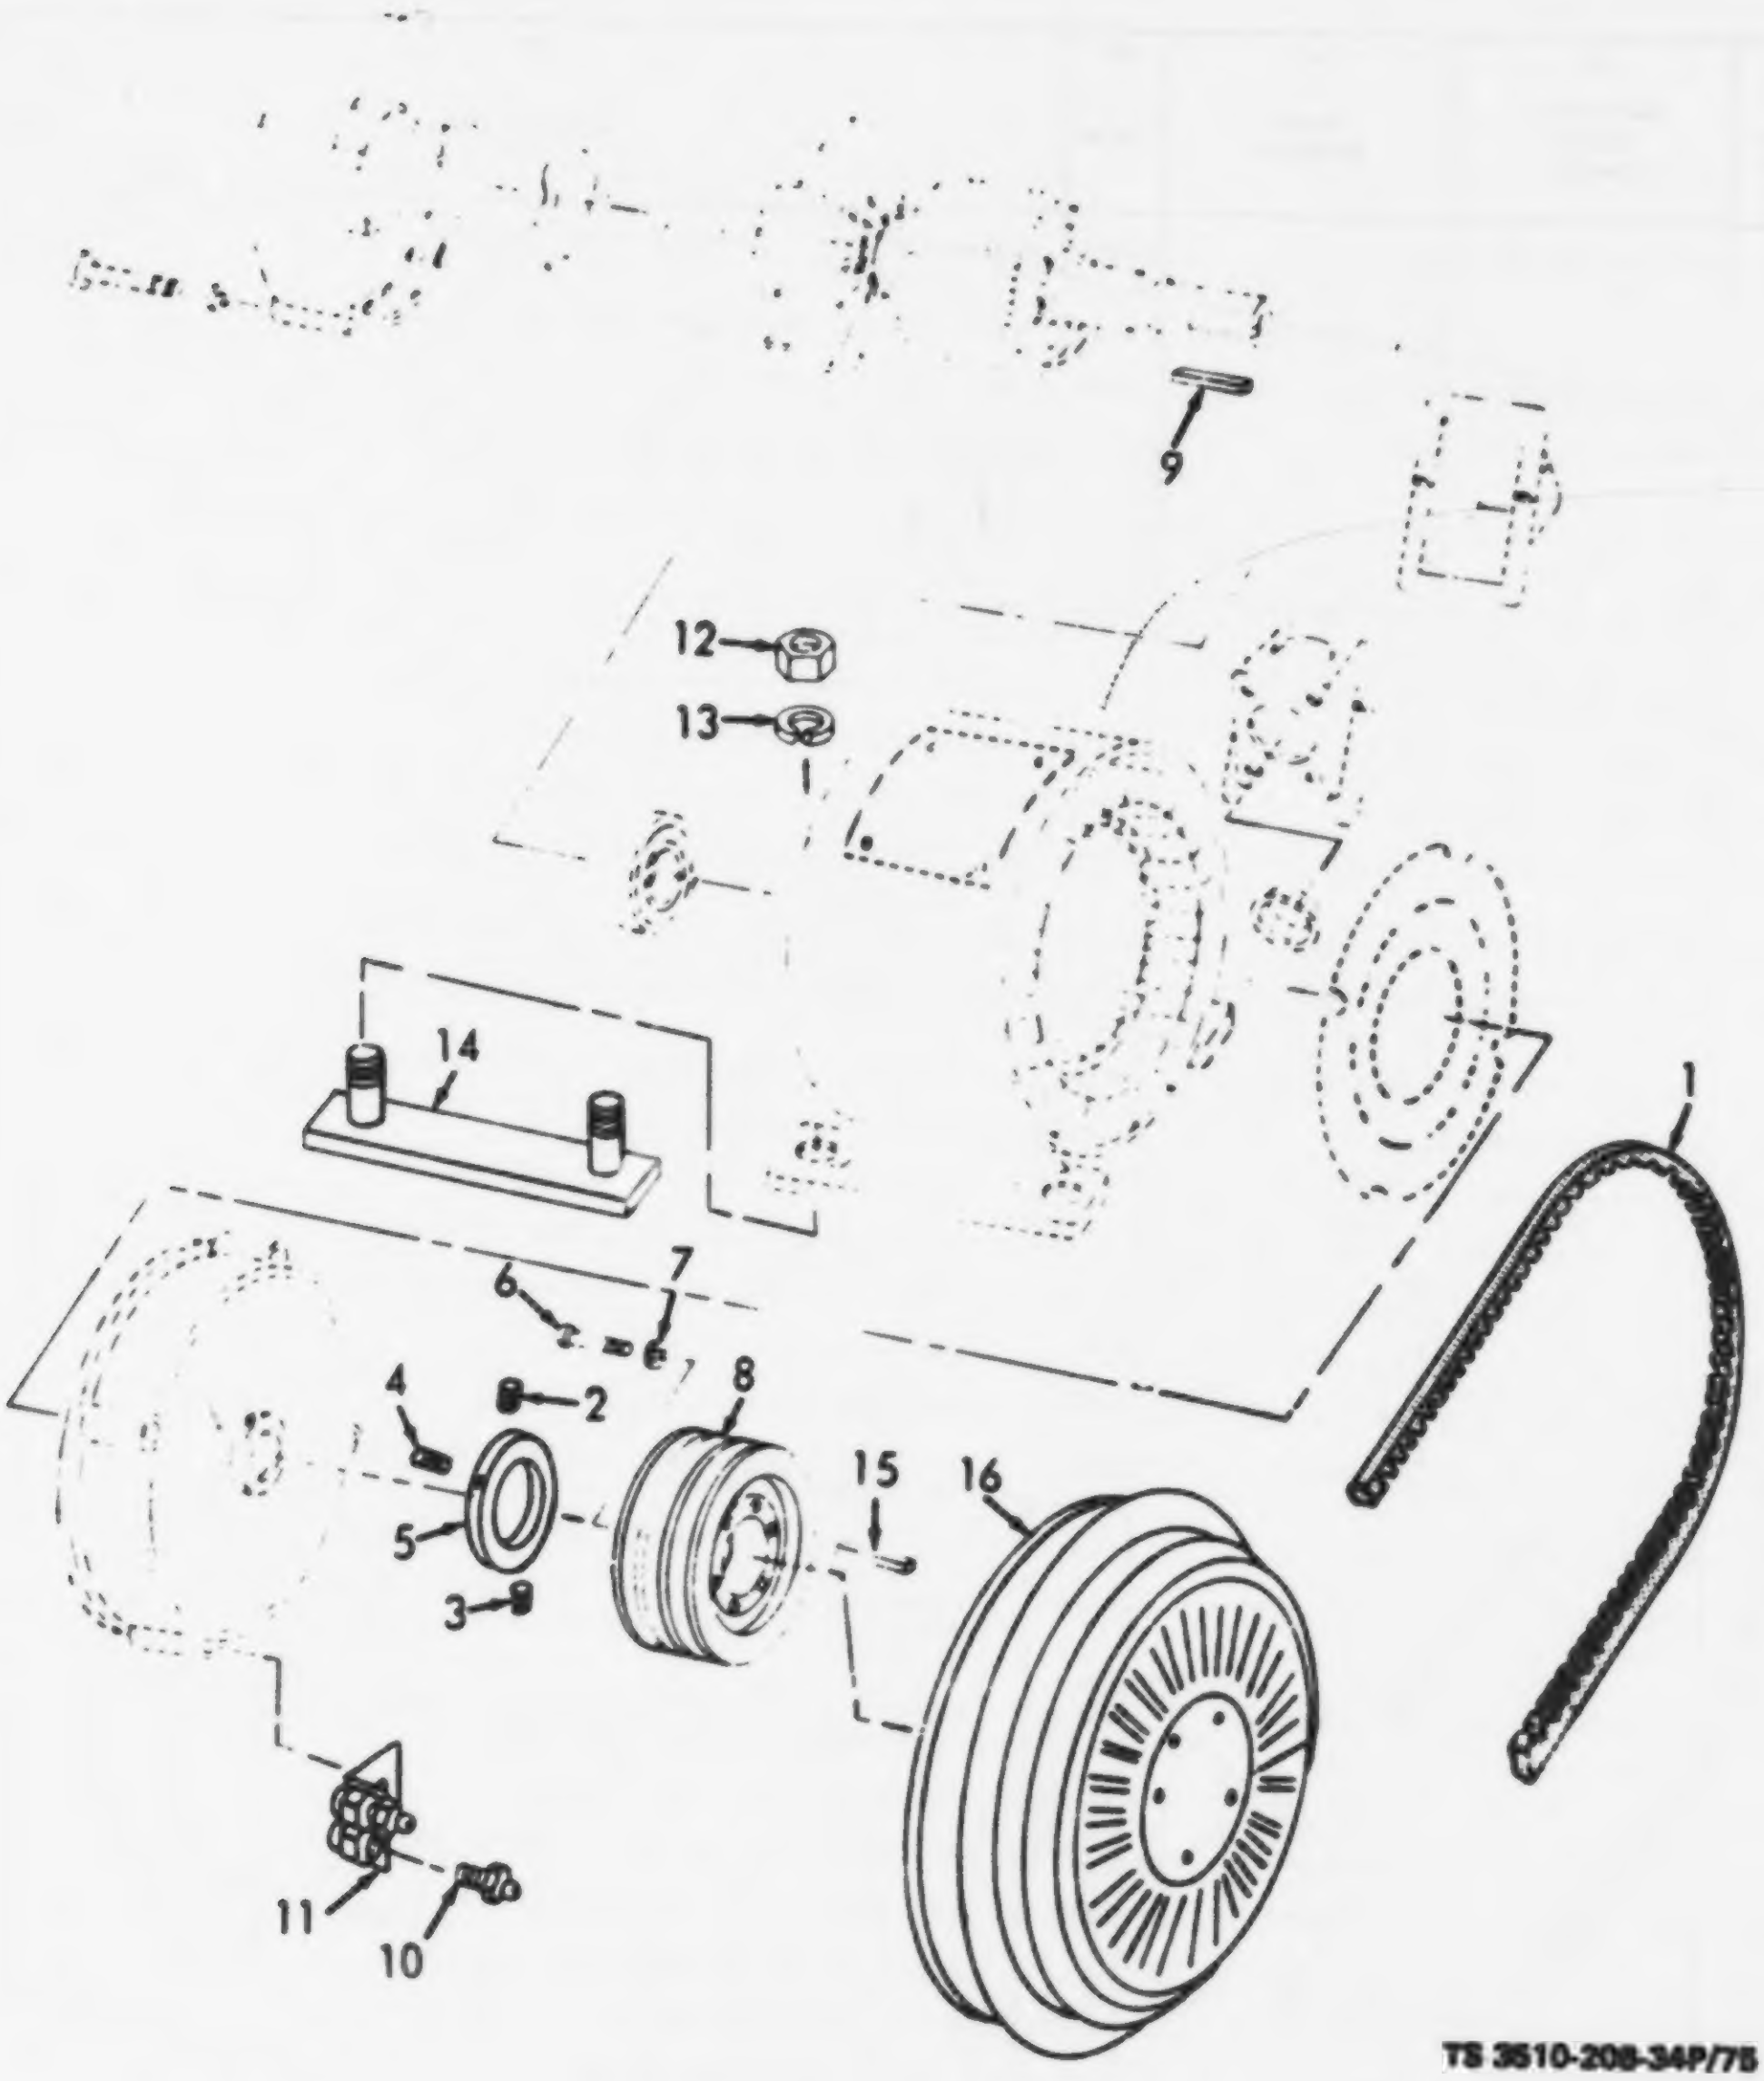
9
12
13
14
1
6
7
4
2
8
5
3
15
16
11
10
TS 3510-208-34P/75

Figure 75. EDRO Extractor Motor and Motor Mountings.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)		(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	Usable On Code	U/M	QTY INC IN UNIT
75	1	PAOZZ	3030-00-169-5692	A35-4	81300	BELT, V, MATCHED SET: JACKSHAFT TO EXTRACTOR MOTOR (4 EA BELTS REQUIRED)	B	ST	1
75	2	PAOZZ	5315-00-171-2614	M201397	90192	PIN, DOWEL	B	EA	1
75	3	PAOZZ	5305-00-025-3981	M201311A	90192	SETSCREW: 5/16-18 X 3/4	B	EA	2
75	4	PAOZZ	5305-00-001-5029	M201311	90192	SETSCREW: 5/16-18 X 3/8	B	EA	2
75	5	XBOZZ		211186	90192	RING, CLAMP	B	EA	1
75	6	PAOZZ	5306-00-225-8504	MS90725-40	96906	BOLT, MACHINE: SHEAVE MTG, EXTRACTOR MOTOR	B	EA	6
75	7	PAOZZ	5310-00-407-9566	MS35338-44	96906	WASHER, LOCK: SHEAVE MTG SCREW, EXTRACTOR MOTOR	B	EA	6
75	8	XBOZZ		3AQ6	93232	SHEAVE PULLEY: EXTRACTOR DRIVE END	B	EA	1
75	9	PAOZZ	5315-00-956-5683	MS20066-229	96906	KEY, EXTRACTOR MOTOR SHAFT: 1/4 IN. X 1/4 IN. X 1 IN. LG		EA	1
75	10	PAOZZ		6-1-2981-33-112A	72869	FITTING, LUBRICATION	B	EA	2
75	11	XBOZZ		6-1-2981-33-132A	72869	BLOCK, GREASE	B	EA	1
75	12	PAOZZ	5310-00-050-3383	5293200	19207	NUT, SELF-LOCKING: EXTRACTOR MOTOR MTG	B	EA	4
75	13	PAOZZ	5310-00-595-6057	MS15795-315	96906	WASHER, PLAIN: EXTRACTOR MOTOR MTG SCREW, 3/8 IN.	B	EA	2
75	14	XBOZZ		6-1-2985-33-93	01551	CLAMP ASSEMBLY, MOTOR HOLDDOWN	B	EA	2
75	15	PAOZZ	5315-00-956-5683	MS20066-229	96906	KEY, EXTRACTOR MOTOR SHAFT: 1/4 IN. X 1/4 IN. X 1 IN. LG	B	EA	1
75	16	PAOFF	3030-00-171-0316	X217402A	90192	HYDRO SHEAVE DRIVE: MODEL 8.4 HSD W/3AW6.0 SHEAVE	B	EA	1

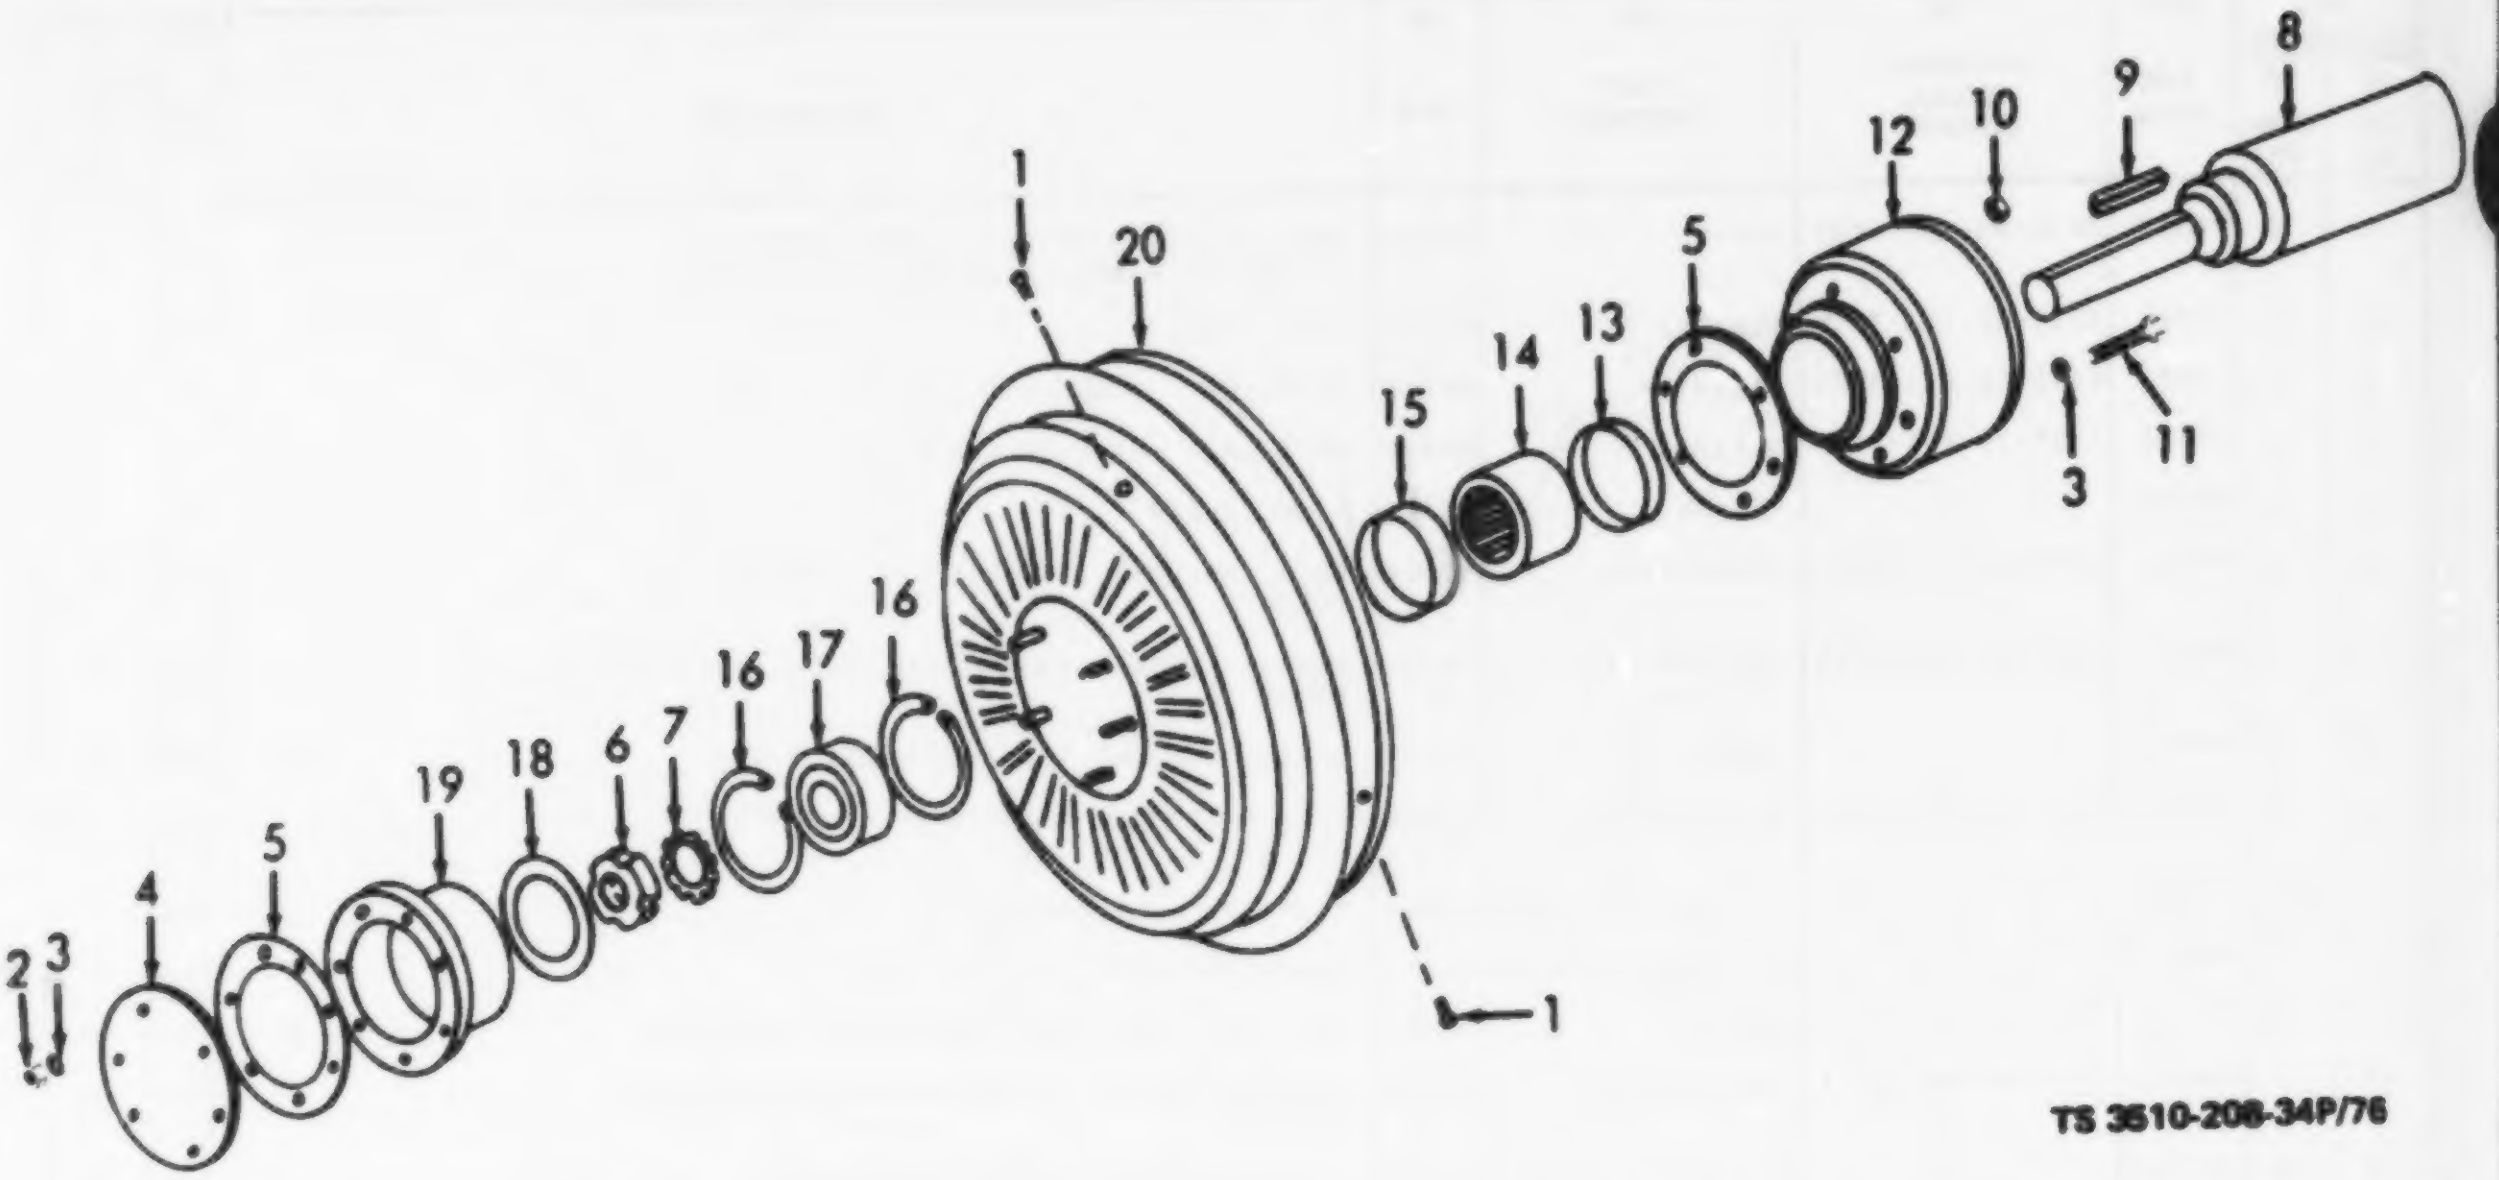

TS 3510-208-34P/76

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION	Usable On Code	(7) U/M	(8) QTY INC IN UNIT
76	1	XBFZZ		M2051K	90192	PLUG, PIPE: 1/4	B	EA	1
76	2	XBFZZ		M2027A	90192	NUT: 1/4-28	B	EA	6
76	3	XBFZZ		M2047G	90192	WASHER: 1/4	B	EA	9
76	4	XBFZZ		211179	90192	PLATE, COVER	B	EA	1
76	5	PAFZZ	5330-00-418-2886	211104	90192	GASKET, IMPELLER	B	EA	2
76	6	XBFZZ		M2012B	90192	NUT	B	EA	1
76	7	XBFZZ		M2013B	90192	WASHER, LOCK	B	EA	1
76	8	XAFZZ		215077	90192	SHAFT	B	EA	1
76	9	PAFZZ	5315-00-169-8360	M2032J	90192	KEY, SQUARE: 3/16 X 3/16 X 1.56	B	EA	1
76	10	XBFZZ		M2049D	90192	NUT, HEXAGON, SOCKET: 1/4-28 (ALLEN NUT)	B	EA	6
76	11	XBFZZ		M2000M	90192	SCREW, CAP, HEXAGON HEAD: 1/4-20 X 1-1/4	B	EA	3
76	12	XAFZZ		213116	90192	HUB, SHEAVE	B	EA	1
76	13	PAFZZ	5330-00-435-3009	M201293	90192	SEAL, OIL	B	EA	1
76	14	PAFZZ	3110-00-056-9377	M210292	90192	NEEDLE, ROLLER BEARING	B	EA	1
76	15	PAFZZ	5330-00-435-4933	M2519	90192	SEAL, OIL	B	EA	1
76	16	PAFZZ	5365-00-130-5972	211151	90192	RING, SNAP, INTERNAL	B	EA	1
76	17	PAFZZ	3110-00-555-5221	M1537	90192	BALL BEARING	B	EA	1
76	18	PAFZZ	5330-00-435-5734	A2916CN	90192	"O" RING	B	EA	1
76	19	XBFZZ		211147B	90192	CARRIER, BEARING	B	EA	1
76	20	XAFZZ		X215046M	90192	IMPELLER ASSEMBLY	B	EA	1

Figure 76. Hydro Sheave Drive (EDRO,Model EP120-LTU).

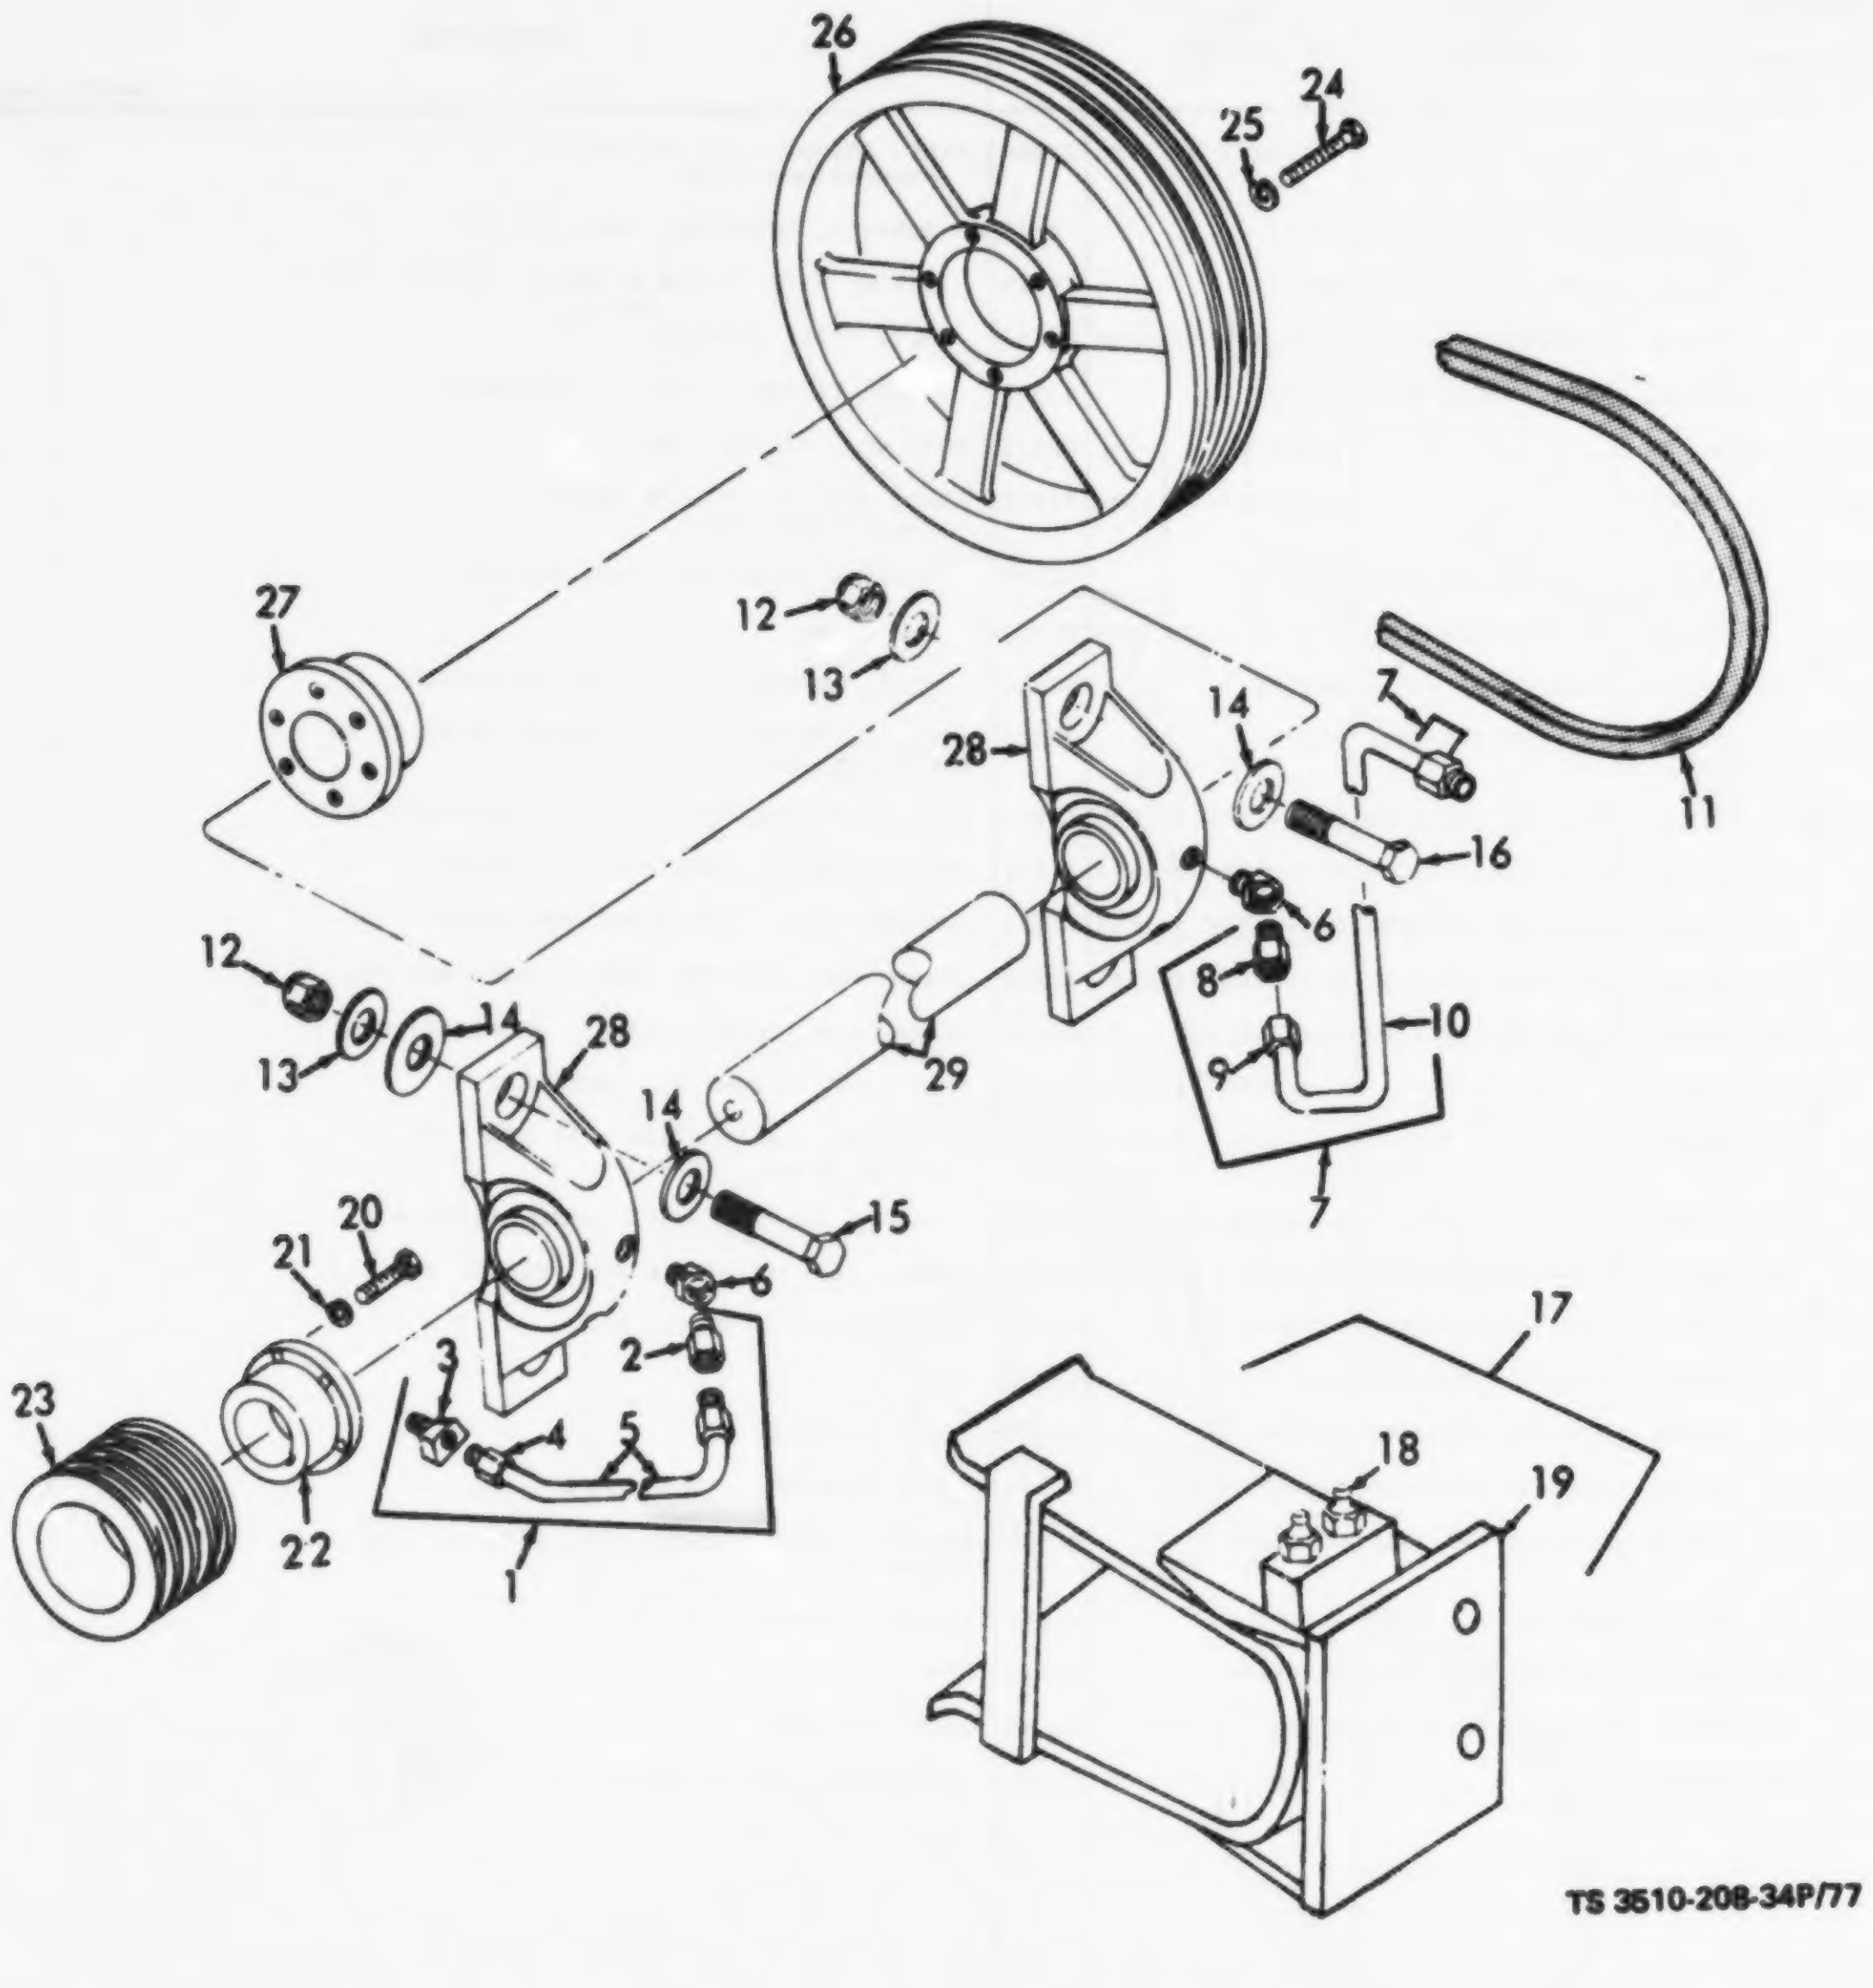
26
24
25
11
27
12
13
28
14
7
16
6
8
10
9
7
12
14
28
13
29
14
15
20
21
6
2
3
4
5
23
22
1
17
18
19
TS 3510-208-34P/77

Figure 77. Jackshaft, Washer Drive (EIDAL, Model ELT9T).

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)		(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	Usable On Code	U/M	QTY INC IN UNIT
77	1	MOOOO		6-1-2981-33-52A	72869	LINE, GREASE: PILLOW BLOCK MANUFACTURE FROM:	A	EA	1
77	2	PAOZZ	4730-00-278-8253	200X3	79470	ADAPTER, STRAIGHT, PIPE TO TUBE	A	EA	1
77	3	PAOZZ	4730-00-277-8269	400X3	79470	ELBOW, PIPE TO TUBE, MALE: GREASE LINE	A	EA	1
77	4	PAOZZ	4730-00-278-5464	6-1-1936-33-105A	60883	NUT, TUBE, 3/16 IN.	A	EA	2
77	5	PAOZZ	4710-00-277-5524	WWT775	81349	TUBE, COPPER, 7-7/8 IN. REQUIRED	A	FT	V
77	6	XBOZZ		310912	95879	BUSHING: GREASE LINE	A	EA	2
77	7	MOOOO		6-1-2981-33-53A	72869	LINE, GREASE: PILLOW BLOCK MANUFACTURE FROM:	A	EA	1
77	8	PAOZZ	4730-00-278-8253	200X3	79470	ADAPTER, STRAIGHT, PIPE TO TUBE	A	EA	2
77	9	PAOZZ	4730-00-278-5464	6-1-1936-33-105A	72869	NUT, TUBE	A	EA	2
77	10	PAOZZ	4710-00-277-5524	WWT775	81349	TUBE, COPPER, 17-1/4 IN. REQUIRED	A	FT	V
77	11	PAOZZ	3030-00-802-6872	A53-4	81300	BELT, V, MATCHED SET: WASHER DRIVE (4 EA BELTS REQUIRED)	A	ST	1
77	12	PAOZZ	5310-00-050-3389	6-1-1936-33-100A	72869	NUT, SELF-LOCKING, HEXAGON: JACKSHAFT MTG	A	EA	4
77	13	PAOZZ	5310-00-595-6521	6-1-1936-33-114A	72869	WASHER, LOCK: JACKSHAFT MTG SCREW	A	EA	4
77	14	PAOZZ	5310-00-739-2994	6-1-1936-33-104A	72869	WASHER, FLAT: JACKSHAFT MTG SCREW	A	EA	8
77	15	PAOZZ	5305-00-716-8182	6-1-1936-33-92A	72869	SCREW, CAP, HEXAGON HEAD: JACKSHAFT MTG	A	EA	2
77	16	PAOZZ	5305-00-725-4187	MS35292-114	96906	SCREW, CAP, HEXAGON HEAD: JACKSHAFT MTG	A	EA	2
77	17	XBOZZ		6-1-1936-33-30A	72869	BELT GUARD ASSEMBLY: JACKSHAFT	A	EA	1
77	18	PAOZZ		6-1-1936-33-89A	72869	FITTING, LUBRICATION: 45 DEG, 1/8 NPT (ALEMITE NO. 1688-B)	A	EA	2
77	19	XBOZZ		6-1-1936-33-88A	72869	BLOCK, GREASE: BELT GUARD ASSEMBLY	A	EA	1
77	20	PAOZZ	5305-00-225-3839	MS35291-8	96906	SCREW, CAP, HEXAGON HEAD: PULLEY MTG	A	EA	3
77	21	PAOZZ	5310-00-582-5965	MS35338-44	96906	WASHER, LOCK: PULLEY MTG	A	EA	3
77	22	PBOZZ	3040-00-432-0628	SH1-1-8	93232	HUB	A	EA	1
77	23	PBOZZ	3020-00-457-1561	4A34PD	93232	PULLEY, SHEAVE	A	EA	1
77	24	PAOZZ	5306-00-225-8504	MS90725-40	96906	BOLT, MACHINE: PULLEY MTG	A	EA	3
77	25	PAOZZ	5310-00-407-9566	MS35338-45	96906	WASHER, LOCK: PULLEY MTG, 5/16 IN. SCREW	A	EA	3
77	26	PBOZZ	3020-00-457-1560	3A12PD	93232	PULLEY, SHEAVE	A	EA	1
77	27	PBOZZ	3040-00-437-0628	SK1-1-8	93232	HUB	A	EA	1
77	28	PAOZZ	3130-00-933-5985	NPD18	02695	BLOCK, PILLOW	A	EA	1
77	29	PBOZZ		6-1-1936-33-57A	72869	JACKSHAFT, WASHER DRIVE	A	EA	1

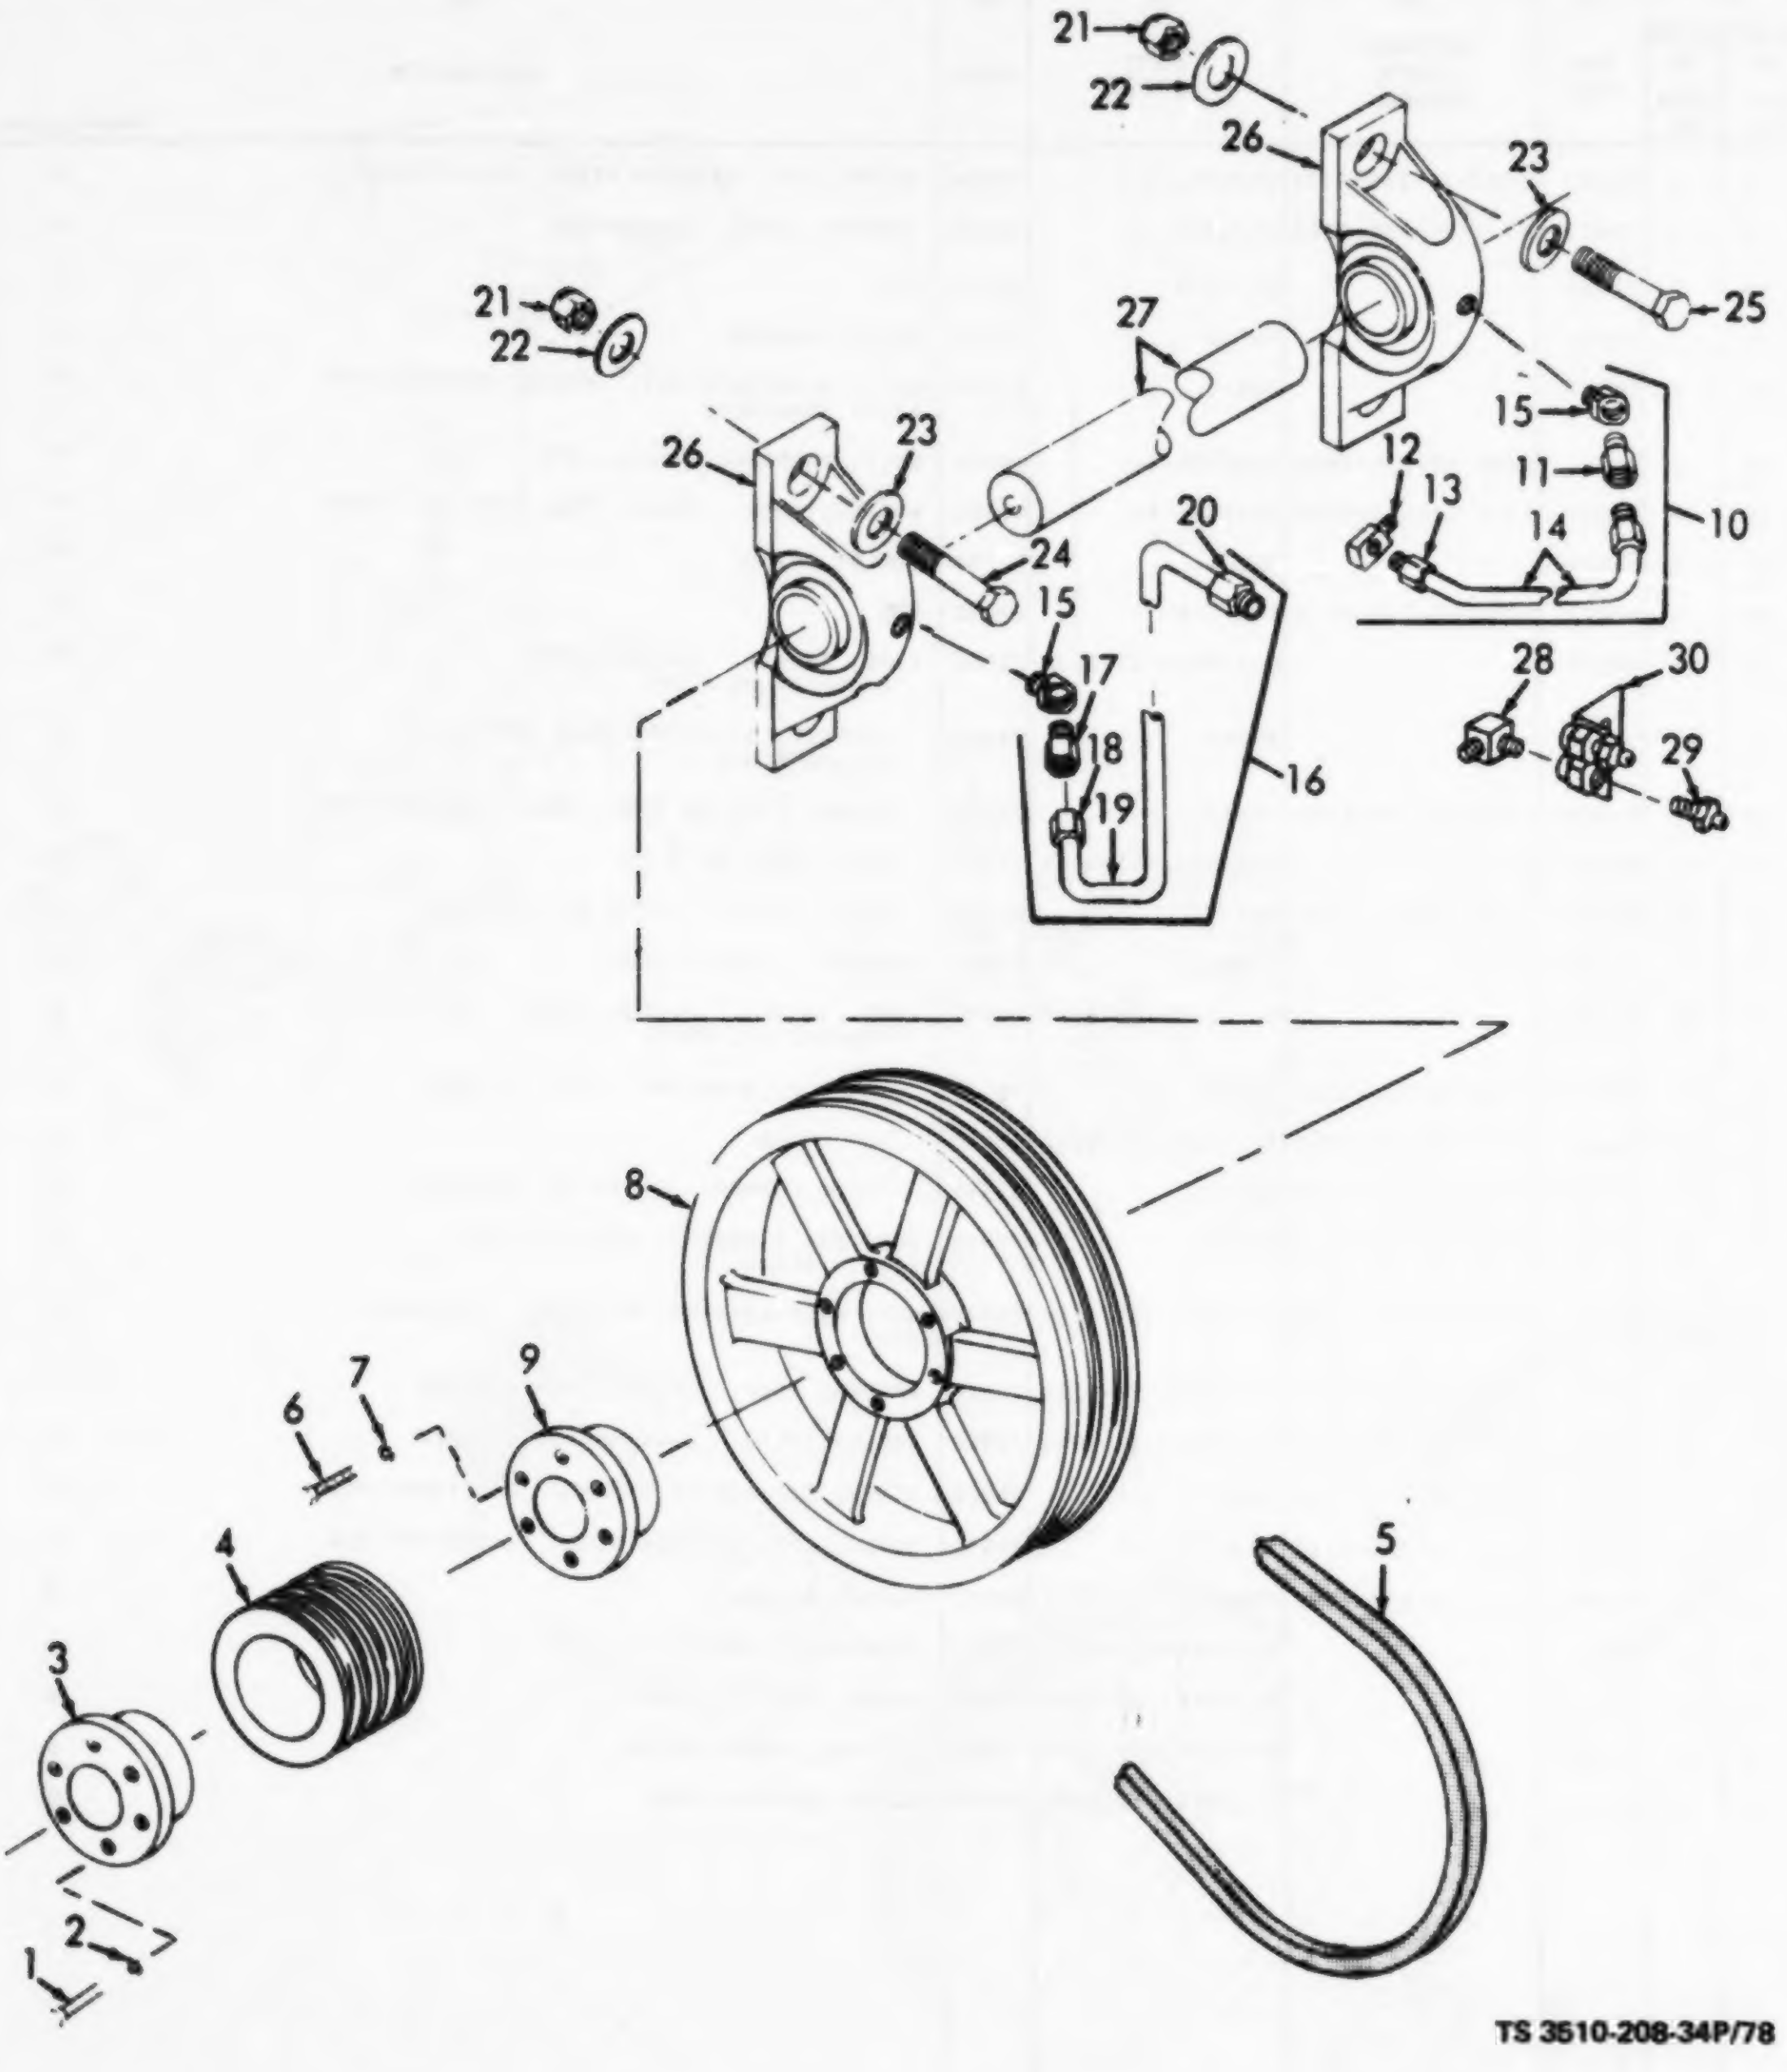
21
22
26
23
25
21
22
27
15
23
26
12
11
13
10
14
20
24
15
17
28
30
18
29
19
16
8
7
6
9
5
4
3
2
1
TS 3510-208-34P/78

Figure 78. Jackshaft # 2, Washer Drive (EDRO, Model EP120-LTU).

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION	Usable On Code	(7) U/M	(8) QTY INC IN UNIT
78	1	PAOZZ	5305-00-224-3839	MS35291-8	96906	SCREW, CAP, HEXAGON HEAD: PULLEY MTG	B	EA	3
78	2	PAOZZ	5310-00-582-5965	MS35338-44	96906	WASHER, LOCK: PULLEY MTG	B	EA	3
78	3	PBOZZ		SH1-1-8	01551	HUB	B	EA	1
78	4	PBOZZ		4AQ30	93232	PULLEY SHEAVE	B	EA	1
78	5	PAOZZ		A35-3	81300	BELT, V, MATCHED SET: WASHER DRIVE (3 EA BELTS REQUIRED)	B	ST	1
78	6	PAOZZ	5306-00-225-8504	MS90725-40	96906	BOLT, MACHINE: PULLEY MTG	B	EA	3
78	7	PAOZZ	5310-00-407-9566	MS35338-45	96906	WASHER, LOCK: PULLEY MTG, 5/16 IN. SCREW	B	EA	3
78	8	PBOZZ		3AQ90	93232	PULLEY, SHEAVE	B	EA	1
78	9	PBOZZ	3040-00-437-0632	SK1-1-8	93232	HUB	B	EA	1
78	10	MOOOO		6-1-2981-33-107A	72869	LINE, GREASE: PILLOW BLOCK MANUFACTURE FROM:	B	EA	1
78	11	XBOZZ		200X3	79470	ADAPTER, STRAIGHT, PIPE TO TUBE: PILLOW BLOCK	B	EA	1
78	12	PAOZZ	4730-00-277-8269	400X3	79470	ELBOW, PIPE TO TUBE, MALE: GREASE LINE	B	EA	1
78	13	XBOZZ		6-1-2981-33-105A	01551	NUT, TUBE, 3/16 IN.	B	EA	2
78	14	PAOZZ	4710-00-277-5524	WWT775	81349	TUBE, COPPER, 7-7/8 IN. REQUIRED	B	FT	V
78	15	XBOZZ		310912	95879	BUSHING: GREASE LINE	B	EA	2
78	16	MOOOO		6-1-2981-33-53A	72869	LINE, GREASE: PILLOW BLOCK MANUFACTURE FROM:	B	EA	1
78	17	PAOZZ	4730-00-278-8253	200X3	79470	ADAPTER, STRAIGHT, PIPE TO TUBE	B	EA	1
78	18	PAOZZ	4730-00-278-5464	6-1-2981-33-105A	01551	NUT, TUBE	B	EA	2
78	19	PAOZZ	4710-00-277-5524	WWT775	81349	TUBE, COPPER, 17-1/4 IN. REQUIRED	B	FT	V
78	20	PAOZZ	4730-00-278-8253	200X3	79470	ADAPTER, STRAIGHT, PIPE TO TUBE: PILLOW BLOCK	B	EA	1
78	21	PAOZZ	5310-00-050-3389	6-1-2981-33-100A	72869	NUT, SELF-LOCKING, HEXAGON: JACKSHAFT MTG	B	EA	4
78	22	PAOZZ	5310-00-595-6521	6-1-2981-33-114A	72869	WASHER, LOCK: JACKSHAFT MTG SCREW	B	EA	4
78	23	PAOZZ	5310-00-739-2994	6-1-2981-33-104A	72869	WASHER, FLAT: JACKSHAFT MTG SCREW	B	EA	6
78	24	PAOZZ	5305-00-716-8182	MS90726-117	96906	SCREW, CAP, HEXAGON HEAD: JACKSHAFT MTG	B	EA	2
78	25	PAOZZ	5305-00-725-4187	MS35292-114	96906	SCREW, CAP, HEXAGON HEAD: JACKSHAFT MTG	B	EA	2
78	26	PAOZZ	3130-00-033-5985	HPD18	02695	BLOCK, PILLOW	B	EA	2
78	27	PBOZZ		6-1-2988-33-57A	01551	JACKSHAFT, WASHER	B	EA	1
78	28	XBOZZ		6-1-2981-33-117A	72869	ELBOW, PIPE TO TUBE	B	EA	1
78	29	XBOZZ		6-1-2981-33-112A	72869	FITTING, LUBRICATION	B	EA	2
78	30	XBOZZ		6-1-2981-33-132A	72869	BLOCK, LUBRICATION	B	EA	1

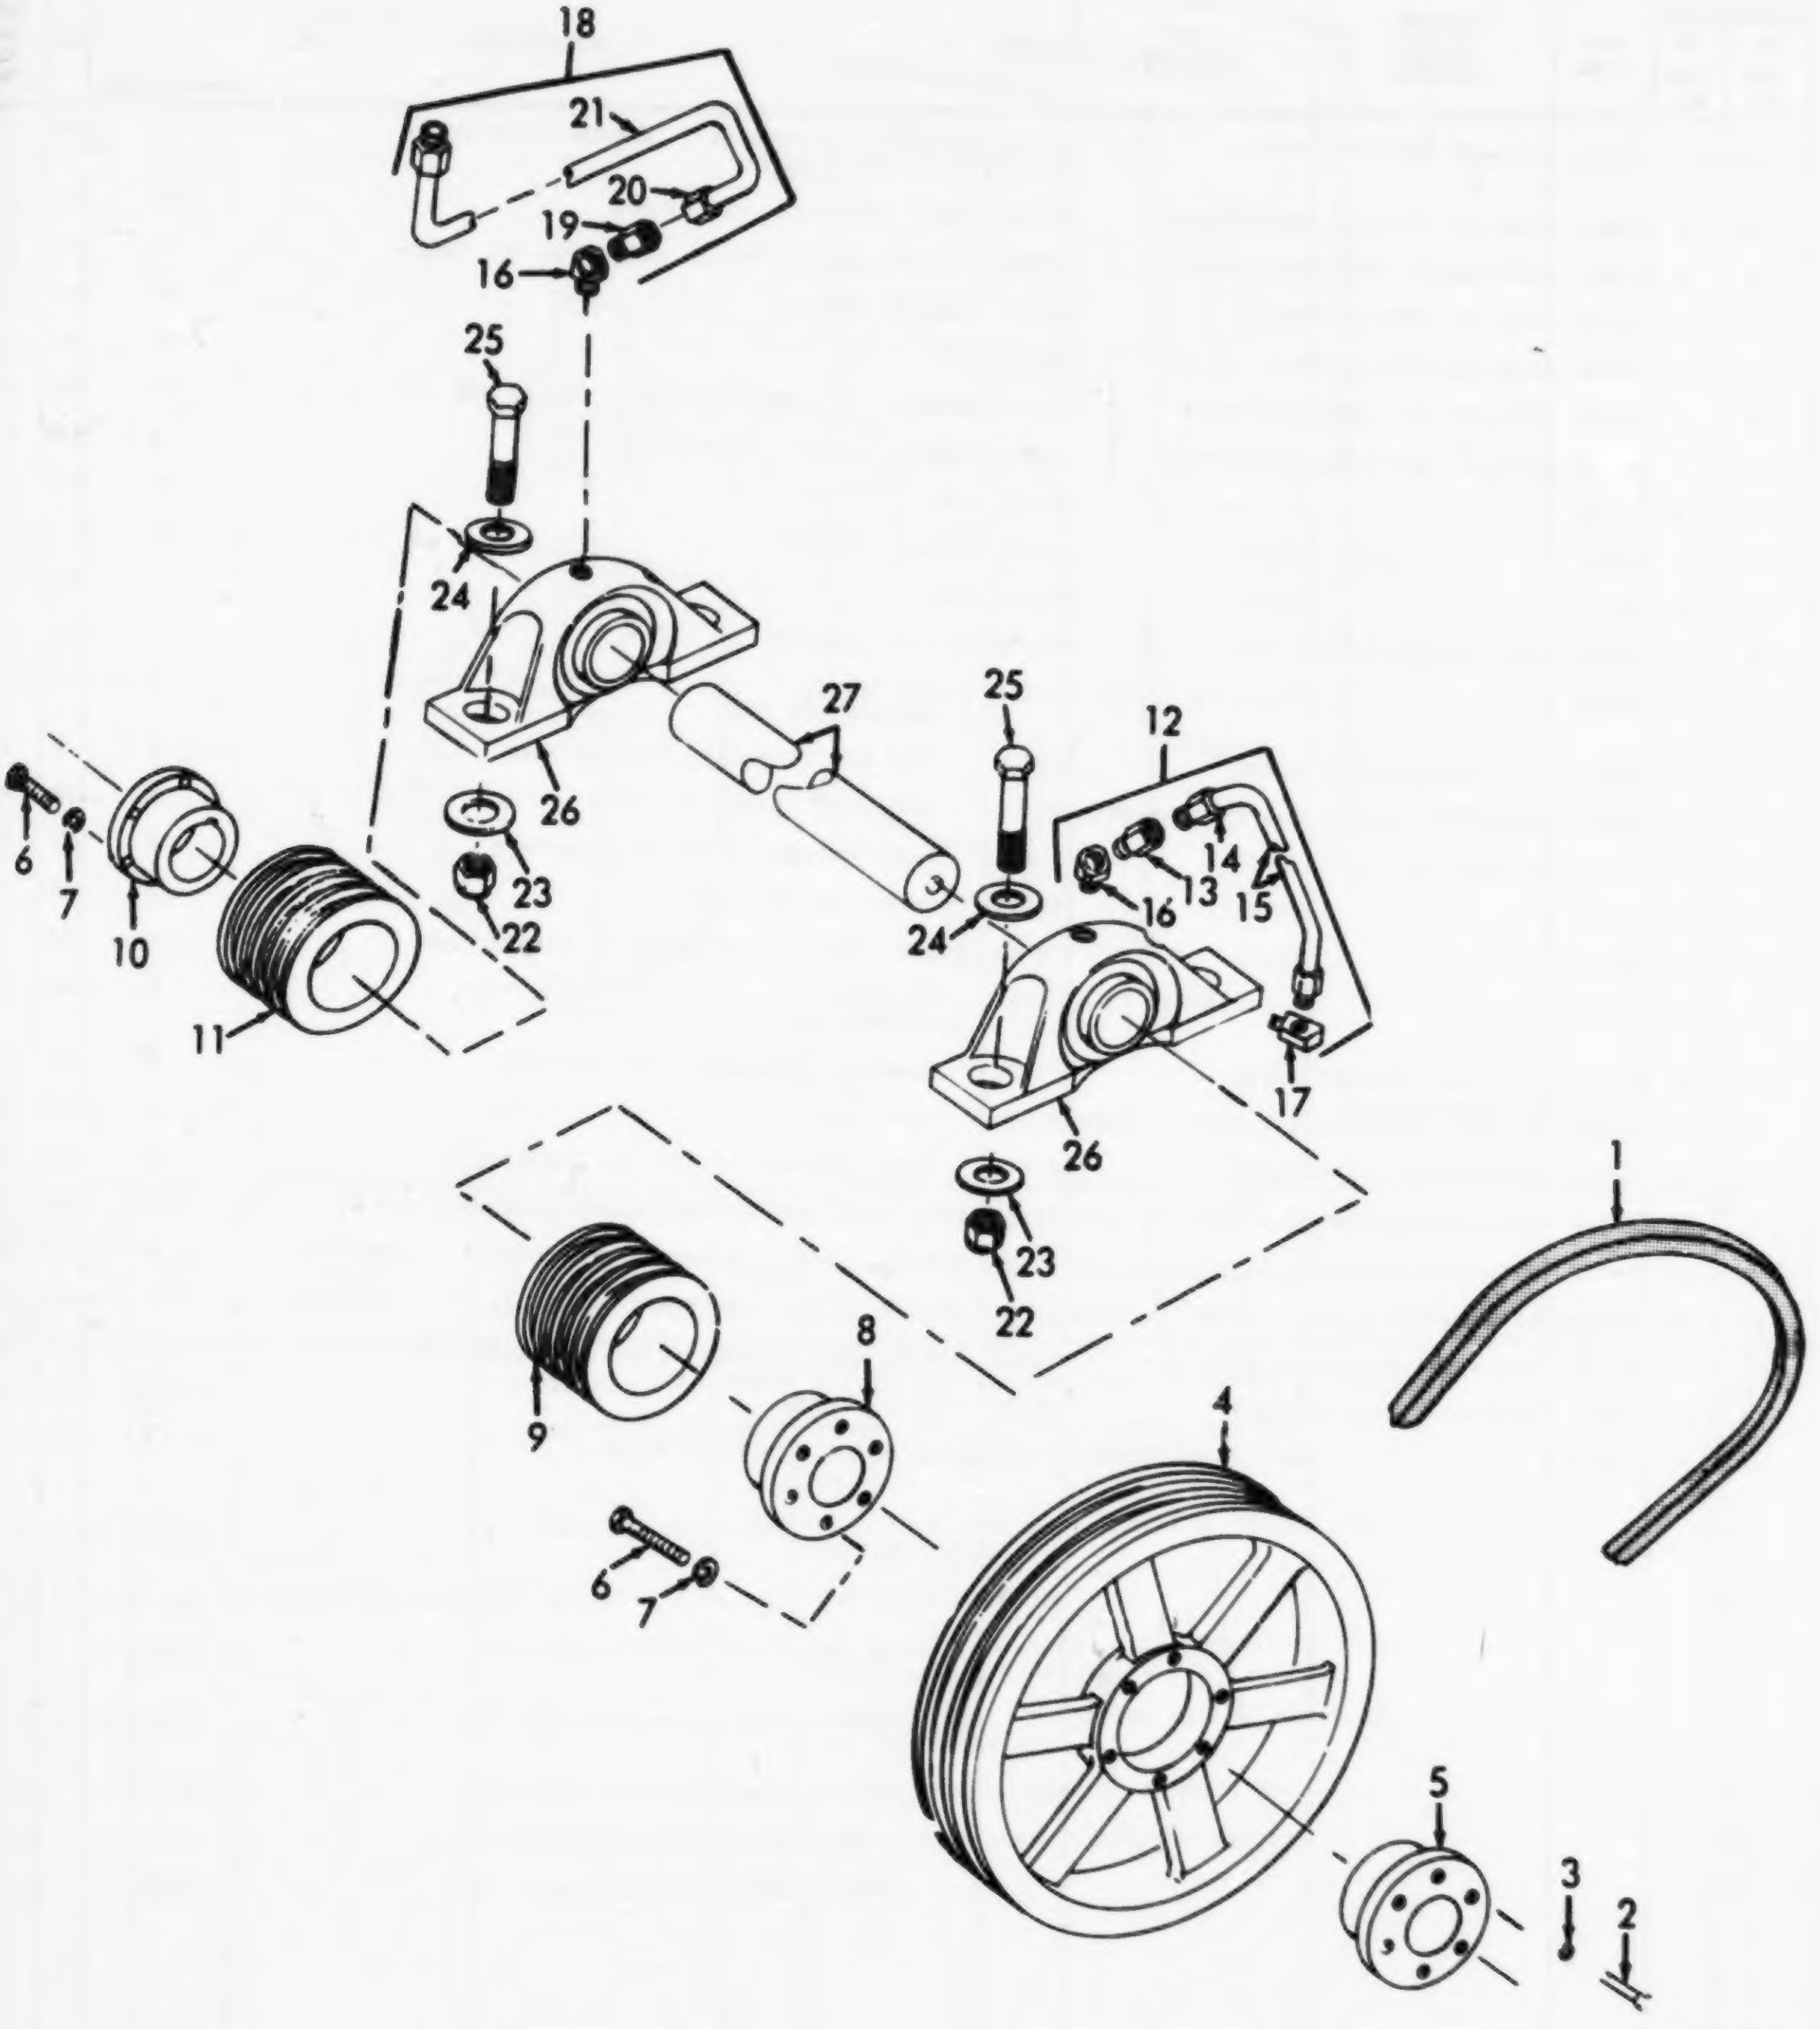
18
21
20
19
16
25
24
27
25
12
26
14
13
16
15
6
7
23
24
10
22
11
17
26
1
23
22
8
9
4
6
7
5
3
2

TS 3510-208-34P/79

Figure 79. Jackshaft # 1, Extractor Motor (EDRO, Model EP120-LTU).

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)		(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	Usable On Code	U/M	QTY INC IN UNIT
79	1	PAOZZ	3030-00-715-2750	A35-3	81300	BELT, V, MATCHED SET: WASHER DRIVE (3 EA BELTS REQUIRED)	B	ST	1
79	2	PAOZZ	5306-00-225-8504	MS90725-40	96906	BOLT, MACHINE: PULLEY MTG	B	EA	3
79	3	PAOZZ	5310-00-407-9566	MS35338-45	96906	WASHER, LOCK: PULLEY MTG, 5/16 IN. SCREW	B	EA	3
79	4	PBOZZ	3020-00-163-0360	4AQ82	93232	PULLEY, SHEAVE	B	EA	1
79	5	PBOZZ	3040-00-437-0832	SK1-1-8	93232	HUB	B	EA	1
79	6	PAOZZ	5305-00-225-3839	MS35291-8	96906	SCREW, CAP, HEXAGON HEAD: PULLEY MTG	B	EA	6
79	7	PAOZZ	5310-00-582-5965	MS35338-44	96906	WASHER, LOCK: PULLEY MTG	B	EA	6
79	8	PBOZZ		SD1-1-8	93232	HUB	B	EA	1
79	9	PBOZZ		3AQ44	93232	PULLEY, SHEAVE	B	EA	1
79	10	PBOZZ		SD1-1-8	93232	HUB	B	EA	1
79	11	PBOZZ	3020-00-163-0441	5BQ56	93232	PULLEY, SHEAVE	B	EA	1
79	12	MOOOO		6-1-2981-33-52A	01551	LINE, GREASE MANUFACTURE FROM:	B	EA	1
79	13	PAOZZ	4730-00-278-8253	200X3	79470	ADAPTER, STRAIGHT, PIPE TO TUBE	B	EA	1
79	14	PAOZZ	4730-00-278-5464	6-1-2981-33-105A	01551	NUT, TUBE, 3/16 IN.	B	EA	2
79	15	PAOZZ	4710-00-277-5524	WWT775	81349	TUBE, COPPER, 7-7/8 IN. REQUIRED	B	FT	V
79	16	XBOZZ		310912	95879	BUSHING, GREASE LINE	B	EA	2
79	17	XBOZZ		400X3	79470	ELBOW, PIPE TO TUBE, MALE: GREASE LINE	B	EA	1
79	18	MOOOO		6-1-2981-33-146A	01551	LINE, GREASE MANUFACTURE FROM:	B	EA	1
79	19	PAOZZ	4730-00-278-8253	200X3	79470	ADAPTER, STRAIGHT, PIPE TO TUBE	B	EA	2
79	20	PAOZZ	4730-00-278-5464	6-1-2981-33-105A	01551	NUT, TUBE	B	EA	2
79	21	PAOZZ	4710-00-277-5524	WWT775	81349	TUBE, COPPER, 17-1/4 IN. REQUIRED	B	FT	V
79	22	PAOZZ	5310-00-050-3389	6-1-2981-33-108A	01551	NUT, SELF-LOCKING, HEXAGON: JACKSHAFT MTG	B	EA	4
79	23	PAOZZ	5310-00-595-6521	6-1-2981-33-114A	01551	WASHER, LOCK: JACKSHAFT MTG SCREW	B	EA	4
79	24	PAOZZ	5310-00-735-2994	6-1-2981-33-104A	01551	WASHER, FLAT: JACKSHAFT MTG SCREW	B	EA	4
79	25	PAOZZ	5305-00-725-4187	MS35292-114	96906	SCREW, CAP, HEXAGON HEAD: JACKSHAFT MTG	B	EA	4
79	26	PAOZZ	3130-00-933-5985	MP018	02695	BLOCK, PILLOW	B	EA	2
79	27	PBOZZ		6-1-2988-33-57A	01551	JACKSHAFT, EXTRACTOR MOTOR	B	EA	1

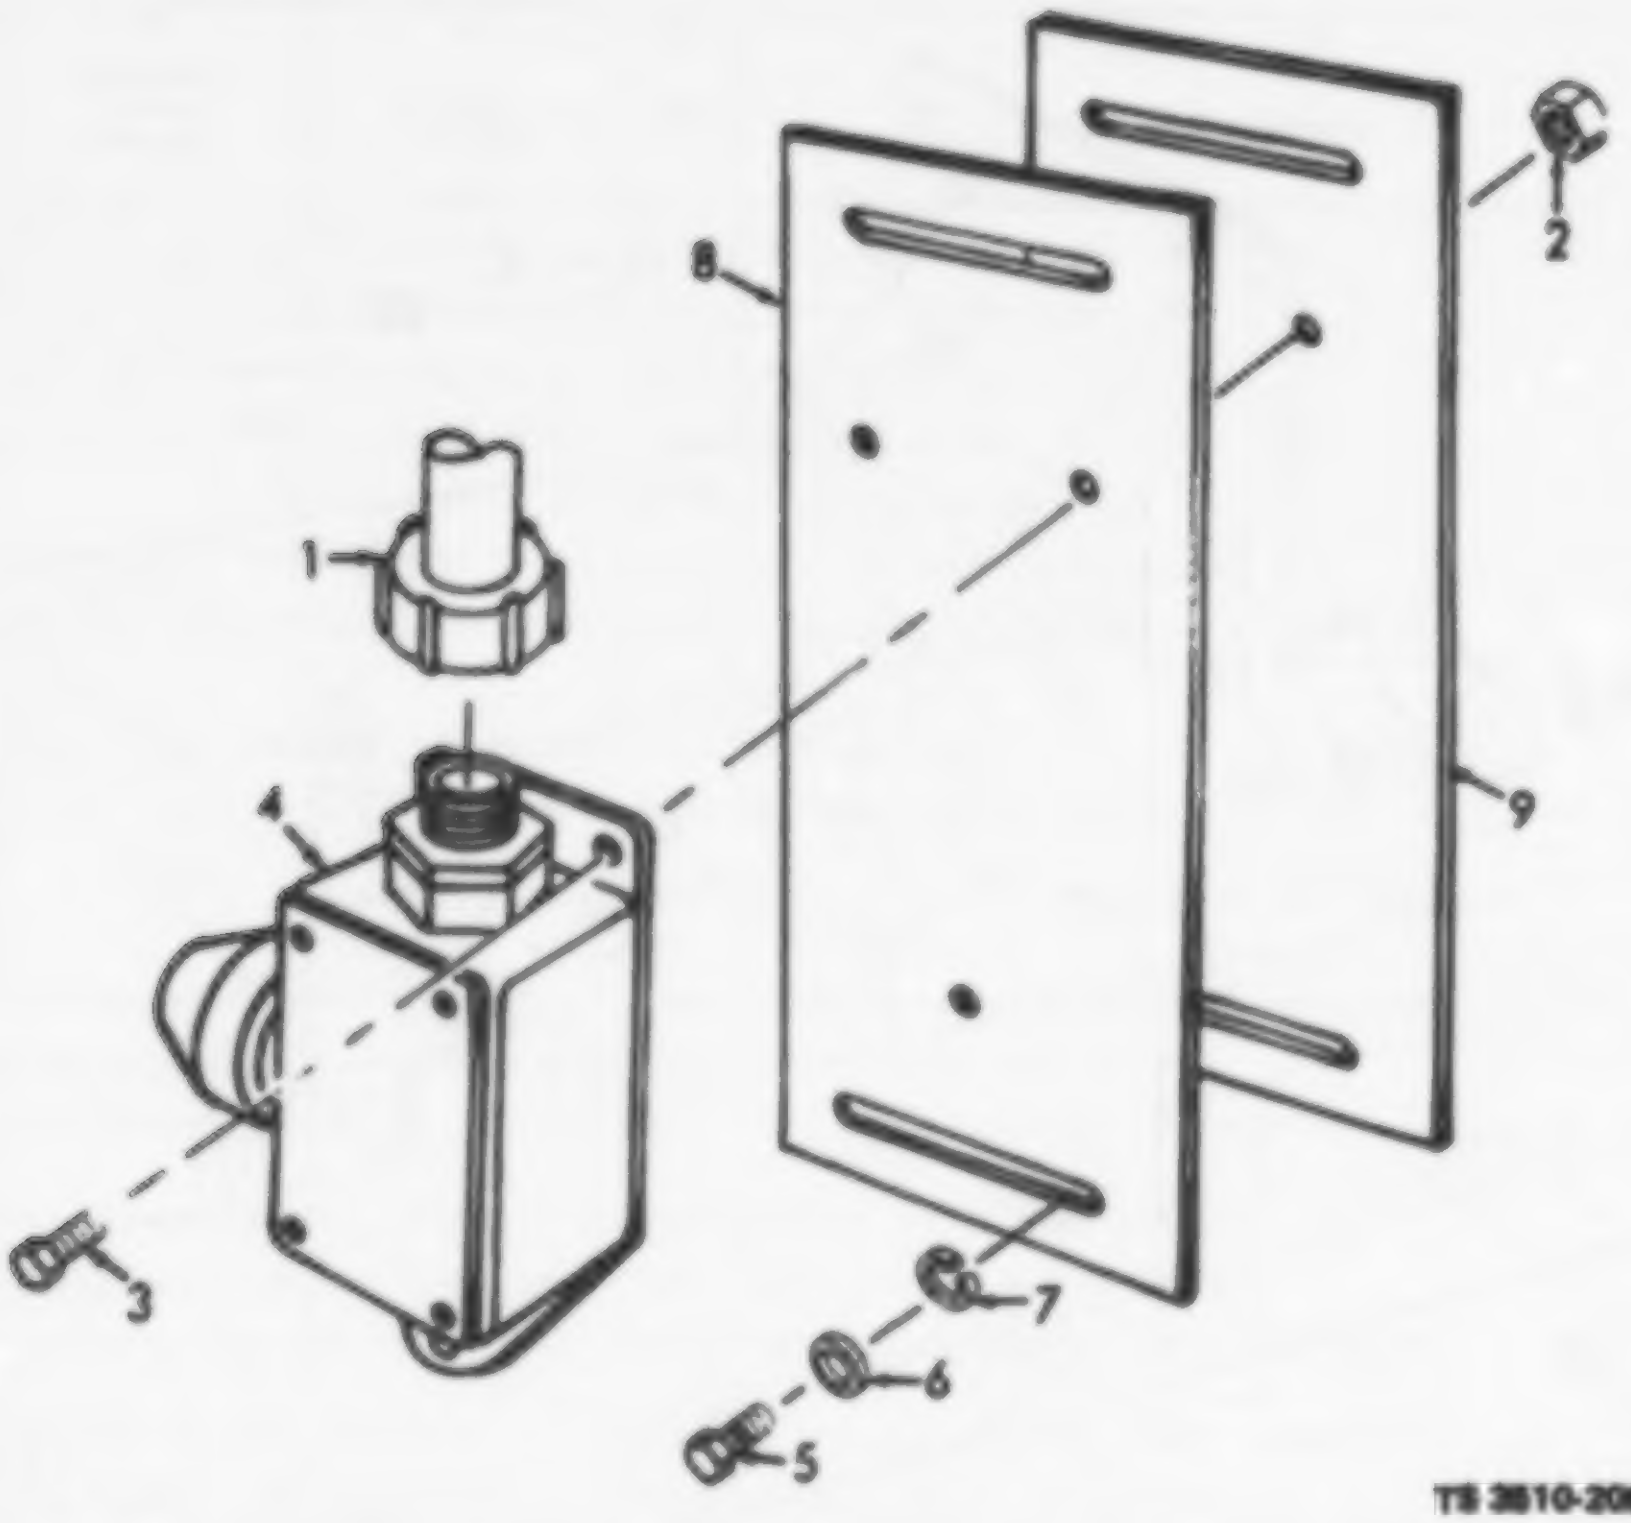

TS 3510-208-34P/80

(1) ILLUSTRATION		(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
(a) FIG NO.	(b) ITEM NO.							
80	1	PAOZZ		6-1-2981-33-118A	72869	CONNECTOR, CORD AND CABLE: SENSITIVE SWITCH	EA	1
80	2	XBOZZ		6-1-2981-33-115A	72869	SCREW, MACHINE, FLAT HEAD, SLOTTED: SENSITIVE SWITCH MTG, 1/4-20 X 1-1/2 IN. LG	EA	3
80	3	XBOZZ		6-1-2981-33-108A	72869	NUT, SELF-LOCKING: SENSITIVE SWITCH MTG, 1/4 IN. SCREW SIZE	EA	3
80	4	PAOZZ	5930-00-960-7630	6AF1-28NLH	91929	SWITCH, SENSITIVE	EA	1
80	5	XBOZZ		6-1-2981-33-116A	72869	SCREW, CAP, HEXAGON HEAD: SENSITIVE SWITCH PLATE MTG, 1/4-20 UNC-2A X 3/4 IN. LG	EA	2
80	6	XBOZZ		6-1-2981-33-121A	72869	WASHER, LOCK: SENSITIVE SWITCH PLATE MTG, 1/4 IN. SCREW SIZE	EA	2
80	7	XBOZZ		6-1-2981-33-120A	72869	WASHER, PLAIN, 1/4 IN. SCREW SIZE	EA	2
80	8	XBOZZ		6-1-2981-33-85A	72869	PLATE, MOUNTING: SENSITIVE SWITCH	EA	1
80	9	XBOZZ		6-1-2981-33-132A	72869	SPACER	EA	1

Figure 80. Sensitive Switch.

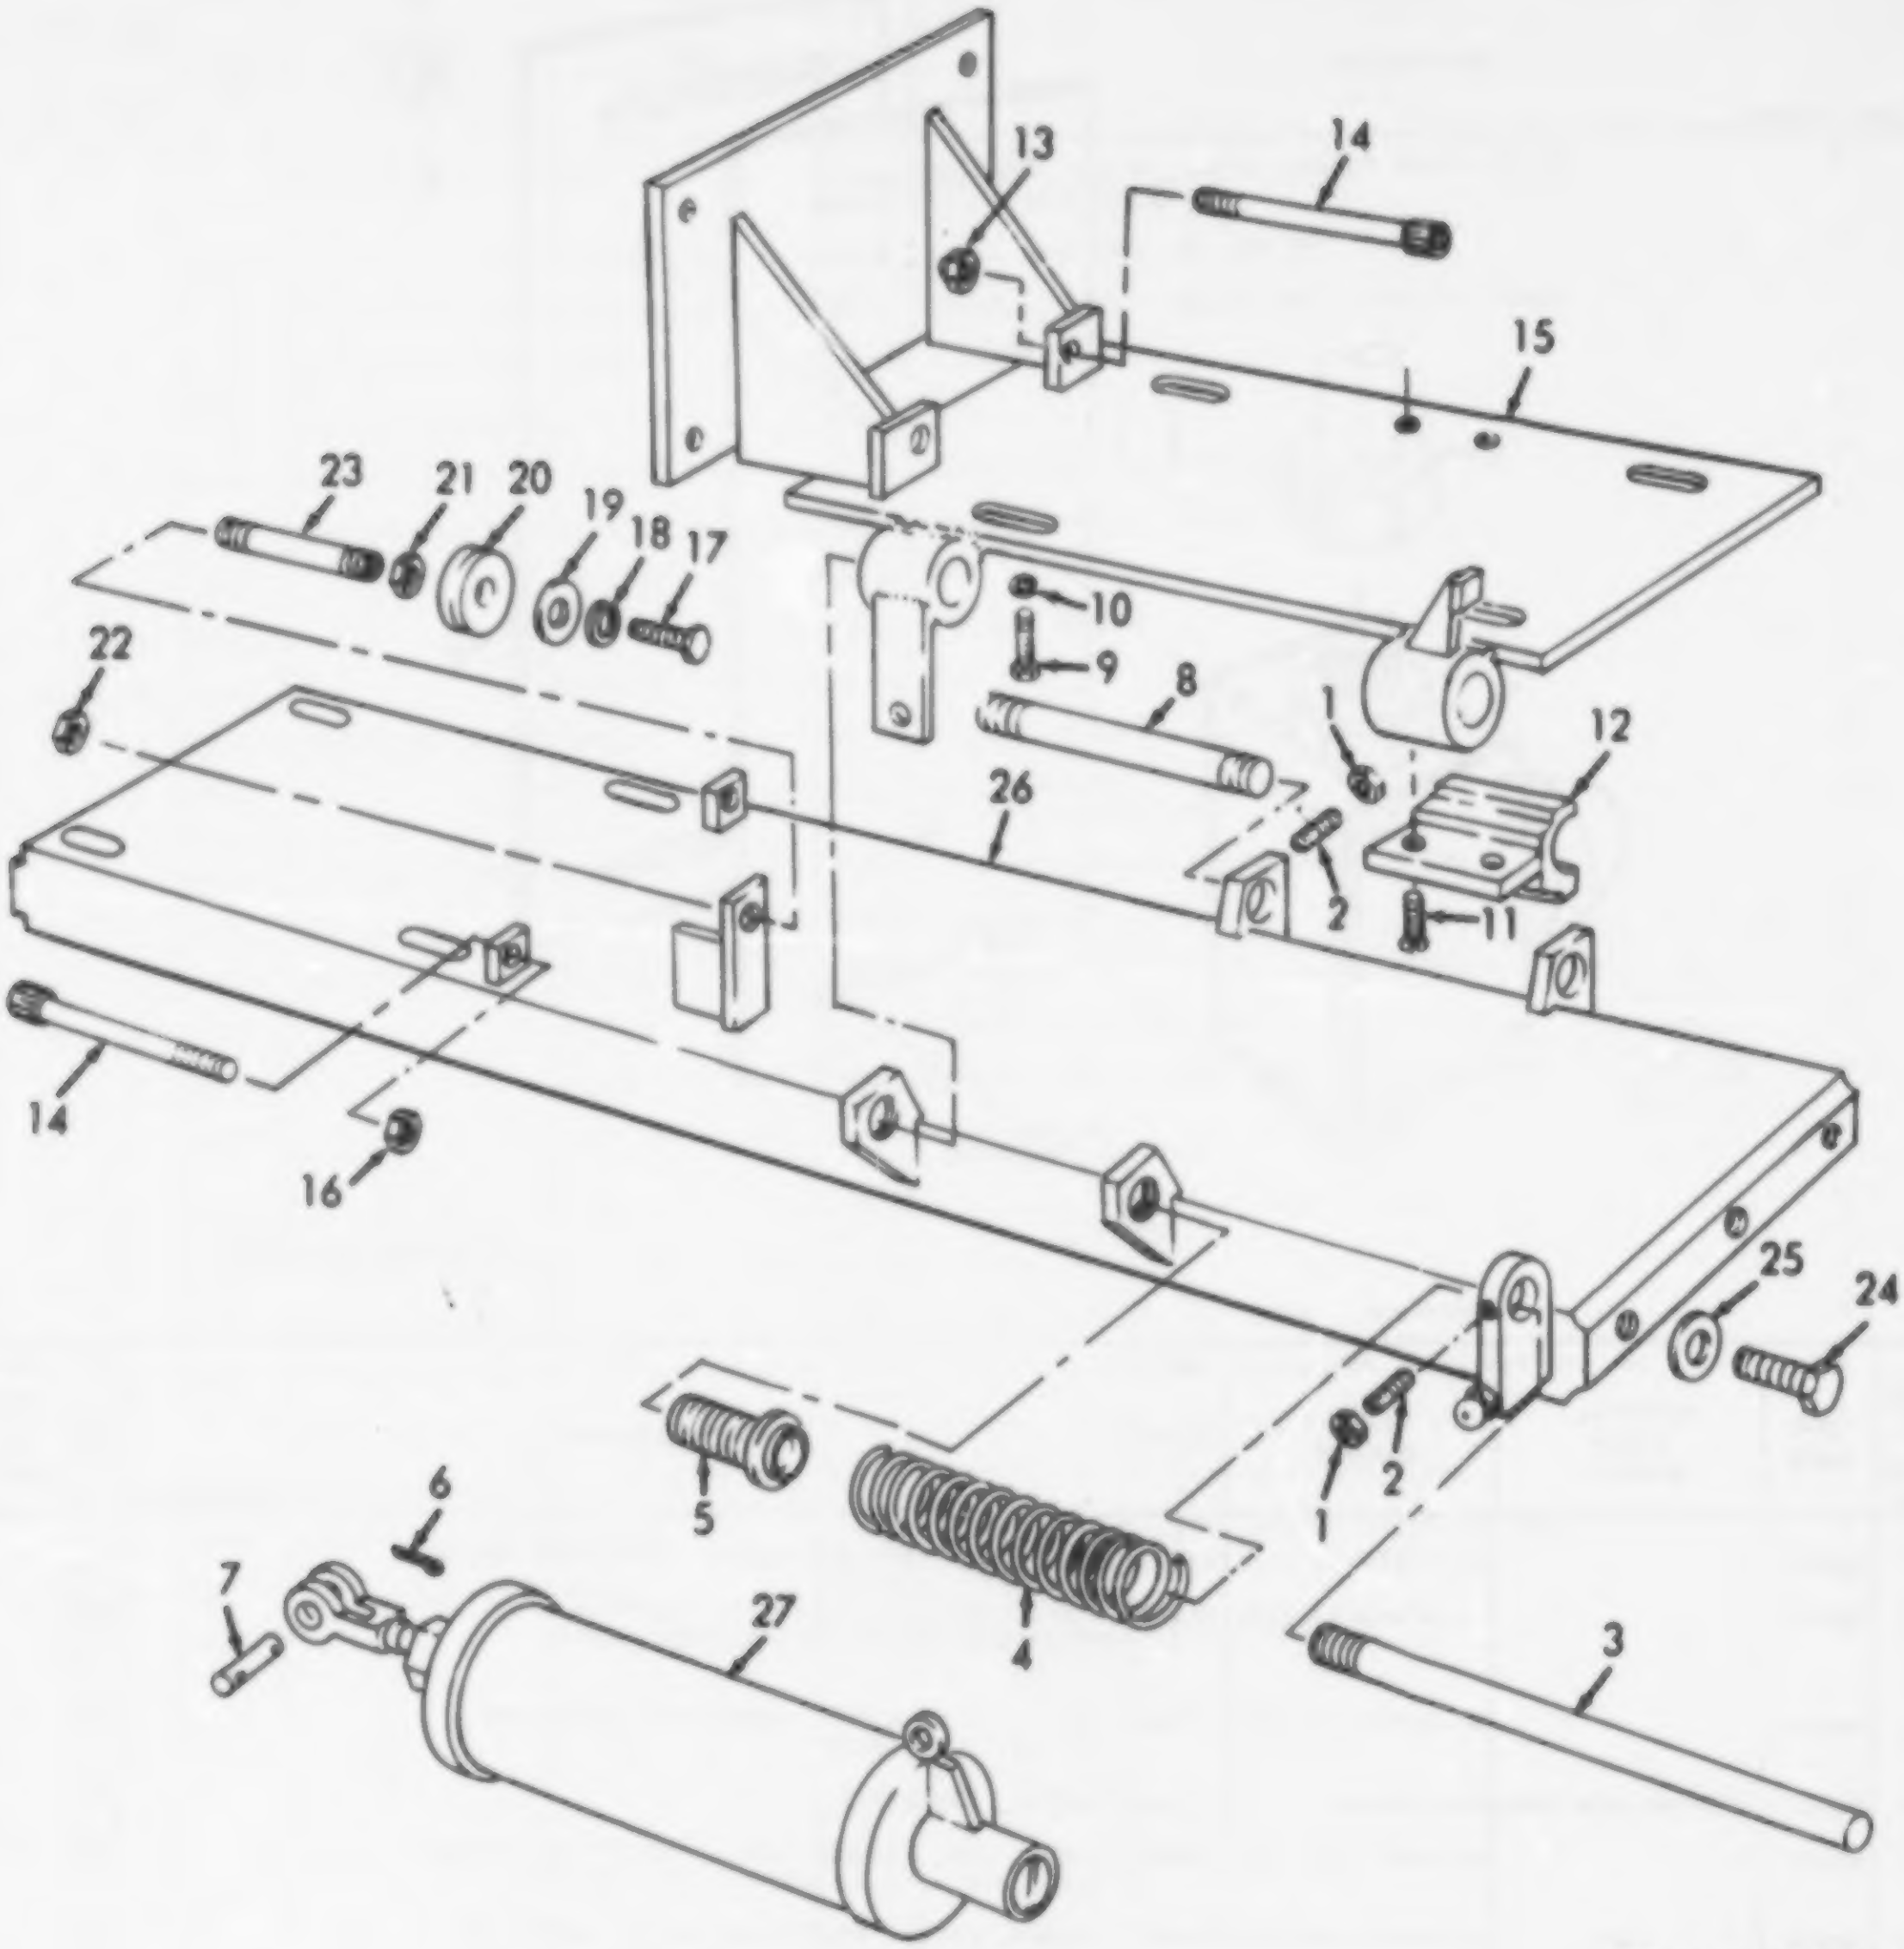
13
14
15
23
21
20
19
18
17
10
9
8
22
1
12
26
2
11
14
16
25
24
5
4
1
2
6
7
27
3

TS 3510-208-34P/81

Figure 81. Washer and Extractor Motors Base (EIDAL, Model ELT9T).

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)		(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	Usable On Code	U/M	QTY INC IN UNIT
81	1	PAFZZ	5310-00-761-6882	6-1-1936-33-99A	72869	NUT, PLAIN, HEXAGON: ROD MTG	A	EA	2
81	2	PAFZZ	5305-00-723-9379	6-1-1936-33-96A	72869	SETSCREW: ROD MTG	A	EA	2
81	3	PBFZZ	3510-00-460-6104	6-1-1936-33-59A	72869	ROD, GUIDE MOTOR	A	EA	1
81	4	PBFZZ	5340-00-125-7896	6-1-1936-33-82A	72869	SPRING, DRIVE	A	EA	1
81	5	PBFZZ		6-1-1936-33-83A	72869	RETAINER, DRIVE SPRING	A	EA	1
81	6	PAOZZ	5315-00-852-2336	6-1-1936-33-91A	72869	PIN, COTTER: CYLINDER MTG	A	EA	2
81	7	PAOZZ	5315-00-933-7244	6-1-1936-33-90A	72869	PIN, STRAIGHT, HEADLESS: CYLINDER MTG, 3/8 IN. DIA, 1-7/16 IN. LG, DRILLED BOTH ENDS	A	EA	1
81	8	PBFZZ	3510-00-460-6107	6-1-1936-33-58A	72869	ROD, GUIDE	A	EA	1
81	9	XBOZZ		6-1-1936-33-97A	72869	SCREW, MACHINE: WASHER MOTOR MTG, 3/8 X 2-1/4 IN. LG	A	EA	4
81	10	XBOZZ		6-1-1936-33-103A	72869	WASHER, FLAT: WASHER MOTOR MTG, 3/8 IN. SCREW SIZE	A	EA	4
81	11	PAFZZ	5305-00-044-4153	6-1-1936-33-115A	72869	SCREW, FLAT HEAD: GUIDE TO MOTOR BASE	A	EA	2
81	12	PAFZZ	3510-00-470-1281	6-1-1936-33-55A	72869	GUIDE, MOTOR BASE	A	EA	1
81	13	PAOZZ	5310-00-732-0558	MS51967-8	96906	NUT, PLAIN, HEXAGON: WASHER MOTOR ADJUSTING	A	EA	2
81	14	PAOZZ	5305-00-492-6032	6-1-1936-33-97A	72869	SCREW: MOTOR ADJUSTING	A	EA	4
81	15	PBFZZ	3510-00-247-9908	6-1-1936-33-12A	72869	BASE, MOTOR: WASHER MOTOR	A	EA	1
81	16	PAOZZ	5310-00-012-0377	MS35690-605	96906	NUT, PLAIN, HEXAGON: EXTRACTOR MOTOR ADJUSTING	A	EA	2
81	17	PAOZZ	5305-00-068-0502	MS90725-6	96906	SCREW, CAP, HEXAGON HEAD: LEVELER MTG	A	EA	1
81	18	PAOZZ	5310-00-042-6798	MS35338-82	96906	WASHER, LOCK: LEVELER MTG	A	EA	1
81	19	PAOZZ	5310-00-637-9541	MS35338-46	96906	WASHER, LOCK: LEVELER MTG	A	EA	1
81	20	PAOZZ	5340-00-874-9281	FB4444	76871	LEVELER, JACKSHAFT	A	EA	1
81	21	PAOZZ	5310-00-768-0318	MS35690-803	96906	NUT, PLAIN, HEXAGON: LEVELER MTG	A	EA	1
81	22	PAOZZ	5310-00-989-5945	MS35691-35	96906	NUT, PLAIN, HEXAGON: LEVELER MTG	A	EA	1
81	23	XBOZZ		6-1-1936-33-86A	72869	STUD, SPECIAL: LEVELER, 1/2-13 THD SIZE, 1-9/16 IN. LG, ONE END HEXAGON HEAD, 3/8 IN. ACROSS FLATS, OTHER END DRILLED AND TAPPED FOR 1/4-20 THD SIZE SCREW, 7/8 IN. LG	A	EA	1
81	24	PAFZZ	5305-00-044-5503	MS90725-160	96906	SCREW, CAP, HEXAGON HEAD: MAIN BASE MTG, 5/8-AA THD SIZE, 1-1/4 IN. LG	A	EA	6
81	25	PAFZZ	5310-00-067-6358	QQS00627	81349	WASHER, FLAT: MAIN BASE MTG	A	EA	6
81	26	XBFZZ		6-1-1936-33-1A	72869	BASE, MAIN DRIVE ASSEMBLY	A	EA	1
81	27	PBOZF	3510-00-869-7009	6-1-1943-33-60A	72869	CYLINDER, AIR DRIVE: WASHER MOTOR		EA	1

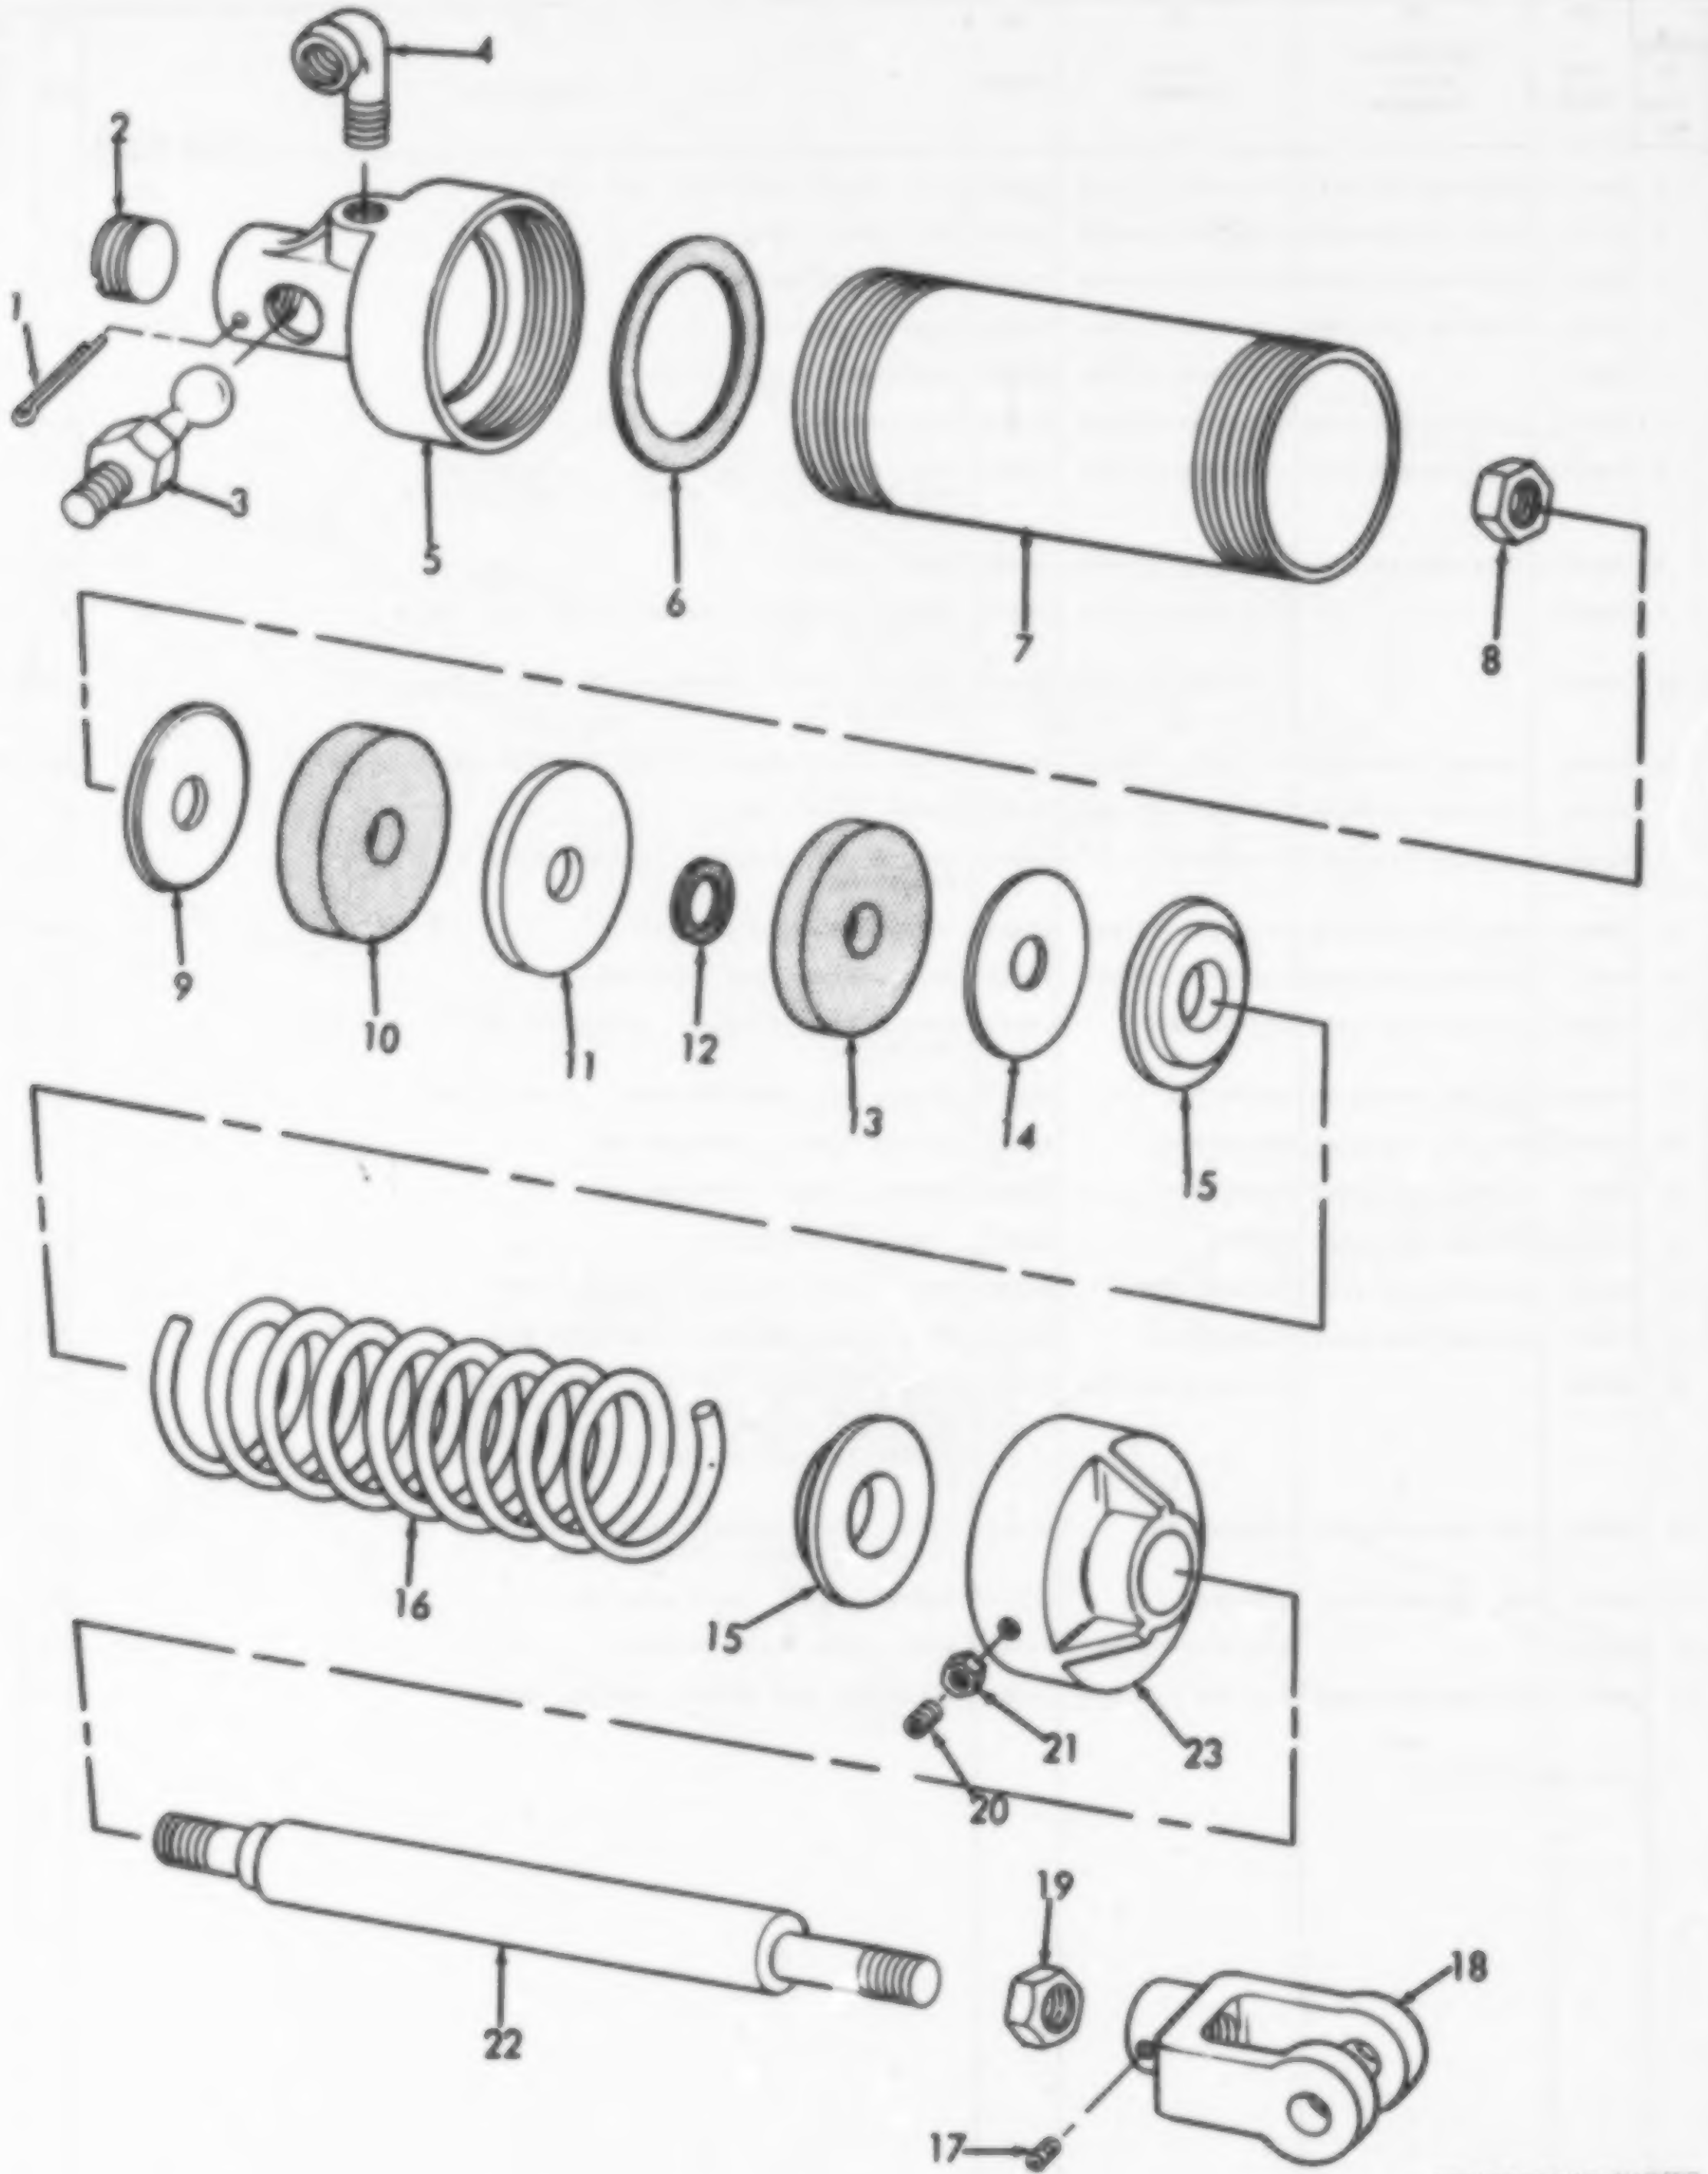
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
15
16
17
18
19
20
21
22
23
TS 3510-208-34P/82

Figure 82. Air Cylinder, Washer Motor.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
82	1	PAFZZ	5315-00-316-1794	MS24665-285	96906	PIN, COTTER: PLUG LOCKING	EA	1
82	2	PAOZZ	5365-00-498-7026	6-1-1943-33-72A	72869	PLUG, SOCKET, BALL: AIR CYLINDER	EA	1
82	3	PAOZZ	5307-00-437-8959	6-1-1943-33-71A	72869	STUD, BALL: AIR CYLINDER	EA	1
82	4	PAOZZ	4730-00-278-4293	6-1-1943-33-112A	72869	ELBOW, STREET: HOSE TO CYLINDER, 1/8 IN. PIPE	EA	1
82	5	PBFZZ		6-1-1943-33-70A	72869	HEAD, CYLINDER, SOCKET: AIR CYLINDER	EA	1
82	6	PBFZZ		6-1-1943-33-75A	72869	GASKET: AIR CYLINDER, 2-1/2 IN. OD, 1-7/8 IN. ID, 1/16 IN. THK, ASBESTOS, COMPRESSED	EA	1
82	7	PBFZZ		6-1-1943-33-63A	72869	BODY: AIR CYLINDER	EA	1
82	8	PAFZZ	5305-00-050-3383	6-1-1943-33-78A	72869	NUT, SELF-LOCKING, HEXAGON: AIR CYLINDER	EA	1
82	9	PBFZZ		6-1-1943-33-69A	72869	RETAINER, SEAL, AIR: AIR CYLINDER	EA	1
82	10	PBFZZ		6-1-1943-33-68A	72869	SEAL, AIR: AIR CYLINDER	EA	1
82	11	PBFZZ		6-1-1943-33-67A	72869	COLLAR, PISTON: AIR CYLINDER	EA	1
82	12	PBFZZ		6-1-1943-33-76A	72869	WASHER: WASHER MOTOR AIR CYLINDER, 1/2 IN. OD, 3/8 IN. ID, 1/16 IN. THK, LEAD	EA	1
82	13	PBFZZ		6-1-1943-33-73A	72869	PAD, LUBRICATOR: AIR CYLINDER, 1/4 IN. THK, FELT	EA	1
82	14	PBFZZ		6-1-1943-33-74A	72869	WASHER, LUBRICATOR PAD: AIR CYLINDER	EA	1
82	15	PBFZZ		6-1-1943-33-66A	72869	SEAT, SPRING: AIR CYLINDER	EA	2
82	16	PBFZZ	5360-00-457-2726	6-1-1943-33-65A	72869	SPRING: AIR CYLINDER	EA	1
82	17	PAOZZ	5305-00-719-5346	MS51963-35	96906	SETSCREW: CLEVIS MTG, NO. 8-32 THD SIZE, 1/4 IN. LG	EA	1
82	18	PBOZZ		6-1-1943-33-61A	72869	CLEVIS: AIR CYLINDER	EA	1
82	19	PAOZZ	5310-00-732-0559	MS51968-8	96906	NUT, PLAIN HEXAGON, JAM: AIR CYLINDER	EA	1
82	20	PAFZZ	5305-00-285-5238	AN565B10-6	88044	SETSCREW: HEAD MTG	EA	1
82	21	PAFZZ	5310-00-934-9758	MS35649-202	96906	NUT, PLAIN, HEXAGON: SETSCREW MTG	EA	1
82	22	PBFZZ		6-1-1943-33-64A	72869	ROD, PISTON: AIR CYLINDER	EA	1
82	23	PBFZZ		6-1-1943-33-62A	72869	HEAD, UPPER: AIR CYLINDER	EA	1

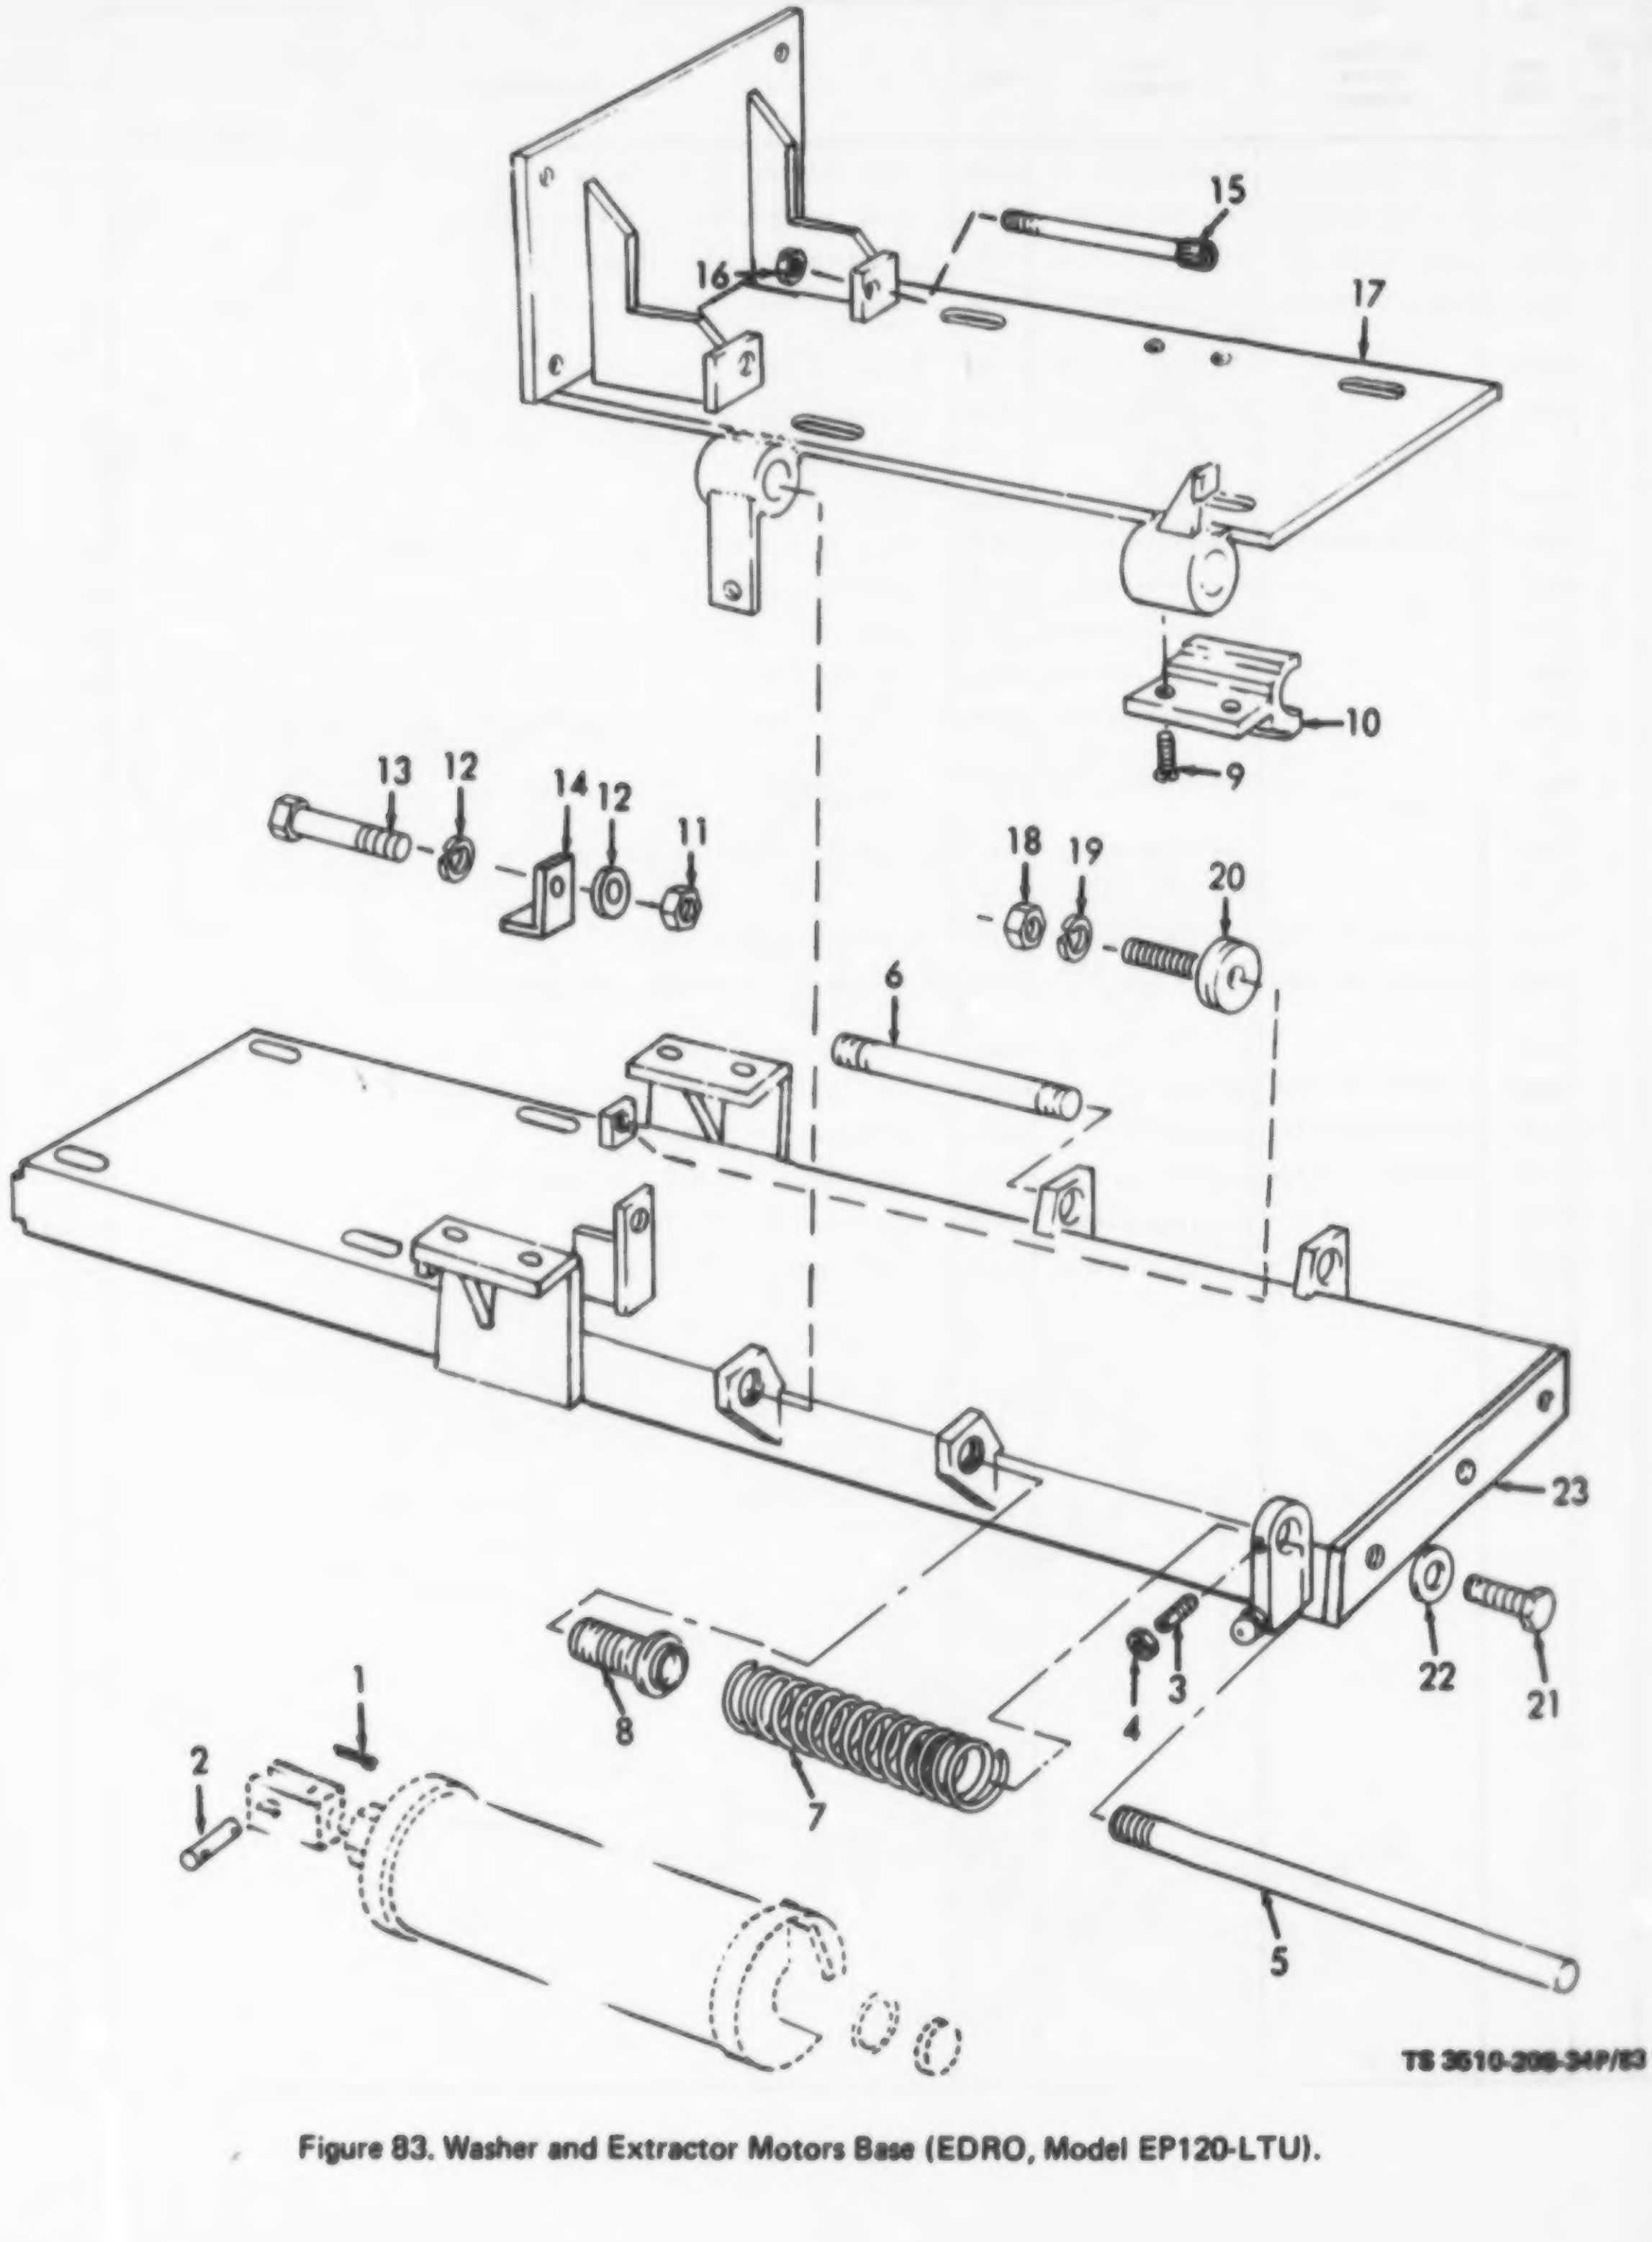
15
16
17
10
9
13
12
14
12
11
18
19
20
6
23
22
21
3
4
8
7
1
2
5
TS 3510-208-34P/83

Figure 83. Washer and Extractor Motors Base (EDRO, Model EP120-LTU).

(1) ILLUSTRATION (a) FIG NO.	(1) ILLUSTRATION (b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION	Usable On Code	(7) U/M	(8) QTY INC IN UNIT
83	1	PAOZZ	5315-00-852-2336	6-1-1943-33-77A	72869	PIN, COTTER: CYLINDER MTG	B	EA	2
83	2	XBOZZ		6-1-2981-33-90A	72869	PIN, STRAIGHT, HEADLESS: CYLINDER MTG, .375 IN. DIA, 1-9/16 IN. LG., DRILLED BOTH ENDS	B	EA	1
83	3	XBFZZ		6-1-2981-33-96A	72869	SETSCREW, DOG PT, 1/4 X 20, UNC-2A X 1 IN. LG: ROD MTG	B	EA	2
83	4	XBFZZ		6-1-2981-33-99A	72869	NUT, HEXAGON HEAD, 1/4 X 20, UNC-2B: ROD MTG	B	EA	2
83	5	PBFZZ		6-1-2981-33-59A	72869	ROD, GUIDE: MOTOR BASE, LH	B	EA	1
83	6	PBFZZ		6-1-2981-33-58A	72869	ROD, GUIDE: MOTOR BASE, RH	B	EA	1
83	7	PBFZZ		6-1-2981-33-32A	72869	SPRING, DRIVE, COMPRESSION	B	EA	1
83	8	PBFZZ		6-1-2981-33-83A	72869	RETAINER, DRIVE SPRING	B	EA	1
83	9	XBFZZ		6-1-2981-33-95A	72869	SCREW, MACHINE, FLAT HD. 1/2 X 13, UNC-2A X 1 IN. LG: GUIDE MTG, MOTOR BASE	B	EA	2
83	10	PBFZZ		6-1-2981-33-55A	72869	GUIDE, MOTOR BASE	B	EA	1
83	11	XBOZZ		6-1-2981-33-100A	72869	NUT, HEXAGON, SELF-LOCKING, 1/2 X 20, UNF-3B: JACKSHAFT BELT GUARD SUPPORT MTG	B	EA	2
83	12	XBOZZ		6-1-2981-33-104A	72869	WASHER, PLAIN: JACKSHAFT BELT GUARD SUPPORT MTG	B	EA	4
83	13	XBOZZ		6-1-2981-33-129A	72869	SCREW, CAP, HEXAGON HEAD, 1/2 X 20, UNF-2AXX, 2-1/4 LG: JACKSHAFT BELT GUARD SUPPORT MTG	B	EA	2
83	14	PAOZZ		6-1-2981-33-131A	72869	SUPPORT, JACKSHAFT BELT GUARD	B	EA	2
83	15	XBFZZ		6-1-2981-33-97A	72869	SCREW, CAP, HEXAGON HEAD, 3/8 X 16, UNC-2A X 2-1/2 LG: MOTOR ADJUSTING	B	EA	2
83	16	XBFZZ		6-1-2981-33-98A	72869	NUT, HEX, JAM, 3/8-16 UNC-2B: MOTOR ADJUSTING	B	EA	2
83	17	PBFZZ		6-1-2981-33-12A	72869	BASE ASSEMBLY, MOTOR	B	EA	1
83	18	XBOZZ		6-1-2981-33-101A	72869	NUT, HEXAGON, 1/2 X 13, UNC-2B: ADJUSTING SCREW MTG	B	EA	1
83	19	XBOZZ		6-1-2981-33-114A	72869	WASHER, LOCK, SPLIT, HELICAL, 1/2: ADJUSTING SCREW MTG	B	EA	1
83	20	XBOZZ		6-1-2981-33-86A	72869	SCREW, ADJUSTING, RUBBER CUSHIONED	B	EA	1
83	21	PAFZZ	5305-00-044-5503	MS90725-160	96906	SCREW, CAP, HEXAGON, HEAD: MAIN BASE MTG, 5/8-AA THD SIZE, 1-1/4 IN. LG.	B	EA	6
83	22	PAFZZ	5310-00-067-6358	QQS00627	81349	WASHER, FLAT: MAIN BASE MTG	B	EA	6
83	23	XBFZZ		6-1-2981-33-1A	72869	BASE, MAIN DRIVE ASSEMBLY	B	EA	1

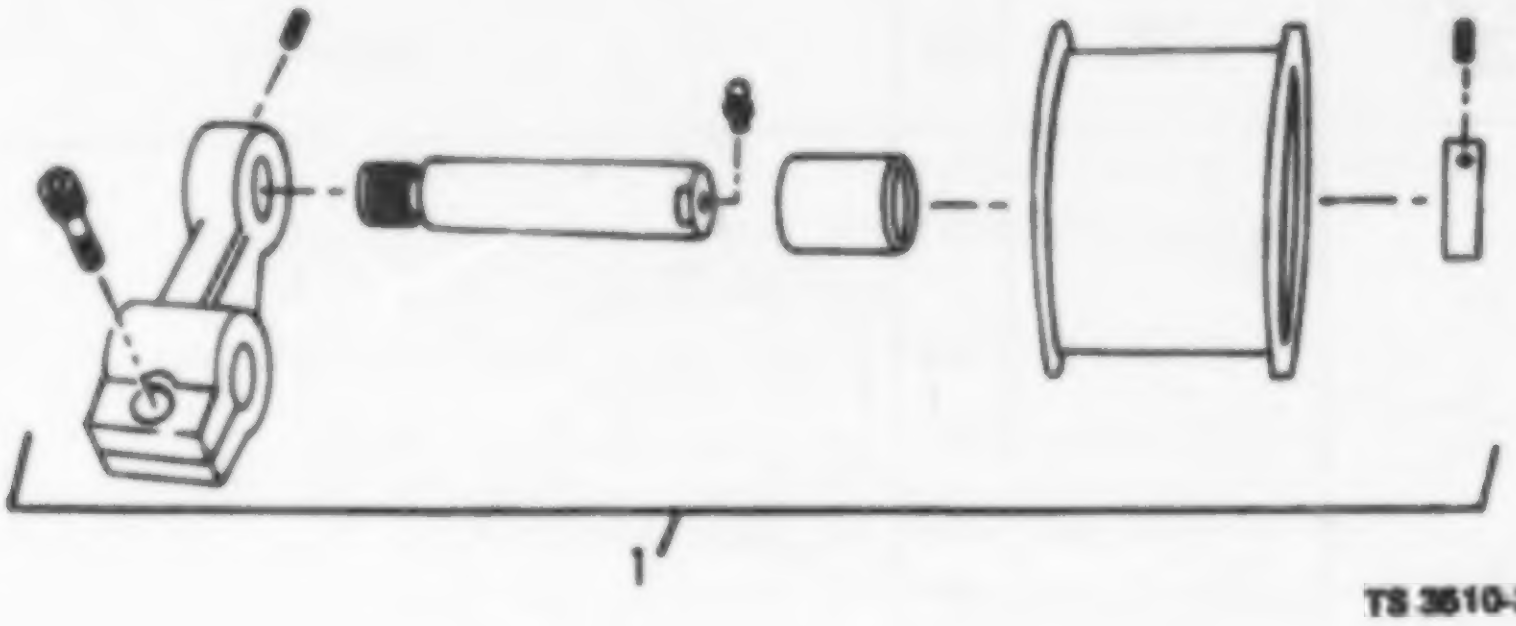

TS 3510-208-34P/84

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)		(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION	Usable On Code	U/M	QTY INC IN UNIT
						GROUP 45 - IDLER PULLEY			
84	1	PAOZZ	3040-00-410-6954	SATN4	71176	IDLER PULLEY ASSEMBLY: W/SHAFT	B	EA	1

Figure 84. Idler Assembly, Belt.

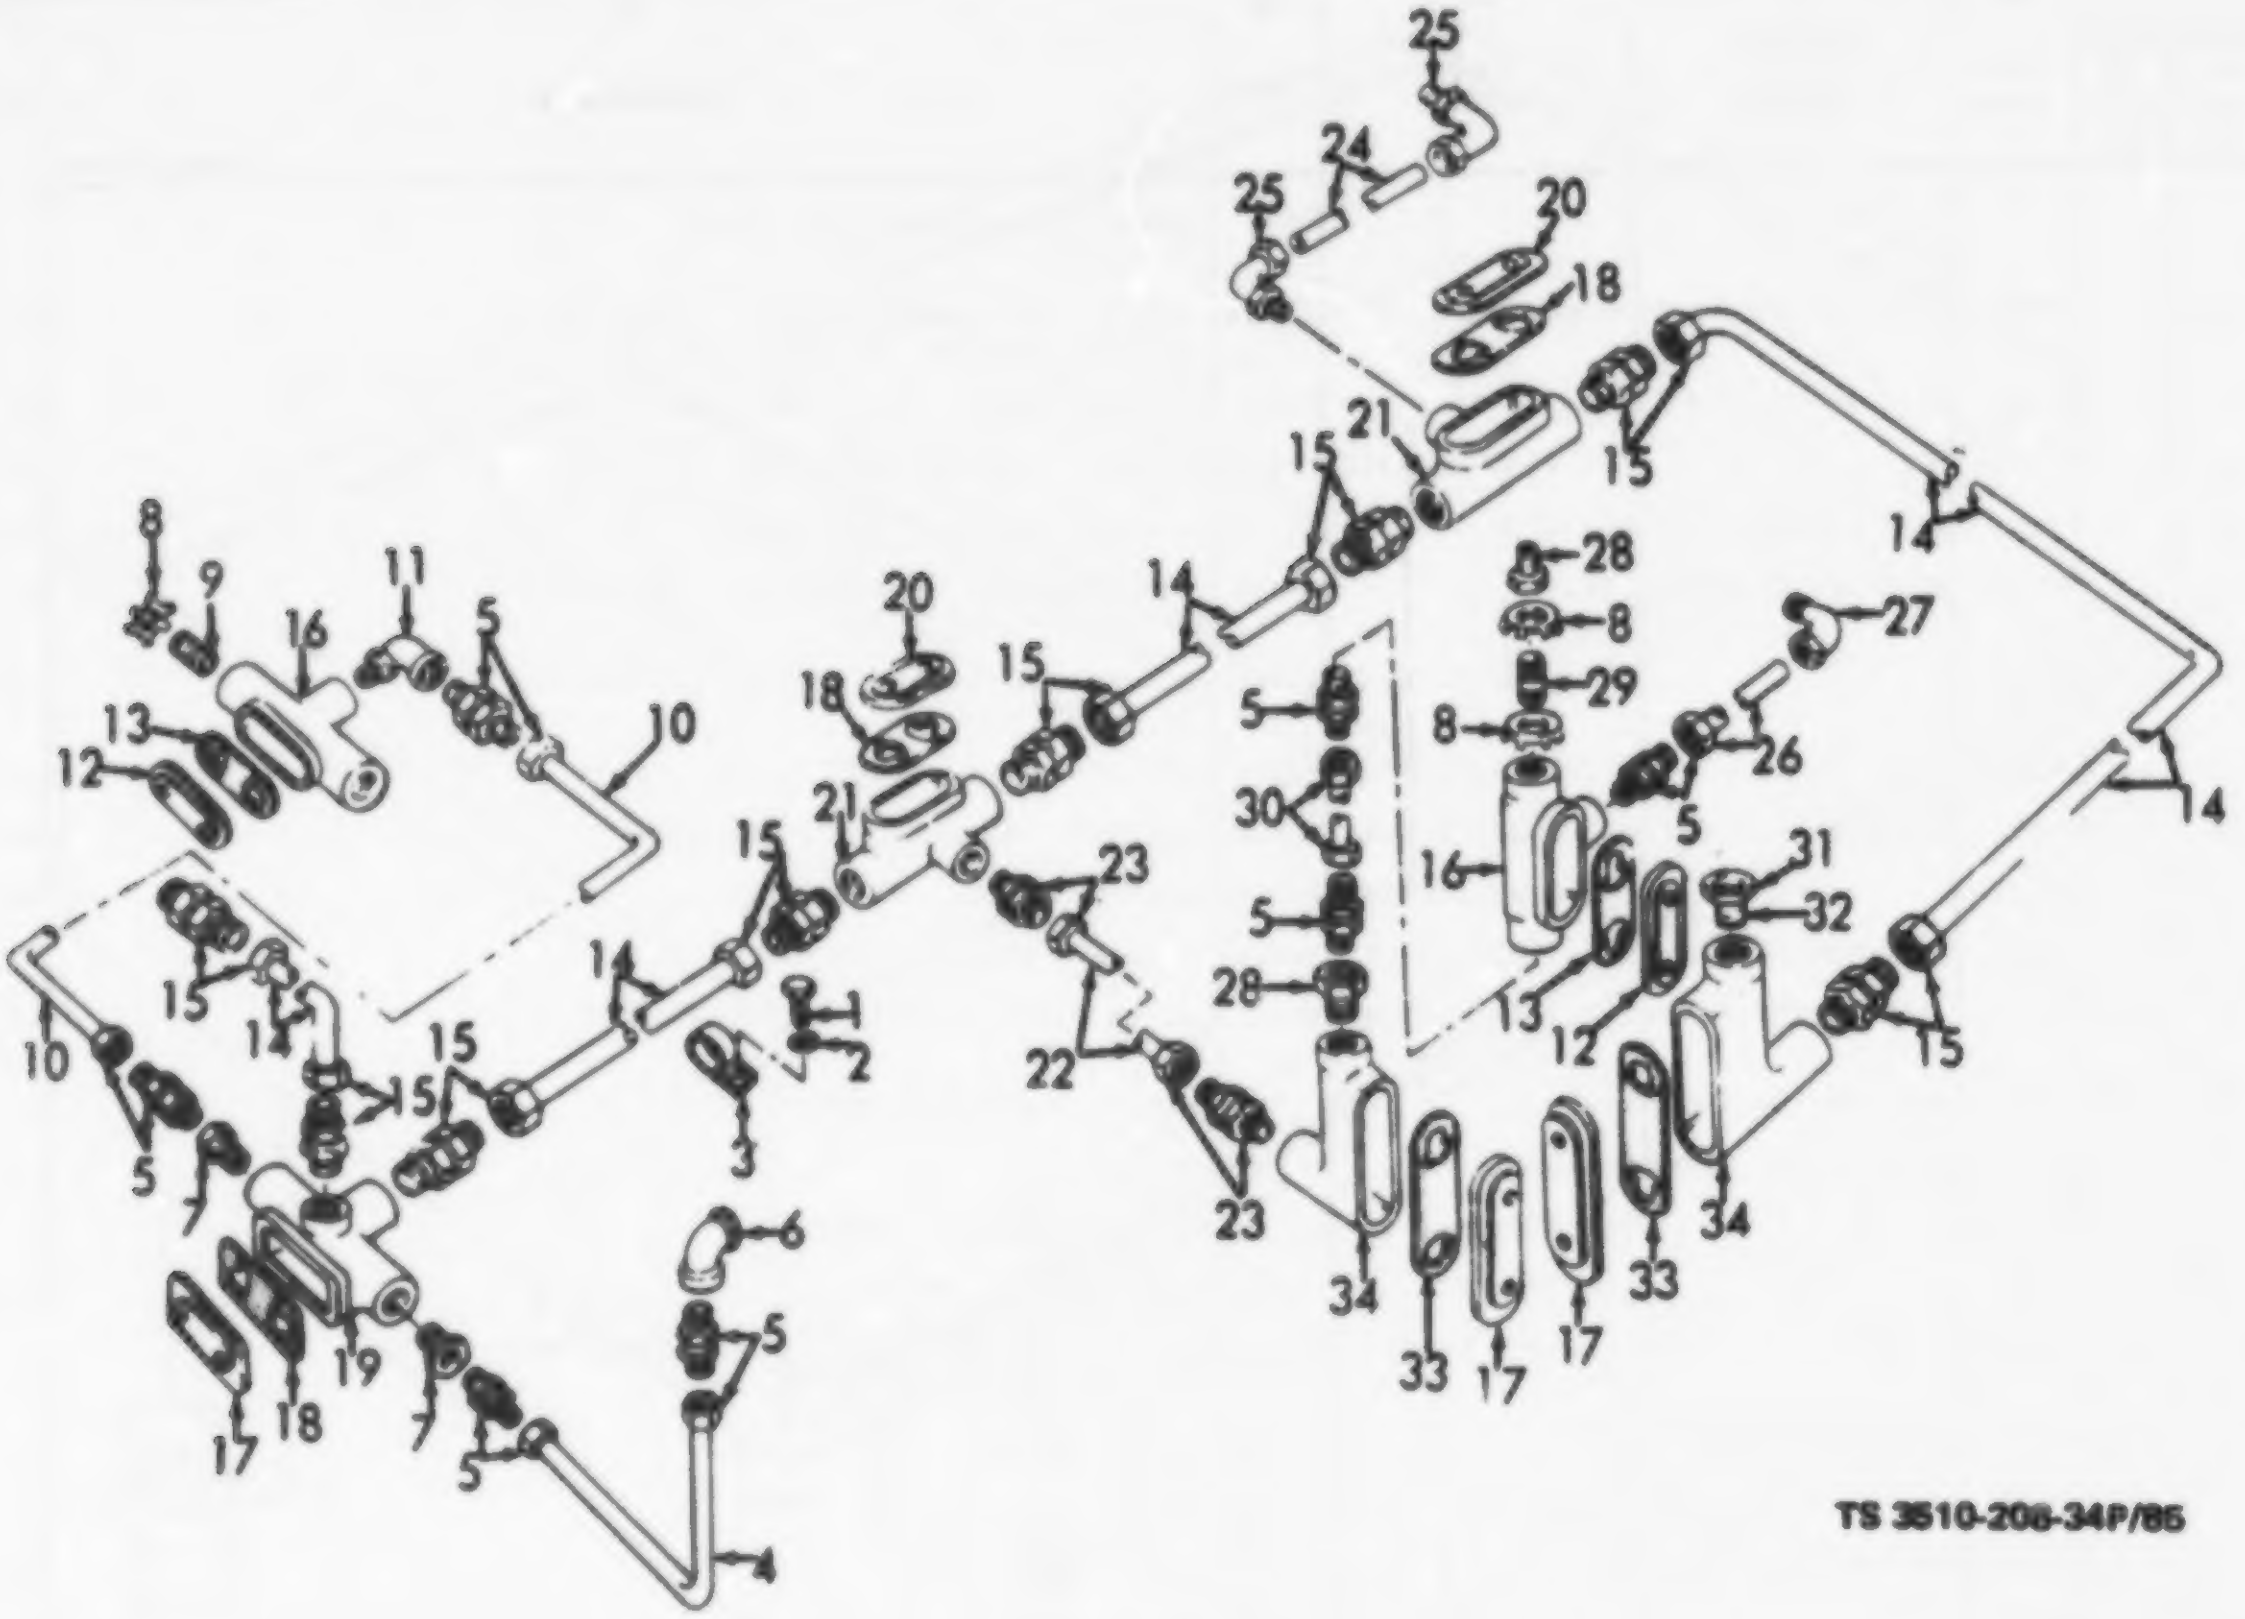
25
24
25
20
18
21
15
15
14
8
9
11
16
5
10
13
12
20
18
15
14
28
8
29
8
27
26
5
5
30
5
16
21
15
23
31
32
13
12
14
15
10
15
14
15
14
15
1
2
3
22
28
23
34
33
17
17
33
34
5
7
6
5
17
18
19
7
5
4
TS 3510-208-34P/85

Figure 85. Electrical Conduit.

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 46 - ELECTRICAL CONDUIT		
85	1	PAOZZ	5305-00-068-0502	MS90725-6	96906	SCREW, CAP, HEXAGON HEAD: CLAMP MTG, 1/4-20 THD SIZE X 3/4 IN. LG	EA	2
85	2	PAOZZ	5310-00-010-3319	MS35338-6	96906	WASHER, LOCK: CLAMP MTG, 1/4 IN.	EA	2
85	3	XBOZZ		6-1-2337-20-471A	72869	CLAMP: CONDUIT RETAINING	EA	2
85	4	PAOZZ	5975-00-178-1216	6-1-2337-20-459A	72869	CONDUIT, RIGID: 1/2 IN.	FT	V
85	5	PAOZZ	5975-00-179-0098	5121	59730	BOX CONNECTOR, ELECTRICAL: GENERATOR SWITCH BOX RECEPTACLE	EA	7
85	6	XBOZZ		6-1-2337-20-468A	72869	CONNECTOR, ELBOW: TUMBLER CONTROL BOX, 90 DEG X 1/2 IN.	EA	4
85	7	XBOZZ		6-1-1900-151A	72869	REDUCER: RECEPTACLE, 3/4 X 1/2	EA	2
85	8	PAOZZ	5310-00-189-9145	6-1-2337-20-509A	72869	LOCKNUT: CONDUIT, 1/2 IN. STEEL	EA	5
85	9	XBOZZ		6-1-1912-21-15A	72869	NIPPLE, CLOSE: RECEPTACLE	EA	2
85	10	PAOZZ	5975-00-178-1216	6-1-1912-21-13A	72869	CONDUIT, RIGID: 1/2 IN.	FT	V
85	11	PAOZZ	4730-00-933-7938	6-1-1912-21-90A	72869	ELBOW, PIPE: GENERATOR SWITCH BOX RECEPTACLE	EA	1
85	12	PAOZZ	5975-00-159-0969	170	15235	COVER, CONDUIT OUTLET	EA	2
85	13	PAOZZ	5975-00-395-2294	GASK571	15235	GASKET	EA	2
85	14	PAOZZ		6-1-2337-20-[illegible]A	72869	CONDUIT, RIGID: 3/4 IN.	FT	V
85	15	XBOZZ		6-1-1900-93A	72869	CONNECTOR, CONDUIT	EA	9
85	16	XBOZZ		6-1-1912-21-10A	72869	RECEPTACLE, CONDUIT: MAIN CONTROL BOX AND AIR COMPRESSOR SWITCH	EA	2
85	17	PAOZZ	5975-00-158-8496	270	15235	COVER, CONDUIT OUTLET	EA	3
85	18	PAOZZ	5330-00-933-7249	GASK470	15235	GASKET: RECEPTACLE COVER	EA	3
85	19	PAOZZ	5975-00-079-4313	TA27	15235	RECEPTACLE, CONDUIT	EA	1
85	20	XBOZZ		6-1-1900-92A	72869	COVER, CONDUIT OUTLET	EA	2
85	21	XBOZZ		6-1-1900-91A	72869	TEE, CONDUIT	EA	2
85	22	XBOZZ		6-1-1900-152A	72869	CONDUIT, FLEXIBLE: 36 IN. REQUIRED	FT	V
85	23	XBOZZ		6-1-1900-153A	72869	CONNECTOR, WATERTIGHT	EA	2
85	24	XBOZZ		6-1-1907-19-19A	72869	TUBING, STEEL: 36 IN. REQUIRED	FT	V
85	25	XBOZZ		6-1-1907-19-10A	72869	ELBOW, CONNECTOR: WATER HEATER RECEPTACLE, 1/2 IN.	EA	2
85	26	XBOZZ		6-1-1910-20-32A	72869	CONDUIT, FLEXIBLE, RUBBER, 10 IN. REQUIRED	FT	V
85	27	XBOZZ		6-1-1910-20-34A	72869	ELBOW, COMPRESSOR RECEPTACLE	EA	2
85	28	XBOZZ		6-1-1910-20-35A	72869	BUSHING, REDUCING	EA	2
85	29	XBOZZ		6-1-1910-20-12A	72869	NIPPLE, CONDUIT	EA	1
85	30	XBOZZ		6-1-1910-20-33A	72869	CONDUIT, RIGID: THIN WALL	FT	V
85	31	XBOZZ		6-1-1919-126A	72869	NUT, LOCKING	EA	1
85	32	XBOZZ		6-1-1919-124A	72869	NIPPLE, CONDUIT	EA	1
85	33	XBOZZ		GASK572	15235	GASKET	EA	2
85	34	XBOZZ		6-1-1919-27-115A	72869	RECEPTACLE, CONDUIT	EA	2
85		PAFZZ	6145-00-310-2590	59-255-AGR3	60883	WIRE, ELECTRICAL, 3 FT REQUIRED	FT	V
85		PAFZZ	5940-00-825-3697	MS17143-11	96906	TERMINAL, LUG	EA	6
85		PAFZZ	6145-00-310-2593	7714	70903	WIRE, ELECTRICAL, 3 FT REQUIRED	FT	V
85		PAFZZ	6145-00-310-2598	59-255-AGR4	60883	WIRE, ELECTRICAL, 3 FT REQUIRED	FT	V
85		PAFZZ	6145-00-310-2592	6-1-1919-22-153A	72869	WIRE, ELECTRICAL, 24 IN. REQUIRED	FT	V

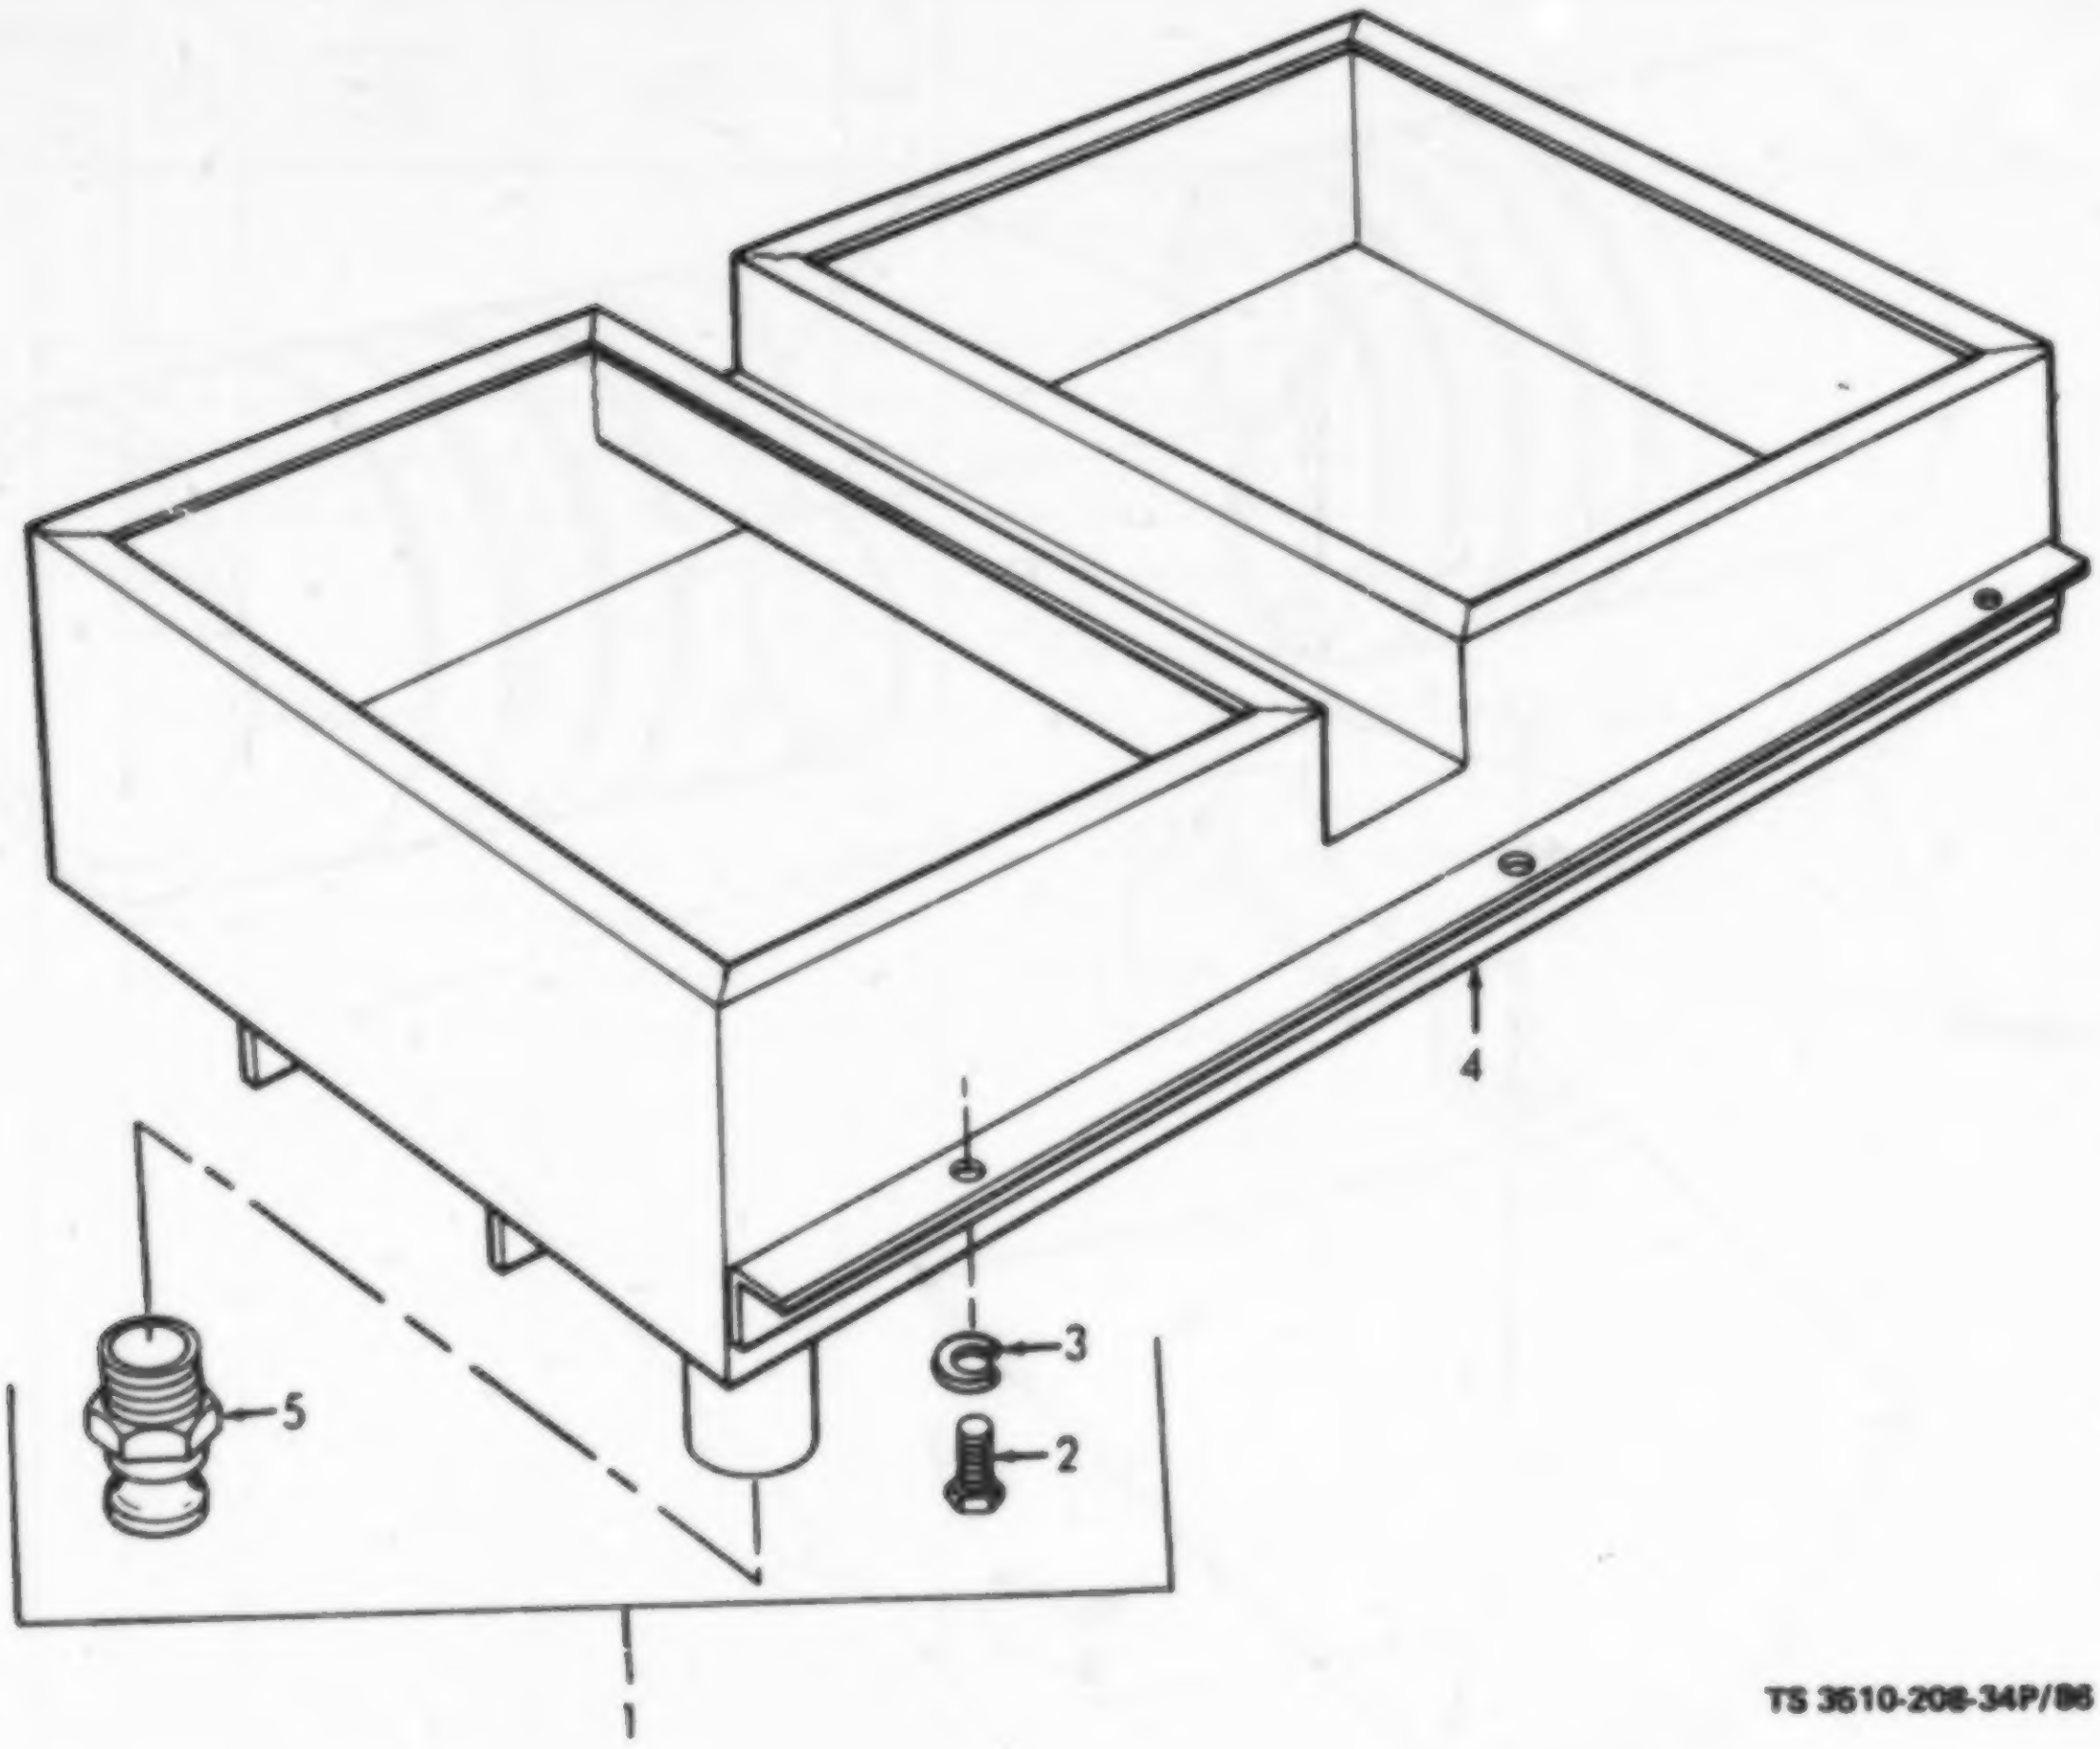

TS 3510-208-34P/86

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 47 - DRAIN PAN ASSEMBLY		
86	1	XBFZZ		6-1-1906-12A	72869	PAN, DRAIN ASSEMBLY	EA	1
86	2	PAFZZ	5305-00-069-5572	MS90725-84	96906	SCREW, CAP, HEXAGON HEAD: DRAIN PAN MTG	EA	6
86	3	PAFZZ	5310-00-209-0965	MS35338-28	96906	WASHER, LOCK	EA	6
86	4	XBFZZ		6-1-1906-12-1A	72869	PAN, DRAIN	EA	1
96	5	PAOZZ	4730-00-958-7117	MS27022-10A	96906	COUPLING, HALF	EA	1

Figure 86. Drain Pan.

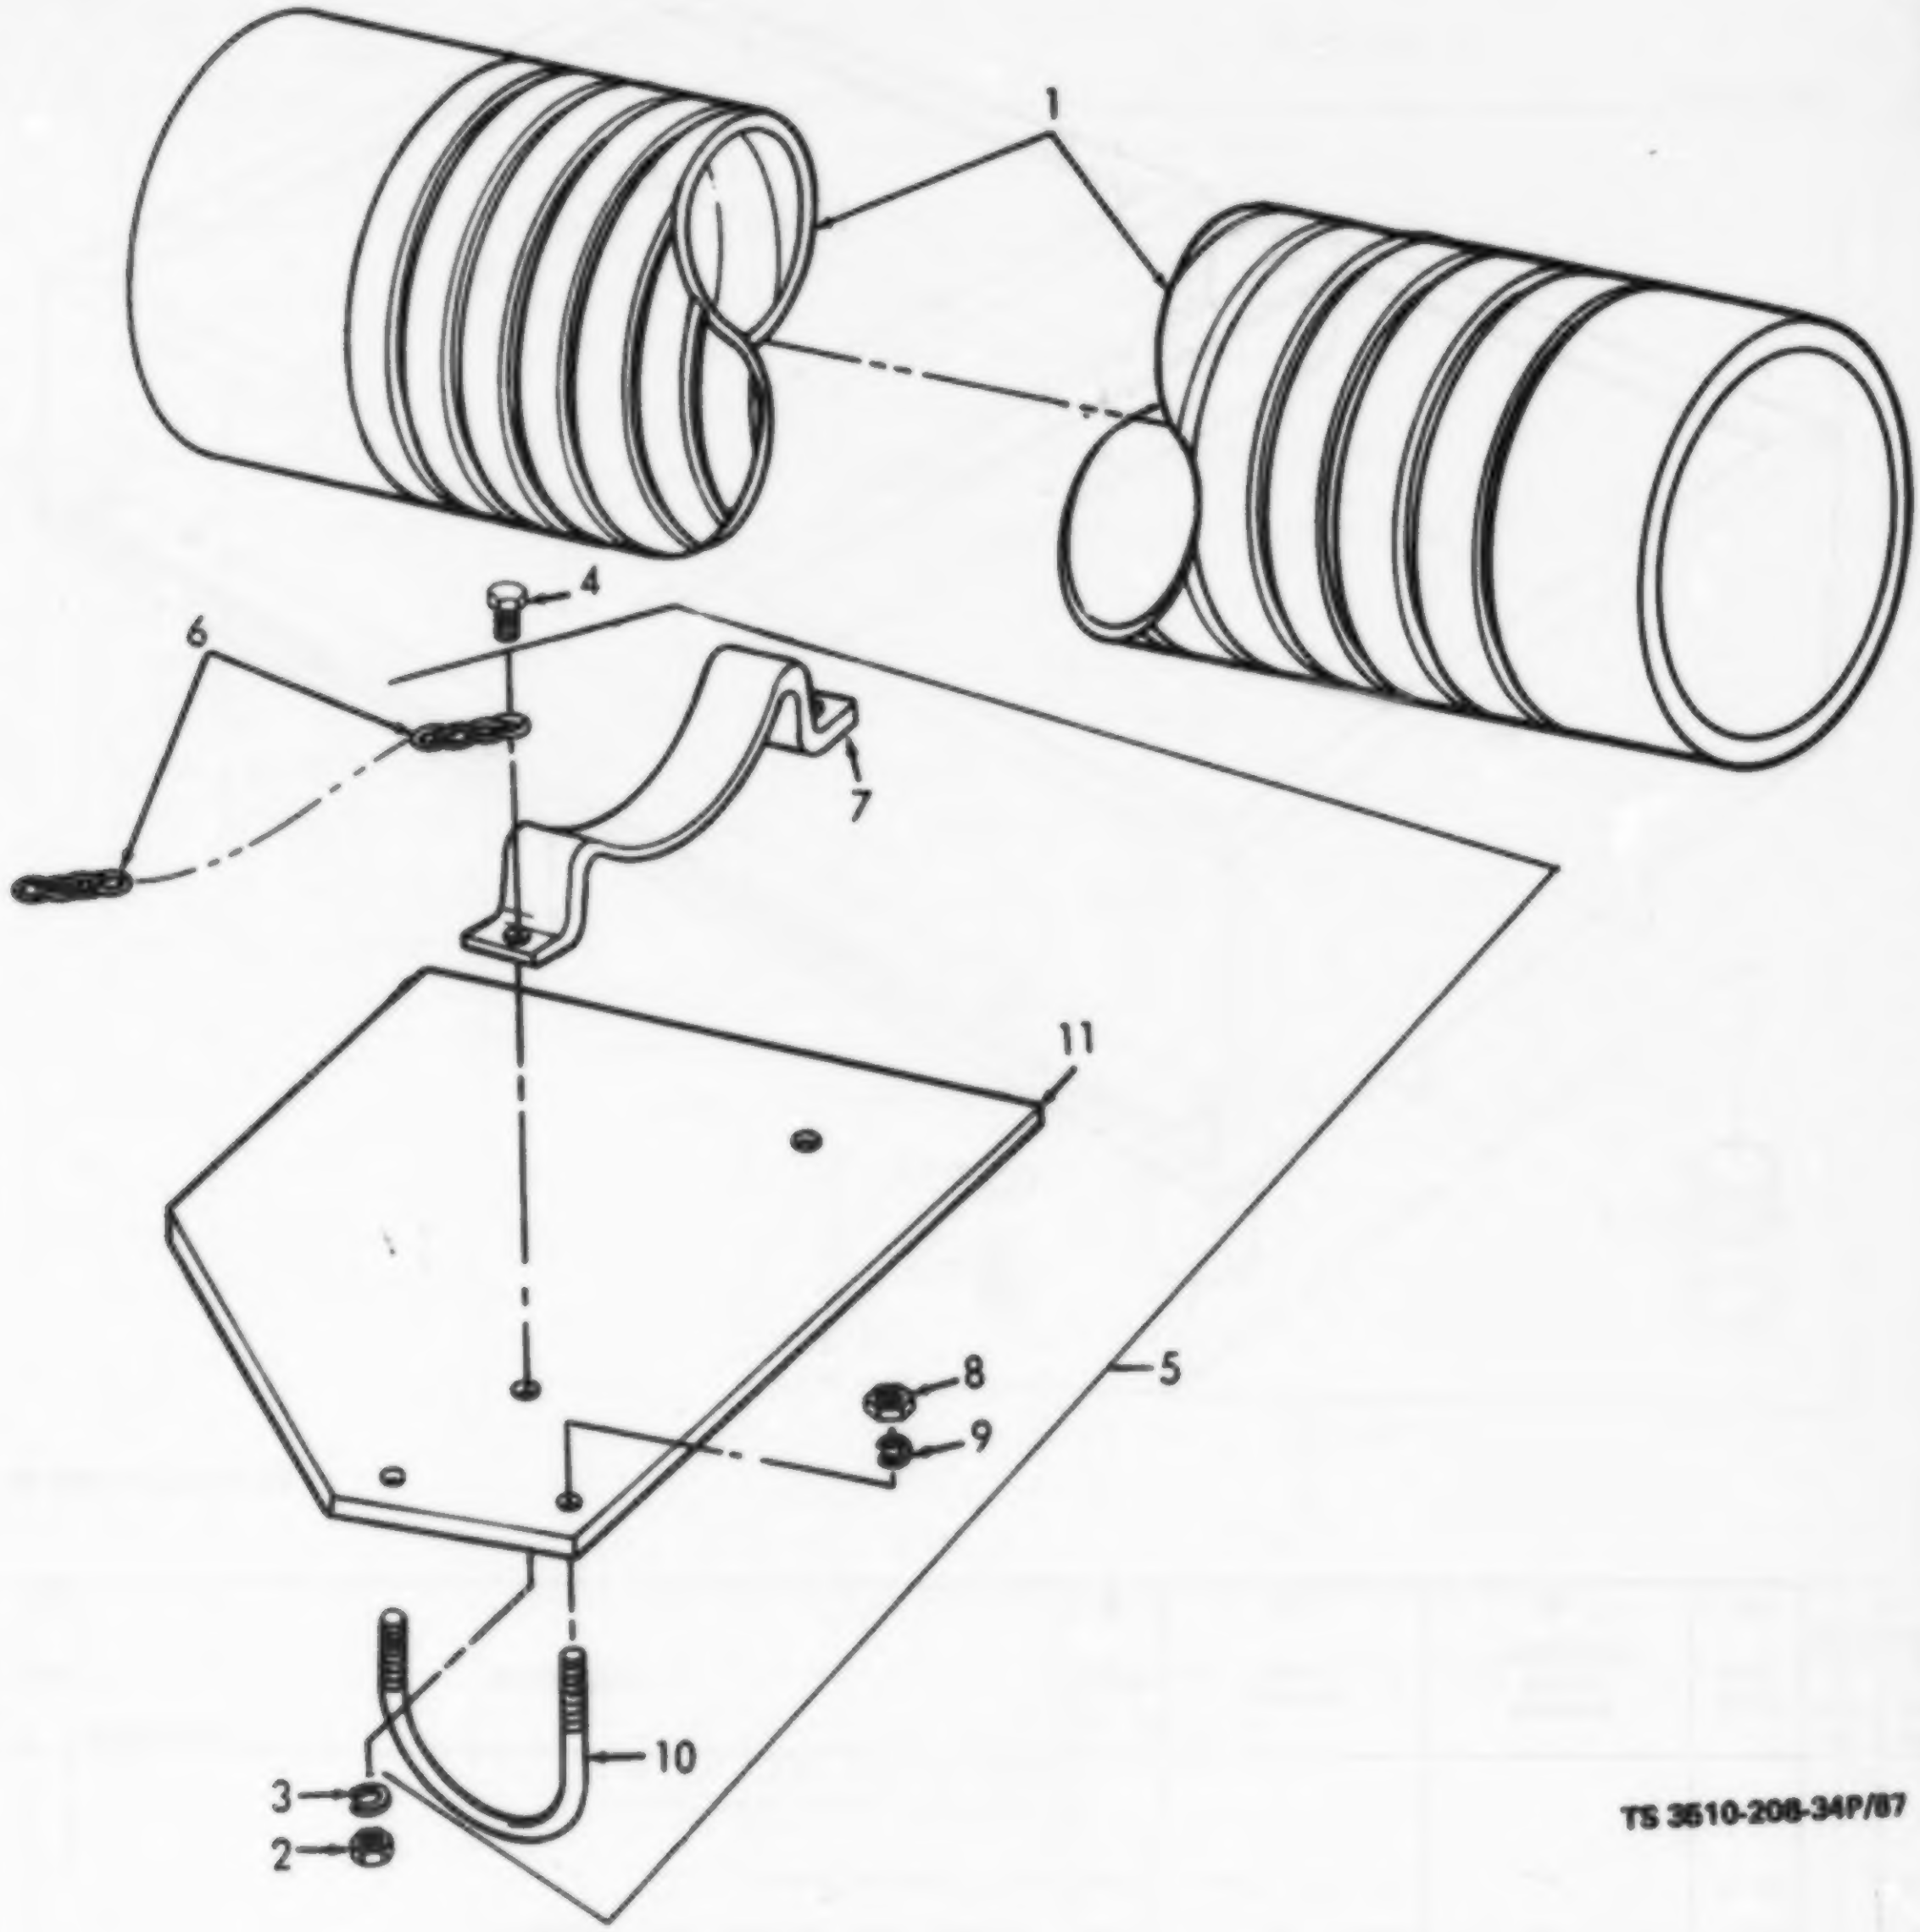
1
4
6
7
11
8
5
9
10
3
2

TS 3510-208-34P/87

Figure 87. Heat Exchanger Exhaust Duct and Retainer.

(1) ILLUSTRATION (a) FIG NO.	(b) ITEM NO.	(2) SMR CODE	(3) NATIONAL STOCK NUMBER	(4) PART NUMBER	(5) FSCM	(6) DESCRIPTION Usable On Code	(7) U/M	(8) QTY INC IN UNIT
						GROUP 48 - HEAT EXCHANGER EXHAUST DUCT AND RETAINER		
87	1	PAOZZ	4720-00-472-5912	10452-20	49200	DUCT, EXHAUST: HEAT EXCHANGER	EA	1
87	2	PAOZZ	5310-00-208-9966	141104-20	58417	NUT, PLAIN, HEXAGON: RETAINER MTG	EA	2
87	3	PAOZZ	5310-00-209-0786	MS35335-33	96906	WASHER, LOCK: RETAINER MTG SCREW	EA	2
87	4	PAOZZ	5305-00-068-0502	MS90725-6	96906	SCREW, CAP, HEXAGON HEAD: RETAINER MTG	EA	2
87	5	XBOOO		6-1-1912-21-38A	72869	RETAINER ASSEMBLY: EXHAUST DUCT	EA	1
87	6	MOOOO		6-1-1912-21-40A	72869	CHAIN: EXHAUST DUCT MANUFACTURE FROM:	EA	1
		PAOZZ	4010-00-221-0738	RRC271TYPEICLASS 5STYLE2	81349	CHAIN, WELDED, TWISTED LINK, AS REQUIRED	FT	V
87	7	XBOZZ		6-1-1912-21-39A	72869	RETAINER, EXHAUST DUCT	EA	1
87	8	PAOZZ	5310-00-934-9758	MS35649-202	96906	NUT, PLAIN, HEXAGON: RETAINER STRAP MTG	EA	4
87	9	PAOZZ	5310-00-596-7691	MS35335-32	96906	WASHER, LOCK: RETAINER STRAP MTG	EA	4
87	10	XBOZZ		6-1-1912-21-68A	72869	STRAP, BASE	EA	2
87	11	XBOZZ		6-1-1912-21-67A	72869	BASE, RETAINER	EA	1

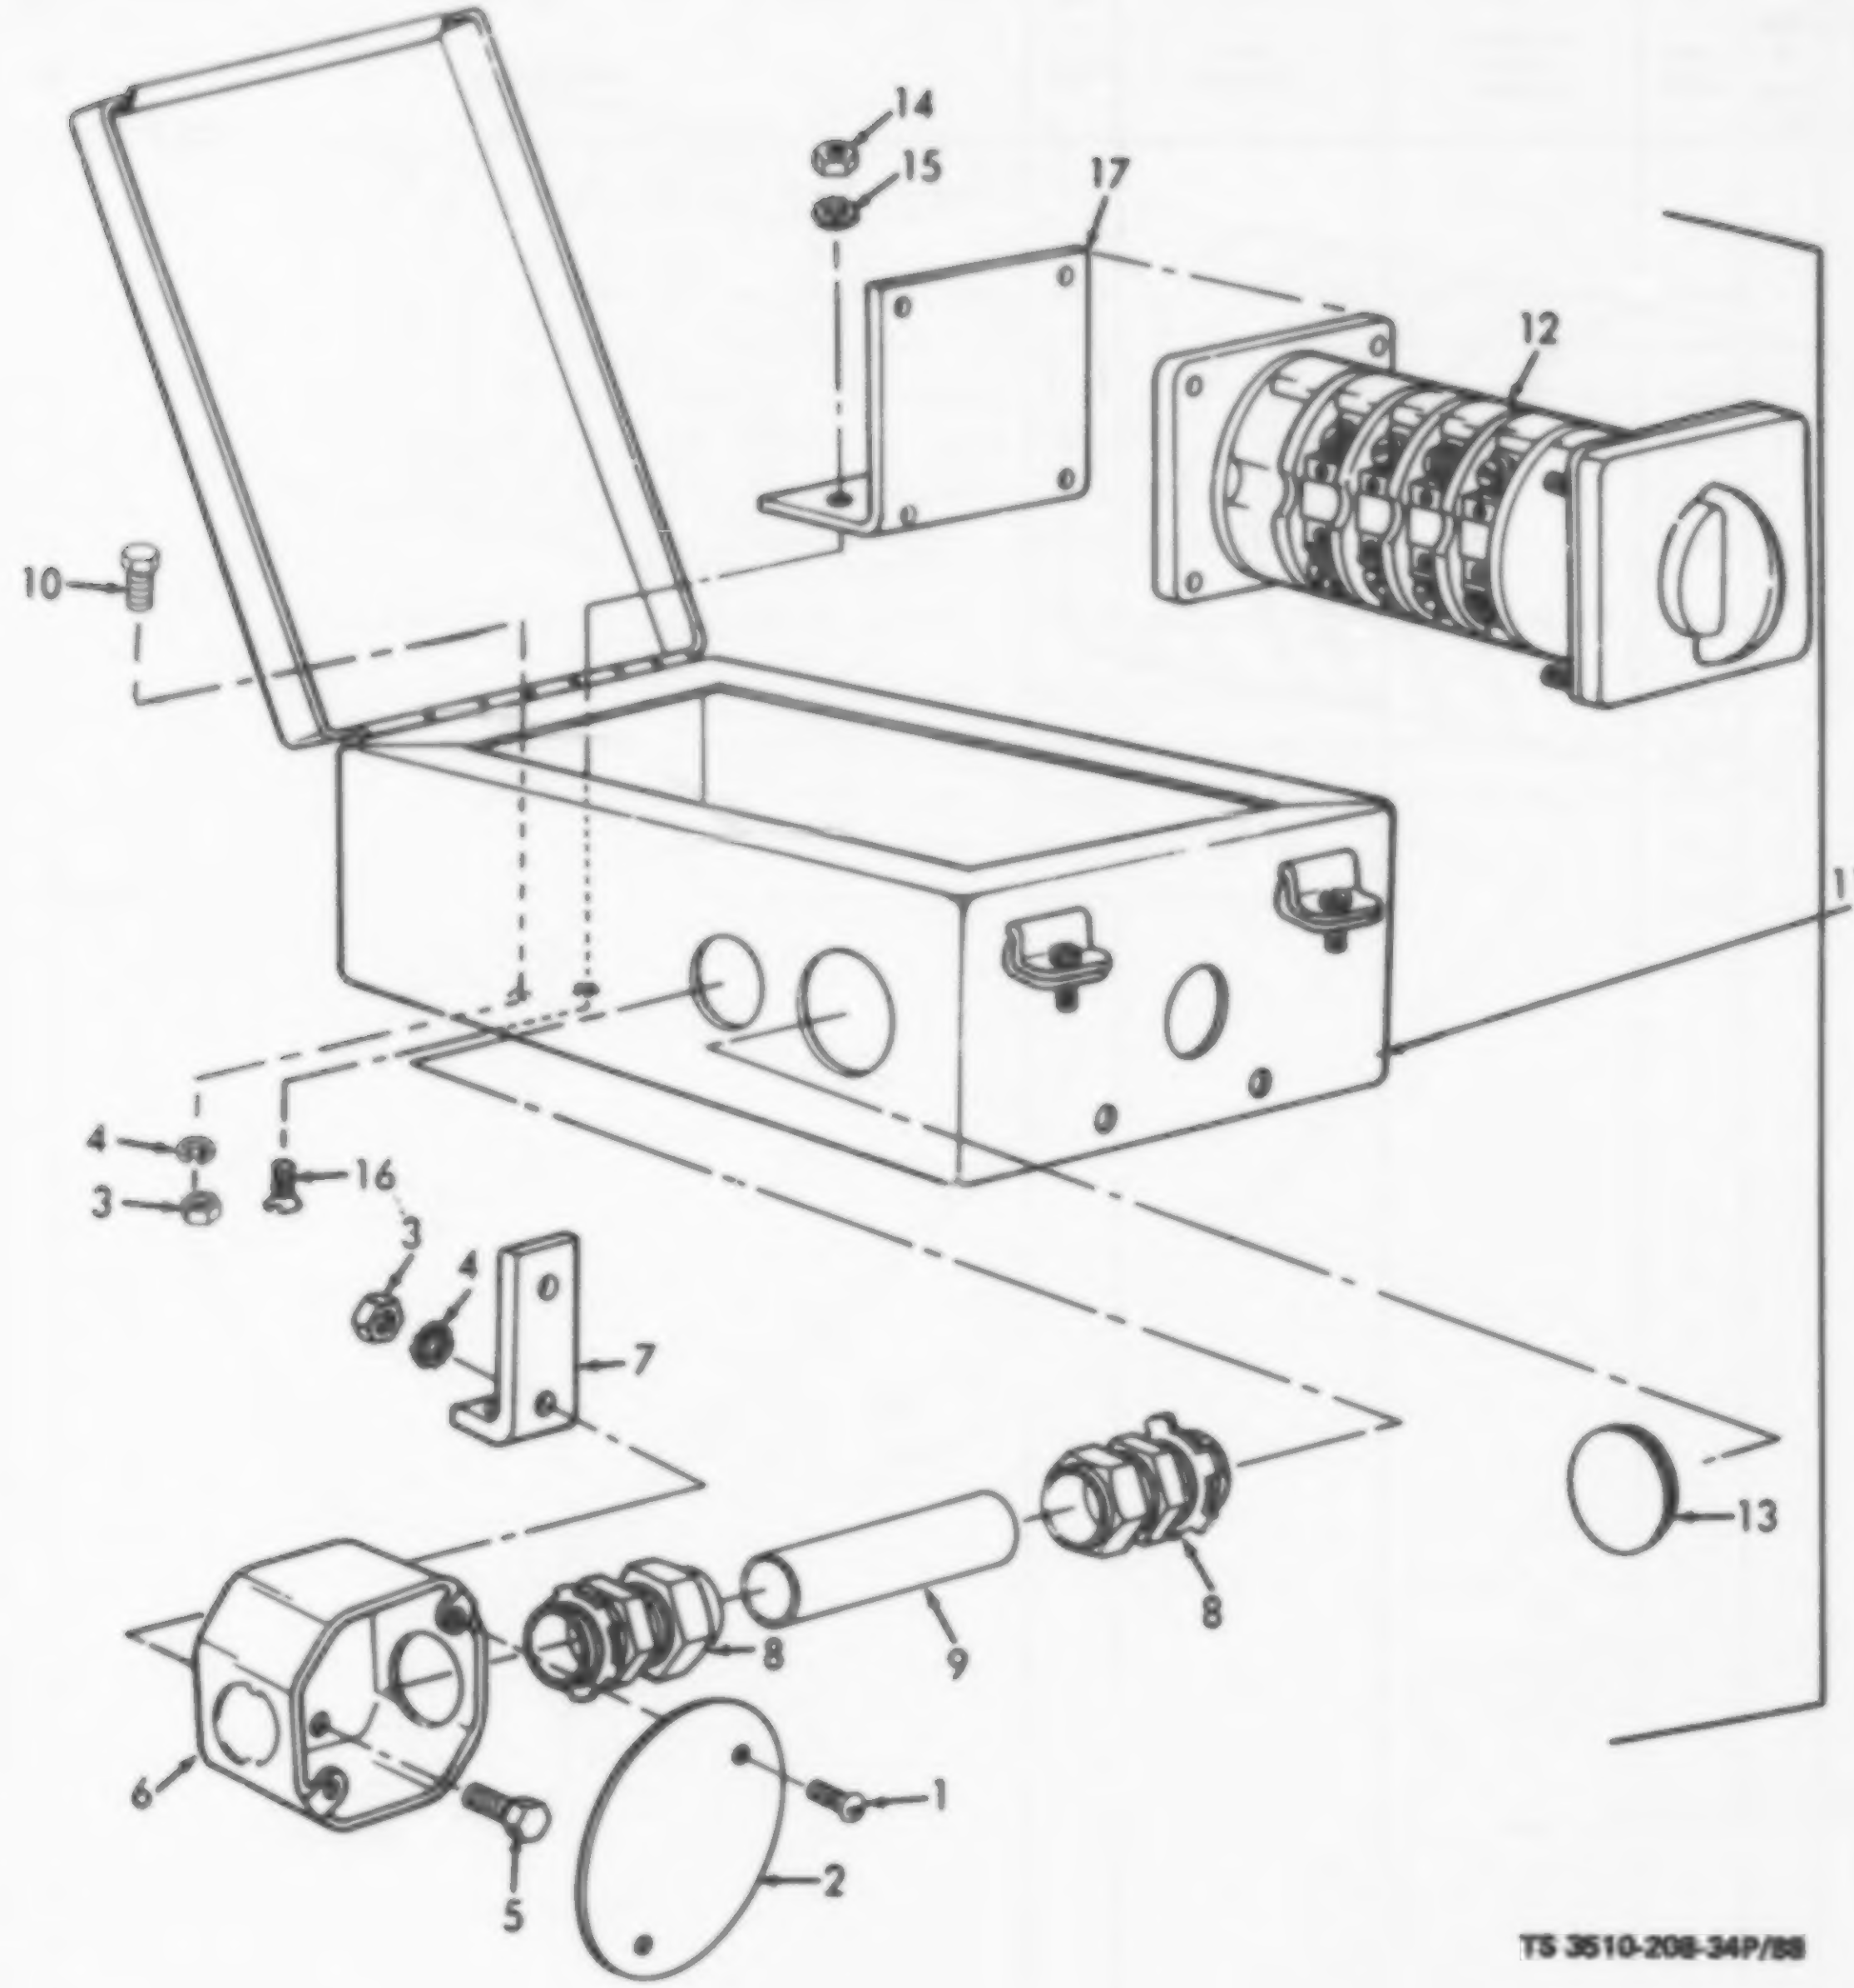
14
15
17
12
10
11
4
3
16
3
4
7
13
8
9
8
6
1
5
2

TS 3510-208-34P/88

Figure 88. Generator Switch Box and Outlet Box

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 49 - GENERATOR SWITCH BOX AND OUTLET BOX		
88	1	PAOZZ	5305-00-042-0465	MS0ES420465	81349	SCREW ASSEMBLED WASHER: OUTLET BOX COVER MTG	EA	2
88	2	XBOZZ		24C1	12673	COVER: OUTLET BOX	EA	1
88	3	PAOZZ	5310-00-761-6882	MS55310-9	08283	NUT, PLAIN, HEXAGON: OUTLET BOX AND SUPPORT MTG	EA	6
88	4	PAOZZ	5310-00-209-0786	MS35335-19	96906	WASHER, LOCK: OUTLET BOX AND SUPPORT MTG	EA	6
88	5	PAOZZ	5305-00-559-9202	6-1-1912-21-55A	72869	SCREW, CAP, HEXAGON HEAD: OUTLET SUPPORT MTG	EA	2
88	6	XBOZZ		24151-3-4	12673	BOX, OUTLET: GENERATOR	EA	1
88	7	XBOZZ		6-1-1912-21-79A	72869	SUPPORT, JUNCTION: OUTLET BOX	EA	1
88	8	XBOZZ		6-1-1912-21-93A	72869	CONNECTOR: SWITCH BOX	EA	2
88	9	MOOOO		6-1-1912-21-89A	72869	CONDUIT, THINWALL: SWITCH BOX TO OUTLET BOX, 3/4 IN. MANUFACTURE FROM:	EA	1
88		PAOZZ	5975-00-179-1216	UWC5715IZE5-4IN	81349	CONDUIT, THINWALL: 3/4 IN. DIA, 3 IN. LG, AS REQUIRED	FT	V
88	10	PAOZZ	5305-00-068-0499	MS55305-21	03238	SCREW, CAP, HEXAGON HEAD: SWITCH BOX TO FRAME MTG	EA	4
88	11	XBOZZ		6-1-1912-21-92A	72869	BOX, SWITCH: GENERATOR	EA	1
88	12	PAOZZ	5930-00-492-2128	C40A213EVEG0025 ES15M0035E4POLE	10933	SWITCH, ROTARY: GENERATOR	EA	1
88	13	XBOZZ		6-1-1912-21-94A	72869	BLANK, SNAP-IN: SWITCH BOX	EA	1
88	14	PAOZZ	5310-00-851-2674	MS35691-1	96906	NUT, PLAIN, HEXAGON: SWITCH BRACKET MTG	EA	2
88	15	PAOZZ	5310-00-082-0650	MS45904-70	96906	WASHER, LOCK: SWITCH BRACKET MTG	EA	2
88	16	PAOZZ	5305-00-912-7289	MS35276-277	96906	SCREW, MACHINE: SWITCH BRACKET MTG	EA	2
88	17	XBOZZ		6-1-1912-21-98A	72869	BRACKET, SUPPORT: SWITCH MTG	EA	2

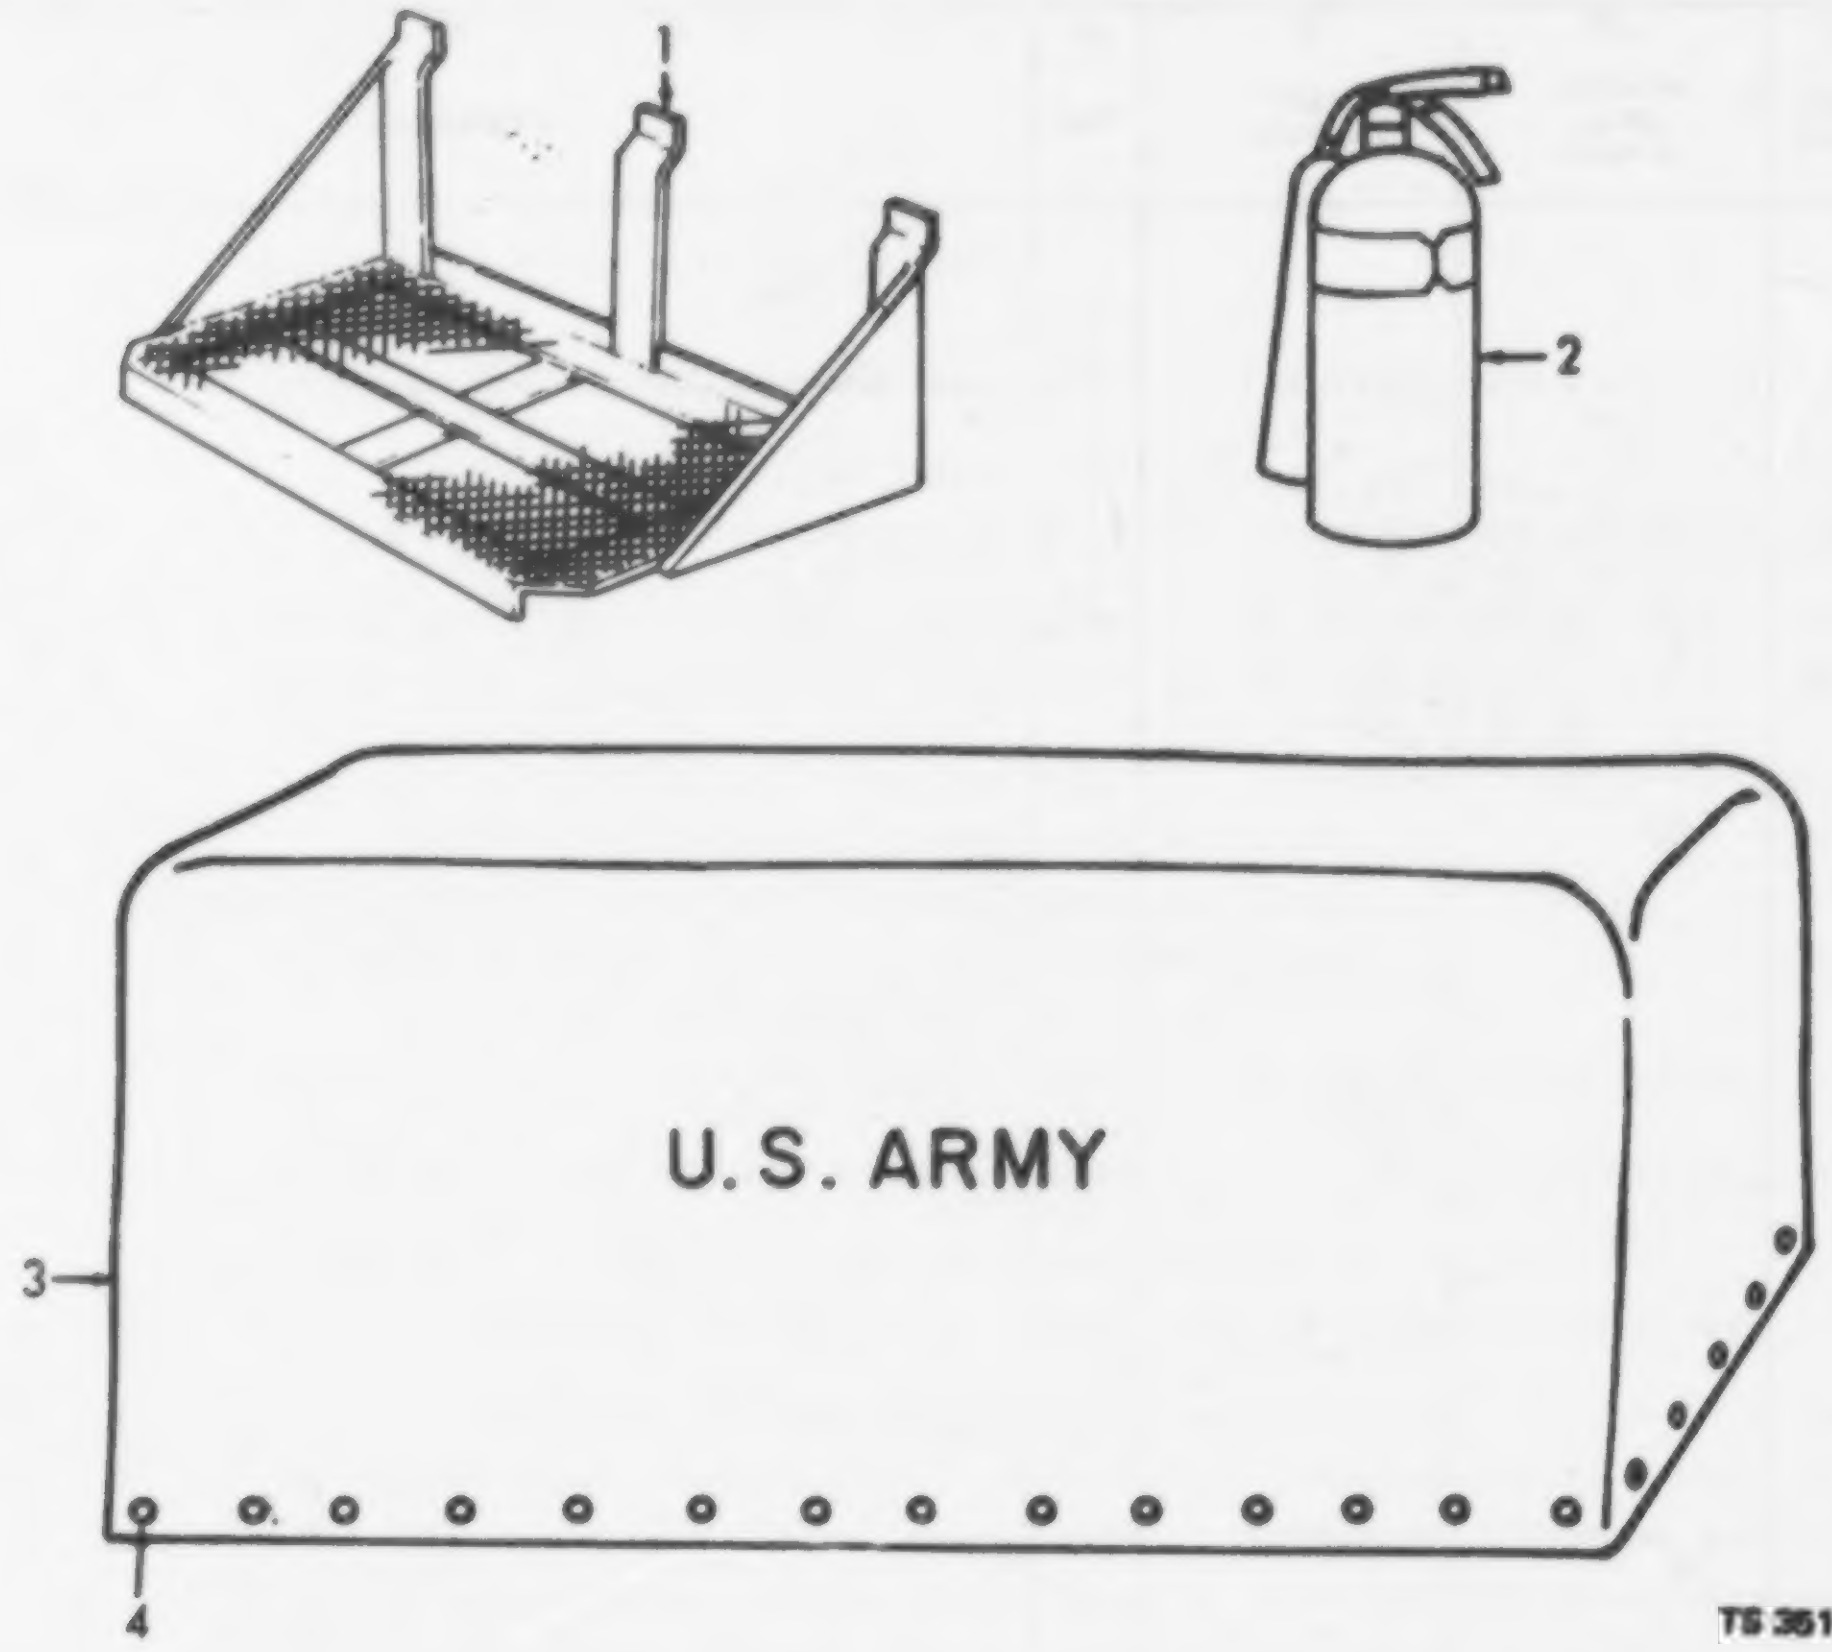

TS 3510-208-34P/89

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 50 - FIRE EXTINGUISHER, STEP ASSEMBLY AND CANVAS ITEMS		
89	1	XBOZZ		6-1-1909-22A	72869	STEP ASSEMBLY	EA	1
89	2	PAOZZ	4210-00-270-4512	N752366	99539	EXTINGUISHER, FIRE	EA	1
89	3	PAOZZ	3510-00-933-7923	MILC40624	81349	COVER ASSEMBLY	EA	1
89	4	MOOZZ		MILR1670	81349	ROPE: COVER MANUFACTURE FROM:	EA	16
89		PAOZZ	4020-00-231-2581	5-4-1094-17A	72869	ROPE, MANILA, 36 IN. REQUIRED FOR EACH ROPE	FT	V

Figure 89. Fire Extinguisher, Step Assembly and Canvas Items.

(1) ILLUSTRATION		(2)	(3)	(4)	(5)	(6)	(7)	(8)
(a) FIG NO.	(b) ITEM NO.	SMR CODE	NATIONAL STOCK NUMBER	PART NUMBER	FSCM	DESCRIPTION Usable On Code	U/M	QTY INC IN UNIT
						GROUP 51 - BULK MATERIEL		
BULK			4020-00-231-2591			ROPE, MANILA, 36 IN.	FT	
BULK			4710-00-277-4508	WWT799CLASSII TYPEL	81348	TUBING, COPPER, 5/8 IN. OD, 4 FT	FT	
BULK			4720-00-200-0356	MILZZH601GRADE1	81349	HOSE, RUBBER, 3/4 IN. DIA, 32 IN.	FT	
BULK			4720-00-540-2465	8134	04255	HOSE, 13 IN.	FT	
BULK			4730-00-446-2535	4740-48	00620	FITTING, HOSE	EA	2
BULK			4730-00-933-7953	100376	79466	NUT, UNION	EA	2
BULK			4730-00-958-9925	5115X10	79470	NUT, TUBE COUPLING	EA	1
BULK			5330-00-301-1031			GASKET, 24 IN.	FT	
BULK			5940-00-503-6764			TERMINAL, SOLDERLESS	EA	1
BULK			5940-00-825-3697	MS17143-11	96906	TERMINAL, LUG	EA	2
BULK			5975-00-178-1216			CONDUIT, RIGID, 14-3/4 IN.	FT	
BULK			6145-00-310-2590			WIRE, STRANDED, RED, 12 IN.	FT	
BULK			6145-00-310-2592			WIRE, ELECTRICAL, 24 IN.	FT	
BULK			6145-00-310-2593			WIRE, ELECTRICAL, 30 IN.	FT	
BULK			6145-00-310-2598			WIRE, ELECTRICAL, 30 IN.	FT	
BULK			6145-00-824-2517			CABLE, POWER, ELECTRICAL, 13-1/2 IN.	FT	
BULK				6-1-1910-20-32A	60833	CONDUIT, FLEXIBLE, RUBBER, 36 IN.	FT	

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

NSN	Figure No.	Item No.
2910-00-472-6189	10	18
	47	21
2930-00-900-1580	26	18
	70	10
3010-00-138-7995	21	10
3010-00-430-9223	21	9
3010-00-933-7932	23	5
3020-00-153-6642	23	6
3020-00-163-0441	79	11
3020-00-214-3357	26	15
3020-00-231-8734	23	7
3020-00-437-6974	62	4
3020-00-437-6976	18	8
3020-00-457-1559	73	5
3020-00-457-1560	77	25
3020-00-457-1561	77	22
3020-00-580-7827	23	8
3020-00-932-7929	74	7
3020-00-933-7930	74	9
3030-00-163-0368	79	4
3030-00-169-5692	75	1
3030-00-451-2777	74	4
3030-00-529-0348	62	1
3030-00-529-0472	6	21
3030-00-715-2758	79	1
3030-00-802-6872	77	11
3040-00-410-6954	84	1
3040-00-437-0628	73	4
3040-00-432-0628	77	21
3040-00-437-0628	77	26
3040-00-437-0632	74	8
	78	9
	79	5
3040-00-490-5470	62	5
3040-00-933-5984	62	20
3110-00-056-9377	76	14
3110-00-100-0335	65	32
3110-00-100-0668	65	31
3110-00-108-9247	23	34
3110-00-144-8534	36	19
3110-00-144-8589	22	5
3110-00-144-8622	22	7
3110-00-144-9001	19	4
3110-00-155-7458	23	21
3110-00-293-9163	19	6
3110-00-555-5216	12	2
3110-00-555-5221	76	17
3110-00-877-6161	65	23
3110-00-913-6527	12	3
3110-00-917-6435	73	15
	74	26
3110-00-933-9896	36	9
3120-00-493-2945	58	25
3120-00-933-5920	74	19
3130-00-033-5985	78	26
3130-00-116-9031	26	19
3130-00-933-5985	77	27
	79	26
3340-00-195-5651	37	9
3460-00-901-5996	66	13
3510-00-026-0410	33	17
3510-00-063-8152	52	27
3510-00-133-5531	2	17
3510-00-152-8237	33	16
3510-00-152-8256	23	26
3510-00-152-8258	23	32
3510-00-152-8269	23	31
3510-00-152-8271	36	18
3510-00-152-8274	36	16
3510-00-152-8276	36	21
3510-00-152-8279	23	36
3510-00-152-8290	23	24
3510-00-153-6643	23	37
3510-00-153-6647	36	22
3510-00-153-6649	23	19
3510-00-212-1283	37	15
3510-00-214-3352	34	7
3510-00-214-3354	34	6

NSN	Figure No.	Item No.
3510-00-214-3355	18	5
3510-00-214-3358	26	20
3510-00-247-9908	81	15
3510-00-253-0562	62	9
3510-00-253-0566	68	38
3510-00-253-0567	48	10
3510-00-253-0568	57	
3510-00-253-0584	37	23
3510-00-253-0585	65	33
3510-00-253-0586	65	11
3510-00-253-0587	34	
3510-00-253-0588	11	5
3510-00-253-0590	26	3
3510-00-253-0591	50	4
3510-00-253-0592	67	1
3510-00-253-0593	37	
3510-00-253-0609	62	30
3510-00-359-9335	34	16
3510-00-359-9338	34	12
3510-00-359-9339	34	17
3510-00-359-9345	34	13
	34	10
3510-00-359-9346	34	14
3510-00-359-9351	26	11
3510-00-359-9353	17	11
3510-00-359-9356	36	3
3510-00-359-9373	33	6
3510-00-359-9375	23	15
3510-00-359-9478	17	18
3510-00-411-2658	6	17
	7	17
3510-00-411-2659	63	11
3510-00-411-2660	63	4
3510-00-411-2661	63	13
3510-00-411-2662	63	10
3510-00-411-2663	63	9
3510-00-411-2664	63	6
3510-00-411-2665	63	8
3510-00-411-2667	65	29
3510-00-411-2668	58	4
3510-00-411-2669	58	5
3510-00-411-2670	24	13
3510-00-411-2671	58	1
3510-00-411-2672	57	23
3510-00-411-2673	66	31
3510-00-411-2674	48	15
3510-00-460-6064	68	21
3510-00-460-6065	68	17
3510-00-460-6066	68	30
3510-00-460-6067	68	31
3510-00-460-6068	68	14
3510-00-460-6071	3	13
	74	3
3510-00-460-6072	2	12
	3	3
3510-00-460-6073	58	13
3510-00-460-6074	37	1
	37	7
3510-00-460-6076	37	13
3510-00-460-6081	37	10
	37	31
3510-00-460-6083	33	19
3510-00-460-6084	68	10
3510-00-460-6092	33	3
3510-00-460-6097	68	28
3510-00-460-6100	17	12
3510-00-460-6101	66	19
3510-00-460-6104	81	3
3510-00-460-6107	81	8
3510-00-460-6108	36	8
3510-00-460-6112	23	38
3510-00-467-5516	36	20
3510-00-470-1281	81	12
3510-00-869-3711	63	2
3510-00-869-7009	81	27
3510-00-871-7354	24	12
3510-00-906-9079	31	9
3510-00-930-2355	58	3
3510-00-930-2356	58	3
3510-00-930-2358	66	34
3510-00-933-7923	89	3

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

NSN	Figure No	Item No
3510-00-949-6254	72	6
4010-00-221-0738	1	10
	2	6
	3	6
	24	20
	38	
4020-00-231-2581	89	
4030-00-281-1683	1	9
	2	7
	24	18
4210-00-270-4512	89	2
4310-00-019-4220	30	42
4310-00-055-0666	29	5
4310-00-463-7529	30	34
4310-00-606-9913	30	12
4310-00-608-5782	30	17
4310-00-608-5785	30	14
4310-00-608-5786	30	37
4310-00-608-5787	30	43
4310-00-609-9615	30	1
4310-00-609-9616	30	16
4310-00-609-9619	30	38
4310-00-736-2018	30	19
4310-00-736-2021	30	32
4310-00-736-2027	30	40
4310-00-739-1603	30	9
4310-00-756-9563	30	20
4310-00-756-9564	30	24
4320-00-949-5615	30	31
4330-00-640-5820	8	
	44	17
4510-00-445-9917	46	1
4510-00-707-5961	48	28
4510-00-707-5962	48	27
4510-00-707-5963	48	23
4510-00-707-5965	41	20
4510-00-707-5969	14	
4510-00-707-5970	15	4
4510-00-707-5971	14	18
4510-00-707-5972	14	
4510-00-707-5973	14	37
4510-00-707-5974	14	31
4510-00-707-5975	14	29
4510-00-708-1345	42	7
4510-00-708-1347	42	6
4510-00-708-1348	42	5
4510-00-709-8535	48	9
4510-00-758-0059	50	33
4510-00-955-9457	43	32
4520-00-300-0333	25	1
4520-00-359-9590	11	19
4520-00-359-9592	11	7
4520-00-359-9598	11	2
4520-00-359-9612	11	14
4520-00-933-7944	32	18
4520-00-976-2253	10	22
	47	25
4520-00-989-3380	48	21
4530-00-214-3360	17	37
4530-00-214-3362	17	39
4530-00-214-3363	34	3
4530-00-214-3364	17	38
4530-00-359-9481	16	17
4530-00-359-9482	16	19
4530-00-359-9487	11	1
4530-00-359-9510	17	15
4530-00-359-9556	17	27
4530-00-467-5773	17	28
4530-00-707-4851	9	17
	47	3
4530-00-707-4855	10	
	47	
4530-00-708-5458	41	3
4530-00-708-5459	41	5
4530-00-981-8673	41	6
4710-00-277-4508	43	
	43	14
4710-00-277-5524	65	1
	68	3
	70	4
	77	5
	77	10
	78	14
	78	19
	79	15
	79	21
4710-00-359-9570	9	14
4720-00-136-1972	70	15
4720-00-142-1369	51	3
4720-00-200-0366	52	2
4720-00-229-0661	4	10
	4	16
4720-00-472-5912	87	1
4720-00-540-2465	9	7
	16	3
4720-00-708-8047	9	11
4720-00-847-1710	32	1
	32	2
	32	3
	61	5
4720-00-903-4148	5	5
4730-00-011-9928	9	4
4730-00-012-7878	43	10
4730-00-018-9566	74	21
4730-00-019-2032	43	4
4730-00-019-2084	43	7
4730-00-019-2470	43	15
4730-00-021-9650	52	14
4730-00-028-7021	32	4
4730-00-042-6318	23	27
4730-00-044-1487	68	2
	70	3
4730-00-050-4208	74	20
4730-00-055-8704	4	7
	4	12
4730-00-055-8704	50	6
4730-00-062-0085	17	4
	17	22
4730-00-142-2165	9	9
4730-00-142-2177	9	12
4730-00-170-1538	52	6
4730-00-172-0049	2	13
4730-00-188-1876	52	10
4730-00-189-2617	43	6
4730-00-196-1464	42	15
4730-00-196-1472	71	26
4730-00-196-1483	41	21
	42	17
4730-00-196-1972	9	3
4730-00-202-6491	16	6
	17	3
	44	2
4730-00-203-1010	14	9
4730-00-203-3012	42	14
4730-00-203-3178	44	1
4730-00-222-1837	16	9
	52	16
4730-00-231-2428	50	16
4730-00-231-3909	71	24
4730-00-231-5632	9	8
4730-00-249-1517	50	13
4730-00-249-2033	50	19
4730-00-249-3917	43	27
4730-00-249-3945	52	5
4730-00-253-4412	44	16
4730-00-254-6225	16	5
4730-00-265-6907	50	12
4730-00-257-2116	42	16
4730-00-257-2117	32	8
4730-00-263-3122	31	11
4730-00-263-3123	50	15
4730-00-263-3700	43	8

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

NSN	Figure No	Item No
4730-00-266-0531	68	5
	70	6
4730-00-273-6054	52	9
4730-00-277-2141	43	17
4730-00-277-5105	44	12
4730-00-277-5542	9	2
4730-00-277-5553	16	8
4730-00-277-8289	44	9
4730-00-277-8369	77	3
	78	12
4730-00-277-9641	42	18
4730-00-277-9642	32	7
4730-00-278-0084	17	29
4730-00-278-0187	65	2
4730-00-278-2934	50	18
4730-00-278-3142	44	13
4730-00-278-4293	82	4
4730-00-278-5464	77	4
	77	9
	78	18
4730-00-278-5464	79	20
4730-00-278-5467	17	1
4730-00-278-8253	77	2
	77	8
	78	17
	78	20
	79	13
4730-00-278-5464	79	14
4730-00-278-8253	79	19
4730-00-287-1649	42	10
4730-00-287-1784	61	4
4730-00-289-5176	14	23
	44	15
	52	31
4730-00-289-8051	43	10
4730-00-293-3971	45	6
4730-00-293-7971	8	6
4730-00-359-5635	14	11
4730-00-359-5656	14	14
4730-00-360-0589	4	17
4730-00-360-0589	14	13
4730-00-360-0592	4	9
4730-00-360-0595	4	15
4730-00-371-5337	50	14
4730-00-391-3771	9	1
	16	4
4730-00-393-6798	50	17
4730-00-426-8253	32	6
4730-00-467-5505	23	13
4730-00-471-0030	5	4
4730-00-491-0031	5	2
4730-00-492-5042	52	4
4730-00-533-4840	9	6
	16	2
4730-00-534-6934	36	25
4730-00-540-1998	42	8
4730-00-541-2784	41	15
4730-00-542-5938	52	1
4730-00-618-2952	43	2
4730-00-620-6904	44	14
4730-00-640-0536	43	5
4730-00-640-5665	36	24
4730-00-706-2966	41	18
4730-00-706-2968	42	19
4730-00-707-6621	14	6
4730-00-707-6622	14	8
4730-00-707-6626	4	18
4730-00-710-4332	50	10
4730-00-719-2634	65	5
4730-00-753-7464	9	10
4730-00-781-7040	71	15
4730-00-786-4255	17	5
4730-00-787-6384	65	36
	73	13
4730-00-808-1590	52	12
4730-00-811-6205	65	4
4730-00-826-6512	14	24
4730-00-851-1940	65	3
4730-00-892-5590	52	13
4730-00-908-6294	70	14
4730-00-908-3194	71	27
4730-00-933-7925	5	1
4730-00-933-7938	85	11
4730-00-933-7939	65	8
4730-00-933-7943	52	17
4730-00-933-7950	50	20
4730-00-933-7953	43	
	43	13
4730-00-947-0890	32	17
4730-00-948-1719	50	31
4730-00-948-1722	4	8
4730-00-949-8291	4	14
4730-00-950-9646	4	13
4730-00-951-6790	43	26
4730-00-958-7117	86	5
4730-00-958-9985	43	
4730-00-972-1631	68	4
4730-00-973-1630	70	5
4810-00-707-1356	42	20
4810-00-930-2352	59	41
4810-00-930-2357	16	13
4820-00-174-0339	50	32
4820-00-200-0664	16	7
4820-00-203-0054	42	9
	43	3
4820-00-276-9041	14	22
4820-00-289-2153	17	2
4820-00-739-1635	30	13
4820-00-903-4921	50	11
4820-00-933-5587	32	9
4820-00-933-5988	43	28
4820-00-933-7947	68	1
4820-00-962-5834	32	13
	52	7
4920-00-629-4894	11	11
5305-00-001-5029	75	4
5305-00-011-5298	10	5
	47	8
5305-00-011-7200	58	18
5305-00-012-1880	27	14
5305-00-012-5978	24	1
5305-00-012	24	11
5305-00-013-1904	13	7
	27	6
	40	6
5305-00-013-2056	27	11
5305-00-016-9496	33	1
5305-00-016-9525	8	1
	45	1
5305-00-016-9740	7	1
	6	1
5305-00-018-6742	6	16
	7	16
	44	7
5305-00-021-3618	34	1
5305-00-021-3806	65	9
	71	30
5305-00-025-3981	75	3
5305-00-042-0465	88	1
5305-00-042-3437	3	1
5305-00-042-3437	2	10
5305-00-042-4509	31	3
5305-00-042-6367	65	13
5305-00-042-6417	38	5
5305-00-042-6459	57	1
5305-00-043-1942	43	20
5305-00-044-4153	81	11
5305-00-044-5503	81	24
	83	21
5305-00-044-6556	46	14
5305-00-050-3383	82	8
5305-00-050-9226	71	38
5305-00-050-9227	51	4
5305-00-050-9229	52	25
5305-00-051-0827	6	3
	7	3
	72	12
5305-00-052-2221	37	22
5305-00-052-9051	55	2
	56	6

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

NSN	Figure No	Item No
5305-00-054-6668	51	1
5305-00-054-9260	68	32
5305-00-054-9261	62	14
5305-00-057-9613	22	9
5305-00-058-0763	21	5
5305-00-058-0770	36	10
5305-00-058-0783	11	13
	23	25
5305-00-068-0498	24	22
5305-00-068-0499	88	10
5305-00-068-0500	1	5
	15	1
	17	16
	33	15
5305-00-068-0501	23	29
	35	5
	51	8
	71	41
5305-00-068-0502	11	8
	13	18
5305-00-068-0502	16	36
	25	2
	27	1
	28	1
	36	4
	40	3
	44	5
	46	12
	57	7
	58	29
	71	2
	81	17
	85	1
	87	4
5305-00-069-5572	86	2
5305-00-071-1315	68	22
5305-00-071-1318	57	3
5305-00-071-1769	62	6
5305-00-071-2229	37	12
5305-00-071-2241	32	15
5305-00-078-7039	11	6
5305-00-082-1633	69	5
5305-00-121-7889	30	7
5305-00-151-3051	13	10
	27	9
	40	14
5305-00-175-3230	37	33
5305-00-206-1065	23	16
5305-00-206-2220	50	35
5305-00-206-2510	66	11
5305-00-206-2511	66	18
5305-00-244-3839	78	1
5305-00-225-3839	29	3
	51	14
	52	30
	73	2
	77	19
5305-00-225-3840	32	22
	35	3
	70	8
5305-00-249-0511	5	20
5305-00-249-0520	48	20
5305-00-253-5618	73	22
	74	32
5305-00-269-2801	70	16
5305-00-269-2808	74	13
5305-00-269-3211	9	15
	11	20
	47	1
	48	7
	48	25
	50	2
	62	16
	74	1
5305-00-269-3213	11	3

NSN	Figure No	Item No
5305-00-269-3213	14	17
	18	3
	21	4
	23	4
	26	7
	48	16
5305-00-269-3216	62	2
5305-00-269-3223	50	38
5305-00-273-4949	65	25
5305-00-281-1694	6	9
	7	9
5305-00-285-4520	70	11
5305-00-285-5238	82	20
5305-00-292-8875	24	3
5305-00-297-0664	5	8
5305-00-408-0127	27	21
	28	14
	66	35
5305-00-460-6071	3	11
5305-00-465-6389	68	15
5305-00-472-6234	10	19
5305-00-492-6032	81	14
5305-00-515-8228	31	6
5305-00-543-4925	13	13
	28	9
	40	10
5305-00-559-9202	88	5
5305-00-562-6472	1	3
5305-00-584-7990	72	1
5305-00-590-7883	70	1
5305-00-609-9613	30	4
5305-00-614-0245	16	25
	40	17
5305-00-614-0274	24	17
	33	4
	36	1
5305-00-655-9711	68	34
5305-00-716-8182	2	15
	77	15
	78	24
5305-00-716-8186	10	1
	47	4
5305-00-716-8192	16	33
	38	35
5305-00-719-5007	33	9
5305-00-719-5336	63	1
5305-00-719-5346	82	17
5305-00-723-9379	81	2
5305-00-723-9383	23	14
5305-00-723-9386	57	14
5305-00-723-9388	11	10
5305-00-723-9398	63	3
5305-00-723-9399	58	19
5305-00-724-5835	18	7
	26	14
5305-00-724-5896	21	8
	48	22
5305-00-724-5910	72	13
5305-00-725-4187	77	16
	78	25
5305-00-725-4187	79	25
5305-00-728-6275	17	23
5305-00-770-0238	73	10
5305-00-782-9489	33	12
5305-00-782-9495	36	12
5305-00-803-9738	41	4
5305-00-808-9977	30	18
5305-00-811-0798	68	26
5305-00-817-2478	71	12
5305-00-817-6139	69	2
5305-00-824-6197	71	46
5305-00-882-8259	13	17
5305-00-889-3116	57	21
5305-00-912-7289	88	16
5305-00-933-7225	42	3

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

NSN	Figure No	Item No
5305-00-933-7226	37	8
5305-00-933-7227	20	1
5305-00-933-7229	20	7
5305-00-933-9880	71	45
5305-00-933-9882	37	30
5305-00-933-9884	16	12
5305-00-933-9885	41	16
5305-00-933-9886	66	37
5305-00-957-6272	69	13
5305-00-958-5260	48	26
5305-00-958-5471	65	6
5305-00-983-6647	64	1
5305-00-984-3022	74	22
5305-00-984-6193	58	21
5305-00-984-6206	57	18
5305-00-984-6210	37	26
5305-00-984-6212	38	14
	38	21
	39	4
5305-00-984-6214	14	28
5305-00-984-6214	58	26
5305-00-988-1720	37	4
5305-00-988-1721	74	15
5305-00-988-1727	17	31
	31	2
5305-00-993-1849	38	27
5306-00-010-9221	14	1
5306-00-167-4129	18	13
5306-00-225-8494	11	16
5306-00-225-8504	74	5
	75	6
	77	23
	78	6
	79	2
5306-00-225-9081	36	7
5306-00-325-8497	16	16
5306-00-655-6170	15	5
	17	35
5306-00-582-6207	16	22
5307-00-437-8959	82	3
5307-00-467-5474	14	36
5310-00-010-3319	1	4
	85	2
5310-00-012-0214	23	17
5310-00-012-0377	81	16
5310-00-012-0382	2	2
5310-00-012-0388	18	4
5310-00-017-8267	72	10
5310-00-017-8627	5	9
5310-00-042-6758	11	9
	23	30
	24	23
	28	2
	29	2
	33	5
	34	2
	37	28
	51	5
	57	8
	58	30
5310-00-042-6758	70	9
	71	10
	71	42
	81	18
5310-00-042-6759	34	5
5310-00-043-2226	37	25
	38	15
	52	24
5310-00-044-6485	62	8
5310-00-045-3296	42	21
5310-00-045-5210	48	12
5310-00-050-3383	74	11
	75	12
5310-00-050-3389	2	14
	77	12
	79	22
	78	21
5310-00-050-6652	14	16
	14	19
5310-00-060-8432	62	12
5310-00-060-8432	62	17
5310-00-061-1258	18	2
	26	5
	50	39
5310-00-067-6358	81	25
	83	22
5310-00-080-9786	66	19
5310-00-082-0650	15	2
	17	17
	88	15
5310-00-087-4652	33	10
5310-00-087-7493	18	12
	22	11
5310-00-088-1251	33	7
5310-00-167-0662	43	21
5310-00-167-0721	17	21
5310-00-176-8141	16	14
	17	33
5310-00-189-9145	38	29
	85	8
5310-00-198-3733	57	19
5310-00-207-9074	40	16
5310-00-208-5235	38	31
5310-00-208-8426	14	30
5310-00-208-9966	87	2
5310-00-209-0786	1	6
	16	32
	87	3
	88	4
5310-00-209-0965	86	3
5310-00-209-4391	68	36
5310-00-225-3839	79	6
5310-00-260-7924	69	10
5310-00-261-7340	14	20
	26	2
	70	17
5310-00-266-0404	38	2
5310-00-269-6250	26	9
5310-00-274-4597	22	6
5310-00-276-2975	45	7
5310-00-285-5620	72	4
	72	11
5310-00-297-2540	14	25
	26	1
	26	4
5310-00-297-3251	1	1
5310-00-350-4989	6	15
	7	15
5310-00-359-5355	43	35
5310-00-407-9566	11	17
	22	10
	65	14
	73	11
	74	23
	74	6
	75	7
	77	24
	78	7
	79	3
5310-00-474-3639	50	34
5310-00-515-8773	43	29
5310-00-527-3288	40	18
	43	19
5310-00-543-5626	71	1
5310-00-550-1130	17	10
	33	[illegible]
	38	36
	40	2
	41	13
	46	11
	48	8
	48	17
	57	4
	58	27
	65	7
	66	26
5310-00-550-1645	34	4
5310-00-550-2379	66	2
5310-00-576-5752	16	11
5310-00-579-3454	1	2

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

NSN	Figure No	Item No
5310-00-582-5965	25	3
	27	2
	35	2
	52	29
	68	23
	71	3
	73	3
	74	16
	77	20
	78	2
	79	7
5310-00-584-5272	38	3
	62	7
	64	2
5310-00-584-7888	6	8
	7	8
5310-00-595-6057	74	12
	75	13
5310-00-595-6521	2	16
	23	10
5310-00-595-6521	71	32
	77	13
	78	22
	79	23
5310-00-595-7237	44	4
	50	3
	47	2
5310-00-596-7691	66	12
5310-00-616-1739	52	28
5310-00-616-3777	22	1
	43	18
	44	6
5310-00-616-7998	33	11
5310-00-637-9541	9	16
	11	4
	11	21
	21	2
	23	2
	37	21
	62	3
5310-00-637-9541	81	19
5310-00-655-9335	2	1
5310-00-655-9969	73	14
	74	25
5310-00-656-0341	18	10
5310-00-725-4712	53	2
5310-00-732-0558	18	1
	21	1
	23	1
	36	11
	37	20
	50	1
	68	9
	81	13
5310-00-732-0559	82	19
5310-00-739-2994	5	7
	77	14
	79	24
5310-00-761-6882	16	31
	21	6
5310-00-761-6882	29	1
	32	14
	33	18
	37	27
	40	1
	41	1
	41	12
	44	3
	46	10
	62	15
	63	5
	81	1
	88	3
5310-00-763-8920	5	6
	72	9
5310-00-768-0318	23	9
	37	16
	81	21
5310-00-776-0284	5	10
5310-00-809-4061	21	3
5310-00-809-4061	23	3
	26	6
5310-00-809-5998	36	14
	38	4
	67	3
5310-00-815-1087	24	15
5310-00-820-6653	6	4
	7	4
5310-00-826-8268	65	10
5310-00-826-8965	13	17
	17	9
	17	32
5310-00-834-7606	6	14
	7	14
	24	16
	33	2
	36	2
5310-00-834-8734	14	2
5310-00-838-6056	32	21
5310-00-839-3770	50	36
5310-00-851-2674	35	1
	88	14
5310-00-854-8011	51	16
5310-00-880-5977	25	6
	27	3
	28	3
	37	29
	43	30
	44	10
	71	11
5310-00-889-2528	36	5
5310-00-889-2623	51	15
5310-00-901-0278	53	3
5310-00-901-0279	16	15
	17	34
5310-00-903-5966	71	9
5310-00-905-3091	22	4
5310-00-917-2796	22	8
5310-00-930-2297	12	4
5310-00-933-5940	65	18
5310-00-933-7232	26	10
5310-00-933-7236	58	15
5310-00-933-7238	42	1
5310-00-933-8122	68	16
5310-00-934-9758	6	13
	7	13
	16	10
	82	21
5310-00-934-9760	37	11
	37	24
	52	23
5310-00-957-7127	18	14
5310-00-988-7516	35	7
	36	13
	37	17
	71	31
5310-00-989-5945	81	22
5315-00-013-7137	48	11
5315-00-054-4111	62	21
	62	25
	68	20
5315-00-054-5610	68	20
	68	29
5315-00-057-6607	18	9
5315-00-057-6608	11	15
5315-00-058-3519	68	7
5315-00-058-6608	23	22
5315-00-081-6414	48	24
5315-00-168-2942	37	6
5315-00-169-8360	76	9
5315-00-169-8361	75	15
5315-00-171-2614	75	2
5315-00-187-9370	68	6
5315-00-188-0214	68	27
5315-00-198-5969	23	28
5315-00-221-6006	37	3
5315-00-358-9291	36	15
5315-00-472-6156	23	11
5315-00-616-5522	23	35
5315-00-616-5526	26	17
5315-00-732-1020	65	12

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

NSN	Figure No.	Item No.
5315-00-781-1996	21	11
5315-00-810-4761	73	6
5315-00-814-9424	23	23
5315-00-815-8840	66	3
5315-00-815-9499	26	16
5315-00-816-1794	26	8
	62	11
	82	1
5315-00-842-3044	66	1
5315-00-849-3971	57	10
5315-00-852-2336	81	6
	83	1
5315-00-933-7242	57	11
5315-00-933-7243	68	34
5315-00-933-7244	81	7
5315-00-956-5683	74	10
	75	9
5320-00-061-8213	1	12
5320-00-616-5244	66	7
5320-00-829-0493	25	5
5320-00-933-7945	38	10
	38	13
5320-00-994-7076	58	16
5325-00-930-2354	72	2
	72	5
5325-00-933-7940	54	12
5330-00-234-8572	71	5
5330-00-285-9441	23	33
5330-00-290-9471	45	8
5330-00-301-1081	34	
5330-00-313-7954	23	18
5330-00-351-6427	8	8
5330-00-360-5303	8	2
	45	2
5330-00-406-3224	68	25
5330-00-406-3225	68	18
5330-00-406-1400	71	49
5330-00-418-2886	76	5
5330-00-435-3009	76	13
5330-00-435-4983	76	15
5330-00-435-5734	76	18
5330-00-437-8726	66	39
5330-00-444-7136	65	20
5330-00-454-7528	27	13
5330-00-467-3553	41	23
5330-00-491-1530	66	30
5330-00-542-1800	41	10
5330-00-542-1806	40	9
5330-00-599-9428	17	14
5330-00-703-1402	13	12
	28	11
	40	12
5330-00-704-0307	14	5
	14	7
5330-00-739-9087	30	35
5330-00-776-7568	5	3
5330-00-844-9319	52	21
5330-00-903-3716	65	16
5330-00-903-3877	65	27
5330-00-903-6706	65	35
5330-00-903-6711	65	34
5330-00-905-4411	50	26
	50	28
5330-00-930-2372	65	30
5330-00-930-6858	65	22
5330-00-933-5912	69	12
5330-00-933-5947	70	18
5330-00-933-7246	1	14
5330-00-933-9249	38	43
	85	18
5335-00-181-1133	57	2
5340-00-125-7896	81	4
5340-00-200-6139	24	4
	35	4
5340-00-297-6645	71	7
5340-00-297-6833	71	6
5340-00-406-3226	37	18
5340-00-582-2741	2	5
5340-00-664-1364	1	13
5340-00-703-0078	42	2
5340-00-703-0079	42	4

NSN	Figure No.	Item No.
5340-00-823-5317	14	12
5340-00-874-9281	81	20
5340-00-916-6296	50	27
5340-00-933-5906	62	10
5340-00-933-5907	62	19
5340-00-933-5909	48	13
5340-00-933-5910	36	17
5340-00-933-7251	58	22
5340-00-933-7252	57	20
5355-00-031-1465	52	22
5355-00-181-1135	68	8
5360-00-457-2726	82	16
5360-00-479-2896	72	8
5360-00-492-6030	72	7
5360-00-492-6031	56	14
5365-00-180-5872	76	16
5365-00-498-7026	82	2
5815-00-126-4156	59	16
5845-00-073-6615	59	24
5905-00-359-5372	16	18
5910-00-367-8017	16	34
5910-00-538-2301	16	35
5920-00-142-4824	59	8
5920-00-221-5665	39	5
5920-00-280-5003	39	3
5920-00-284-7039	59	11
5920-00-518-3208	59	14
5925-00-300-4448	13	14
	27	16
	28	13
	31	7
	40	13
5930-00-498-2128	89	12
5930-00-823-0962	59	36
5930-00-905-9135	43	43
5930-00-919-7796	30	8
5930-00-906-0085	59	39
5930-00-906-0116	59	40
5930-00-960-7650	38	37
	66	20
	80	4
5930-00-967-8796	32	5
5935-00-176-3015	4	2
5935-00-284-3366	4	4
5935-00-302-6343	59	29
5935-00-317-3116	20	6
	55	1
5935-00-581-4099	4	3
5935-00-936-3605	27	10
5935-00-962-2510	13	8
5940-00-310-2583	39	1
5940-00-310-2584	39	2
5940-00-472-6040	39	8
5940-00-825-3697	85	
5940-00-933-9154	59	20
5945-00-251-7403	39	10
5945-00-728-1743	59	26
5945-00-833-6340	59	17
5945-00-902-0640	59	22
5945-00-910-5558	59	19
5945-00-933-7037	59	13
5945-00-937-0768	39	18
5950-00-627-6753	16	21
	46	13
5950-00-674-5783	13	16
	27	15
	28	12
	40	15
5950-00-909-9146	59	7
5965-00-867-4559	38	26
5975-00-006-0355	27	5
5975-00-079-4313	85	19
5975-00-152-1075	46	5
5975-00-152-1095	17	13
5975-00-152-1144	56	8
5975-00-158-8486	85	17
5975-00-159-0969	85	12
5975-00-178-1216	13	4
	20	
	24	
	43	
	46	

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

NSN	Figure No	Item No
5975-00-178-1216	48	2
	66	14
	85	4
	85	10
	88	
5975-00-179-0098	20	5
	43	12
	43	37
	46	4
	85	5
5975-00-243-5861	5	17
5975-00-244-7807	16	30
	38	44
	38	49
	66	16
	71	17
5975-00-280-7445	16	26
5975-00-280-8558	39	12
	42	13
5975-00-395-2294	85	13
5975-00-445-9926	46	2
5975-00-581-0768	28	5
5975-00-642-8937	5	19
5975-00-644-3183	46	6
5975-00-681-0531	16	28
5975-00-713-8321	28	10
5975-00-805-7433	38	46
5975-00-839-5322	38	42
	38	47
5975-00-840-5844	13	9
	2[illegible]	7
	40	7
5975-00-893-8544	38	48
5975-00-899-7948	16	37
5975-00-899-8948	16	29
5975-00-973-6950	43	42
5977-00-359-9494	17	25
5977-00-708-3693	41	22
5999-00-672-9212	39	16
5999-00-707-8706	39	17
6105-00-014-7565	49	
6105-00-136-8475	21	14
6105-00-930-8920	74	14
6105-00-930-8921	73	9
6105-00-930-9426	11	23
6105-00-933-7926	30	41
6105-00-952-6547	18	19
6105-00-953-1399	58	28
6105-00-961-1632	14	21
6110-00-405-4083	59	4
6110-00-484-3459	53	
	59	43
6110-00-951-9824	39	14
6145-00-189-6695	5	18
6145-00-310-2590	85	
6145-00-310-2592	85	
6145-00-310-2593	43	41
	85	
6145-00-310-2598	43	40
	48	4
6145-00-310-2598	85	
6145-00-310-2590	48	5
6145-00-310-2593	48	6
6145-00-519-2821	4	5
6220-00-548-0134	54	19
6240-00-143-7513	54	20
6240-00-155-7878	54	13
6645-00-917-6225	38	28
6250-00-133-7604	54	16
6645-00-917-6140	59	25
6645-00-917-6225	54	6
6680-00-152-8259	23	12
6680-00-460-3846	52	26
6680-00-930-8384	51	7
6680-01-247-0764	52	22
6685-00-063-9722	42	12
6685-00-453-5306	52	18
6685-00-472-5764	24	2
	24	8
6685-00-698-6805	50	5
	52	11
6685-00-949-3339	24	21
6685-00-949-4876	17	8
	32	11
6685-00-961-9821	42	11
83[illegible]5-00-261-8850	32	19
9330-00-463-4954	53	6
9340-00-903-6160	50	29

best copy available

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference No.	Mfg. Code	Figure No.	Item No.
AC1828	29633	22	2
AG2595	29633	22	7
AL129REVA	45035	11	5
AN335-4	88044	44	3
AN365-1024C	88044	40	16
AN565B10-6	88044	82	20
AN915-8STD	88044	71	24
AX48-3	81300	73	1
AZ3010	29633	22	8
A2323A1	30703	54	6
A24PT	12793	14	14
A2916CN	90192	76	18
A35-3	81300	79	1
	81300	78	5
A35-4	81300	75	1
A4864	29633	20	8
A4865	29633	20	2
A53-3	81300	77	11
A53-4	81300	74	4
A56915AC	76117	12	6
A6845	04255	17	2
A76613-1	76117	12	4
BAF1-2RNLH	91929	66	20
BAF1-2	91929	80	4
BUL705S0890598K SERIES	01121	59	21
BX85-3	81300	62	1
B659	64104	14	30
B705SOSTRT0T3PH24V	01121	59	22
B849SBCTZ0V24VAC	01121	59	13
B850Z0V40L3-24V	01121	59	25
C12002303	06631	30	6
C172A	79466	14	10
C355	29633	22	4
C40A213EVEG0025 E515M0035E4POLE	10983	88	12
C40010604	06631	30	36
C4316	29633	20	1
C4954	29633	22	3
C58055	60883	38	11
C62504	80510	50	34
DA12706-2	15472	44	17
DA2073	49200	62	20
DA2095	49200	62	30
DA2157	49200	62	18
DA2339	49200	62	9
DA597-4	49200	50	11
DS12706-2	15472	8	
DS70G	15235	28	5
D760347	04773	27	21
	04773	28	14
D8547-1	49200	62	27
D8553	49200	62	28
EPA	38797	2	5
E12517-1	76117	12	9
E55057-1	76117	12	5
E56456BC	76117	12	7
E56837-1	76117	12	10
E70014EC	76117	12	8
FB4444	76871	81	20
FCN15-5-8INX3-4IN	71041	21	9
FFN836	81348	52	28
F1G20	34494	43	28
F4334	29633	20	7
F80PLP2-25-60	76444	17	27
GASK470	15235	38	43
	15235	85	18
GASK571	15235	85	13
GASK572	15235	85	33
GC1TYPE9446	03743	5	17
G2595	29633	22	5
H11213-13	46175	73	17
H134	04255	9	7
	04255	16	3
H17215-115-5	46175	74	31
H173A	79466	14	4
H213-21	46175	74	34
H213-81	46175	73	26
H215-33	46175	73	12
	46175	74	14
H215-47	46175	73	18
H215-47	46175	74	27

Reference No.	Mfg. Code	Figure No.	Item No.
H337MI	79466	14	3
H440M	81718	14	5
H6213-84	46175	74	29
H769M	79466	14	7
H9215-115-5	46175	73	25
JC30	81348	5	18
J1211-5-23	76005	11	11
J3BA178P	58417	9	17
KRP11AG	77342	59	26
K3002A7	46175	73	15
LB3170	15235	43	38
	15235	46	8
LLO32U	04009	13	14
	04009	27	16
	04009	31	1
	04009	31	7
	04009	40	13
LLU32U	04009	28	13
MBOES169525	96906	8	1
	81348	45	1
MBOES420427	08288	31	6
MBOES420465	81349	88	1
MBOES424504	81349	70	1
MBOES424509	08288	31	3
MBOES446485	81348	62	8
MDM10	71400	59	8
MILB857TYPE2STYLEA	81349	69	10
MILC40624	81349	89	3
MILF15049	81349	16	4
	81349	16	5
MILLZZH601GRADE1	81349	71	
MILP18174TYPE1SIZE 1-4IN NPT	81349	52	5
MILR1670	81349	89	4
MILW530TYPEIII CLASS4	81349	71	8
MILZZH601GRADE1	81349	50	
	81349	50	7
	81349	50	8
	81349	52	2
MLM2	29679	37	15
ML100	29679	23	37
ML14	29679	23	24
ML148	29679	21	12
ML17	29679	23	19
ML18	29679	23	32
ML19	29679	23	15
ML25	29679	23	12
ML42	29679	36	16
ML47	29679	36	19
ML48M	29679	36	20
ML5	29679	26	11
ML50	29679	36	22
ML55	29679	36	6
ML73	29679	36	3
ML8	29679	23	36
ML86	29679	23	11
ML89	29679	23	13
ML9	29679	23	26
MRC207SFF	76062	74	26
MSS5305-21	08288	88	10
MSS5305-33	08288	66	18
MSS3510-4	08288	23	31
MSS5310-9	08288	88	3
MSS5310-40	08288	62	12
MSS5320-2A	08288	62	23
MSS4030-6	08288	1	9
	08288	24	18
MSS4710-1	08288	9	14
MSS5305-10	08288	24	1
	08288	24	11
	08288	33	1
MSS5305-21	08288	29	3
	08288	43	20
	08288	51	14
MSS5305-23	08288	47	1
	08288	48	7
	08288	48	25
	08288	50	2
MSS5305-29	08288	21	5
MSS5305-33	08288	27	11
MSS5305-43	08288	5	8

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference No.	Mfg Code	Fig No.	Item No.
MSS5310-31	08288	44	10
MSS5310-32	08288	32	21
MSS5310-6	08288	17	9
	08288	17	32
MSS5310-7	08288	14	25
MSS5310-9	08288	1	1
MSS5310-10	08288	14	2
MSS5310-31	08288	1	2
MSS5310-36	08288	22	6
MSS5310-61	08288	2	2
MSS5310-62	08288	5	9
MSS5310-68	08288	5	10
MSS5910-01	08288	16	34
MSS5920-02	08288	39	5
MSS5935-01	08288	13	8
MSS5940-12	08288	39	8
MSS5975-10	08288	66	16
MSS	08288	71	17
MSS6240-1	08288	54	13
MS15003-1	96906	26	18
MS15003-1	96906	70	10
	96906	74	20
MS15795-315	96906	74	12
	96906	75	13
MS15795-811	96906	25	6
	96906	27	3
	96906	28	3
	96906	37	29
	96906	71	11
MS16995-96	96906	64	1
MS16997-89	96906	74	22
MS17143-11	96906	85	
MS20066-166	96906	48	24
MS20066-171	96906	23	23
MS20066-229	96906	74	10
	96906	75	9
MS20066-258	96906	73	6
MS20066-544	96906	65	12
MS20068-102	96906	21	11
MS20470A5-5	96906	71	5
MS20470B8-10	96906	66	7
MS20613-4P3	96906	1	12
MS20613-4P4	96906	58	16
MS20613-6P6	96906	25	5
MS20725-10	96906	4	13
MS21318-14	96906	37	33
MS21318-27	96906	73	22
	96906	74	32
MS24621-32	96906	22	9
MS24630-36	96906	55	2
	96906	56	6
MS24665-172	96906	68	6
MS24665-283	96906	66	1
MS24665-285	96906	62	11
	96906	82	1
MS24665-814	96906	48	11
MS24677-48	96906	65	25
MS24692-210	96906	68	20
	96906	68	29
MS24692-214	96906	23	28
MS25265-63	96906	36	1
MS27020-9	96906	50	31
MS27021-9	96906	4	9
MS27021-10	96906	4	14
MS27022-8	96906	5	2
MS27022-9	96906	4	17
	96906	14	13
MS27022-10A	96906	86	5
MS27025-9	96906	4	8
MS27026-8	96906	5	4
MS27028-9	96906	14	12
MS27030-5	96906	4	15
MS27183-13	96906	18	12
	96906	22	11
MS27183-15	96906	21	3
	96906	23	3
	96906	26	6
MS27183-18	96906	38	4
	96906	67	3
MS35190-269	96906	69	13

Reference No.	Mfg Code	Fig No.	Item No.
MS35190-273	96906	65	6
MS35206-213	96906	57	21
MS35206-259	96906	57	18
MS35206-265	96906	28	14
	96906	39	4
MS35206-267	96906	14	28
MS35206-276	96906	37	4
MS35206-283	96906	31	2
MS35207-259	96906	38	27
MS35214-32	96906	50	35
MS35215-55	96906	66	11
MS35241-120	96906	48	26
MS35265-63	96906	24	17
	96906	33	4
MS35265-64	96906	16	25
MS35265-66	96906	13	13
	96906	28	9
MS35276-277	96906	88	16
MS35291-1	96906	24	22
MS35291-5	96906	71	41
MS35291-6	96906	71	2
MS35291-7	96906	35	3
MS35291-8	96906	52	30
	96906	78	1
MS35291-10	96906	32	15
MS35291-36	96906	36	7
MS35291-113	96906	38	5
MS35291-115	96906	62	6
MS35292-114	96906	2	15
	96906	77	16
	96906	78	25
	96906	79	25
MS35297-62	96906	26	7
MS35298-110	96906	10	1
	96906	47	4
MS35307-38	96906	15	5
	96906	17	35
MS35307-113	96906	65	9
	96906	71	30
MS35307-357	96906	68	34
MS35333-25	08288	47	2
MS35333-39	96906	16	11
MS35333-40	96906	17	10
	96906	33	8
	96906	38	36
	96906	40	2
	96906	41	13
	96906	48	8
	96906	48	17
	96906	57	4
	96906	58	27
	96906	65	7
	96906	66	26
MS35333-42	96906	50	3
MS35334-21	96906	33	11
MS35334-25	96906	51	16
MS35334-127	96906	14	1
MS35335-19	96906	88	4
MS35335-32	96906	66	12
MS35335-33	96906	1	6
MS35335-33	96906	16	32
	96906	87	3
MS35338	96906	64	2
MS35338-6	96906	85	2
MS35338-26	96906	23	17
MS35338-28	96906	86	3
MS35338-43	96906	42	21
MS35338-44	96906	25	3
	96906	27	2
	96906	35	2
	96906	52	29
	96906	68	23
	72869	71	3
	96906	75	7
	96906	77	20
	96906	78	2
	96906	79	7
MS35338-45	96906	22	10
	96906	65	14
	96906	73	11

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference No.	Mfg Code	Fig No.	Item No.
MS35338-45	96906	73	11
	96906	74	6
	96906	74	23
	96906	77	24
	96906	78	7
	96906	79	3
MS35338-46	96906	9	16
	96906	11	4
	96906	11	21
	96906	14	20
	96906	21	2
	96906	23	2
	96906	37	21
	96906	62	3
	96906	81	19
MS35338-48	96906	38	3
	96906	62	7
MS35338-82	96906	23	30
	96906	24	23
	96906	28	2
MS35338-82	96906	29	2
	96906	33	5
	96906	34	2
	96906	37	28
	96906	51	5
	96906	57	8
	96906	58	30
	96906	71	10
	96906	71	42
	96906	81	18
MS35338-159	96906	68	16
MS35291-8	96906	79	6
MS35340-41	96906	50	36
MS35340-48	96906	24	16
	96906	33	2
	96906	36	2
MS35649-202	96906	6	13
	96906	7	13
	96906	16	10
	96906	82	21
MS35649-204A	96906	52	23
MS35649-204	96906	37	11
	96906	37	24
MS35690-605	96906	81	16
MS35690-606	96906	2	1
	96906	50	1
MS35690-803	96906	23	9
	96906	37	16
	96906	81	21
MS35691-1	96906	35	1
	96906	88	14
MS35691-35	96906	81	22
MS35691-510	96906	34	4
MS35691-608	96906	18	10
MS35756-12	96906	23	35
MS35782-3	96906	50	32
MS35810-34	96906	66	3
MS35822-26	96906	71	47
MS35842-2	96906	50	6
	96906	52	1
MS35842-11	96906	71	27
MS35842-16	96906	70	14
MS3591-8	96906	77	19
MS39162-3	96906	9	8
MS39230-2	96906	44	16
MS39255A38	96906	18	6
MS45904-16	96906	26	5
MS45904-58	96906	53	3
MS45904-60	96906	66	19
MS45904-68	96906	36	5
MS45904-70	96906	15	2
	96906	17	17
	96906	88	15
MS45904-74	96906	16	15
	96906	17	34
MS45904-76	96906	18	2
	96906	50	39
MS45904-87	96906	35	7
	96906	36	13
	96906	37	17
MS45904-87	96906	71	31
MS51021-56	96906	69	2
MS51021-83	96906	68	26
MS5167-20	96906	5	6
MS51922-1	96906	33	7
MS51922-17	96906	14	16
	96906	14	19
	96906	33	10
MS51952-2	96906	16	8
MS51955-4	96906	68	32
MS51955-6	96906	62	14
MS51955-19	96906	23	25
MS51955-41	96906	36	10
MS51957-43	96906	51	1
MS51957-60	96906	71	38
MS51957-61	96906	51	4
MS51957-79	96906	68	22
MS51957-83	96906	57	3
MS51959-83	96906	33	9
MS51963-33	96906	63	1
MS51963-35	96906	82	17
MS51963-67	96906	23	14
MS51963-82	96906	48	22
MS51963-88	96906	18	7
	96906	26	14
MS51964-41	96906	21	8
MS51967-2	96906	16	31
	96906	21	6
	96906	29	1
	96906	32	14
	96906	33	18
	96906	37	27
	96906	40	1
	96906	41	1
	96906	41	12
	96906	62	15
	96906	63	5
MS51967-8	96906	18	1
	96906	21	1
	96906	23	1
MS51967-8	96906	36	11
	96906	37	20
	96906	68	9
	96906	81	13
MS51967-20	96906	72	9
MS51968-8	96906	82	19
MS51971-1	96906	71	9
MS51973-51	96906	17	23
MS51017-48	96906	48	20
MS90725-3	96906	1	5
	96906	15	1
	96906	17	16
	96906	33	15
MS90725-5	96906	23	29
	96906	35	5
	96906	51	8
MS90725-6	96906	13	17
	96906	13	18
	96906	16	36
	96906	27	1
MS90725-6	96906	28	1
	96906	25	2
	96906	36	4
	96906	40	3
	96906	44	5
	96906	46	12
	96906	57	7
	96906	58	29
	96906	81	17
	96906	85	1
	96906	87	4
MS90725-7	96906	32	22
	96906	70	8
MS90725-22	96906	37	12
MS90725-40	96906	74	5
	96906	75	6
	96906	77	23
	96906	78	6
	96906	79	2
MS90725-60	96906	3	11

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference No.	Mfg Code	Fig No.	Item No.
MS90725-60	96906	9	15
	96906	11	20
	96906	62	16
	96906	74	1
MS90725-62	96906	2	4
	96906	11	3
	96906	14	17
	96906	18	3
	96906	23	4
	96906	48	16
MS90725-66	96906	62	2
MS90725-73	96906	50	38
MS90725-84	96906	86	2
MS90725-111	96906	36	12
MS90725-160	96906	81	24
	96906	83	21
MS90725-164	96906	72	12
MS90726-58	96906	70	16
MS90726-65	96906	74	13
MS9072[illegible]-107	96906	16	33
MS90726-107	96906	38	35
MS90726-117	96906	78	24
MS90728-66	96906	33	12
MV100D5106B	06631	30	41
M1537	90192	76	17
M200M	90192	76	11
M2000R	90192	73	2
M2012B	90192	76	6
M201293	90192	76	13
M2013B	90192	76	7
M201311A	90192	75	3
M201311	90192	75	4
M201397	90192	75	2
M2027A	90192	76	2
M2032J	90192	76	9
M2047G	90192	73	3
	90192	76	3
M2049D	90192	76	10
M2051K	90192	76	1
M210292	90192	76	14
M2519	90192	76	15
M41SPEC23720	39709	24	2
	39709	24	8
M674	11583	41	23
N116494C28	79466	42	22
N47870C5	79466	41	19
NAS388-8-8P	80205	71	46
NAS671-8	88044	53	2
NPD18	02695	77	27
	02695	78	26
NPD18	02695	79	26
N752366	99539	89	2
OK18-3	11583	41	22
OPE113A615ABP1	88422	49	3
PD380	81336	5	19
PE113A616ABP1	88422	49	2
P11800	46175	73	9
P11801	46175	74	14
P9664-1	49200	62	29
P212	36384	26	19
P302N	00656	16	35
P4267	06631	30	1
P631S	61349	17	8
	61349	32	11
ODTYPESF	93232	62	5
OOB746	81348	65	10
OOI666	81349	35	4
OOS00627	81349	81	25
	81349	83	22
OOS633TYPEFS1019	81348	18	9
OOS633	81348	17	1
	81349	44	7
OOS763	81348	51	15
	81348	68	36
OS100M285	08484	4	7
	08484	4	12
OS200M725	08484	11	1
REN15	71400	39	3
ROTOR29-23-81-01	11349	19	7
R225-426B	46175	74	18
R225-426C	46175	74	17
R225-250	46175	73	14
	46175	74	25
R28-546	46175	73	21
R4225-763	46175	73	16
R4225-768	46175	74	28
R742	60266	68	15
SATN4	71176	84	1
SB1500-21	46175	74	19
SCBB15	71041	21	10
SD1-1-8	93232	79	8
	93232	79	10
SH1-1-8	93232	73	4
	93232	77	21
	01551	78	3
SHP37-116ST	06631	30	7
SK1-1-8	93232	74	8
	93232	77	26
	93232	78	9
	93232	79	5
SK6112-29D20	29633	22	1
SP4550	24446	43	37
	24446	46	4
SYCZ178	06631	30	14
SYCZ1309	06631	30	33
SYCZ1315	06631	30	24
SYC1Z178	06631	30	17
SYC1Z184	06631	30	34
SYC1Z195	06631	30	9
SYC1-1[illegible]	06631	30	12
SYC1-1213	06631	30	11
SYC11187CD	06631	30	29
SYC1138	06631	30	43
SYC1143	06631	30	38
SYC1143-1	06631	30	39
SYC1163	06631	30	42
SYC1177	06631	30	27
SYC1179	06631	30	37
SYC12-1	06631	29	5
SYC12-1275BR	06631	30	23
SYC1316SS	06631	30	26
SYC1317BR	06631	30	28
SYC156	06631	30	31
SYC2Z13	06631	30	5
SYC2Z1308	06631	30	32
SYC2Z631	06631	30	8
SYC2816	06631	30	18
SYC3Z194	06631	30	19
SYC3-192	06631	30	15
	06631	30	21
SYC3-195	06631	30	10
SYC4-1187	06631	30	4
SYC4-154	06631	30	22
SYC6Z1275	06631	30	20
SYC6-188	06631	30	3
SYC7-154	06631	30	35
SYC921180	06631	30	40
SYG1126SS	06631	30	25
SYRA2-1	06631	30	13
S300	25567	14	35
S7C1-184	06631	30	30
TAN15	60883	65	17
TA27	15235	85	19
T17	15235	43	42
TW115	60038	65	18
TYPE162	14907	58	28
T27	15235	38	42
	15235	38	47
V4001B1L1	40931	42	20
V0980	49200	62	19
WC596-58-1	81348	4	2
WF408TYPE1CLASS2KIND1	81349	38	44
WWC563SIZE1-2	81349	20	
WWC	81348	24	
	81349	48	2
WWC563SIZE3-4	81349	20	
WWC563	81348	43	
	81349	46	
WWC5[illegible]1SIZE3-4IN	81349	88	
WWN351TYPEA	81348	17	29
WWN351TYPE1SIZE1-2IN NPT	81348	52	10

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference No.	Mfg Code	Fig No.	Item No.
WWN351TYPE1SIZE1-4IN NPT	81348	52	16
WWN351TYPE1	81349	71	26
WWN351	81348	16	9
WWP460CLA	81348	9	2
WWP471TYPE1SIZE1-8NPTF	81349	50	14
WWP471TYPE1SIZE3-8NPTF	81349	50	15
WWP471ATYPE2STYLEC	81349	71	15
WWP471TYPE1	81348	17	3
	81349	31	11
WWP471TYPE2STYLEC SIZE1-2IN NPTF	81348	52	31
WWP471TYPE2STYLEC	81349	14	23
	81349	14	24
WWP471	81348	16	6
WWP521TYPE1SIZE1 NPT	81349	50	18
WWP521TYPE1SIZE1.500	81349	50	19
WWP521TYPE2SIZE1-1-2 NPT	81349	50	16
WWP521TYPE2	81348	32	8
WWP471TYPEC2STYLEC	81348	44	15
WWT775	81348	65	1
	81349	68	3
WWT775	81349	70	4
	81349	77	5
	81349	77	10
	81349	78	14
	81349	79	15
	81349	78	19
	81349	79	21
WWT799ATYPEN	81348	43	
	81348	43	14
WWT799CLASSIITYPEL	81348	43	
XT659-24V-60HZ	81978	59	41
X120	14351	74	21
X201	25051	1	4
X215046M	90192	76	20
X217402A	90192	75	16
X232217	01121	59	23
X23222	01121	59	18
223367	01121	59	19
223363	01121	59	24
29802-16-7748624	21335	12	3
08492	61368	23	7
09074-09194	08162	23	21
00-13M	30703	38	28
100TYPESST2	92000	59	30
100159-5NP	49200	66	37
100241	58417	10	17
100241	58417	47	20
100281-1	24446	57	16
10035-75SS	49200	62	26
100371	58417	10	18
	58417	47	21
100372	79466	43	16
100376	79466	43	
	79466	43	13
100382	79466	43	43
100450	79466	50	29
100601001	45035	17	28
100901	58417	10	20
	58417	47	23
100003-12	11349	19	6
100004-12	11349	19	4
1010	70847	50	17
101121	79466	48	12
101123	79466	48	19
101128	79466	48	13
10177H1036	15605	39	16
103247	79466	71	23
103369	79466	43	9
103379	58417	10	19
	58417	47	22
10452-20	49200	87	1
104671	58417	10	7
	58417	47	10
105021	58417	10	5
	58417	47	8
10177H1023	15605	39	17
10826-10	92798	70	22
10913	25567	14	
110441	58417	10	3
	58417	47	6
1110X3	79470	68	2
	79470	70	3
111A522AAP60	88422	49	4
11-1142	15605	39	22
11-1619-2	15605	39	19
11-482-2	15605	39	15
112	24981	36	25
112077	58417	10	2
	58417	47	5
113331	58417	10	16
	58417	47	19
114227	58417	10	21
	58417	47	24
116492	79466	40	11
116494	79466	40	5
116495	79466	50	4
116656	79466	50	20
117531	58417	10	15
	58417	47	18
117667	58417	10	14
117667	58417	47	17
118377	79466	50	24
118714	79466	50	22
11928	00000	9	4
119928	24617	44	2
119984	58417	47	27
	58417	10	24
12SV	46175	73	23
	46175	74	33
121232	58417	47	7
12132	58417	10	4
121732	58417	10	22
	58417	47	25
1230	24981	69	1
123632	58417	10	12
	58417	47	15
123652	58417	10	9
	58417	47	12
124027	58417	10	6
	58417	47	9
1250	59730	38	46
1268	26901	46	2
129772	58417	10	10
	58417	47	13
129782	58417	10	11
	58417	47	14
129792	58417	10	12
	58417	10	13
	58417	47	16
130605012	45035	17	14
132-1-4-4002B	88733	32	9
132802004	45035	17	15
1334-8	15472	45	8
1-4IN	46175	74	16
1411D4-20	58417	87	2
1-4	46175	73	20
1-4-20X3-8	46175	73	19
	46175	74	15
1-4-20X5-8	46175	73	24
	46175	74	30
144157STD	00000	9	9
1539	10941	14	36
15641	14608	71	39
15797PH	14608	53	1
159502001	45035	16	18
1621-36-1	60883	11	7
1627B	70270	65	5
1650	70270	2	13
170	15235	85	12
1-8NPT	46175	73	13
18355	92298	51	7
198MA14	79466	14	8
200X3	79470	77	2
	79470	77	8
	79470	78	11
	79470	78	17
	79470	78	20
	79470	79	13
	79470	79	19
200-198REVA	96480	32	18

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference No.	Mfg Code	Fig No.	Item No.
202KD	21335	12	2
211104	90192	76	5
211147B	90192	76	19
211151	90192	76	16
211179	90192	76	4
211181	90192	75	15
211186	90192	75	5
213116	90192	76	12
215077	90192	76	8
219198	24617	23	27
22	77860	50	10
23-3112	15605	39	24
23-3113	15605	39	23
23-3114	15605	39	21
23370-31	15472	8	4
	15472	45	4
2387040260-81-2	45035	11	2
24C1	12673	88	2
2-4PRC	97576	65	4
24151-3-4	12673	88	6
25014-15-IW	92878	34	
25-3520	49200	66	5
25-3697	72869	66	31
25-4187A	49200	66	30
	49200	66	33
2556-4	01276	32	1
	01276	32	2
	01276	32	3
	01276	61	5
265V	59730	16	28
270	15235	85	17
	79470	14	22
2704	49200	62	10
28329-00	15472	8	3
	15472	45	3
28778	58417	10	23
	58417	47	26
29-23-81-01	11349	19	8
3A12PD	93232	77	25
3A34QD	93232	73	5
3AQ30	01551	73	5
3AQ44	93232	79	9
3AQ6	93232	75	8
3AQ90	93232	78	8
3B946	93232	79	11
300943-02	11349	19	2
30127304	11349	12	1
	11349	49	1
301273-12	11349	19	1
310912	95879	77	6
	95879	78	15
	95879	79	16
3121-10	45681	43	22
314298-01	11349	19	3
31582-32	15472	8	5
	15472	45	5
32058-31	15472	8	8
32059-31	15472	8	7
	15472	45	7
321	59730	16	37
321	59730	16	29
32158-31	15472	8	6
	15472	45	6
324901001	45035	17	25
32845	15472	45	2
32849-31	15472	8	2
3325X4	79470	44	9
3328X4	79470	9	3
3351A	53477	66	13
374A	19557	38	26
38A545161	29633	21	14
387000	93232	74	9
39161-11	04009	31	10
39161-12	04009	31	4
399031076	45034	13	12
4AQ30	93232	78	4
4AQ82	93232	79	4
4A12-0Q0	93232	74	7
4A34PD	93232	77	22
400X3	79470	77	3
400X3	79470	78	12
	79470	79	17
410SIZE1-4IN	14959	32	13
	14959	52	7
410101003	45035	16	19
4158R1	26901	46	1
4176	59730	24	4
42115	04009	31	9
42118	04009	13	16
	04009	27	15
	04009	28	12
	04009	40	15
4230	59730	16	30
426367	21450	65	13
4300-50-500-6INS	65092	24	21
444	82084	50	37
4512	71400	59	11
470	15235	43	39
47310	79466	50	40
47352	79466	13	6
4738-2-4B	00624	61	4
4738-4-4B	00624	32	4
47540	79466	41	3
47416	79466	4	18
47484	79466	15	4
47543	79466	41	5
47620	60038	65	24
47679W47620	60883	65	23
47857	79466	48	23
47862	79466	40	4
47870	79466	41	14
47878	79466	40	12
47888	79466	9	11
47895	79466	14	
47909	79466	41	10
47910	79466	41	9
47950	29633	22	12
48X3	79470	68	5
	79470	70	6
48X4A	79470	9	1
48021	79466	50	21
49X3	79470	68	4
	79470	70	5
49283	79466	40	9
49364	79466	41	17
49367	79466	41	6
5K36FG5046	88422	49	
5K43GG3266	03510	14	21
5-13-2090-32	81337	25	1
5-16-18X3-1-4	46175	73	10
50810	79466	46	5
51017	58417	10	8
	58417	47	11
5115X100	79470	43	
5121	59730	20	5
	59730	43	12
	59730	85	5
5221	59730	20	6
	59730	55	1
5293200	19207	74	11
5293200	19207	75	12
530601033	45035	17	11
53945	79466	46	9
535228	72560	72	2
	72560	72	5
5405X10	79470	43	26
5411	11349	19	5
544111	00000	62	21
	00000	62	25
5-4-1094-17A	72869	89	
55-1501	15605	39	20
550	61349	52	11
	61349	50	5
5552315	72560	72	6
563902007	45035	33	6
565301023	45035	26	20
567401003	45035	17	38
57141	79466	46	6
571740-4H16	73030	1	3
5765	25567	14	34

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference No.	Mfg Code	Fig No.	Item No.
5816X5	79470	44	1
5816X5X4	79470	44	14
5822X5	79470	42	14
5825X5	79470	44	12
58615	79466	46	14
5886X5	79470	41	15
5889	25567	14	32
59-255-AGR3	60883	48	5
	60883	85	
59-255-AGR4	60883	43	40
	80883	48	4
	60883	85	
50050-160-2-1-2DA	61349	42	11
50009L	76680	23	33
686-24V	24446	54	20
6-0-325A	93084	24	10
60	76022	36	24
6038-659	60038	65	31
607007104	45035	34	16
6087	25567	14	33
6103D	25567	14	26
6103GA	25567	14	27
61196	79466	41	18
6203-2RS	52676	23	34
621016005	45035	17	18
621109002	45035	34	10
621109004	45035	34	13
621109006	45035	34	14
638	39305	43	35
634-30102	45033	18	5
63729	79466	48	21
638-253-296	75138	16	21
	75138	46	13
6477	25567	14	37
6479A	25567	14	31
64920115	45035	17	37
653	60038	65	32
66-14L	72625	23	8
67201	79466	41	21
67203	79466	41	16
67218	79466	14	11
67223	79466	13	5
	79466	48	3
67250	88044	43	29
67263	79466	41	20
67265	79466	46	11
67285	79466	47	3
67286	79466	44	4
67300	79466	42	16
67301	79466	42	10
67302	79466	43	4
67303	79466	42	19
67304	79466	42	12
67305	79466	42	18
67309	79466	40	17
67313	79466	42	13
67315	79466	42	3
67316	79466	42	1
67317	79466	42	4
67328	79466	41	4
67354	79466	14	6
68X3	79470	65	3
681X4	79470	43	2
69-2261	15605	39	25
6928	93736	42	2
69957	79466	43	21
69X3	79470	65	2
706906003	45035	34	12
706906004	45035	34	17
706906005	45035	34	7
709A0WB	01121	59	17
72C1	78229	16	26
72-171-1-12	78229	16	24
721109007	45035	34	6
7410G	74545	27	10
7411G	74545	4	3
7420	74545	27	7
750	24981	23	18
7541	74545	4	4
755702131	45035	17	39
7714	70903	48	6
	70903	85	
7724	25567	14	29
79486	79466	50	25
79487	79466	48	9
8BXX146	78290	39	10
8NBD	96881	58	25
80369	79466	42	6
80370	79466	42	5
80741	79466	46	15
80764	79466	47	
80901-511	72619	54	19
811-2EE3-4	25567	14	18
81114	79466	42	7
842	59730	39	12
881-4	14959	16	7
8981-2E	14959	52	15
9013AMG6	90211	32	5
90324	79466	50	33
90325	79466	43	32
90326	79466	43	31
907-1-8	37239	42	9
	37239	43	3
9115H168	15605	39	14
91555	79466	43	24
91558	79466	43	33
91559	79466	43	23
91563	79466	40	8
91565C	79466	40	19
9157788-94	00000	71	12
91605	79466	50	30
91791	79466	50	28
91792	79466	50	27
91793	79466	50	26
94778	79466	48	14
94779	79466	48	15
94781	79466	27	5
94782	79466	27	13
94783	79466	44	8
94786	79466	44	11
990636	58417	10	
6-1-1638-40-172A	60883	36	21
6-1-1900-22A	72869	89	1
6-1-1900-82A	72869	15	3
6-1-1900-87A	72869	71	25
6-1-1900-89A	72869	61	3
6-1-1900-91A	72869	85	21
6-1-1900-92A	72869	85	20
6-1-1900-93A	72869	85	15
6-1-1900-103A	72869	59	3
6-1-1900-105A	72869	61	1
6-1-1900-107A	72869	59	1
6-1-1900-108A	72869	5	11
6-1-1900-109A	72869	5	12
6-1-1900-110A	72869	59	2
6-1-1900-111A	72869	61	2
6-1-1900-113A	72869	5	5
6-1-1900-122A	72869	6	9
	72869	7	9
6-1-1900-123A	72869	6	8
	72869	7	8
6-1-1900-126A	72869	66	36
6-1-1900-127A	72869	66	35
6-1-1900-139A	72869	5	1
6-1-1900-141A	72869	5	13
6-1-1900-142A	72869	5	20
6-1-1900-145A	72869	5	3
6-1-1900-151A	72869	85	7
6-1-1900-152A	72869	85	22
6-1-1900-153A	72869	85	23
6-1-1900-157A	72869	6	7
	72869	7	7
6-1-1900-20A	60883	37	
6-1-1900-26A	72869	1	7
6-1-1900-28A	72869	25	4
6-1-1900-48A	72869	2	[illegible]
6-1-1900-81A	72869	1	16
6-1-1906-12-1A	72869	86	4
6-1-1906-12A	72869	86	1

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference No.	Mfg Code	Fig No.	Item No.
6-1-1907-19-10A	72869	85	25
6-1-1907-19-11A	72869	43	17
6-1-1907-19-12A	72869	43	7
6-1-1907-19-15A	72869	43	15
6-1-1907-19-16A	72869	43	11
6-1-1907-19-19A	72869	43	34
	72869	85	24
6-1-1907-19-20A	72869	43	5
6-1-1907-19-4A	72869	43	6
6-1-1907-19-6A	72869	43	8
6-1-1907-19-63A	72869	50	12
6-1-1907-19-69A	72869	43	10
6-1-1907-19-71A	72869	43	1
6-1-1907-19-86A	72869	43	18
6-1-1907-19-87A	72869	43	19
6-1-1907-19-9A	72869	50	13
6-1-1907-19-95A	72869	43	36
6-1-1908-19-51A	72869	42	8
6-1-1908-19-54A	72869	42	17
6-1-1908-19-55A	72869	42	15
6-1-1909-19-33A	72869	28	4
6-1-1909-19-34A	72869	28	16
6-1-1909-19-40A	72869	28	8
6-1-1909-19-41A	72869	28	7
6-1-1909-19-42A	72869	28	6
6-1-1909-21-39A	72869	28	10
6-1-1909-21-56A	72869	13	19
	72869	27	23
	72869	27	4
6-1-1909-21-574A	72869	27	20
6-1-1909-21-576A	72869	27	17
6-1-1909-21-577A	72869	27	19
6-1-1909-21-578A	72869	27	18
6-1-1909-21-58A	72869	28	11
	72869	31	5
6-1-1909-21-62A	72869	27	[illegible]
6-1-1909-21-63A	72869	27	14
6-1-1909-21-62A3	72869	27	8
6-1-1909-21-99A	72869	13	11
	72869	27	12
6-1-1910-20-10A	72869	32	16
6-1-1910-20-12A	72869	85	29
6-1-1910-20-13A	72869	32	17
6-1-1910-20-14A	72869	32	23
6-1-1910-20-21A	72869	32	20
6-1-1910-20-32A	72869	85	26
6-1-1910-20-33A	72869	85	30
6-1-1910-20-34A	72869	85	27
6-1-1910-20-35A	72869	85	28
6-1-1910-20-369A	72869	17	12
6-1-1910-20-40A	72869	32	6
6-1-1910-20-41A	72869	32	10
6-1-1910-20-43A	72869	32	12
6-1-1910-20-45A	72869	32	7
6-1-1910-20-49A	72869	30	2
6-1-1910-20-50A	72869	24	13
6-1-1910-20-51A	60883	29	4
6-1-1910-20-539A	72869	38	19
6-1-1910-20-540A	72869	38	20
6-1-1910-20-541A	72869	38	18
6-1-1910-20-542A	72869	38	17
6-1-1910-20-56A	72869	33	14
6-1-1910-20-57A	72869	33	13
6-1-1910-20-8A	72869	32	19
6-1-1911-20-2A	60883	24	12
6-1-1912-12-21A	60883	28	15
6-1-1912-21-10A	72869	85	16
6-1-1912-21-13A	72869	85	10
6-1-1912-21-15A	72869	85	9
6-1-1912-21-23A	72869	27	22
6-1-1912-21-35A	72869	88	5
6-1-1912-21-38A	72869	87	5
6-1-1912-21-40A	72869	87	6
6-1-1912-21-41A	72869	46	7
6-1-1912-21-47A	72869	5	16
6-1-1912-21-67A	72869	87	11
6-1-1912-21-73A	72869	5	14
6-1-1912-21-79A	72869	88	7
6-1-1912-21-84A	72869	5	7
6-1-1912-21-88A	72869	88	9
6-1-1910-20-634A	72869	50	23
6-1-1912-21-90A	72869	85	11
6-1-1912-21-92A	72869	88	11
6-1-1912-21-93A	72869	88	8
6-1-1912-21-94A	72869	88	13
6-1-1912-21-95A	72869	5	15
6-1-1912-21-98A	72869	88	17
6-1-1916-26-1A	72869	1	15
6-1-1916-26-26A	72869	1	10
	72869	2	6
	72869	3	6
6-1-1916-26-28A	72869	2	7
6-1-1916-26-4A	72869	1	8
6-1-1916-26-9A	72869	1	11
6-1-1918-26-16A	72869	1	13
6-1-1918-26-27A	72869	1	14
6-1-1919-124A	72869	85	32
6-1-1919-126A	72869	85	31
6-1-1919-22-153A	72869	85	
6-1-1919-27A	72869	59	4
6-1-1919-27-1394	72869	54	21
6-1-1919-27-14A	72869	54	1
6-1-1919-27-33A	72869	57	
6-1-1919-27-87A	72869	60	6
6-1-1919-27-88A	72869	60	7
6-1-1919-27-89A	72869	60	8
6-1-1919-27-91A	72869	59	42
6-1-1919-27-93A	72869	54	18
6-1-1919-27-94A	72869	59	33
6-1-1919-27-97A	72869	54	16
6-1-1919-27-100A	72869	59	40
6-1-1919-27-106A	72869	39	6
6-1-1919-27-109A	72869	59	7
6-1-1919-27-110A	72869	59	31
6-1-1919-27-113A	72869	59	14
6-1-1919-27-114A	72869	59	16
6-1-1919-27-115A	72869	56	5
	72869	85	34
6-1-1919-27-116A	72869	56	11
6-1-1919-27-117A	72869	56	7
6-1-1919-27-118A	72869	54	4
6-1-1919-27-119A	72869	60	4
6-1-1919-27-120A	72869	55	9
6-1-1919-27-121A	72869	55	3
6-1-1919-27-122A	72869	55	4
6-1-1919-27-123A	72869	55	5
6-1-1919-27-124A	72869	56	4
6-1-1919-27-125A	72869	56	10
6-1-1919-27-126A	72869	56	3
6-1-1919-27-127A	72869	56	9
6-1-1919-27-128A	72869	59	37
6-1-1919-27-130A	72869	56	8
6-1-1919-27-131A	72869	60	1
6-1-1919-27-132A	72869	59	38
6-1-1919-27-134A	72869	59	34
6-1-1919-27-135A	72869	54	[illegible]
6-1-1919-27-136A	72869	54	17
6-1-1919-27-138A	72869	59	5
6-1-1919-27-139A	72869	59	12
6-1-1919-27-140A	72869	59	9
6-1-1919-27-143A	72869	54	7
6-1-1919-27-146A	72869	60	2
	72869	60	3
6-1-1919-27-148A	72869	54	22
	72869	59	15
6-1-1919-27-149A	72869	54	2
	72869	59	6
6-1-1919-27-150A	72869	59	35
6-1-1919-27-151A	72869	54	8
	72869	54	5
	72869	59	10
6-1-1919-27-152A	72869	59	20
6-1-1919-27-154A	72869	56	1
6-1-1919-27-155A	72869	56	2
6-1-1919-27-156A	72869	60	5
6-1-1919-27-158A	72869	54	12
6-1-1919-27-159A	72869	54	10
6-1-1919-27-160A	72869	54	11
6-1-1919-27-163A	72869	53	10
6-1-1919-27-164A	72869	53	9
6-1-1919-27-165A	72869	59	39

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference No.	Mfg Code	Fig No.	Item No.
6-1-1919-27-168A	72869	59	27
6-1-1919-27-169A	72869	59	28
6-1-1919-27-171A	72869	55	8
6-1-1919-27-172A	72869	55	6
6-1-1919-27-173A	72869	55	7
6-1-1919-27-174A	72869	59	32
6-1-1919-27-177A	72869	54	14
6-1-1919-27-178	72869	54	15
6-1-1919-27-181A	72869	59	41
6-1-1920-27-1A	72869	53	
	72869	59	43
6-1-1920-27-7A	72869	53	11
6-1-1920-27-8A	72869	53	6
6-1-1920-27-10A	72869	53	8
6-1-1920-27-11A	72869	53	5
6-1-1920-27-15A	72869	53	7
6-1-1920-27-16A	72869	53	4
6-1-1924-27-34A	72869	58	1
6-1-1924-27-40A	72869	57	14
6-1-1924-27-42A	72869	57	5
6-1-1924-27-44A	72869	58	31
6-1-1924-27-45A	72869	58	24
6-1-1924-27-48A	72869	58	23
6-1-1924-27-49A	72869	58	22
6-1-1924-27-50A	72869	58	20
6-1-1924-27-51A	72869	58	13
6-1-1924-27-53A	72869	57	15
6-1-1924-27-54A	72869	57	12
6-1-1924-27-55A	72869	57	6
6-1-1924-27-56A	72869	57	13
6-1-1924-27-57A	72869	57	11
6-1-1924-27-58A	72869	57	9
6-1-1924-27-59A	72869	57	10
6-1-1924-27-61A	72869	58	17
6-1-1924-27-64A	72869	58	14
6-1-1924-27-65A	72869	58	15
6-1-1924-27-66A	72869	58	10
6-1-1924-27-67A	72869	57	2
6-1-1924-27-68A	72869	58	12
6-1-1924-27-69A	72869	58	11
6-1-1924-27-70A	72869	57	17
6-1-1924-27-71A	72869	57	23
6-1-1924-27-72A	72869	57	22
6-1-1924-27-76A	72869	58	26
6-1-1924-27-79A	72869	58	21
6-1-1924-27-80A	72869	58	19
6-1-1924-27-81A	72869	58	18
6-1-1924-27-82A	72869	57	1
6-1-1924-27-85A	72869	57	19
6-1-1924-27-86A	72869	57	20
6-1-1925-27-35A	72869	58	2
6-1-1925-27-36A	72869	58	4
6-1-1925-27-37A	72869	58	8
6-1-1925-27-38A	72869	58	9
6-1-1925-27-39A	72869	58	5
6-1-1925-27-40A	72869	58	7
6-1-1925-27-41A	72869	58	6
6-1-1929-36A	72869	65	11
6-1-1929-41A	72869	66	39
6-1-1929-42A	72869	71	35
6-1-1929-43A	72869	71	33
6-1-1929-44A	72869	71	34
6-1-1929-45A	[illegible]	72	7
6-1-1929-46A	60883	72	8
6-1-1929-51A	93232	62	4
6-1-1929-54A	72869	72	3
6-1-1929-56A	72869	64	3
6-1-1929-61A	72869	6	1
	72869	7	1
6-1-1929-67A	72869	6	4
	72869	7	4
	72869	72	10
6-1-1929-69A	72869	71	32
6-1-1929-70A	72869	72	4
	72869	72	11
6-1-1929-71A	72869	72	1
6-1-1929-73A	72869	58	3
6-1-1929-74A	72869	[illegible]	[illegible]
	72869	[illegible]	[illegible]
6-1-1929-86A	72869	6	3

Reference No.	Mfg Code	Fig No.	Item No.
6-1-1929-86A	72869	7	3
6-1-1929-87A	72869	6	2
	72869	7	2
6-1-1929-88A	72869	2	10
	72869	3	1
6-1-1929-89A	72869	2	11
	72869	3	2
6-1-1929-94A	72869	3	10
6-1-1929-95A	72869	3	8
6-1-1929-96A	72869	3	9
6-1-1930-31A	72869	71	51
	72869	71	22
6-1-1930-31-38A	72869	71	44
6-1-1930-31-45A	72869	71	45
6-1-1930-31-46A	72869	71	36
6-1-1930-31-47A	72869	71	37
6-1-1930-31-54A	72869	71	19
6-1-1930-31-55A	72869	71	18
6-1-1930-51-52A	72869	71	21
6-1-1930-51-53A	72869	71	20
6-1-1931-31-26A	72869	71	40
6-1-1931-31-29A	72869	71	29
6-1-1931-31-31A	72869	71	28
6-1-1931-31-33A	72869	71	43
6-1-1932-31-39A	72869	71	48
6-1-1932-31-41A	72869	71	50
6-1-1932-31-42A	72869	71	49
6-1-1934-32A	72869	66	
6-1-1934-32-1A	72869	66	38
6-1-1934-32-2A	72869	66	8
6-1-1934-32-3A	72869	66	10
6-1-1934-32-4A	72869	66	27
6-1-1934-32-5A	72869	66	6
6-1-1934-32-6A	72869	66	4
6-1-1934-32-8A	72869	66	9
6-1-1934-32-10A	72869	66	22
6-1-1934-32-25A	72869	66	14
6-1-1934-32-34A	72869	66	21
6-1-1934-32-36A	72869	13	3
	72869	66	15
6-1-1934-32-38A	72869	13	1
	72869	66	17
6-1-1934-32-43A	72869	66	2
6-1-1935-32-11A	72869	66	24
6-1-1935-32-13A	72869	66	23
6-1-1935-32-15A	72869	66	29
6-1-1935-32-16A	72869	66	34
6-1-1935-32-18A	72869	66	25
6-1-1935-32-19A	72869	68	13
	72869	66	28
6-1-1935-32-21A	72869	66	32
6-1-1936-33-1A	72869	81	26
6-1-1936-33-12A	72869	81	15
6-1-1936-33-30A	72869	2	17
	72869	77	16
6-1-1936-33-37A	72869	74	3
6-1-1936-33-55A	72869	81	12
6-1-1936-33-56A	72869	74	2
6-1-1936-33-57A	72869	77	28
6-1-1936-33-58A	72869	81	8
6-1-1936-33-59A	72869	81	3
6-1-1936-33-82A	72869	81	4
6-1-1936-33-83A	72869	81	5
6-1-1936-33-86A	72869	81	23
6-1-1936-33-88A	72869	77	18
6-1-1936-33-89A	72869	77	17
6-1-1936-33-90A	72869	81	7
6-1-1936-33-91A	72869	81	6
6-1-1936-33-92A	72869	77	15
6-1-1936-33-96A	72869	81	2
6-1-1936-33-97A	72869	81	9
	72869	81	14
6-1-1936-33-99A	72869	81	1
6-1-1936-33-100A	72869	77	12
6-1-1936-33-103A	72869	81	10
6-1-1936-33-104A	72869	77	14
6-1-1936-33-105A	60883	77	4
	72869	77	9
6-1-1936-33-114A	72869	77	13
6-1-1936-33-115A	72869	81	11

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference No.	Mfg Code	Fig No.	Item No.
6-1-1936-33A	72869	73	
6-1-1936-38-14A	72869	52	27
6-1-1943-33-60A	72869	81	27
6-1-1943-33-61A	72869	8	18
6-1-1943-33-62A	72869	82	23
6-1-1943-33-63A	72869	82	7
6-1-1943-33-64A	72869	82	22
6-1-1943-33-65A	72869	82	16
6-1-1943-33-66A	72869	82	15
6-1-1943-33-67A	72869	82	11
6-1-1943-33-68A	72869	82	10
6-1-1943-33-69A	72869	82	9
6-1-1943-33-70A	72869	82	5
6-1-1943-33-71A	72869	82	3
6-1-1943-33-72A	72869	82	2
6-1-1943-33-73A	72869	82	13
6-1-1943-33-74A	72869	82	14
6-1-1943-33-75A	72869	82	6
6-1-1943-33-76A	72869	82	12
6-1-1943-33-77A	72869	83	1
6-1-1943-33-78A	72869	82	8
6-1-1943-33-112A	72869	82	4
6-1-1945-34A	72869	72	14
6-1-1945-34-25A	72869	72	13
6-1-1947-35-6A	72869	68	14
6-1-1947-35-7A	72869	68	11
6-1-1947-35-9A	72869	68	12
6-1-1947-35-10A	72869	68	21
6-1-1947-35-12A	72869	68	31
6-1-1947-35-71A	72869	71	16
6-1-1947-35-74A	72869	70	15
6-1-1948-35-2A	72869	68	8
6-1-1948-35-3A	72869	68	10
6-1-1948-35-5A	72869	68	19
6-1-1948-35-14A	72869	68	30
6-1-1948-35-15A	72869	68	7
6-1-1948-35-17A	72869	68	34
6-1-1948-35-18A	72869	68	37
6-1-1949-25-38A	72869	69	9
6-1-1949-34A	72869	68	33
6-1-1949-35-21A	72869	68	38
6-1-1949-35-22A	72869	69	3
6-1-1949-35-23A	72869	69	4
6-1-1949-35-25A	72869	69	17
6-1-1949-35-26A	72869	69	14
6-1-1949-35-28A	72869	69	15
6-1-1949-35-29A	72869	69	16
6-1-1949-35-30A	72869	69	12
6-1-1949-35-31A	72869	69	11
6-1-1949-35-35A	72869	69	7
6-1-1949-35-36A	72869	69	8
6-1-1949-35-39A	72869	69	5
6-1-1949-35-40A	72869	69	6
6-1-1950-35-42A	72869	68	1
6-1-1950-35-43A	72869	70	19
6-1-1950-35-44A	72869	71	13
6-1-1950-35-45A	72869	70	23
6-1-1950-35-46A	72869	71	14
6-1-1950-35-47A	72869	68	28
6-1-1950-35-48A	72869	68	17
6-1-1950-35-49A	72869	68	24
6-1-1950-35-50A	72869	70	20
6-1-1950-35-51A	72869	70	21
6-1-1950-35-52A	72869	70	18
6-1-1950-35-53A	72869	68	18
6-1-1950-35-54A	72869	68	25
6-1-1950-35-65A	72869	70	17
6-1-1950-35-67A	72869	68	27
6-1-1953-36-1A	72869	65	38
6-1-1953-36-2A	72869	65	33
6-1-1953-36-3A	72869	65	26
6-1-1953-36-4A	72869	65	15
6-1-1953-36-5A	72869	65	19
6-1-1953-36-6A	72869	65	29
6-1-1953-36-10A	72869	65	20
6-1-1953-36-11A	72869	65	28
6-1-1953-36-12A	72869	65	27
6-1-1953-36-13A	72869	65	16
6-1-1953-36-14A	72869	65	30
6-1-1953-36-15A	72869	65	22
6-1-1953-36-18A	72869	65	36
6-1-1953-36-21A	72869	65	21
6-1-1953-36-22A	72869	65	34
6-1-1953-36-23A	72869	65	35
6-1-1953-36-24A	72869	65	37
6-1-1956-37-19A	72869	62	13
6-1-1956-37-22A	60883	62	24
6-1-1956-37-28A	72869	62	17
6-1-1957-37-2A	72869	63	11
6-1-1957-37-3A	72869	63	4
6-1-1957-37-4A	72869	63	13
6-1-1957-37-5A	72869	63	2
6-1-1957-37-6A	72869	63	10
6-1-1957-37-7A	72869	63	9
6-1-1957-37-8A	72869	63	6
6-1-1957-37-10A	72869	63	12
6-1-1957-37-13A	72869	63	7
6-1-1957-37-14A	72869	63	3
6-1-1957-37-24A	72869	62	22
6-1-1957-37-91A	72869	63	8
6-1-1961-38-1A	72869	52	32
6-1-1961-38-17A	72869	51	19
6-1-1961-38-20A	72869	51	18
6-1-1961-38-23A	72869	51	2
6-1-1961-38-28A	72869	51	6
6-1-1961-38-29A	72869	51	9
6-1-1961-38-30A	72869	51	20
	72869	52	24
6-1-1961-38-31A	72869	51	10
6-1-1961-38-32A	72869	52	26
6-1-1961-38-33A	72869	51	17
6-1-1961-38-34A	72869	52	14
6-1-1961-38-35A	72869	52	12
6-1-1961-38-36A	72869	52	3
6-1-1961-38-38A	72869	52	13
6-1-1961-38-39A	72869	52	8
6-1-1961-38-4A	72869		
6-1-1961-38-41A	72869	51	3
6-1-1961-38-43A	72869	52	6
6-1-1961-38-46A	72869	51	11
6-1-1961-38-50A	72869	51	12
6-1-1961-38-53A	72869	52	4
6-1-1961-38-57A	72869	52	9
6-1-1961-38-61A	72869	51	13
6-1-1961-38-8A	72869	52	18
6-1-1963-38-10A	81337	52	22 ▮
6-1-1963-38-12A	72869	52	17
6-1-1963-38-15A	72869	52	20
6-1-1963-38-16A	72869	52	21
6-1-1963-38-9A	72869	52	19
6-1-1966-40-13A	72869	67	2
6-1-1966-40A	72869	67	1
6-1-1966-40-9A	72869	67	4
6-1-1970-47A	72869	70	7
6-1-1970-47-1A	72869	70	13
6-1-1970-47-3A	72869	70	12
6-1-1970-47-5A	72869	70	11
6-1-1970-47-6A	72869	70	9
6-1-1971-48-1A	72869	6	5
6-1-1971-48-2A	72869	6	6
6-1-1971-48-2A	72869	7	6
6-1-1971-48-11	01551	7	5
6-1-1974-50A	72869	2	12
	72869	3	3
6-1-1974-50-17A	72869	3	4
6-1-1974-50-18A	72869	3	7
6-1-1974-50-22A	72869	3	5
6-1-1978-28-1A	72869	71	4
6-1-1978-52-5A	72869	65	8
6-1-1978-124-2A	72869	71	6
6-1-1978-124-3A	72869	71	7
6-1-1978-124-6A	72869	71	1
6-1-1978-1124-7A	72869	6	14
6-1-1978-1124-7	72869	7	14
	72869	6	16
	72869	7	16
6-1-1978-124-1A	~~72869~~	6	18
	72869	7	18
6-1-1978-124-2A	72869	6	21
	72869	7	21

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference No.	Mfg Code	Fig No.	Item No.
6-1-1978-124-4A	72869	6	19
	72869	7	19
6-1-1978-124-5A	72869	6	20
	72869	7	20
6-1-1978-28A	72869	6	17
	72869	7	17
6-1-1978-28-2A	72869	25	7
6-1-1978-28-3A	72869	6	15
	72869	7	15
6-1-1978-28-6A	72869	25	9
6-1-1978-29-5A	72869	25	8
6-1-1981-119A	72869	6	10
6-1-1981-119	01551	7	10
6-1-1981-120A	72869	6	11
6-1-1981-120	01551	7	11
6-1-1981-121A	72869	6	12
6-1-1981-121	01551	7	12
6-1-2302-25A	72869	9	5
	72869	16	1
6-1-2302-25-1A	72869	9	12
6-1-2302-25-2A	72869	9	6
	72869	16	2
6-1-2302-25-4A	72869	9	10
6-1-2304-20-143A	72869	23	5
6-1-2304-20-233A	72869	23	6
6-1-2304-20-236A	72869	37	26
6-1-2304-20-237A	72869	37	30
6-1-2304-20-240A	72869	18	15
6-1-2304-20-242A	72869	37	25
6-1-2304-20-245A	72869	18	16
6-1-2304-20-252A	72869	18	18
6-1-2304-20-259A	72869	18	17
6-1-2304-20-260A	72869	18	14
6-1-2304-20-261A	72869	18	8
6-1-2304-20-521A	72869	18	11
6-1-2304-20-522A	72869	18	13
6-1-2304-20-523A	72869	38	2
6-1-2304-20-524A	72869	18	4
6-1-2304-20-58A	72869	38	6
6-1-2308-20-100A	72869	24	15
6-1-2308-20-95A	72869	24	19
6-1-2308-20-96A	72869	24	20
6-1-2310-20-443A	72869	37	32
6-1-2312-20-199A	72869	36	15
6-1-2315-20-202A	72869	36	23
6-1-2315-20-207A	72869	36	8
6-1-2315-20-208A	72869	36	9
6-1-2315-20-209A	72869	36	17
6-1-2315-20-210A	72869	36	18
6-1-2319-20-262A	72869	38	7
6-1-2319-20-263A	72869	38	12
6-1-2319-20-269A	72869	38	10
	72869	38	13
6-1-2319-20-270A	72869	38	9
6-1-2319-20-271A	72869	38	
6-1-2319-20-531A	72869	38	8
6-1-2319-20-73A	72869	38	1
6-1-2322-20-78A	72869	26	12
6-1-2322-20-80A	72869	26	15
6-1-2322-20-81A	72869	26	16
6-1-2322-20-82A	72869	26	8
6-1-2322-20-83A	72869	26	13
6-1-2322-20-84A	72869	26	10
6-1-2322-20-85A	72869	26	9
6-1-2322-20-87A	72869	26	17
6-1-2322-20-91A	72869	26	2
6-1-2322-20-92A	72869	26	1
	72869	26	4
6-1-2324-20-120A	72869	38	38
6-1-2324-20-121A	72869	37	34
6-1-2328-20-101A	72869	38	24
6-1-2328-20-102A	72869		
6-1-2328-20-104A	72869	38	22
6-1-2328-20-548A	72869	38	15
6-1-2328-20-59A	72869	38	25
6-1-2328-20-75A	72869	38	23
6-1-2328-20-76A	72869	38	16
6-1-2328-20-77A	72869	26	3
6-1-2328-20-93A	72869	24	9
	72869	24	24

Reference No.	Mfg Code	Fig No.	Item No.
6-1-2328-20-94A	72869	24	14
6-1-2329-20-110A	72869	37	10
	72869	37	31
6-1-2329-20-115A	72869	37	13
6-1-2329-20-116A	72869	37	14
6-1-2329-20-123A	72869	37	1
	72869	37	7
6-1-2329-20-128A	72869	37	9
6-1-2329-20-136A	72869	37	6
6-1-2329-20-137A	72869	37	2
6-1-2329-20-138A	72869	37	3
6-1-2329-20-139A	72869	37	8
6-1-2329-20-513A	72869	37	5
6-1-2330-20-144A	72869	21	13
6-1-2330-20-154A	72869	23	38
6-1-2330-20-156A	72869	21	7
6-1-2330-20-161A	72869	23	20
6-1-2330-20-171A	72869	23	22
6-1-2330-20-179A	72869	23	16
6-1-2330-20-188A	72869	23	10
6-1-2332-20-219A	72869	37	23
6-1-2332-20-222A	72869	37	19
6-1-2332-20-227A	72869	37	18
6-1-2332-20-228A	72869	37	22
6-1-2337-1-511A	72869	39	13
6-1-2337-20-454A	72869	39	
	72869	39	28
6-1-2337-20-456A	72869	20	4
6-1-2337-20-457A	72869	20	3
6-1-2337-20-458A	72869	24	5
	72869	85	4
6-1-2337-20-459A	72869	38	49
6-1-2337-20-460A	72869	38	41
6-1-2337-20-462A	72869	16	27
6-1-2337-20-463A	72869	39	11
6-1-2337-20-466A	72869	13	2
	72869	38	45
	72869	24	7
	72869	48	1
6-1-2337-20-467A	72869	38	50
6-1-2337-20-468A	72869	24	6
	72869	85	6
6-1-2337-20-469A	72869	38	48
6-1-2337-20-471A	72869	85	3
6-1-2337-20-478A	72869	39	1
6-1-2337-20-480A	72869	38	37
6-1-2337-20-482A	81337	11	23
6-1-2337-20-488A	72869	39	2
6-1-2337-20-492A	72869	39	6
6-1-2337-20-493A	72869	39	9
6-1-2337-20-496A	72869	24	3
	72869	39	26
6-1-2337-20-498A	72869	39	27
6-1-2337-20-501A	72869	38	33
6-1-2337-20-503A	72869	38	32
6-1-2337-20-505A	72869	38	34
6-1-2337-20-508A	72869	38	30
6-1-2337-20-509A	72869	38	29
	72869	85	8
6-1-2337-20-512A	72869	39	7
6-1-2337-20-526A	72869	38	40
6-1-2337-20-528A	72869	38	39
6-1-2337-20-88A	72869	85	14
6-1-2339-20-271A	72869	34	
6-1-2339-20-272A	72869	35	8
6-1-2339-20-287A	72869	33	19
6-1-2339-20-301A	72869	34	3
6-1-2339-20-352A	72869	33	3
6-1-2339-20-359A	72869	34	1
6-1-2339-20-369A	72869	34	5
6-1-2343-20-351A	72869	34	15
6-1-2346-20-345A	72869	34	9
6-1-2352-20-335A	72869	34	8
6-1-2361-20-293A	72869	33	17
6-1-2361-20-295A	72869	33	16
6-1-2363-20-395A	72869	16	13
6-1-2363-20-370A	72869	17	24
6-1-2363-20-372A	72869	17	30
6-1-2363-20-377A	72869	17	26
6-1-2363-20-379A	72869	16	23

Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

Reference No.	Mfg Code	Fig No.	Item No.
6-1-2363-20-383A	72869	17	19
6-1-2363-20-384A	72869	17	13
6-1-2363-20-390A	72869	16	17
6-1-2363-20-393A	72869	17	36
6-1-2363-20-403A	72869	17	4
	72869	17	22
6-1-2363-20-404A	72869	16	22
	72869	17	6
6-1-2363-20-406A	72869	17	20
6-1-2363-20-407A	72869	17	31
6-1-2363-20-409A	72869	16	16
6-1-2363-20-410A	72869	17	7
6-1-2363-20-411A	72869	17	21
6-1-2363-20-415A	72869	16	14
	72869	17	33
6-1-2363-20-421A	72869	17	5
6-1-2363-30-404A	72869	16	12
6-1-2363-30-418A	60883	16	20
6-1-2371-20-425A	72869	11	6
6-1-2371-20-427A	72869	11	19
6-1-2371-20-428A	72869	11	22
6-1-2371-20-429A	72869	11	18
6-1-2371-20-430A	72869	11	12
6-1-2371-20-434A	72869	11	14
6-1-2371-20-441A	72869	11	15
6-1-2371-20-442A	72869	11	10
6-1-2371-20-443A	72869	11	13
6-1-2371-20-445A	72869	11	16
6-1-2371-20-446A	72869	11	8
6-1-2371-20-448A	72869	11	17
6-1-2371-20-449A	72869	11	9
6-1-2518-148-14A	72869	2	9
6-1-2518-148-10A	72869	2	3
6-1-2518-148-16A	72869	2	8
6-1-2981-33	01551	73	
6-1-2981-33-1A	72869	83	23
6-1-2981-33-37A	72869	3	17
6-1-2981-33-52A	72869	77	1
	01551	79	12
6-1-2981-33-53A	72869	77	7
6-1-2981-33-53A	72869	78	16
6-1-2981-33-55A	72869	83	10
6-1-2981-33-58A	72869	83	6
6-1-2981-33-59A	72869	83	5
6-1-2981-33-82A	72869	83	7
6-1-2981-33-83A	72869	83	8
6-1-2981-33-85A	72869	80	8
6-1-2981-33-86A	72869	83	20
6-1-2981-33-89A	72869	3	16
6-1-2981-33-90A	72869	83	2
6-1-2981-33-95A	72869	83	9
6-1-2981-33-96A	72869	83	3
6-1-2981-33-97A	72869	83	15
6-1-2981-33-98A	72869	83	16
6-1-2981-33-99A	72869	83	4
6-1-2981-33-100A	01551	79	22
	72869	2	14
	72869	78	21
	72869	83	11
6-1-2981-33-101A	72869	83	18
6-1-2981-33-102A	72869	73	27
6-1-2981-33-103A	72869	73	8
6-1-2981-33-104A	01551	79	24
	72869	2	16
	72869	78	23
	72869	83	12
6-1-2981-33-105A	01551	78	13
	01551	78	18
	01551	79	14
	01551	79	20
6-1-2981-33-106A	01551	79	18
6-1-2981-33-107A	72869	78	10
6-1-2981-33-108A	72869	80	3
6-1-2981-33-112A	72869	73	27
	72869	75	10
	72869	78	29
6-1-2981-33-114A	01551	79	23
	72869	78	22
	72869	83	19
6-1-2981-33-115A	72869	80	2

Reference No.	Mfg Code	Fig No.	Item No.
6-1-2981-33-116A	72869	80	5
6-1-2981-33-117A	72869	78	28
6-1-2981-33-118A	72869	80	1
6-1-2981-33-12A	72869	83	17
6-1-2981-33-120A	72869	80	7
6-1-2981-33-121A	72869	80	6
6-1-2981-33-129A	72869	83	13
6-1-2981-33-131A	72869	83	14
6-1-2981-33-132A	72869	73	28
	72869	75	11
	72869	78	30
	72869	80	9
6-1-2981-33-133A	72869	3	14
6-1-2981-33-134A	72869	3	15
6-1-2985-33-93	01551	75	14
6-1-2988-33-57A	01551	79	27
	01551	78	27
6-1-2988-33-37A	01551	3	13
6-1-2988-33-56A	01551	3	12
6-1-733-1-13A	72869	50	9
6-1-733-1-19A	72869	46	3
6-1-733-1-28A	72869	40	18
6-1-733-1-30A	72869	44	6
6-1-733-1-32A	72869	40	6
6-1-733-1-33A	72869	46	10
6-1-733-1-35A	72869	41	2
	72869	43	30
6-1-733-1-55A	72869	43	23
6-1-733-1-72A	72869	43	27
6-1-737-1-2-1A	79466	48	10
6-1-737-1-2-1	79466	48	28
6-1-737-1-2-13A	72869	44	13
6-1-737-1-2-2A	72869	48	27
6-1-742-1-8-1A	72869	41	7
6-1-742-1-8-10A	72869	41	11
6-1-742-1-8-11A	72869	41	8
6-1-743-2-7	81337	14	9
6-1-744-2-9-10A	72869	40	14
	72869	31	8
	72869	13	15
6-1-743-2-10A	72869	13	4
6-1-744-2-9-11A	72869	13	7
	72869	40	10
6-1-744-2-9-12A	72869	13	10
	72869	27	9
6-1-744-2-9-2A	72869	13	9
6-1-744-2-9-9A	72869	40	7
6-1-746-7A	72869	4	11
6-1-746-7-1A	72869	4	16
6-1-746-8A	72869	4	6
6-1-746-8-1A	72869	4	10
6-1-746-9A	72869	4	1
6-1-746-9-11A	72869	4	5
6-1-747-1-2-23-2A	72869	48	18
6-1-900-83A	72869	35	6
6-200	15605	39	18
6-1-8919-27-167A	72869	59	29
6-330477SPEC55434	11349	18	19

By Order of the Secretary of the Army:

BERNARD W. ROGERS
General, United States Army
Chief of Staff

Official:

J. C. PENNINGTON
Brigadier General, United States Army
The Adjutant General

Distribution:
To be distributed in accordance with DA Form 12-25A, Direct and General Support maintenance requirements for Laundry Equipment.

☆U.S. GOVERNMENT PRINTING OFFICE : 1989 0 - 242-466/08337

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)
PFC JOHN DOE
CoA, 3d ENGINEER BN
FT. LEONARD WOOD MO 63108

DATE 16 DEC 74

PUBLICATION NUMBER TM5-6115-200-20 AND P	DATE 1 APR 72	TITLE GENERATOR SET 10 KW NSN 6115-00-231-7296

BE EXACT. . .PIN-POINT WHERE IT IS

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.	IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:
6	2-1 a			In line 6 of paragraph 2-1a the manual states the engine has 6 cylinders. The engine on my set only has 4 cylinders. Change the manual to show 4 cylinders.
81		4-3		Callout 16 on figure 4-3 is pointing at a bolt. In the key to fig. 4-3, item 16 is called a shim. Please correct one or the other.
125	line 20			I ordered a gasket, item 19 on figure B-16 by NSN 2910-00-762-3001. I got a gasket but it doesn't fit. Supply says I got what I ordered so the NSN is wrong. Please give me a good NSN

SAMPLE

YPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER
JOHN DOE, PFC (268) 317-7111

SIGN HERE: John Doe

DA FORM 1 AUG 2028-2 (TEST)

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG DOTTED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

____

____

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, $300

Commander
US Army Troop Support and Aviation
Materiel Readiness Command
ATTN: DRSTS-MTPS
4300 Goodfellow Boulevard
St. Louis, MO. 63120

TEAR ALONG DOTTED LINE

FOLD BACK

REVERSE OF DA FORM 2028-2 (TEST)

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

SOMETHING WRONG WITH THIS MANUAL?

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER TM 10-3510-208-34P	DATE 1 MAY 1978	TITLE LAUNDRY UNIT, SINGLE TRAILER MOUNTED

BE EXACT. . .PIN-POINT WHERE IT IS

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.	IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

TEAR ALONG DOTTED LINE

DA FORM 1 AUG 74 2028-2 *(TEST)*

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, $300

Commander
US Army Troop Support and Aviation
Materiel Readiness Command
ATTN: DRSTS-MTPS
4300 Goodfellow Boulevard
St. Louis, MO. 63120

TEAR ALONG DOTTED LINE

FOLD BACK

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

SOMETHING WRONG WITH THIS MANUAL?

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER	DATE	TITLE
TM 10-3510-208-34P	1 MAY 1978	LAUNDRY UNIT, SINGLE TRAILER MOUNTED

BE EXACT. . .PIN-POINT WHERE IT IS				IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:
PAGE NO.	PARAGRAPH	FIGURE NO.	TABLE NO.	

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 AUG 74 2028-2 *(TEST)*

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG DOTTED LINE

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE, $300

Commander
US Army Troop Support and Aviation
Materiel Readiness Command
ATTN: DRSTS-MTPS
4300 Goodfellow Boulevard
St. Louis, MO. 63120

TEAR ALONG DOTTED LINE

FOLD BACK

REVERSE OF DA FORM 2028-2 (TEST)

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL MANUALS

THEN. . .JOT DOWN THE DOPE ABOUT IT ON THIS FORM, TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL!

SOMETHING WRONG WITH THIS MANUAL?

FROM: (YOUR UNIT'S COMPLETE ADDRESS)

DATE

PUBLICATION NUMBER	DATE	TITLE
TM 10-3510-208-34P	1 MAY 1978	LAUNDRY UNIT, SINGLE TRAILER MOUNTED

BE EXACT. . .PIN-POINT WHERE IT IS

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.	IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

TYPED NAME, GRADE OR TITLE, AND TELEPHONE NUMBER

SIGN HERE:

DA FORM 1 AUG 74 2028-2 *(TEST)*

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR MANUAL "FIND," MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG DOTTED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

____

____

OFFICIAL BUSINESS

PENALTY FOR PRIVATE USE, $300

Commander
US Army Troop Support and Aviation
Materiel Readiness Command
ATTN: DRSTS-MTPS
4300 Goodfellow Boulevard
St. Louis, MO. 63120

TEAR ALONG DOTTED LINE

FOLD BACK

REVERSE OF DA FORM 2028-2 (TEST)

The Metric System and Equivalents

Linear Measure

1 centimeter = 10 millimeters = . 39 inch
1 decimenter = 10 centimeters = 3.94 inches
1 meter = 10 decimeters = 39.37 inches
1 dekameter = 10 meters = 32.8 feet
1 hectometer = 10 dekameters = 328.08 feet
1 kilometer = 10 hectometers = 3,280.8 feet

Weights

1 centigram = 10 milligrams = . 15 grain
1 decigram = 10 centigrams = 1.54 grains
1 gram = 10 decigrams = . 035 ounce
1 dekagram = 10 grams = . 35 ounce
1 hectogram = 10 dekagrams = 3.52 ounces
1 kilogram = 10 hectograms = 2.2 pounds
1 quintal = 100 kilograms = 220.46 pounds
1 metric ton = 10 quintals = 1.1 short tons

Liquid Measure

1 centiliter = 10 milliters = . 34 fl. ounce
1 deciliter = 10 centiliters = 3.38 fl. ounces
1 liter = 10 deciliters = 38.82 fl. ounces
1 dekaliter = 10 liters = 2.64 gallons
1 hectoliter = 10 dekaliters = 26.42 gallons
1 kiloliter = 10 hectoliters = 264.18 gallons

Square Measure

1 sq. centimeter = 100 sq. millimeters = . 155 sq. inch
1 sq. decimenter = 100 sq. centimeters = 15.5 sq. inches
1 sq. meter (centare) = 100 sq. decimeters = 10.76 sq. feet
1 sq. dekameter (are) = 100 sq. meters = 1,076.4 sq. feet
1 sq. hectometer (hectare) = 100 sq. dekameters = 2.47 acres
1 sq. kilometer = 100 sq. hectometers = . 386 sq. mile

Cubic Measure

1 cu. centimeter = 1000 cu. millimeters = . 06 cu. inch
1 cu. decimeter = 1000 cu. centimeters = 61.02 cu. inches
1 cu meter = 1000 cu. decimeters = 35.31 cu. feet

Approximate Conversion Factors

To change	*To*	*Multiply by*	*To change*	*To*	*Multiply by*
inches	centimeters	2.540	ounce-inches	newton-meters	.007062
feet	meters	.305	centimeters	inches	3.94
yards	meters	.914	meters	feet	3.280
miles	kilometers	1.609	meters	yards	1.094
square inches	square centimeters	6.451	kilometers	miles	.621
square feet	square meters	.093	square centimeters	square inches	.155
square yards	square meters	.836	square meters	square feet	10.764
square miles	square kilometers	2.590	square meters	square yards	1.196
acres	square hectometers	.405	square kilometers	square miles	.386
cubic feet	cubic meters	.028	square hectometers	acres	2.471
cubic yards	cubic meters	.765	cubic meters	cubic feet	35.315
fluid ounces	milliliters	29,573	cubic meters	cubic yards	1.308
pints	liters	.473	milliliters	fluid ounces	.034
quarts	liters	.946	liters	pints	2.113
gallons	liters	3.785	liters	quarts	1.057
ounces	grams	28.349	liters	gallons	.264
pounds	kilograms	.454	grams	ounces	.035
short tons	metric tons	.907	kilograms	pounds	2.205
pound-feet	newton-meters	1.365	metric tons	short tons	1.102
pound-inches	newton-meters	.11375			

Temperature (Exact)

°F	Fahrenheit temperature	5/9 (after subtracting 32)	Celsius temperature	°C

PIN: 033677-000